



Speed-Measuring Device Operator Training

Instructor Manual

L. I. D. A. R.



L.I.D.A.R. COURSE OVERVIEW

- Learning Objectives
 - Describe the origin of L.A.S.E.R. technology as related to speed measuring
 - Explain the scientific principles of L.A.S.E.R. technology
 - Identify the components and features of the specific L.I.D.A.R. device(s) used
 - Discuss L.I.D.A.R. speed measurement
 - Discuss the elements of tracking history
 - Discuss L.I.D.A.R. effects
 - Set up L.I.D.A.R.
 - Perform functions tests
 - Discuss legal considerations pertaining to L.I.D.A.R.
 - Discuss the requirements needed for citation documentation and/or courtroom testimony
 - Operate a L.I.D.A.R. speed-measuring device
- Section Review
- Written Posttest
- Practical/Proficiency Testing
- Course Evaluation

Materials

- Presentation slides
- Flipchart
- Markers
- Tape
- Copy of agenda/schedule

L.I.D.A.R. COURSE OVERVIEW	1
INTRODUCTION/HISTORY	4
MODULE OVERVIEW.....	6
PRETEST (OPTIONAL)	7
TYPES OF L.A.S.E.R.	9
HISTORY OF L.A.S.E.R.S.....	10
SCIENTIFIC PRINCIPLES.....	11
DOPPLER PRINCIPLE	13
RELATIVE MOTION.....	15
LIGHT WAVES.....	16
WAVE AND WAVELENGTH.....	17
ELECTROMAGNETIC SPECTRUM	19
FREQUENCIES.....	21
PROPERTIES OF LIGHT.....	22
FUNCTION.....	23
CREATING L.A.S.E.R. LIGHT.....	25
HOW L.A.S.E.R. WORKS.....	26
LASING MEDIUM.....	28
L.A.S.E.R.S TODAY	29
HOW L.A.S.E.R.S MEASURE DISTANCE.....	30
SPEED OF LIGHT.....	30
L.A.S.E.R. PULSES.....	31
EXAMPLE 1: MEASURING DISTANCE.....	33
EXAMPLE 2: MEASURING DISTANCE.....	33
PROPERTIES OF L.I.D.A.R.S.....	35
BASIC L.I.D.A.R. COMPONENTS.....	35
TIME OF FLIGHT	36
HOW L.I.D.A.R.S MEASURE SPEED	37
EXAMPLE 3: SPEED MEASUREMENT.....	39
EXAMPLE 4: SPEED MEASUREMENT.....	40
L.I.D.A.R. BEAM WIDTH.....	41
AVERAGE OF LEAST SQUARES	42
L.I.D.A.R. TARGETING.....	45
TRACKING HISTORY.....	47
L.I.D.A.R. EFFECTS.....	48
FACTORS AFFECTING L.I.D.A.R.	50
SWEEP EFFECT	53
COSINE EFFECT	56
L.I.D.A.R. JAMMER	58
SET UP.....	59
OPERATIONAL CONSIDERATIONS	61
TESTING.....	63
LIGHT TEST.....	65
INTERNAL TESTING	66
EXTERNAL TESTING	67
L.I.D.A.R. HEALTH CONCERNS	68
LEGAL CONSIDERATION.....	69
FUNDAMENTAL CASE LAW AFFECTING L.I.D.A.R.	71

HONEYCUTT V. COMMONWEALTH.....	74
LESSONS LEARNED: L.I.D.A.R. CHALLENGES AND DISCOVERY	76
IMPACT OF NEW PRODUCTS.....	77
PEOPLE V. DEPASS.....	78
HAWAII V. ABIYE ASSAYE.....	80
MEETING THE NEEDS FOR JUDICIAL NOTICE.....	82
OPERATE	83
OPERATOR PRACTICUM.....	84
SUMMARY AND SECTION REVIEW (20 MINUTES)	86
POSTTEST.....	86

Operation of Specific L.I.D.A.R. Device(s)

The study materials for this section must be obtained through the direct examination of instructions provided by the manufacturer of each L.I.D.A.R. device.

Specific information on component assembly, nomenclature, power supply, testing, etc., must be gleaned from materials supplied by the manufacturers. Because modifications are constantly being made to both new and existing L.I.D.A.R. devices, it would be impossible to provide up-to-date operating materials with this course.

The terminology and operating procedures supplied by the manufacturer may conflict with the instruction you receive in this course. Wherever possible, terminology and procedures should conform to those used in this program.

INTRODUCTION/HISTORY

Estimated time for Chapter 1: 20 Minutes

L. I. D. A. R.


» Contents

» Objectives

Module Overview	6
Pretest (Optional).....	7
Types of L.A.S.E.R.....	9
History of L.A.S.E.R.s.....	10


By the end of this chapter,
you will be able to:

- Describe the origin of L.A.S.E.R. technology as related to speed measuring

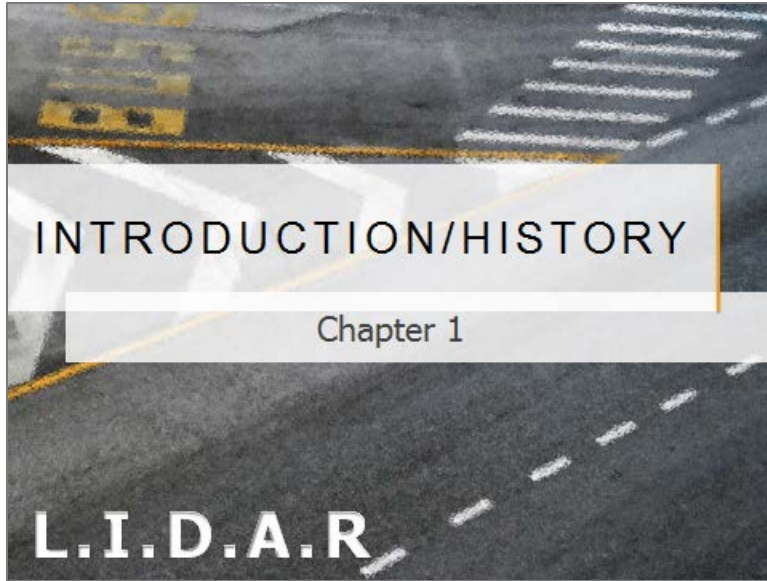

Slide 1.

MODULE OVERVIEW

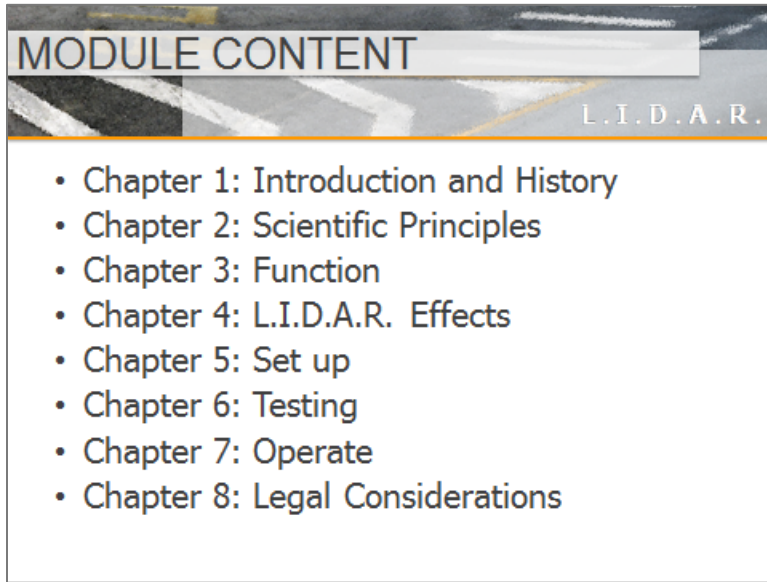

MODULE CONTENT

L.I.D.A.R.

- Chapter 1: Introduction and History
- Chapter 2: Scientific Principles
- Chapter 3: Function
- Chapter 4: L.I.D.A.R. Effects
- Chapter 5: Set up
- Chapter 6: Testing
- Chapter 7: Operate
- Chapter 8: Legal Considerations

Slide 2.

The Speed-Measuring Device Operator Training course is designed to improve speed enforcement programs and enable agencies to better allocate their resources. The L.I.D.A.R. module is specifically designed to provide operators the knowledge and skills necessary to operate L.I.D.A.R. speed-measuring devices.

Students must understand how a L.I.D.A.R. device works and identify components, features, and functions before they can effectively operate the device.

L.I.D.A.R., like any other law enforcement tool, must be used in compliance with laws, court's decisions, and department policy. Students must know the elements of the speeding offense before enforcement action can be taken. The officer's responsibility does not end with issuing a speeding citation. The charge must stand up in court. Officers must be prepared to present evidence and testify in court.

PRETEST (OPTIONAL)




L.I.D.A.R. Handout 1: L.I.D.A.R. Pretest (Optional)

Instructor should administer pretest found in the back of this manual.



Slide 3.

L.I.D.A.R. is an acronym for “Light Detection and Ranging.” L.I.D.A.R.s measure a target vehicle’s speed using light energy generated by a L.A.S.E.R. device. Light is an electromagnetic energy exhibiting the same properties as radio and microwave energies. L.I.D.A.R.s differ in method of generating light energy and resulting higher frequency.

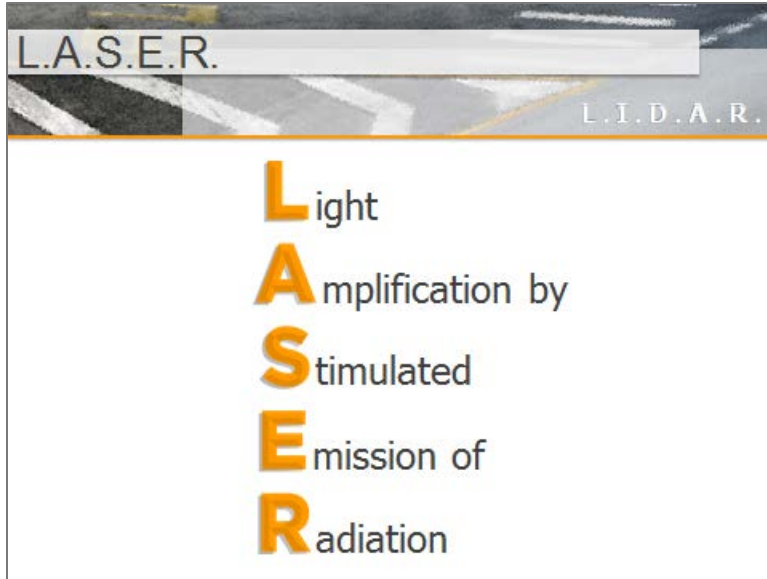

Slide 4.

The term L.A.S.E.R. is an acronym for “Light Amplification by Stimulated Emission of Radiation.”

L.I.D.A.R. is used when referring to speed-measuring devices that employ L.A.S.E.R. and pulse-timing technology for down-the-road speed measurements. L.I.D.A.R. is currently designed for stationary operations only.

Note that there is no such thing as “L.A.S.E.R. R.A.D.A.R.” The correct term is simply “L.I.D.A.R.”

TYPES OF L.A.S.E.R.




Slide 5.

L.A.S.E.R.s are produced from many different active materials (solids, liquids, and gases) and the design of the optical resonator and the method of exciting lasing mediums may vary. Whatever form the L.A.S.E.R. takes, the energy is generated by the same basic principle.

Typical Optical Resonator Device Types

- Semi-Conductor L.A.S.E.R.: uses are unlimited in high-technology applications such as fiber optic communications
- Gas L.A.S.E.R.: popular application is in the entertainment industry; light shows, movies, etc.
- Chemical L.A.S.E.R.: application are inertial confinement fusion and military applications
- Excimer L.A.S.E.R.: application within the medical field for surgical procedures
- Free Electron L.A.S.E.R.: these develop powerful light sources for strategic defense, industry, and basic research

HISTORY OF L.A.S.E.R.S

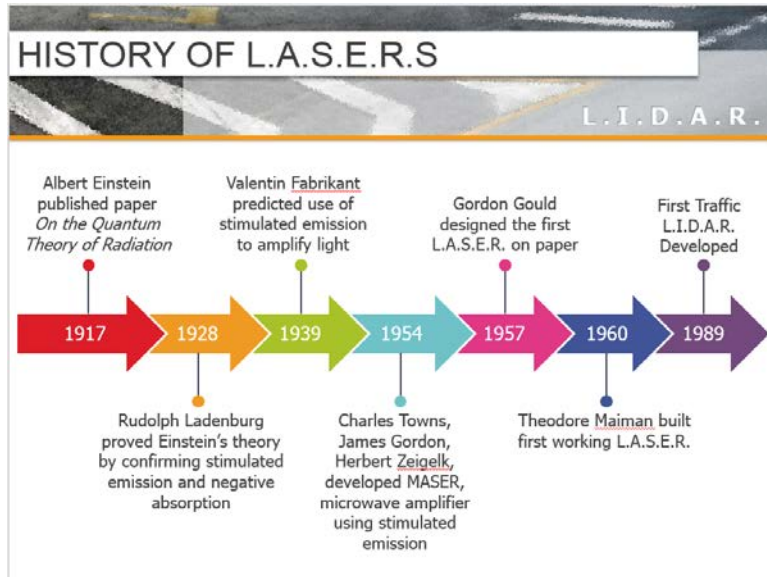

Slide 6.

In 1917, Albert Einstein published his paper *On the Quantum Theory of Radiation*. In the paper, he introduced probability coefficients, or absorption, spontaneous emission, and stimulated emission of electromagnetic radiation. This was the foundation for the L.A.S.E.R.

L.A.S.E.R.s are devices which transmit intense beams of light energy. Stimulated emission is the amplification of a single frequency of light.

The light from police L.I.D.A.R., as with R.A.D.A.R., is a form of electromagnetic radiation. The difference in R.A.D.A.R. and L.I.D.A.R. are the frequency and wavelength of this energy.

SCIENTIFIC PRINCIPLES

Estimated time for Chapter 2: 60 Minutes

L. I. D. A. R.


» Contents

» Objectives

Doppler Principle	13
Relative Motion	15
Light Waves	16
Wave and Wavelength.....	17
Electromagnetic Spectrum	19
Frequencies	21
Properties of Light	22


By the end of this chapter,
you will be able to:

- Explain the scientific principles of L.A.S.E.R. technology

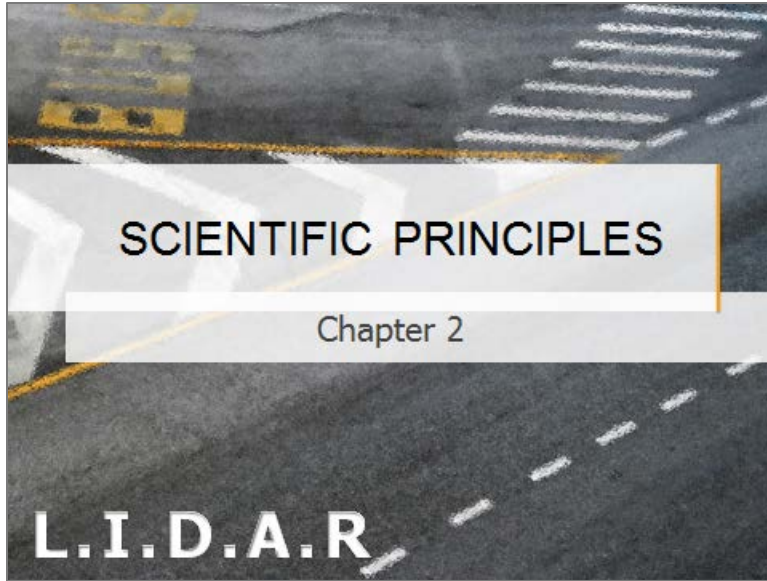

Slide 7.

DOPPLER PRINCIPLE

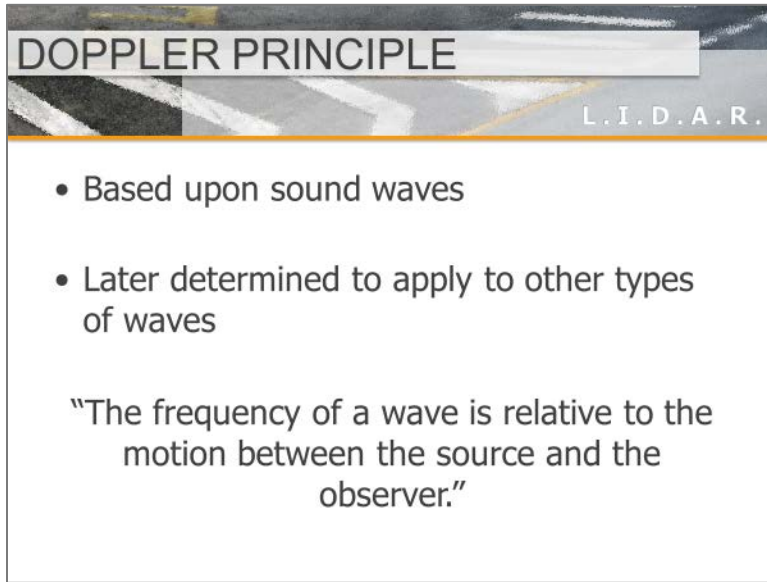

DOPPLER PRINCIPLE


L.I.D.A.R.

- Based upon sound waves
- Later determined to apply to other types of waves

"The frequency of a wave is relative to the motion between the source and the observer."

Slide 8.

Doppler stated, "When there is relative motion between two objects, one of which is transmitting wave energy, the frequency of the signal as received by the other object changes due to that relative motion."

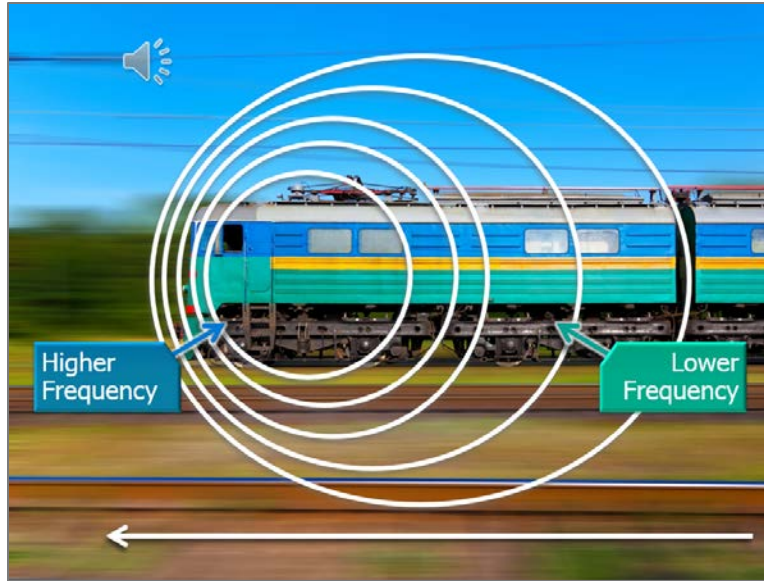


Slide 9.

Click the play button next to the speaker icon on the slide to play the audio clip of the train whistle. Point out the change in pitch of the train whistle.

The same principle can be applied if you stand by a road and listen to passing vehicle.

Most know how the Doppler Principle applies to sound waves. When you stand near a railroad track the sound of an approaching train has a higher pitch and then lowers after the train passes. This frequency change is due to relative motion.

RELATIVE MOTION

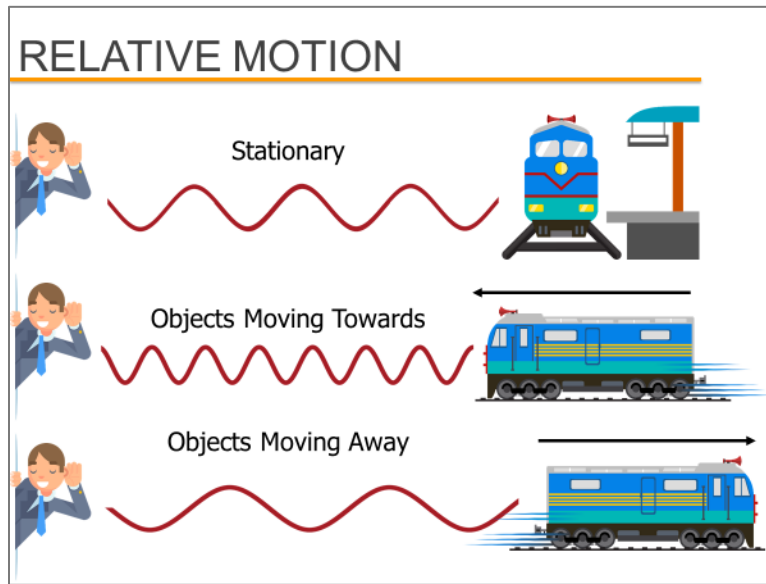

Slide 10.

L.I.D.A.R. devices use specific characteristics of light energy to measure speed.

When the Doppler principle is applied to L.I.D.A.R., if there is relative motion (toward or away) between a L.I.D.A.R. and an object, the frequency of the reflected signal will be different from the frequency of the transmitted signal. This change, or shift, in frequency is known as the "Doppler shift." The greater the relative speed, the greater the frequency shift.

If the relative motion is bringing the object and the L.I.D.A.R. together, the reflected signal will have a higher frequency than the transmitted signal.

If the relative motion is moving the object and the L.I.D.A.R. apart, the reflected signal will have a lower frequency than the transmitted signal.

By measuring the amount of the frequency shift, the L.I.D.A.R. can calculate and display the target speed in miles per hour.

The point to remember about the Doppler Principle is that the frequency change only occurs when there is relative motion between the L.I.D.A.R. and the object.

LIGHT WAVES

L.I.D.A.R. USES LIGHT WAVES

L.I.D.A.R.

Doppler principle (based on sound) also applies to:


- Light Waves
- Radio Waves

Slide 11.

Light waves are produced when rapid reversals of current in a conductor create coherent electromagnetic energy of a measurable wavelength and frequency.

Light waves spread out from the transmitter in a predictable manner at the speed of light. Given the time and location of transmission, frequency, wavelength, and speed of propagation, we can easily obtain useful information by calculating the difference between the original transmission and its reflection.

WAVE AND WAVELENGTH

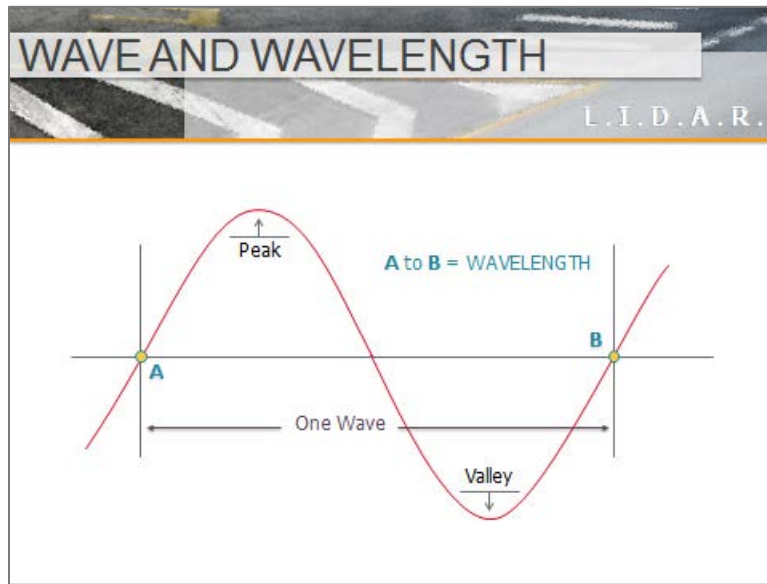

Slide 12.

The L.I.D.A.R. signal possesses the same three distinguishable characteristics as other forms of electromagnetic wave energy:

- Signal Speed

The L.I.D.A.R. signal, as with all forms of electromagnetic energy, travels at the speed of light. This is generally accepted to be approximately 186,282 miles per second. Both the transmitted and reflected L.I.D.A.R. signal will travel at this constant speed.

- Wavelength

The wavelength is defined as “the distance between two points in a periodic wave that has the same phase.” Another way to describe wavelength is the distance from the beginning of the peak to the end of the valley.

- Frequency

Frequency is the number of signal recurrences during one second or the oscillation rate of a periodic signal.


TYPES OF WAVES & THEIR MEDIUMS

L.I.D.A.R.

- Ripple in pond, ocean waves: **Water**
- Sound waves, blast waves: **Air**
 - Seismic waves (sound waves that travel through rock)
- Electromagnetic waves: **Space**

Slide 13.

ELECTROMAGNETIC SPECTRUM

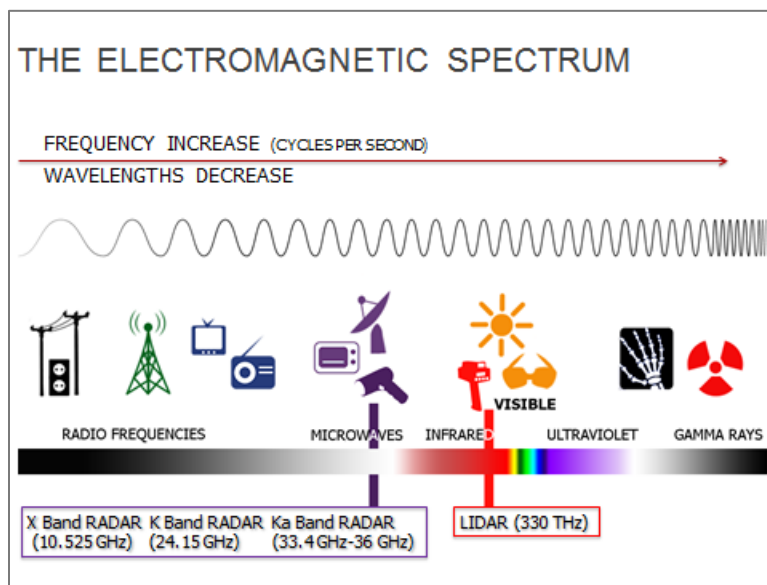

Slide 14.


Frequency is measured in terms of cycles per second. Scientists and engineers use the term Hertz (abbreviated Hz) instead of cycles per second. All these terms have the same meaning: one Hertz = one cycle per second = one wave per second.

The slide features a header with the word 'WAVELENGTH' in a bold, sans-serif font. To the right of the header, the acronym 'L.I.D.A.R.' is displayed. Below the header is a bullet point: '• The distance in which a periodic wave repeats itself'. At the bottom of the slide, the text reads 'L.I.D.A.R. wavelength \approx 904 to 905 nm' followed by a smaller line: '(Nanometer = Billionth of a Meter)'. The background of the slide is a dark, abstract pattern with light-colored geometric shapes.

Slide 15.

The wavelength of the L.I.D.A.R. signal is approximately 904 - 905 nm (nm = nanometer or one billionth of a meter).


FREQUENCIES

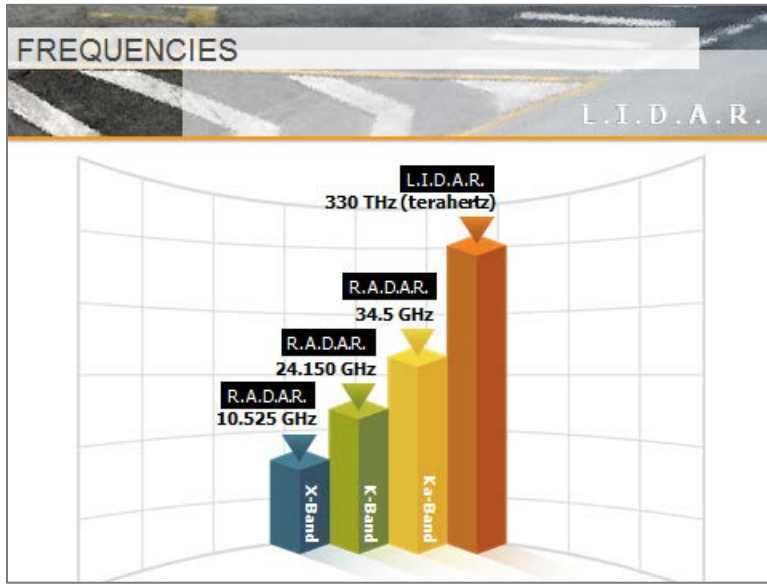

Slide 16.

The frequency of the L.I.D.A.R. signal is approximately 330 terahertz (330,000,000,000,000 Hz), which is about 13,000 times higher than R.A.D.A.R. frequencies.

PROPERTIES OF LIGHT

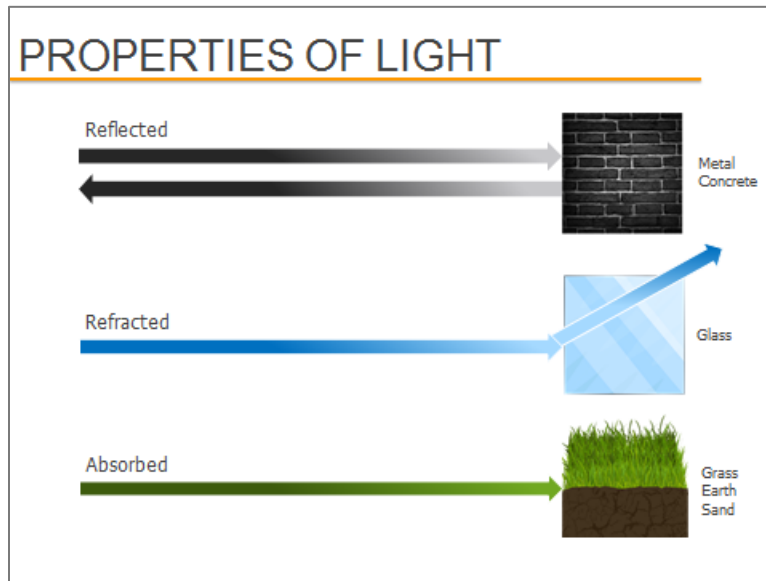

Slide 17.

The L.I.D.A.R. signal, as with all electromagnetic energy, exhibits the following behaviors:

Reflected

The signal bounces back from the target vehicle.

The target vehicle's reflective capability may be influenced by its color and surface composition may affect the operational range. However, it will not affect the device's speed calculations once the reflected signal is detected.

The size of the target vehicle is not at issue. Ideally, the target vehicle should be as large, or larger, than the L.I.D.A.R. signal's cross section at the target's location. This condition is readily accomplished in speed measuring because the L.I.D.A.R. signal at 1,000 feet is approximately three feet wide and proportionately less at closer distances.

Refracted

The bending of a signal as it passes through transparent material. When the opposite faces of the material are parallel, it will result in only a slight displacement of the signal.

Absorbed

The L.I.D.A.R. signal's energy may be absorbed by some types of material, or surfaces, allowing less signal energy to be reflected from that object. The color of a target vehicle may affect the amount of energy absorption. While this may affect the operational range of the device, it in no way will affect the accuracy of the speed measurement. This is because the L.I.D.A.R. computes speed by the time-distance method.

FUNCTION

Estimated time for Chapter 3: 40 Minutes

L. I. D. A. R.


Contents

Objectives

By the end of this chapter, you will be able to:


- Identify the components and features of the specific L.I.D.A.R. device(s) used
- Discuss L.I.D.A.R. speed measurement
- Discuss the elements of tracking history

Creating L.A.S.E.R. Light	25
How L.A.S.E.R. Works.....	26
Lasing Medium.....	28
L.A.S.E.R.s Today.....	29
How L.A.S.E.R.s Measure Distance.....	30
Speed of Light.....	30
L.A.S.E.R. Pulses	31
Example 1: Measuring Distance	33
Example 2: Measuring Distance	33
Properties of L.I.D.A.R.s.....	35
Basic L.I.D.A.R. Components	35
Time of Flight	36
How L.I.D.A.R.s Measure Speed	37
Example 3: Speed Measurement.....	39
Example 4: Speed Measurement.....	40
L.I.D.A.R. Beam Width.....	41
Average of Least Squares.....	42
L.I.D.A.R. Targeting.....	45
Tracking History	47

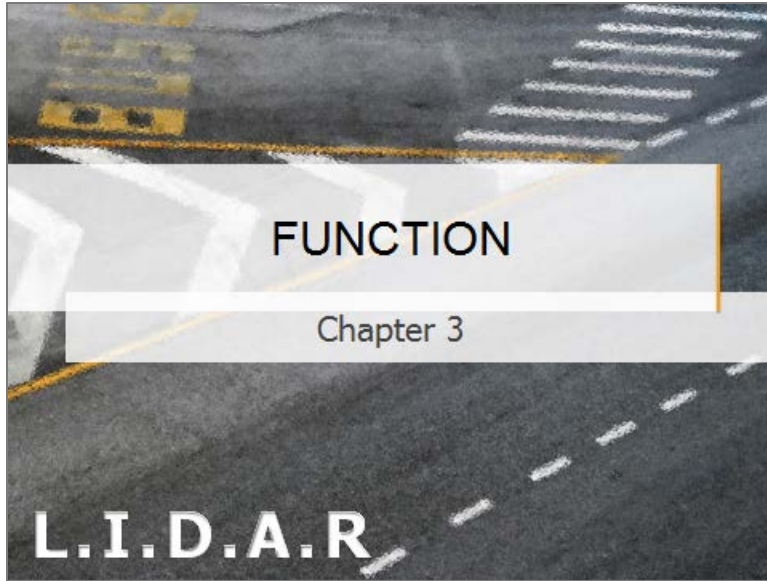

Slide 18.

CREATING L.A.S.E.R. LIGHT

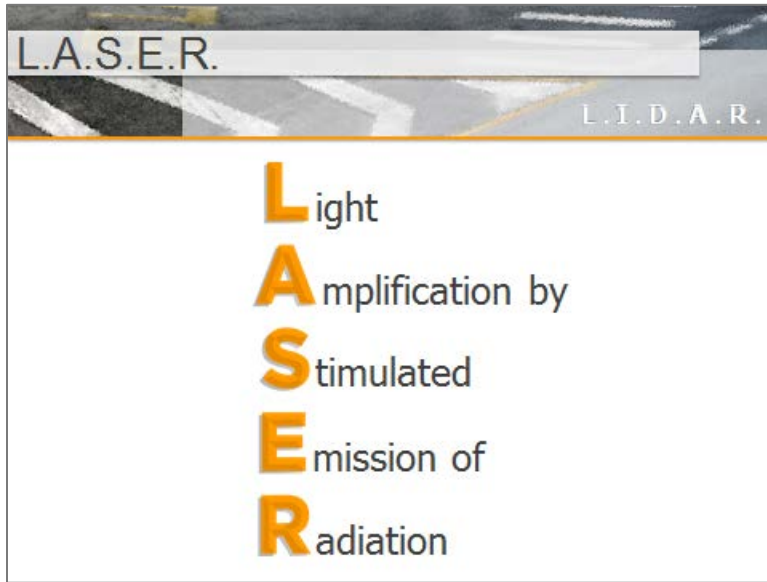


Slide 19.

What is a L.A.S.E.R.?

A device that utilizes the natural oscillations of atoms or molecules between energy levels for generating a beam of coherent electromagnetic radiation usually in the ultraviolet, visible, or infrared regions of the spectrum¹.


¹"L.A.S.E.R." *Merriam-Webster.com*. Merriam-Webster, n.d. Web. 22 Feb. 2017.

HOW L.A.S.E.R. WORKS

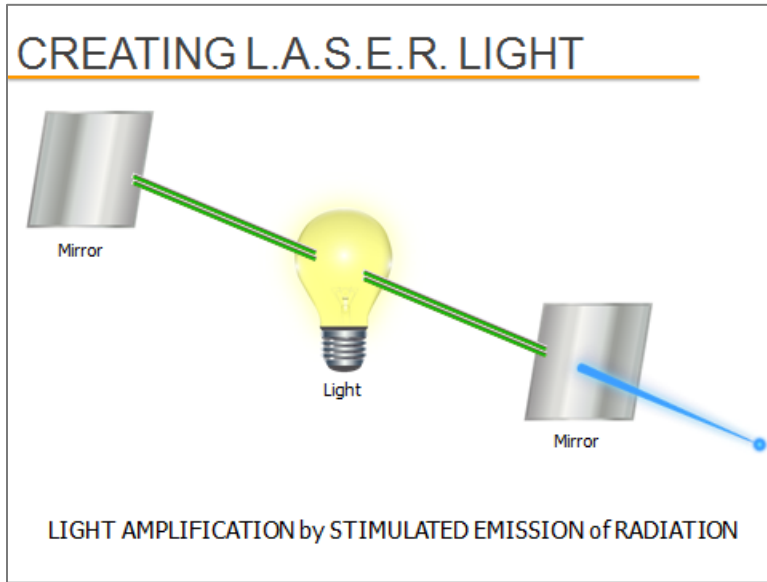

Slide 20.

In its simplest form, L.A.S.E.R. energy is generated by energizing a piece of active material, known as the lasing medium, between two mirrors. These mirrors and the lasing medium form what is called an optical resonator.

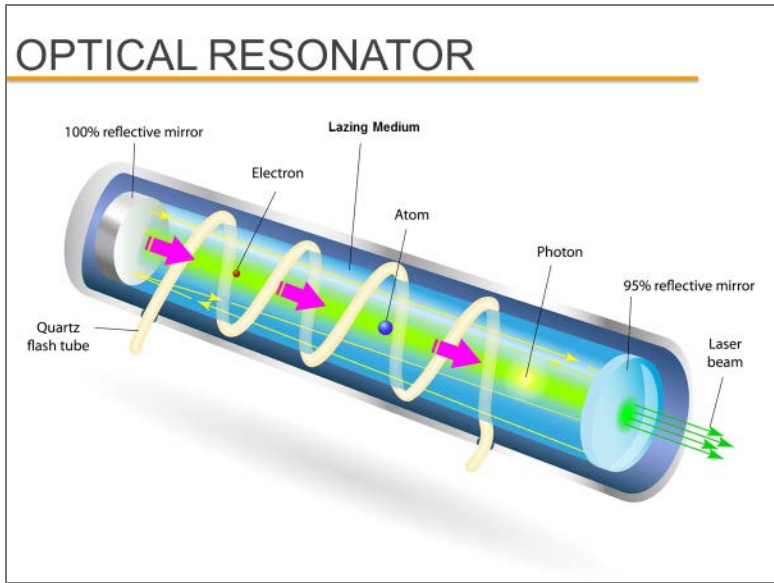


Slide 21.

The atoms of the lasing medium are put into an excited state by an external energy source (the atoms store some of that energy). These excited atoms can then be stimulated to release their stored energy as light energy resulting in an amplification of incoming light.

By positioning the two mirrors of the optical resonator exactly the right distance apart, a standing wave is formed by only those waves bouncing between the mirrors and having the proper wavelength. Under these conditions, the light waves emitted by the atoms of the lasing medium are aligned in the same direction and tuned in wavelength (frequency) to increase the strength of the standing wave. One of the mirrors is designed to allow some of this amplified light to “escape” and pass from the optical resonator as a L.A.S.E.R. beam.

LASING MEDIUM

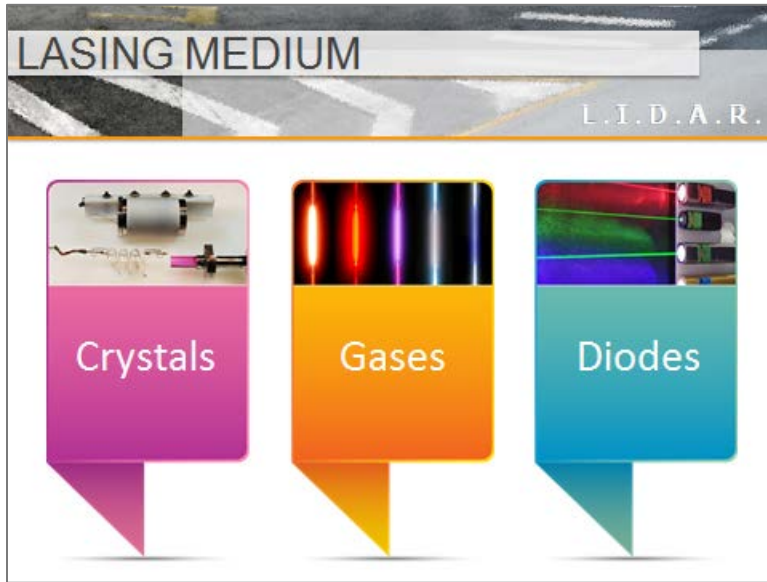

Slide 22.

L.A.S.E.R.S TODAY

CONSISTENT PROPERTIES OF L.A.S.E.R.S TODAY

L.I.D.A.R.


- **Limited divergence**
 - Spreads slowly
- **Narrow spectrum**
 - Occupies small portion of electromagnetic spectrum
- **High intensity**
 - Heat or brightness

Slide 23.

Limited Divergence

- Coherent: refers to the synchronized phase of the light waves
- Collimated: refers to the parallel nature of the L.A.S.E.R. beam
- Monochromatic: refers to the single (wavelength) color of a L.A.S.E.R. beam

HOW L.A.S.E.R.S MEASURE DISTANCE

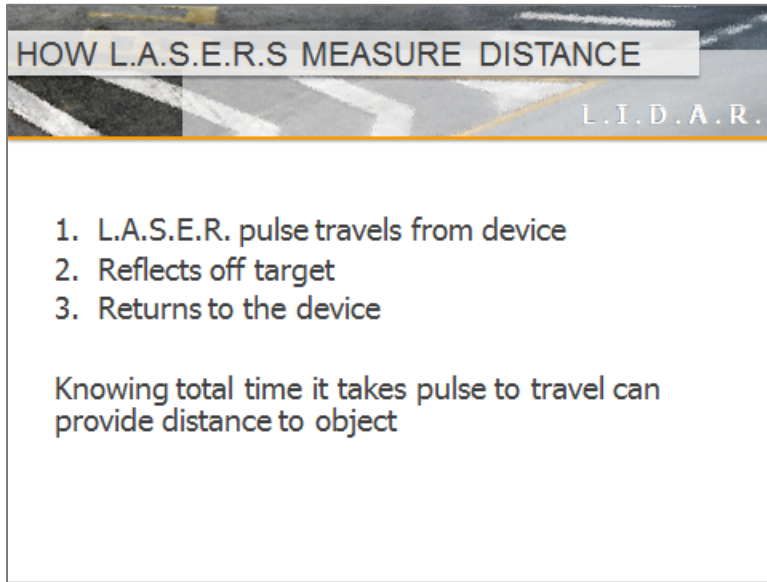

HOW L.A.S.E.R.S MEASURE DISTANCE


L.I.D.A.R.

1. L.A.S.E.R. pulse travels from device
2. Reflects off target
3. Returns to the device

Knowing total time it takes pulse to travel can provide distance to object

Slide 24.

SPEED OF LIGHT

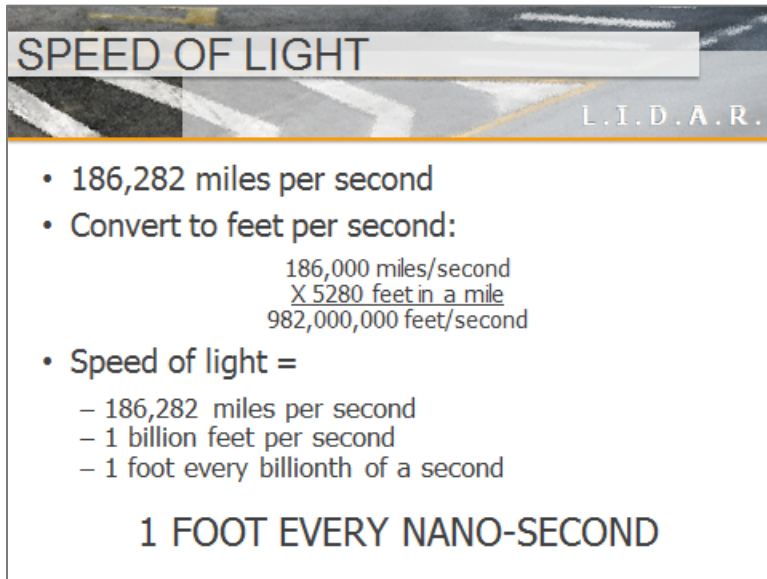

SPEED OF LIGHT

L.I.D.A.R.

- 186,282 miles per second
- Convert to feet per second:
$$\begin{array}{r} 186,000 \text{ miles/second} \\ \times 5280 \text{ feet in a mile} \\ \hline 982,000,000 \text{ feet/second} \end{array}$$
- Speed of light =
 - 186,282 miles per second
 - 1 billion feet per second
 - 1 foot every billionth of a second

1 FOOT EVERY NANO-SECOND


Slide 25.

L.A.S.E.R. PULSES

CHARACTERISTICS OF L.A.S.E.R. PULSES
L.I.D.A.R.

- Speed of a L.A.S.E.R. pulse is constant (speed of light)
- Pulse width: duration / period of L.A.S.E.R. light pulse
- Pulse repetition rate: number of pulses per second of transmission
 - Usually 100 to 300 pulses per second

Slide 26.

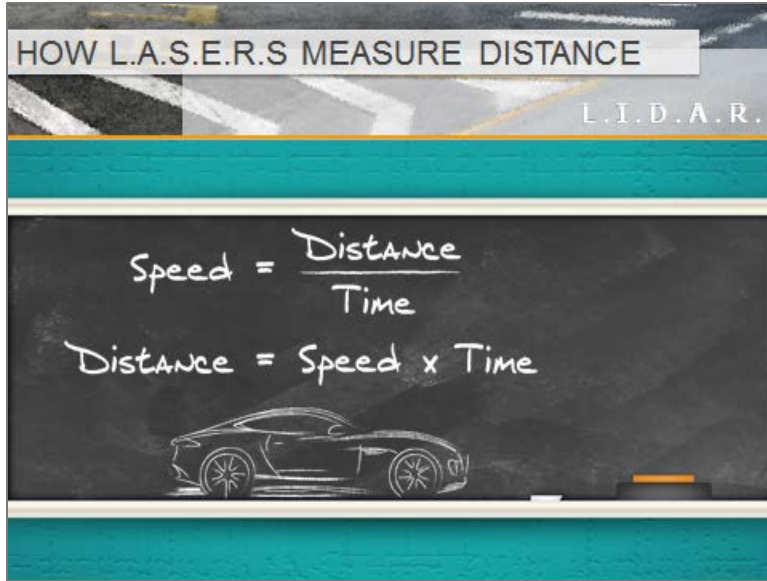

Slide 27.

Recall the basic formula for a time/distance calculation is:


$$\text{Speed} = \frac{\text{Distance}}{\text{Time}}$$

If we know time and speed, we can change this formula using algebra to find a distance.

$$\text{Distance} = \text{Speed} \times \text{Time}$$

EXAMPLE 1: MEASURING DISTANCE

HOW L.A.S.E.R.S MEASURE DISTANCE



The round trip time is 250 ns
The L.A.S.E.R. divides 250 ns in half to find time it took pulse to reach target

$$\frac{250}{2} = 125ns$$

The L.A.S.E.R. reads this as 125 ft

Example 1: L.A.S.E.R. pulse travels to target in 125 ns
L.A.S.E.R. pulse travels back to L.A.S.E.R. in 125 ns

Slide 28.

EXAMPLE 2: MEASURING DISTANCE

HOW L.A.S.E.R.S MEASURE DISTANCE

L.I.D.A.R.

Example 2:

- A L.A.S.E.R. pulse is transmitted towards a car 600 ft away
- Round trip time for the pulse is 1200 ns (600 ft to the car, and 600 ft back)
- Dividing the round trip time by 2 gives the distance to the car

$$1200 \text{ ns} / 2 = 600 \text{ ns} = 600 \text{ ft}$$

Slide 29.



Slide 30.


PROPERTIES OF L.I.D.A.R.S

Slide 31 features a title bar with the text "PROPERTIES OF L.I.D.A.R.S" and "L.I.D.A.R." on the right. Below the title bar, there is a list of three bullet points:

- Use gallium arsenide diodes
 - 904 nm wavelength
- Transmits beam for short time interval
 - L.A.S.E.R. pulse
- Time of L.A.S.E.R. pulse
 - expressed in nanoseconds (ns)

Slide 31.

BASIC L.I.D.A.R. COMPONENTS

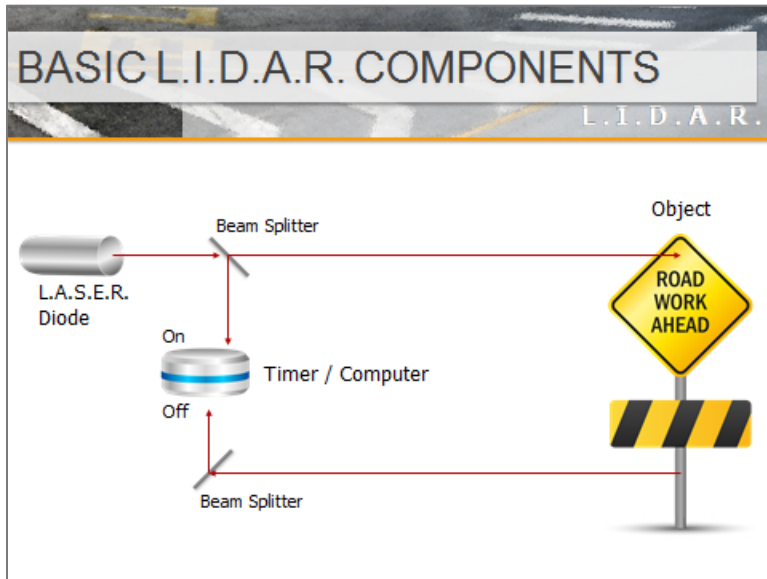

Slide 32.

TIME OF FLIGHT


The slide features a title 'TIME OF FLIGHT' in a white box at the top left and the acronym 'L.I.D.A.R.' in a white box at the top right. Below the title, there are three bullet points:

- R.A.D.A.R.s use the change in frequency of a radio wave
 - The Doppler principle
- L.I.D.A.R.s measure distance change over time
- Measurement of the time is called **Time of Flight**

Slide 33.

L.I.D.A.R. employs a time-of-flight method for taking measurements to determine the target vehicle's speed. This method of measurement may be made at any distance within the operating range of the instrument.

HOW L.I.D.A.R.S MEASURE SPEED

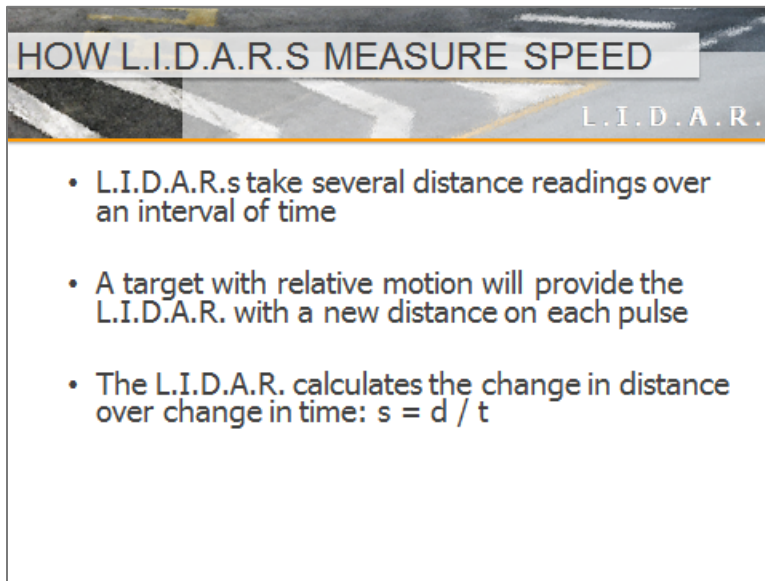

- L.I.D.A.R.s take several distance readings over an interval of time
- A target with relative motion will provide the L.I.D.A.R. with a new distance on each pulse
- The L.I.D.A.R. calculates the change in distance over change in time: $s = d / t$

Slide 34.

When the trigger is pulled, the L.I.D.A.R. transmits hundreds of L.A.S.E.R. light pulses per second. When a pulse is transmitted, the timer is started. When the reflected pulse from the target vehicle is received, the timer is stopped. By comparing the elapsed time between the transmission and reception of the L.A.S.E.R. pulse with the speed of light, the instrument can calculate the range to the target vehicle. After making a specific number of these successive range measurements, the data is mathematically analyzed by the processing algorithm. The calculated target vehicle speed is therefore determined from a group of time and range measurements.

If the range to the target vehicle is increasing with time (the target vehicle is moving away from the instrument), some units will designate the speed reading as a negative value. If the range to the target vehicle is decreasing with time (the target is moving toward the instrument), the speed is designated as a positive value.

Although L.I.D.A.R. instruments employ a variation to the long-accepted time/distance method for speed measuring, it does not depend upon specific reference points for obtaining speed measurements. This process employed by the L.I.D.A.R. instrument is dynamic and occurs without the instrument operator having to identify specific reference points along the target vehicle's path-of-travel.

HOW L.I.D.A.R.S MEASURE SPEED


L.I.D.A.R.

- L.I.D.A.R.s can differentiate one pulse from another
- **Light travels very fast** (one foot every 1 billionth of a second)
- **Time interval of pulses is very slow** (approximately 300 pulses per second)

Slide 35.

If a L.I.D.A.R. transmits 300 pulses per second, then for a returning pulse to meet a departing pulse, the round-trip time for the returning pulse would be 3.3 million nanoseconds or 3.3 million feet – approximately 631 miles!!!

EXAMPLE 3: SPEED MEASUREMENT

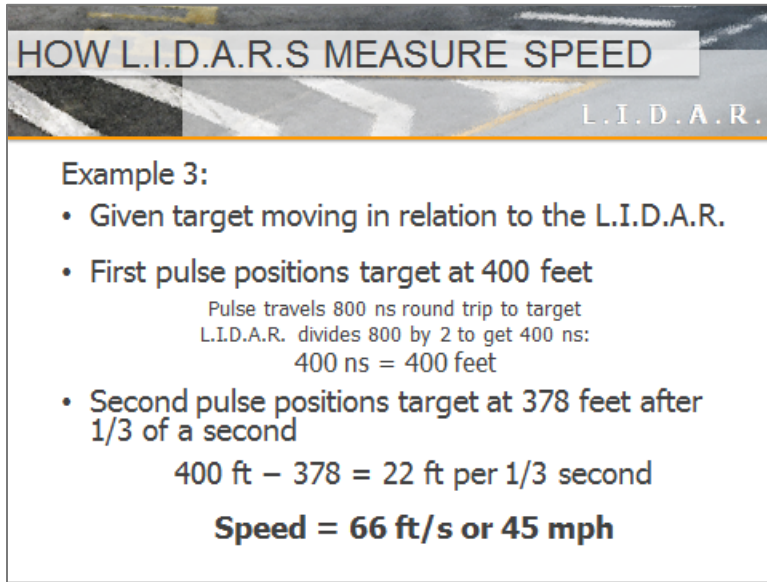

HOW L.I.D.A.R.S MEASURE SPEED

L.I.D.A.R.


Example 3:

- Given target moving in relation to the L.I.D.A.R.
- First pulse positions target at 400 feet
Pulse travels 800 ns round trip to target
L.I.D.A.R. divides 800 by 2 to get 400 ns:
400 ns = 400 feet
- Second pulse positions target at 378 feet after 1/3 of a second
400 ft – 378 = 22 ft per 1/3 second

Speed = 66 ft/s or 45 mph

Slide 36.

EXAMPLE 4: SPEED MEASUREMENT

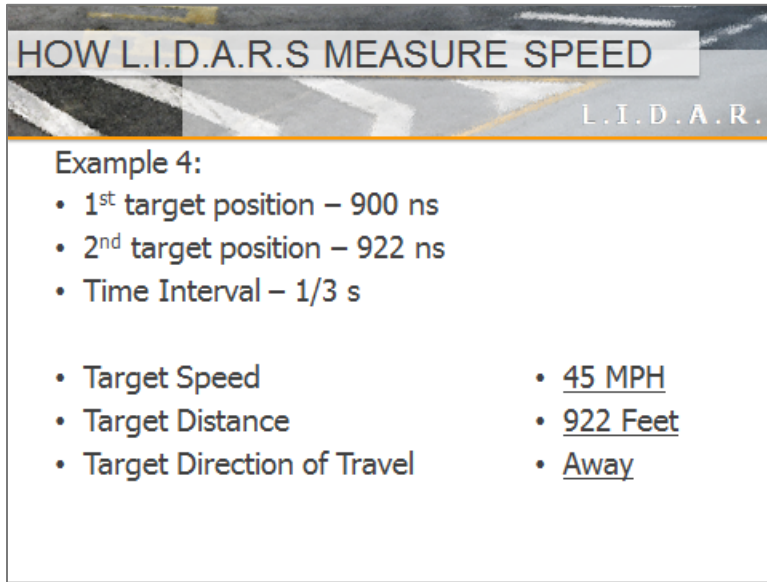

HOW L.I.D.A.R.S MEASURE SPEED

L.I.D.A.R.

Example 4:

- 1st target position – 900 ns
- 2nd target position – 922 ns
- Time Interval – 1/3 s


• Target Speed	• <u>45 MPH</u>
• Target Distance	• <u>922 Feet</u>
• Target Direction of Travel	• <u>Away</u>

Slide 37.

L.I.D.A.R. BEAM WIDTH



Slide 38.

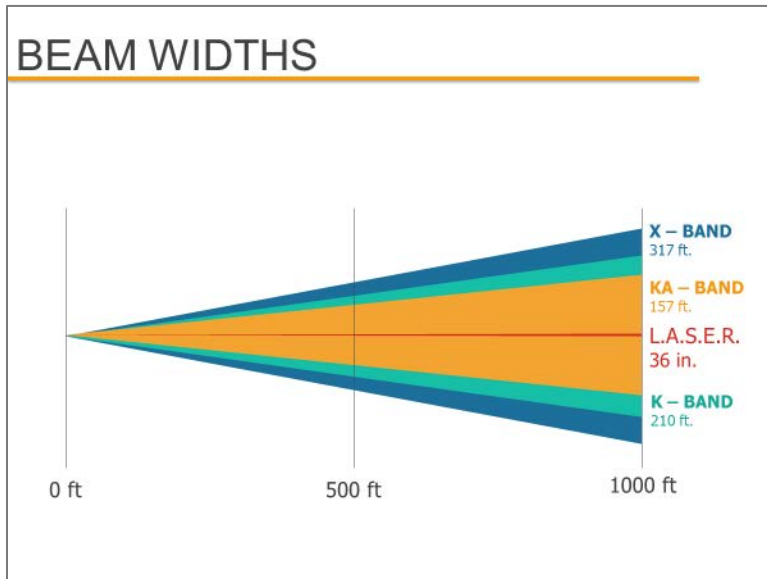


Slide 39.

AVERAGE OF LEAST SQUARES

AVERAGE OF LEAST SQUARES
L.I.D.A.R.

- What if 1st pulse hits the windshield and 2nd pulse hits the grill?
- An erroneous 4 feet gets added and would increase the violator's speed.

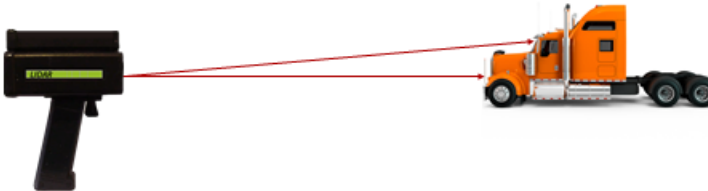


Slide 40.

AVERAGE OF LEAST SQUARES
L.I.D.A.R.

- A process used to eliminate errors
 - Each pulse is mathematically plotted
 - Each new plot is compared with previous data

Slide 41.

AVERAGE OF LEAST SQUARES

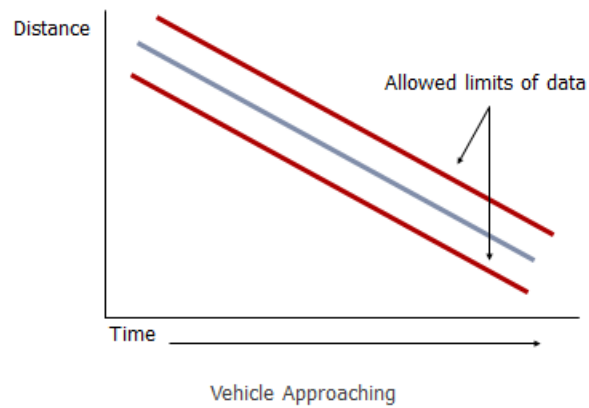

Slide 42.


AVERAGE OF LEAST SQUARES

L.I.D.A.R.

- Sudden changes in targeting points can result in an erroneous speed display
- This data would fall outside the limits set by the L.I.D.A.R.
- Speed reading not displayed during time data falls outside limits


Slide 43.

AVERAGE OF LEAST SQUARES

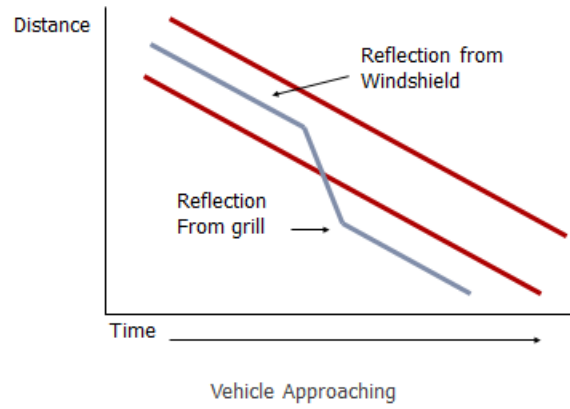

Slide 44.

AVERAGE OF LEAST SQUARES

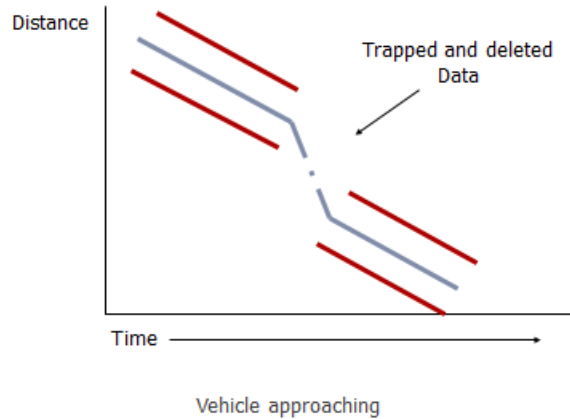

Slide 45.

L.I.D.A.R. TARGETING



Slide 46.

The target vehicle's size, shape, and composition do not affect the L.I.D.A.R. device. When aiming the L.I.D.A.R. device at a target vehicle, some parts of the vehicle provide a better reflective surface. The target vehicle's ability to reflect at optical wavelengths will affect the device's range.

Parts that reflect light are the best L.I.D.A.R. signal reflectors. The best reflective surfaces on receding vehicles are usually the license plate or the tail light reflectors. For oncoming traffic, the best place to aim is normally the front license plate, the headlights, or the turn signal reflectors.

The color or cleanliness of the vehicle may also help increase the range of the L.I.D.A.R. device. Light colors reflect better than dark colors. Clean vehicles reflect better than dirty vehicles.

Keep in mind the diameter of the L.I.D.A.R.'s transmitted signal is very narrow at a distance of 500 feet. This requires accurate aiming on target vehicle. Large amounts of motion may make it difficult to obtain a speed reading when aiming at a target vehicle.

AIMING POINTS ON VEHICLE



Slide 47.

TRACKING HISTORY



Slide 48.

The L.I.D.A.R. operator should continuously monitor traffic for potential violators. Any enforcement action resulting from a speed measurement obtained with a L.I.D.A.R. instrument must be supported by several vital elements that comprise what is referred to as a "tracking history."

L.I.D.A.R. units provide audio feedback from the device (refer to owner’s manual).

Steady or multiple read-outs are necessary to avoid the sweep effect, discussed in Chapter 4.

L.I.D.A.R. EFFECTS

Estimated time for Chapter 4: 15 Minutes

L. I. D. A. R.


Objectives

By the end of this chapter, you will be able to:

- Discuss L.I.D.A.R. effects


Contents

Factors Affecting L.I.D.A.R.....	50
Sweep Effect	53
Cosine Effect	56
L.I.D.A.R. Jammer.....	58

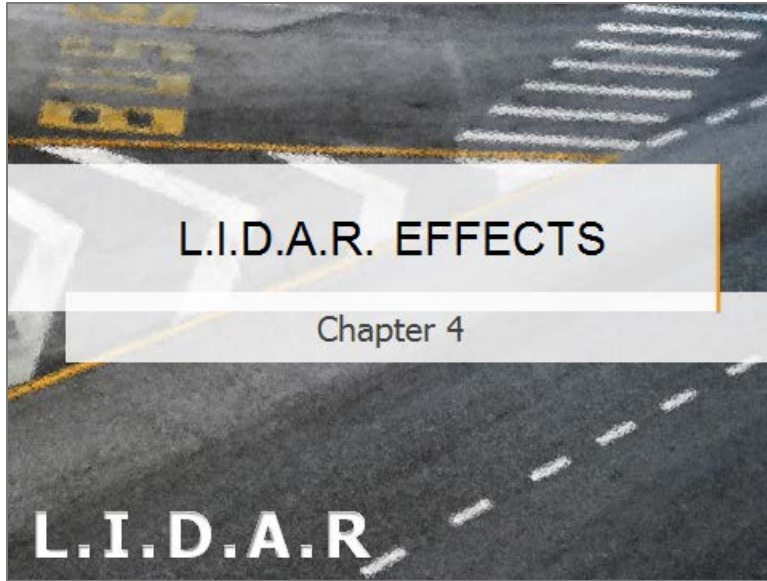

Slide 49.

FACTORS AFFECTING L.I.D.A.R.

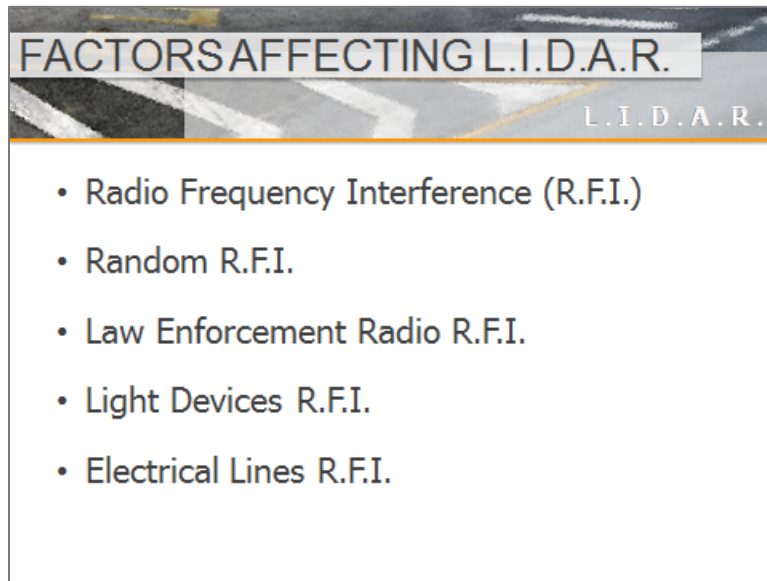

Slide 50.

The L.I.D.A.R. operators should recognize and understand various effects that may affect the L.I.D.A.R. device.

Radio Frequency Interference (R.F.I.)

There are several radio frequency sources capable of generating signals that may interfere with the operation of L.I.D.A.R. devices. Unlike R.A.D.A.R., L.I.D.A.R. devices use infrared light and are not as likely to be affected by R.F.I. sources. The L.I.D.A.R.'s R.F.I. indicator is usually the only indication that there is an R.F.I. source.

Weak R.F.I. signals are generally discarded when the L.I.D.A.R. device receives a stronger reflected signal from the target vehicle.

Law Enforcement Radio R.F.I.

Law enforcement radios, portable radios, or business band radios may produce R.F.I. indications. The interference produced by these types of radios is generally a result of their powerful transmitters.

To avoid/eliminate:

- Do not transmit patrol vehicle's law enforcement radio, a portable radio, or a business band radio while operating the L.I.D.A.R. device
- Develop a valid tracking history

Lighting Devices R.F.I.

Certain types of lighting equipment such as mercury vapor, neon, or fluorescent lights are capable of producing R.F.I. L.I.D.A.R. devices should not be aimed directly at bright lights.

To avoid/eliminate:

- Select an operation site free from this type of potential interference
- Develop a valid tracking history

Electrical Lines R.F.I.

High voltage electrical lines, electrical transformers, or electrical substations may produce R.F.I.

To avoid/eliminate:

- Select an operational site free from this type of potential interference
- Develop a valid tracking history

Most L.I.D.A.R. devices have built in R.F.I. detection that will not allow a target reading to be displayed if R.F.I. is detected. Consult your operator's manual to determine specifics of your unit.



Slide 51.

Windshield

The windshield does not affect the accuracy of the L.I.D.A.R. device; it may only reduce the range.

Weather

Although the L.A.S.E.R. emissions used by L.I.D.A.R. devices are not in the visible spectrum, they are close enough in wavelength that atmospheric or climatic conditions that impair vision also affect L.I.D.A.R. speed-measuring device operations.

Rain, smoke, fog, and airborne dust particles will reduce the ability to acquire a target.

Low Voltage

The L.I.D.A.R. device will be disabled in accordance with the specific manufacturer's specifications when a low voltage situation is experienced. The operator should check the power source if this happens. In the absence of a loose connection or other readily identifiable solutions, the L.I.D.A.R. device should be removed from service and repaired.


A L.I.D.A.R. operator will learn to identify and disregard unusual readings and R.F.I.s through training and experience.

SWEEP EFFECT


SWEEP EFFECT L.I.D.A.R.

- Caused by changing targeting point while transmitting L.A.S.E.R. pulses
- Creates gradual change in speed data instead of sudden change
- L.I.D.A.R. may allow data in and see the change as an increase in speed depending on how wide the limits are set in the average of least squares error trappings

Slide 52.

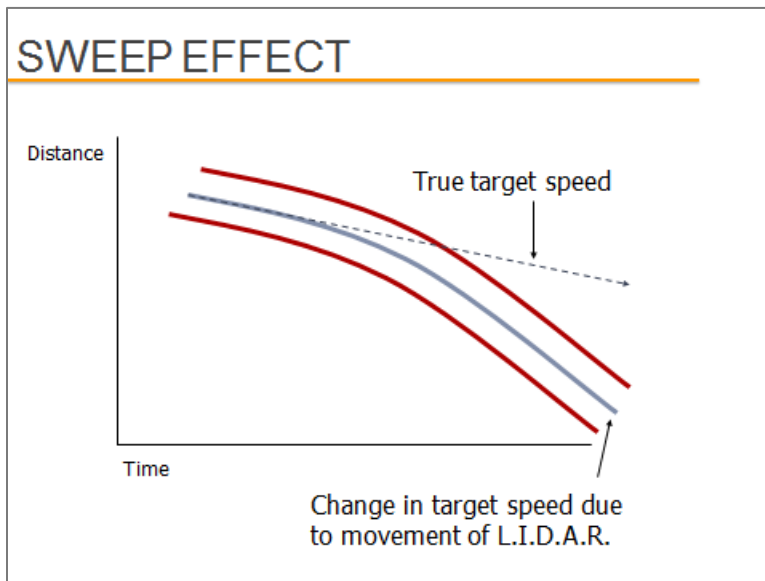


Slide 53.

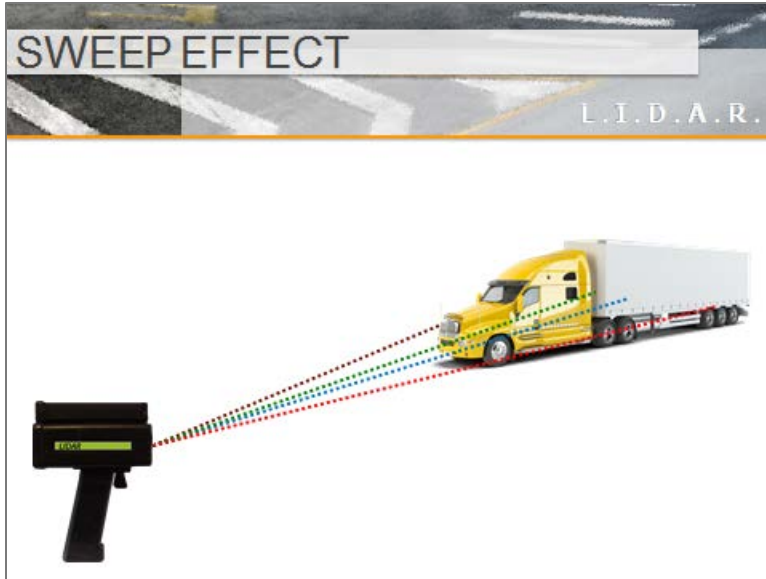

Slide 54.

SWEEP EFFECT

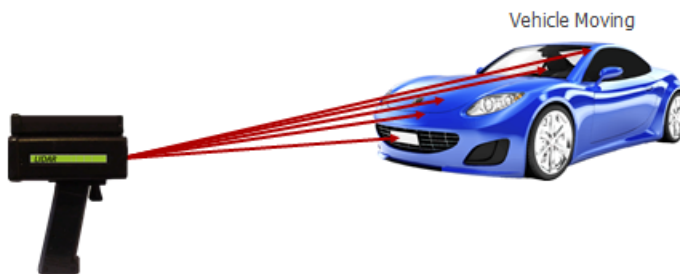

May produce momentary speed reading
higher than actual speed!

Slide 55.

When a L.I.D.A.R. signal strikes at an angle to a vehicle's surface the signal's area of influence on that surface is oval shaped. The L.I.D.A.R. signal's reflection may come from either the front or the back of this oval area.

If a reflection comes first from the front then moves to the rear because of target or L.I.D.A.R. device movement, the overall distance has changed (increased) therefore the speed calculation results in a lower than true speed.


If a reflection comes first from the rear then moves towards the front, then the calculation will result in a higher than true speed.

It is essential that the L.I.D.A.R. operator maintain a steady aiming point on the target vehicle to avoid this effect.

To avoid/eliminate:

- Hold the aim point steady on a single portion of the target vehicle
- Develop a solid tracking history
- Steady or multiple read-outs

COSINE EFFECT

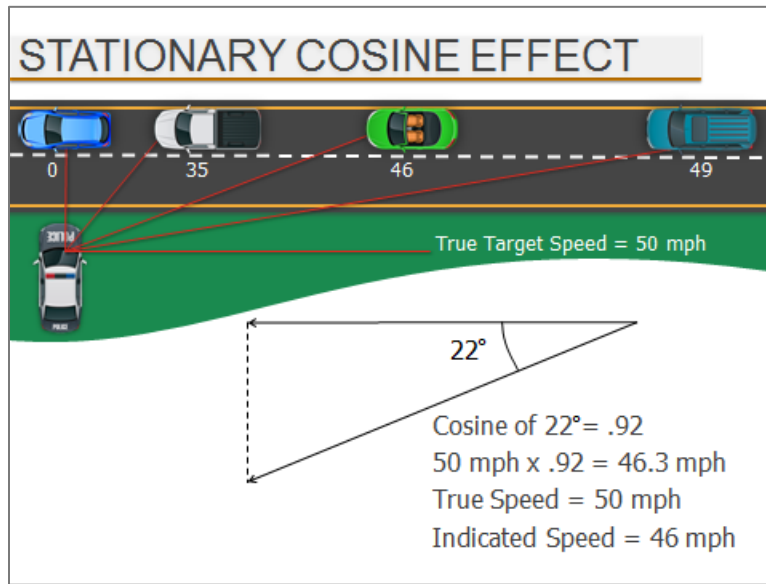

Slide 56.

If a target vehicle were moving directly toward or away from the L.I.D.A.R. device, the relative motion as measured by the L.I.D.A.R. device would be equal to the target vehicle's true speed. Often this is not the case. For safety reasons, operations are set up a short distance off the traveled portion of the road. Therefore, vehicles traveling along the roadway will not be heading directly toward or away from the L.I.D.A.R. device and an angle is created between the target vehicle's direction of travel and the L.I.D.A.R. device's position.

When a target vehicle's direction of travel creates a significant angle with the position of the L.I.D.A.R., the measured speed will be less than the true speed. Since the time/distance calculation is based on the relative speed, the L.I.D.A.R. speed measurement may be less than the vehicle's true speed. This is known as the cosine effect.

The difference between the measured and true speed depends upon the angle between the travel direction of the target vehicle and the position of the L.I.D.A.R. (the greater the angle, the lower the measured speed). This effect always works to the motorist's advantage. The cosine effect is not significant if the angle itself remains small.

The cosine effect decreases as the range to the target vehicle increases. As the target vehicle approaches the L.I.D.A.R. device, the angle then increases. As soon as this angle becomes large enough, the L.I.D.A.R. unit will measure the target's speed as less than its true speed.

To minimize the cosine effect, the angle should be kept small by setting up the L.I.D.A.R. device as close to the road as possible without creating safety risks. The L.I.D.A.R. should be targeted down the road at sufficient distances so as not to create a cosine effect.

COSINE EFFECT						
True Speed as Affected by the Cosine Effect						
Angle Degrees	30 mph	40 mph	50 mph	55 mph	60 mph	70 mph
0	30.00	40.00	50.00	55.00	60.00	70.00
1	29.99	39.99	49.99	54.99	59.99	69.99
3	29.96	39.94	49.93	54.92	59.92	69.90
5	29.89	39.85	49.81	54.79	59.77	69.73
10	29.54	39.39	49.24	54.16	59.09	68.94
15	28.98	38.64	48.30	53.12	57.94	67.61
20	28.19	37.59	46.99	51.68	56.38	65.78
30	25.98	34.64	43.30	47.63	51.96	60.62
45	21.21	28.28	35.36	38.89	42.43	49.50
60	15.00	20.00	25.00	27.50	30.00	35.00
90	0.00	0.00	0.00	0.00	0.00	0.00

Slide 57.

Cosine Effect Table

The table indicates how L.I.D.A.R. speed measurements differ from true speed because of the cosine effect.

The cosine effect does not become a factor until the angle reaches about 10 degrees. When a target vehicle passes by at a 90-degree angle, the L.I.D.A.R. is unable to perceive any vehicle speed because the target is getting neither closer to or farther from the device. This can be understood by imagining a target vehicle being driven in a perfect circle around a L.I.D.A.R. device.

Because the vehicle is getting neither closer to nor farther from the L.I.D.A.R., at 90 degrees, there is no way to measure time/distance. Because the distance part of the equation is not changing or zero, the speed measurement becomes zero.

L.I.D.A.R. JAMMER

- Presence of L.I.D.A.R. jammer may be recognizable when:
 - Operating range is reduced
 - Error code displayed
 - No speed displayed

Slide 58.

A L.I.D.A.R. transmitter when used as a jamming device does not violate FCC regulations. This is because L.I.D.A.R. uses light instead of radio waves.

The presence of a L.I.D.A.R. jammer may be recognizable when the L.I.D.A.R. device:

- Operating range is reduced
- Displays an error code
- Displays no speed

SET UP

Estimated time for Chapter 5: 5 Minutes

L. I. D. A. R.


Objectives

By the end of this chapter, you will be able to:

- Set up L.I.D.A.R.


Contents

Operational Considerations	61
----------------------------------	----

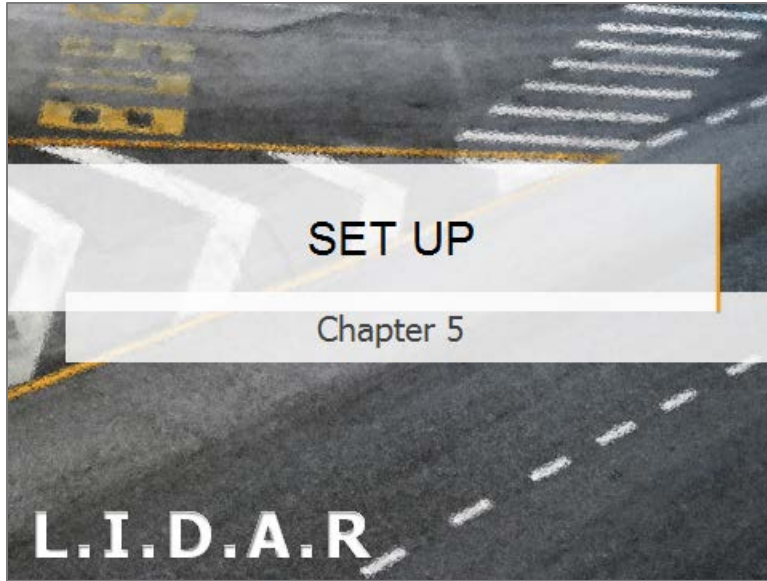

Slide 59.

OPERATIONAL CONSIDERATIONS

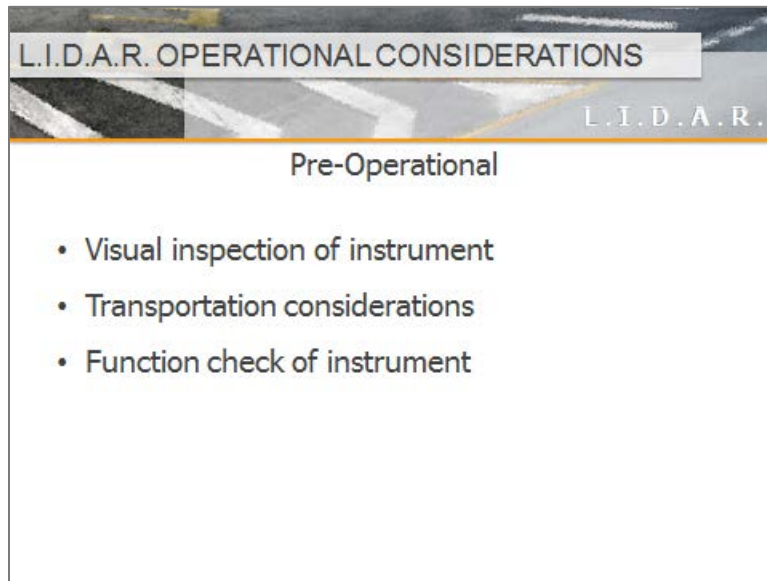

Slide 60.

Operational considerations begin when the L.I.D.A.R. operator removes the device from its storage case. The operator should use the operator's manual to locate each component and understand the features and functions of the components. The operator should then inspect the device for:

- External damage
- Missing components
- Damage or defects that may cause the L.I.D.A.R. device to function improperly

If any problem exists, the device should be removed from service and be repaired.

Care and Handling

- Periodic cleaning of the external optical surfaces when necessary
- Towel off any excess moisture and air-dry the device at room temperature when the device gets wet
- Be extremely careful when cleaning the lenses (The range of the device will be reduced if the lenses become excessively scratched)
- The operator should not aim the device at any bright light sources. This includes the sun. (Doing this may reduce its operational range)

Transportation Considerations

Care should be used with transporting L.I.D.A.R. devices.

The L.I.D.A.R. device should be transported in the patrol vehicle following the manufacturer's recommended procedures. The design of a specific L.I.D.A.R. device will dictate the requirements for transportation.

Take precaution with the L.I.D.A.R. device to prevent occupant injury in the event the patrol vehicle is involved in a crash or evasive driving maneuvers.

TESTING

Estimated time for Chapter 6: 10 Minutes

L. I. D. A. R.


Objectives

By the end of this chapter, you will be able to:

- Perform function tests

Contents

Light Test.....	65
Internal Testing.....	66
External Testing	67
L.I.D.A.R. Health Concerns.....	68

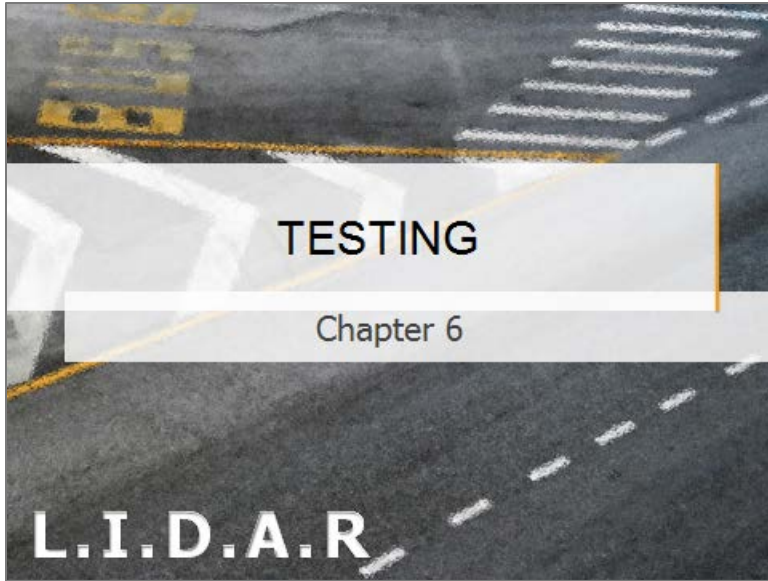


Slide 61.

OPERATORS SHOULD CONDUCT ALL TESTS IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.

Perform function tests per manufacturer specifications and jurisdictional requirements.

Note: "Checks" and "tests" are used interchangeably

LIGHT TEST

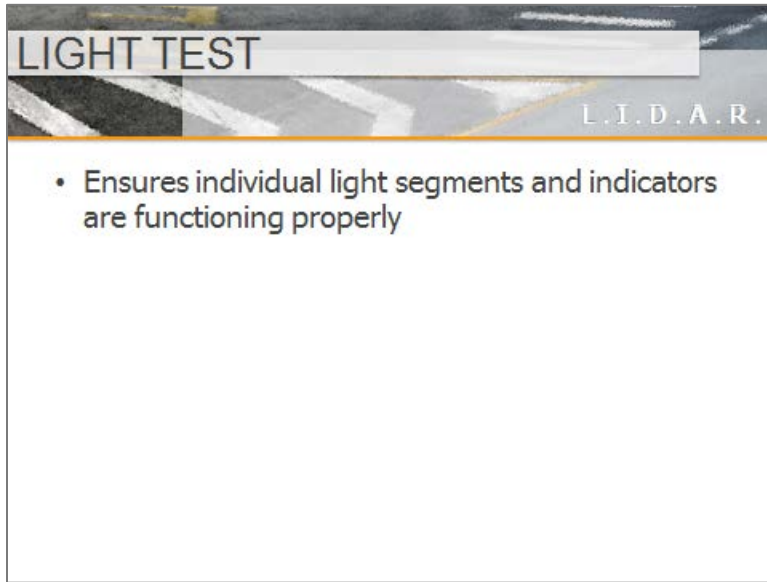


Slide 62.

Light Segment and Indicators Test

The L.I.D.A.R. operator will perform a light test to ensure that all the individual light segments and indicators are functioning properly. If any L.I.D.A.R. device fails to perform the light test as required by manufacture specifications or if any lighting segment is not functioning properly, the L.I.D.A.R. device should be removed from service until repaired.

INTERNAL TESTING

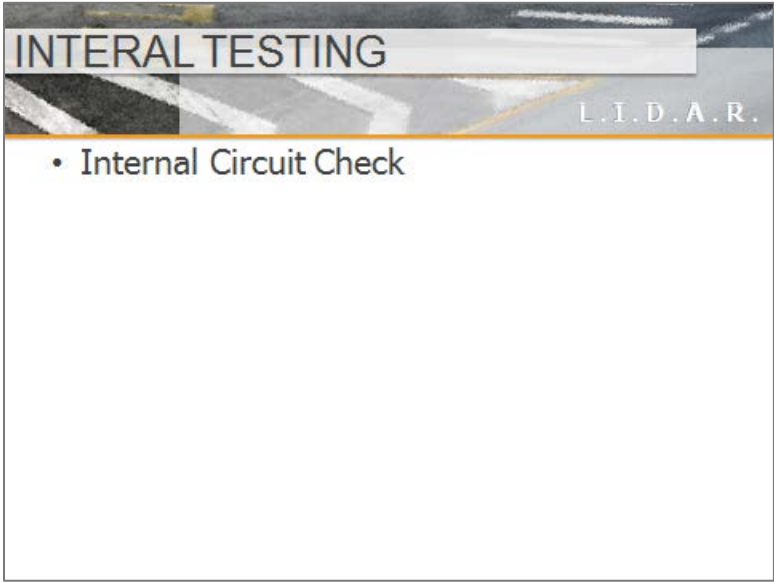


A thumbnail image of a presentation slide. The slide has a dark background with a light-colored banner at the top containing the text 'INTERNAL TESTING'. Below the banner, the text 'L.I.D.A.R.' is visible in the upper right corner. A single bullet point is listed: 'Internal Circuit Check'.

Slide 63.

Internal Circuit Check

The L.I.D.A.R. operator will perform an internal circuit check. If the L.I.D.A.R. device fails to perform the internal circuit check as required by manufacture specifications, the L.I.D.A.R. device should be removed from service until repaired.

EXTERNAL TESTING

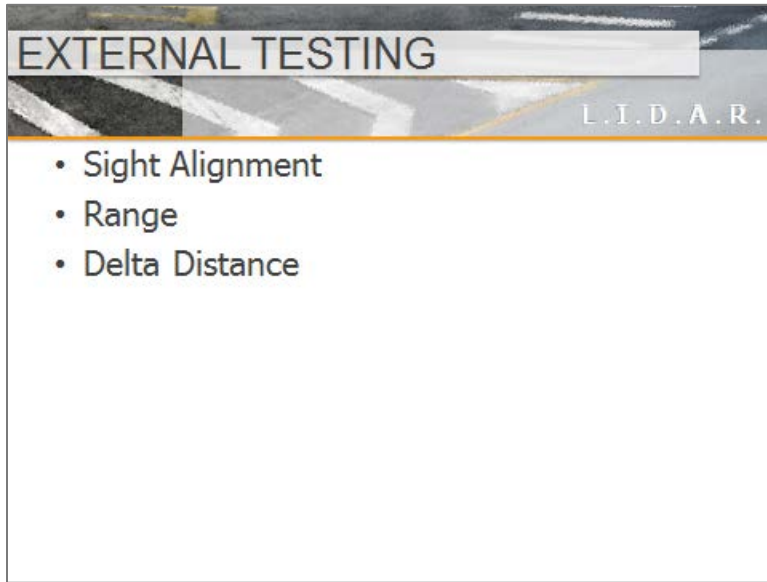

Slide 64.

Sight Alignment:

The purpose of sight alignment tests is to verify that the L.A.S.E.R. beam is aligned with the reticule or cross hairs.


Range (Fixed Distance) Function Check:

The L.I.D.A.R. operator will check the range function by sighting on a fixed object from a point that was measured manually.

Delta (Differential) Distance Test

The purpose of this test is to ensure the unit is accurately calculating target speeds. During this test, the operator takes two different distance measurements so the unit can run a calculation and display a known speed rating based on the distance difference.

L.I.D.A.R. HEALTH CONCERNS

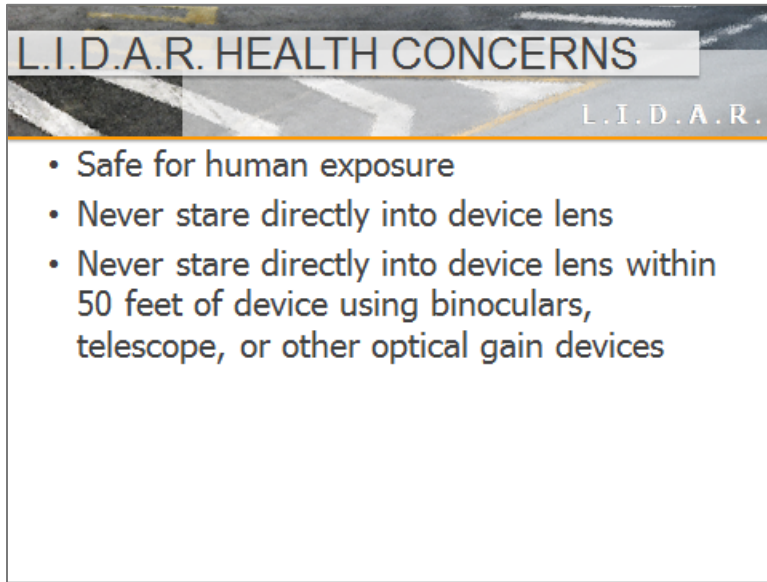

L.I.D.A.R. HEALTH CONCERNS

- Safe for human exposure
- Never stare directly into device lens
- Never stare directly into device lens within 50 feet of device using binoculars, telescope, or other optical gain devices

Slide 65.

L.I.D.A.R. devices are considered Class 1 Eye Safety devices by the United States Food and Drug Administration (FDA). This implies that the devices are considered safe based upon current medical knowledge. While they are Class 1 devices and are inherently eye safe, certain reasonable precautions should be taken in their operation.

- Never stare directly into the device lens
- Never stare directly into the device lens within 50 feet of the device using binoculars, telescope, or other optical gain devices

During normal operations, L.I.D.A.R. devices are safe for human exposure. L.I.D.A.R. devices emit less power and energy than television remotes, flashlights, and L.A.S.E.R. tag games.

LEGAL CONSIDERATION

Estimated time for Chapter 7: 30 Minutes

L. I. D. A. R.


Contents

Objectives

By the end of this chapter, you will be able to:

- Discuss legal considerations pertaining to L.I.D.A.R.
- Discuss the requirements needed for citation documentation and/or courtroom testimony

Fundamental Case Law Affecting L.I.D.A.R.	71
Honeycutt v. Commonwealth.....	74
Lessons Learned: L.I.D.A.R. Challenges and Discovery	76
Impact of New Products.....	77
People v. Depass.....	78
Hawaii v. Abiye Assaye	80
Meeting the Needs for Judicial Notice.....	82

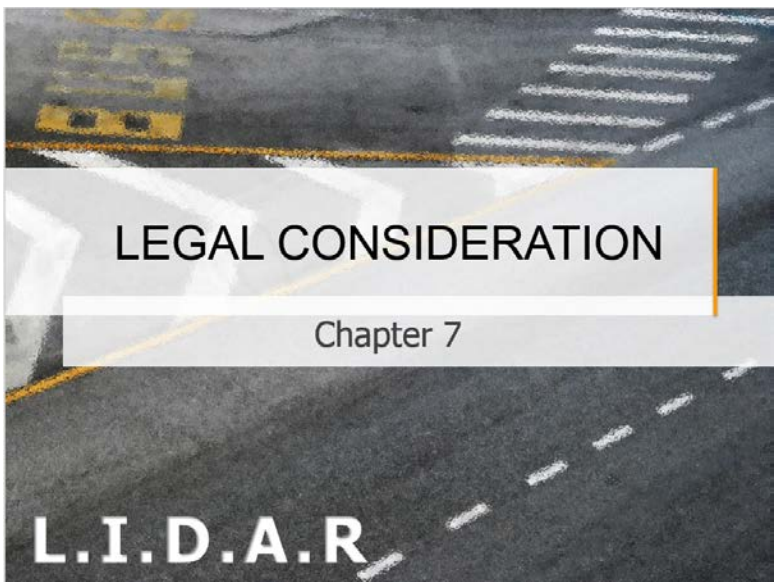


Slide 66.



SUPPLEMENT 1: Additional Court Cases

Lined area for taking notes, consisting of 15 horizontal gray lines.

FUNDAMENTAL CASE LAW AFFECTING L.I.D.A.R.

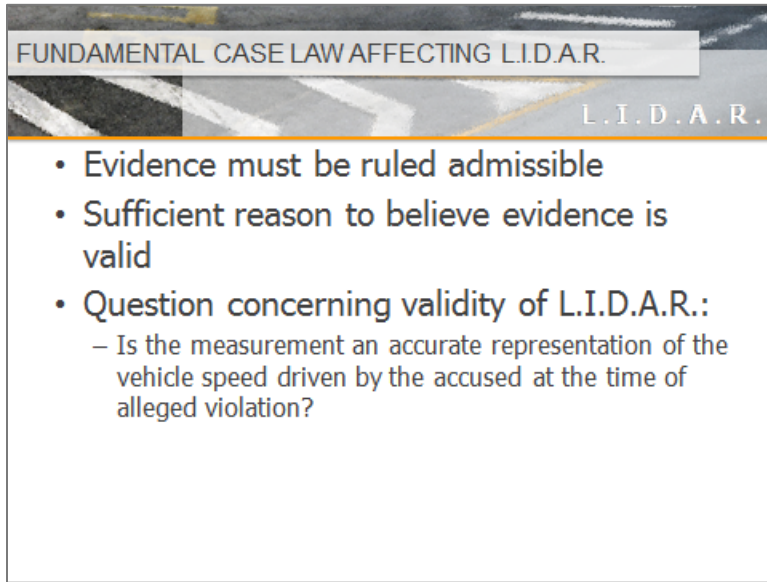

FUNDAMENTAL CASE LAW AFFECTING L.I.D.A.R.

L.I.D.A.R.

- Evidence must be ruled admissible
- Sufficient reason to believe evidence is valid
- Question concerning validity of L.I.D.A.R.:
 - Is the measurement an accurate representation of the vehicle speed driven by the accused at the time of alleged violation?

Slide 67.

L.I.D.A.R. speed-measuring devices are used in traffic enforcement to acquire evidence. To be useful, the evidence must be ruled admissible and there must be sufficient reason to believe evidence is valid for it to be admitted.

The question concerning the validity of a L.I.D.A.R. speed measurement is:

- Is this measurement an accurate representation of the speed of the actual vehicle driven by the accused at the time of the alleged violation?

WHAT IMPACTS ACCEPTANCE OF L.I.D.A.R.

L.I.D.A.R.

- Do we know that the operating principles of L.I.D.A.R. are valid?
- Do we know that the L.I.D.A.R. device was working properly at the time of the alleged violation?
- Do we know that the operator has the necessary qualifications and performed properly at the time of the alleged violation?
- Do we know that the speed measurement came from the vehicle driven by the accused?

Slide 68.

- Are the operating principles of L.I.D.A.R. valid?
- Was the L.I.D.A.R. device was working properly at the time of the alleged violation?
- Is the operator qualified to use the device, and did so correctly at the time of the alleged violation?
- Can it be demonstrated the speed measurement came from the vehicle driven by the accused?

The validity of scientific principles used in a speed-measurement device has been settled and judicial notice is taken that both R.A.D.A.R. and L.I.D.A.R. are reliable and accurate technologies for measuring speed. The principle of judicial notice applies to facts that are common knowledge and states that it is not necessary to introduce evidence to prove what common knowledge is.


We know that the scientific principles used in L.I.D.A.R. are valid and common knowledge. This principle involves basic concepts like the speed of light (186,282 miles per second) and the formula for speed, i.e., $speed = \frac{distance}{time}$.

Ensuring that a L.I.D.A.R. device is functioning correctly is critical to making fair and accurate measurements of speed for enforcement purposes. Because the device is working properly today does not mean it will work properly tomorrow. The law enforcement officer must be prepared to provide evidence that the device was working properly at the time the speed measurement was made.

Courts have long accepted the practice of “before-and-after” testing. Before-and-after testing requires the device be shown working properly both at the beginning and end of the tour of duty during in which the measurement of the suspect vehicle’s speed was taken. These actions support the argument that when measurements are taken between the start and end of a shift, the device was working properly.

1. The operator can establish that he/she was trained in the use of the specific device.
2. Where applicable, that the law enforcement officer has been trained to a specific standard or curriculum content in compliance with established statute(s).
3. The operator followed established operating procedures for the specific device.
4. The operator performed and verified the required pre-and post-operational accuracy checks.
5. The operator had an opinion as to the target vehicle speed that was independent of the speed-measuring device.
6. The enforcement action resulted only after the operator’s opinion was corroborated by the speed-measurement device and demonstrated a clear-cut violation of the applicable speed laws.

HONEYCUTT V. COMMONWEALTH

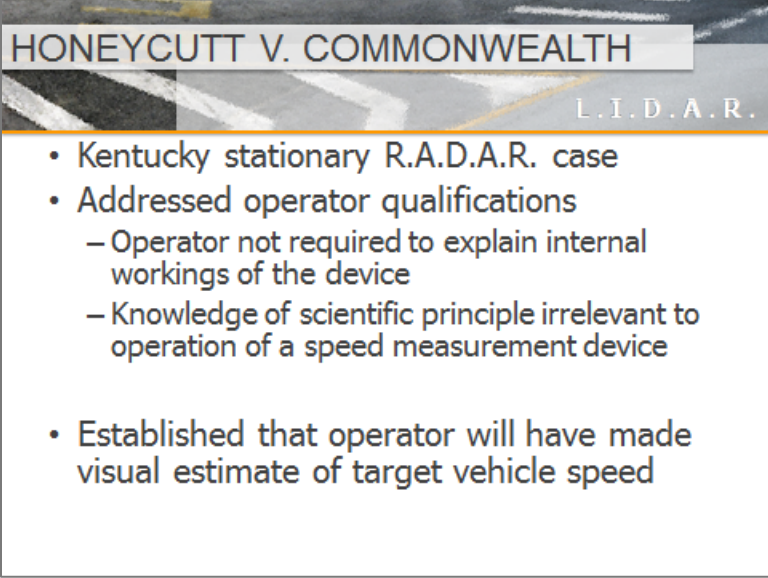

The slide features a background image of a road with a speed measurement device. The title "HONEYCUTT V. COMMONWEALTH" is at the top, with "L.I.D.A.R." in the bottom right corner of the slide frame.

- Kentucky stationary R.A.D.A.R. case
- Addressed operator qualifications
 - Operator not required to explain internal workings of the device
 - Knowledge of scientific principle irrelevant to operation of a speed measurement device
- Established that operator will have made visual estimate of target vehicle speed

Slide 69.

The question of operator qualifications was addressed by the Kentucky Court of Appeals in the landmark (R.A.D.A.R.) case *Honeycutt v. Commonwealth*. “Honeycutt” established that a speed-measurement device operator need not be able to explain the internal workings of the device. This case set a standard in 1966 for acceptable use of and testimony about R.A.D.A.R.

Also, knowledge of the scientific principle is irrelevant to the operation of a speed measurement device. The defense cannot question the operator’s knowledge of the scientific principles.

The operator should not attempt to describe or explain these principles in courtroom testimony.

In *Honeycutt v. Commonwealth*, the court ruled that it is sufficient to have enough knowledge and training to properly:

- Set up the device
- Test its accuracy
- Read the device to obtain the speed measurement

The impact of this ruling on an officer’s testimony suggests:


- You must establish that you have the necessary qualifications and training for a L.I.D.A.R. operator
- You must establish that the device was set up properly and working normally

- You must establish that the L.I.D.A.R.'s accuracy was verified with a proper test

How can we verify that the L.I.D.A.R. speed measurement came from the accused's vehicle?

- The speed-measurement device was operated in accordance with established procedures
- The officer must make a visual estimate of the vehicle's speed
- The L.I.D.A.R. speed measurement must be relatively close to the initial visual estimate

LESSONS LEARNED: L.I.D.A.R. CHALLENGES AND DISCOVERY

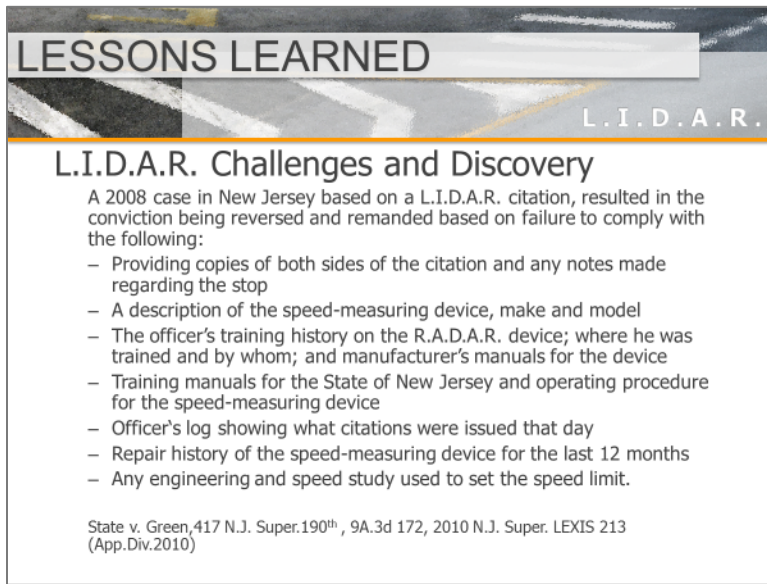

LESSONS LEARNED

L.I.D.A.R.

L.I.D.A.R. Challenges and Discovery

A 2008 case in New Jersey based on a L.I.D.A.R. citation, resulted in the conviction being reversed and remanded based on failure to comply with the following:

- Providing copies of both sides of the citation and any notes made regarding the stop
- A description of the speed-measuring device, make and model
- The officer's training history on the R.A.D.A.R. device; where he was trained and by whom; and manufacturer's manuals for the device
- Training manuals for the State of New Jersey and operating procedure for the speed-measuring device
- Officer's log showing what citations were issued that day
- Repair history of the speed-measuring device for the last 12 months
- Any engineering and speed study used to set the speed limit.

State v. Green, 417 N.J. Super. 190th, 9A.3d 172, 2010 N.J. Super. LEXIS 213 (App.Div.2010)

Slide 70.

The New Jersey case includes additional elements, such as providing copies of the citation(s) and any notes associated with the violation, being able to produce training records and curricula, daily activity logs, the maintenance records for the device, and even data to justify the established speed limit.

While these kinds of expectations are not likely to arise in most speeding cases, the elements laid out in State v Green reflect a very different set of issues unrelated to the reliability of L.I.D.A.R. technology.

Law enforcement officers should be prepared to address such questions if they arise. Having access to device maintenance records and traffic engineering and speed study data are also valuable resources.

IMPACT OF NEW PRODUCTS

IMPACT OF NEW PRODUCTS

L.I.D.A.R.

- L.I.D.A.R. is accepted in most courts and will be received by judicial notice
- When a new product is used, a Court can be demanding
 - State v. Sweat, 2016-Ohio
- On appeal, the court defined the requirements for acceptance of a new device, and noted they had not been met
- State specific requirements are important in case preparation

State v. Sweat, 2016-Ohio-2680 *, 2016 Ohio App. LEXIS 1548 (Ohio Ct. App., Butler County Apr. 25, 2016)
State v. Heike, 2015-Ohio-4402, 46 N.E.3d 188, 2015 Ohio App. LEXIS 4267 (Ohio Ct. App., Montgomery County 2015)


Slide 71.

Note that when a new product is used, acceptance and judicial notice is not always a given. L.I.D.A.R. is accepted in most courts and will be received by judicial notice, which is not always the case for new speed-measuring devices. Here is language from a 2016 Ohio appeal:

This court has previously recognized that the reliability of a speed-measuring device can be established in one of three ways: a reported municipal court decision from this district, a reported or unreported case from our appellate court, or the previous consideration of expert testimony by the trial court as noted on the record. *State v. Starks*, 196 Ohio App.3d 589, 2011-Ohio-2344, 964 N.E.2d 1058 (12th Dist.). Within *Starks*, ***we noted that no such decision existed wherein any court in this district took judicial notice of the reliability of the (XXXXXXX) and no court had considered expert testimony on the issue.*** The circumstances set forth in *Starks* have not changed, as the state has never offered expert testimony to establish the scientific reliability of the XXXXXXX in our district. (manufacturer/model name omitted for purposes of this curriculum)

Understanding the requirements within your State are critical to making effective cases if judicial notice is based on similar factors, or other legal requirements.

PEOPLE V. DEPASS

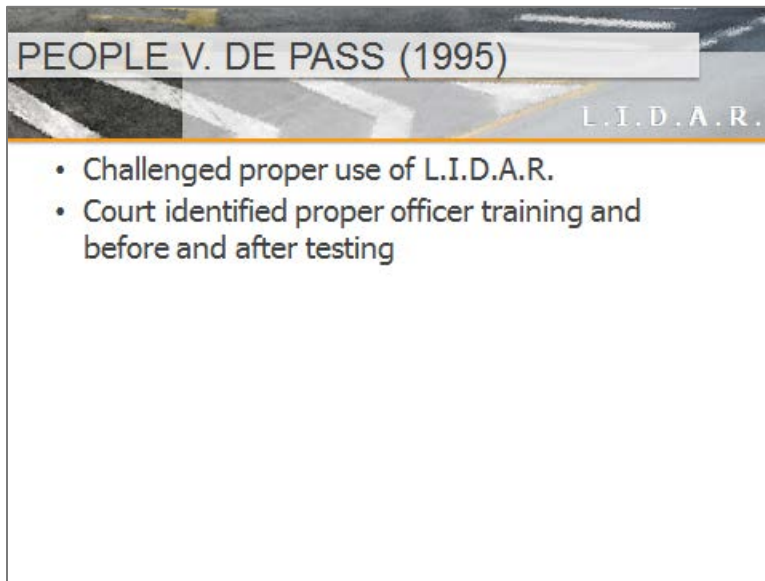

PEOPLE V. DE PASS (1995)

L.I.D.A.R.

- Challenged proper use of L.I.D.A.R.
- Court identified proper officer training and before and after testing

Slide 72.

In a lower-case ruling, a New York court held in favor of L.I.D.A.R. evidence.

The court ruled that speed calculations of motor vehicles made by a L.A.S.E.R. device is scientific evidence and admissible in court, based in part on testimony given by an astrophysicist on the basic workings of the device. The device has been used by the space shuttle astronauts and is now widely used by law enforcement officers for measuring the speed of vehicles.

A qualified scientist and astrophysicist explained the principles utilized in the operation and use of the hand-held device for determining speed of a moving vehicle. His testimony made clear that the device makes use of principles that are well accepted in the scientific community, as it uses the principle that the speed of light is known and constant.

It further relies on the accepted understanding that a L.A.S.E.R. beam emitted from a L.A.S.E.R. generator is very narrow in width and will not spread significantly after emission and is emitted in a narrow frequency band.

In addition to a L.A.S.E.R. emitter, the device in question also contained a photo diode, a clock, and a computational device. In operation, when a short L.A.S.E.R. beam burst is emitted toward an object having a reflective surface, the time at which the reflected beam is received back at the photo diode is determined. Based upon the time between L.A.S.E.R. beam emission and return and the known speed of light, the distance between the object and the L.A.S.E.R. device is determined by simple arithmetic calculation. If two or more sequential beams are emitted toward a specific vehicle and the return times are measured, the difference in the distances measured for each

emission can be used to determine the difference between the locations of the vehicle at two points.

By knowing the difference in time between each of the emission returns, and then dividing the difference in distance by the time elapsed between the two returns, the velocity of the vehicle between the two points is determined.

Testimony given was that these principles of operation are widely used in L.A.S.E.R. range finders, in geodesic survey work and in many other applications. The device in question had been used on several space flights in the previous two years to measure distances between the Space Shuttle and other objects.


A data base survey has revealed the existence of over 1500 publications dealing with the use of L.A.S.E.R.s to determine distance or measure velocity. The same principle of operation is also used by airport "R.A.D.A.R." which uses pulsed radio waves rather than L.A.S.E.R. pulses to locate the positions of aircraft flying in the vicinity. The only difference is in the wavelength of radio waves as compared to that of L.A.S.E.R. light.

Considerable care appears was taken to ensure the accuracy of readings taken with the device which emits 60 pulses within about one third of a second when activated.

The first several pulses establish a range to the target. The next 40 pulses are then transmitted and the reflections received back by the diode clock combination.

For a reading of speed to be displayed, 30 pulses must return to the diode and result in speed determinations within one (1) mile per hour. The emissions of the pulses are computer generated. The computer also does the calculations and insures that the calculated velocity values formed fit within the allowable tolerance, i.e. +/-1 mile per hour at a speed of 60 miles per hour.

HAWAII V. ABIYE ASSAYE

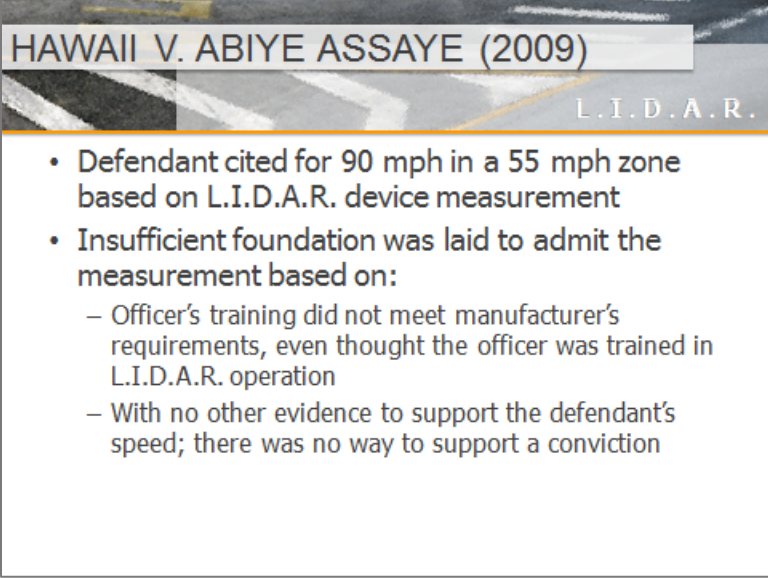

The slide features a background image of a road with white dashed lines receding into the distance. At the top, the title "HAWAII V. ABIYE ASSAYE (2009)" is displayed in a white box, and "L.I.D.A.R." is written in the bottom right corner of the slide area.

- Defendant cited for 90 mph in a 55 mph zone based on L.I.D.A.R. device measurement
- Insufficient foundation was laid to admit the measurement based on:
 - Officer's training did not meet manufacturer's requirements, even though the officer was trained in L.I.D.A.R. operation
 - With no other evidence to support the defendant's speed; there was no way to support a conviction

Slide 73.

On September 30, 2009, the Supreme Court of Hawaii reversed a L.I.D.A.R. court case stating the prosecution has not adduced "sufficient evidence to prove every element of the offense beyond a reasonable doubt." This case resulted from a citation issued September 5, 2007, by a Honolulu police officer, certified to operate a specific L.I.D.A.R. device. The officer testified he had measured Assaye's vehicle moving at 90 mph in a 55-mph zone from 492 feet. The officer had tested the L.I.D.A.R. exactly as he had been trained and in accordance to the manufacturer's specifications. Tests included:

1. Self-Test,
2. Light Segment Test,
3. Scope Alignment Test, and
4. Known Distance Test (including a delta-distance test)

The Honolulu Police Officer had used the same L.I.D.A.R. for the past 15 months and had never experienced any problems with this equipment. Why did the court dismiss this case?

The court held that an inadequate foundation was laid to show that the speed measured by the LADAR device could be relied on as a substantive fact.

The prosecution was required to prove that accuracy of the device was tested per procedures recommended by the manufacturer and that the officer was qualified by training and experience to operate that device. Namely, the prosecution must establish whether the nature and extent of the officer's training in the operation of the device met requirements indicated by the manufacturer.

Although the officer testified that he was certified to use the device, this did not show his training met the manufacturer's requirements.

Because an improper foundation was laid for the admission L.I.D.A.R. device reading and because no other evidence was admitted at trial to establish the defendant's speed, the evidence was insufficient to support the defendant's conviction.

This case underscores the importance of being properly trained to use a specific device and having the materials available to demonstrate the operation was consistent with the training, e.g., device operator's manual and/or training curricula.

MEETING THE NEEDS FOR JUDICIAL NOTICE

MEETING THE NEEDS FOR JUDICIAL NOTICE

L.I.D.A.R.

- Ensure officer's training is well documented and meets all State or local requirements
- Ensure all training requirements and standards for a particular device are met and can be demonstrated
- Maintain the operator's manual for the device in an appropriate format for easy reference and confirmation of information
- Review and assess potential for challenges to new devices with appropriate authority, e.g. prosecutor's office, court
- Ensure all documentation is available, including maintenance records for each speed-measuring device

Slide 74.

Hawaii v Assaye illustrates the potential issues that may arise with the introduction of new technology or substantial changes in comparison to judicial notice given to older devices.

While the scientific principles of how L.I.D.A.R. functions remain constant, the standards and specifications provided by the manufacturer for the appropriate use of a particular device must be considered and met to help establish judicial notice. Having all relevant records for both the operator and speed-measuring device can become critical to the admissibility of evidence. Discussing any issues of admissibility with local prosecutors and/or review with counsel is highly recommended when using new devices.

OPERATE

Estimated time for Chapter 8: Varies

L. I. D. A. R.

Objectives

By the end of this chapter, you will be able to:

- Operate a L.I.D.A.R. speed-measuring device

Contents

Operator Practicum	84
--------------------------	----

OPERATOR PRACTICUM

Instructor should follow suggested procedures detailed in this section. This should allow the student to demonstrate his/her competency in L.I.D.A.R. operation.

Point out: This is a perishable skill and individuals should practice occasionally. The operator should get acclimated to location prior to enforcement.

The instructor should break the class into groups to give students the opportunity for hands-on practice with similar L.I.D.A.R. device(s) they will be using in their departments. It is recommended that the groups be no larger than four students to one instructor or aide. Student group size can be smaller if additional instructors or approved L.I.D.A.R. operators are available.

The selection of a practice site is at the discretion of the course administrator. The practice facility can be a controlled or restricted area such as a test track, large parking lot, or some other location isolated from unauthorized traffic or can be a public access roadway. Remember the most important criterion is the safety of the student and the motoring public if the practice segments are to be conducted on a highway. The lead instructor must keep the exercises simple, organized, and safe for all students. Instructors should notify the law enforcement agency charged with the patrol of an area when operating L.I.D.A.R. at a location.

The instructor's task is to monitor each student's performance, provide necessary instruction and demonstration, and determine when each student has achieved the satisfactory level of skill proficiency.

Note: If the practice is conducted at a controlled facility, an instructor or aide must operate the target vehicle.

Students will take turns setting up, performing function checks, and operating the L.I.D.A.R. device the student will use during enforcement activities. Each group of students must be furnished with a L.I.D.A.R. device.

After setting up and testing the L.I.D.A.R. device, the student should be allowed to obtain 20 target readings. Follow your State and local guidelines for certification.

Students should be encouraged to ask questions during the practice session.

Students must keep in mind and should point out various elements of supportive evidence to the instructor as they arise. They should identify the elements needed to develop a tracking history for each target vehicle.

Students should evaluate each other for any actions they consider inappropriate or inaccurate. At the end of each student's turn, the operator should demonstrate how to disassemble and store the device per their agency guidelines.



L.I.D.A.R. Handout 2: L.I.D.A.R. Practicum

A set of work exercises that may be used in this field practice segment are found in this handout. It contains a series of experiments that a student or group of students can conduct to determine the tendencies and limitations of a L.I.D.A.R. device. The format may be used as written or modified to meet the instructor's specific needs.

Note: This is a perishable skill and individuals should practice occasionally. The operator should be acclimated to location prior to enforcement.

This purpose of this practicum is to give you the opportunity for hands-on practice with similar L.I.D.A.R. device(s) you will be using in your department.

Remember the most important criterion in this practicum is your safety, the safety of other students and of the motoring public.

Each student will take turns as the operator.

Begin by setting up the unit and running through its various testing procedures. You must follow all approved operating procedures that would be taken in actual patrol situations.


After setting up and testing the L.I.D.A.R. device, you will be allowed to obtain at least 20 practice target readings.

You should feel free to ask questions during your practice session.

Keep in mind and point out various elements of supportive evidence to the instructor as they arise. You should identify the elements needed to develop a tracking history for each target vehicle.

You should evaluate other group members for any actions you consider inappropriate or inaccurate. You should disassemble and dismount the unit per your agency guidelines at the end of your turn. The groups will return to the classroom after everyone has had a turn as operator.

SUMMARY AND SECTION REVIEW (20 Minutes)

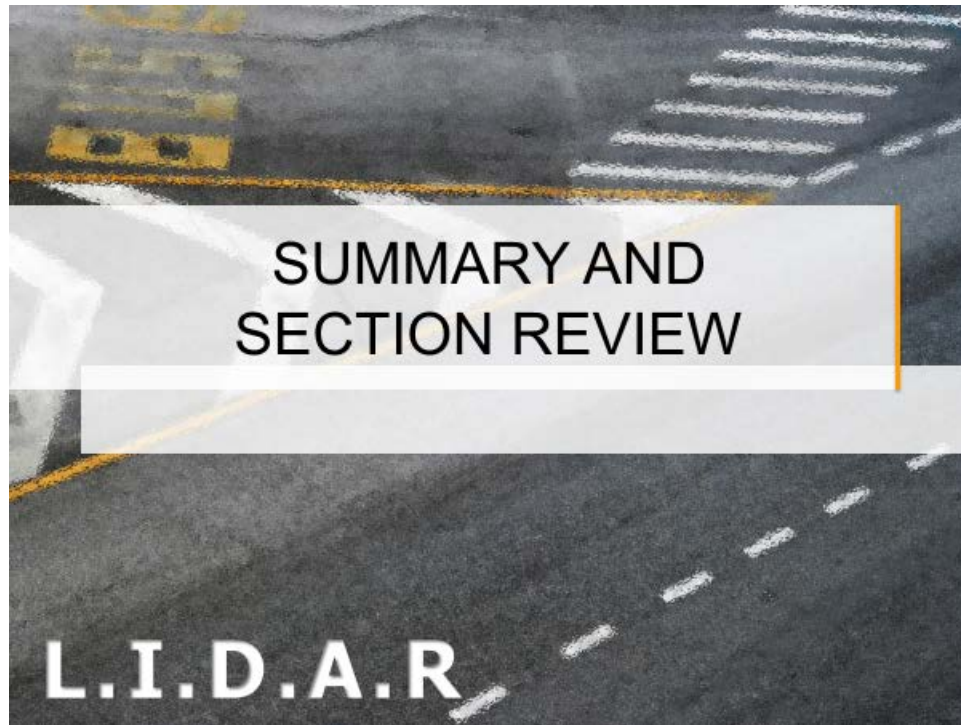

Slide 75.

POSTTEST



L.I.D.A.R. Handout 3: L.I.D.A.R. Posttest (60 Minutes)

Instructor should administer posttest found in the back of this manual.

This Page Intentionally Left Blank

ADDITIONAL COURT CASES

Additional Uses of LIDAR

<https://science.larc.nasa.gov/lidar/>

LIDAR: Not enough for a speeding ticket, but it is just fine for NASA space investigations, astronomy, geology and oceanography. See 41 uses of LIDAR at: <http://grindgis.com/data/lidar-data-50-applications>

Some States require training statutorily:

(a) In any judicial or administrative proceeding in which the results of a R.A.D.A.R., L.A.S.E.R or similar device used to measure the speed of a motor vehicle are being introduced for the purpose of proving the speed of the motor vehicle or the conduct of the driver of the vehicle, such results shall not be admissible for such purposes unless the law enforcement officer operating the device has been trained pursuant to guidelines established by the National Highway Traffic Safety Administration or the Tennessee peace officer standards and training (POST) commission.

Tenn. Code Ann. § 24-7-124

Honeycutt vs. Commonwealth

This case set a standard in 1966 for the acceptable use of and testimony about R.A.D.A.R..

Concepts in this case are now reflected in statutes and other cases like:

Minnesota v Olson from 2016. It centered on the Minnesota statute that requires:

- 1) the officer operating the device has sufficient training to properly operate the equipment;
- 2) the officer testifies as to the manner in which the device was set up and operated;
- 3) the device was operated with minimal distortion or interference from outside sources; and
- 4) the device was tested by an accurate and reliable external mechanism, method, or system at the time it was set up.

Minn. Stat § 169.14, subd. 10(a).

[State v. Olson, 887 N.W.2d 687 *, 2016 Minn. App. LEXIS 81 \(Minn. Ct. App. 2016\)](#)

ADDITIONAL COURT CASES

Vermont Supreme Court in 2011.

On appeal, in a one-sentence argument, defendant asserts that the court erred in admitting the LIDAR results because R.A.D.A.R. and LIDAR are not the same, no Vermont authorities confirm the reliability or admissibility of LIDAR technology, and the district court did not give “judicial notice” of the reliability of the technology. We find no merit to this argument. Defendant has not identified any evidence suggesting that the LIDAR device incorporates a novel technology or is significantly different from or less accurate than other speed-detection devices. Indeed, several jurisdictions, including Illinois, have held that the reliability of this technology has been sufficiently demonstrated to allow its introduction into evidence without first holding an underlying evidentiary hearing on its reliability. See, e.g., *State v. Williamson*, 144 Idaho 597, 166 P.3d 387, 389-90 (Idaho Ct. App. 2007) (citing other jurisdictions that have accepted general reliability of L.A.S.E.R device in support of holding “that L.A.S.E.R speed detection devices are generally reliable and their results may be admitted into evidence in Idaho courts” without either taking specific judicial notice or requiring scientific evidence of L.A.S.E.R's reliability); *People v. Mann*, 397 Ill. App. 3d 767, 922 N.E.2d 533, 537-38, 337 Ill. Dec. 410 (Ill. App. Ct. 2010) (concluding that decisions from other jurisdictions “are ample authority that the use of LIDAR to measure the speed of moving vehicles is based on generally accepted scientific principles”). Defendant's reliance upon *Canulli* is unavailing insofar as the appellate court in that case reversed the trial court because it had relied upon an inadequately litigated, nonbinding decision in another trial court case involving a different type of L.A.S.E.R technology from the technology being challenged in *Canulli*. See *Mann*, 922 N.E.2d at 535-36; *Canulli*, 792 N.E.2d at 444-45. Accordingly, the hearing officer did not abuse his discretion in admitting results from the use of the LIDAR L.A.S.E.R device without first holding an evidentiary hearing on the device's reliability.

[State v. de Macedo Soares, 2011 VT 56 *, 190 Vt. 549, 26 A.3d 37, 2011 Vt. LEXIS 58 \(Vt. 2011\)](#)

Judicial Notice

Note that when a new product is used, a Court can be demanding. While LIDAR is accepted in most courts and will be received by judicial notice, that is not always the case for new speed measuring devices. Here is language from a 2016 Ohio appeal:

This court has previously recognized that the reliability of a speed-measuring device can be established in one of three ways: a reported municipal court decision from this district, a reported or unreported case from our appellate court, or the previous consideration of expert testimony by the trial court as noted on the record. *State v. Starks*, 196 Ohio App.3d 589, 2011-Ohio-2344, 964 N.E.2d 1058 (12th Dist.). Within *Starks*, we noted that no such decision existed wherein any court in this district took judicial notice of the reliability of the (XXXXXXX) and no court had considered expert testimony on the issue. The circumstances set forth in *Starks* have not changed, as the state has never offered expert testimony to establish the scientific reliability of the (XXXXXXX) in our district.

ADDITIONAL COURT CASES

State v. Sweat, 2016-Ohio-2680 *, 2016 Ohio App. LEXIS 1548 (Ohio Ct. App., Butler County Apr. 25, 2016)

Another in which the devise required expert testimony in Ohio is:

State v. Helke, 2015-Ohio-4402, 46 N.E.3d 188, 2015 Ohio App. LEXIS 4267 (Ohio Ct. App., Montgomery County 2015)

Hawaii v. Abiye Assaye 2009

Defendant was cited for speeding after a police officer's L.A.S.E.R gun revealed that he was traveling at 90 m.p.h. in a 55-m.p.h. zone. On review of the appellate court order affirming defendant's speeding conviction, the court held that an inadequate foundation was laid to show that the speed measured by the L.A.S.E.R gun could be relied on as a substantive fact. The prosecution was required to prove that the L.A.S.E.R gun's accuracy was tested per procedures recommended by the manufacturer and that the officer was qualified by training and experience to operate the particular L.A.S.E.R gun; namely, the prosecution must establish whether the nature and extent of the officer's training in the operation of the L.A.S.E.R gun met the requirements indicated by the manufacturer. Although the officer testified that he was certified to use the L.A.S.E.R gun, that did not show that his training met the L.A.S.E.R gun manufacturer's requirements. Because an improper foundation was laid for the admission L.A.S.E.R gun reading and because no other evidence was admitted at trial to establish defendant's speed, the evidence was insufficient to support defendant's conviction.

This Page Intentionally Left Blank

LIDAR PRACTICUM

Practical exercises should follow the instructions for each LIDAR device.

Set-up

- Inspect device condition. Is there any visible damage?
 - Yes
 - No
- Check optics for cleanliness
- Inspect power cord (if applicable). Is there any visible damage?
 - Yes
 - No

Tests

- Perform light segment and indicator test. Are all individual light segments and indicators functioning properly?
 - Yes
 - No

Internal Test

- Perform internal circuit check

External Tests

- Perform sight alignment (horizontal and vertical). Is the LASER beam aligned with the reticule or cross-hairs?
 - Yes
 - No
- Perform range test
- Perform Delta Distance test

Site selection

- Line of sight
- Safe location

LIDAR PRACTICUM

Target identification


- Device aiming
- Aiming point on target

Speed estimation

Target acquisition

Speed display corresponds with visual estimate

Describe tracking history

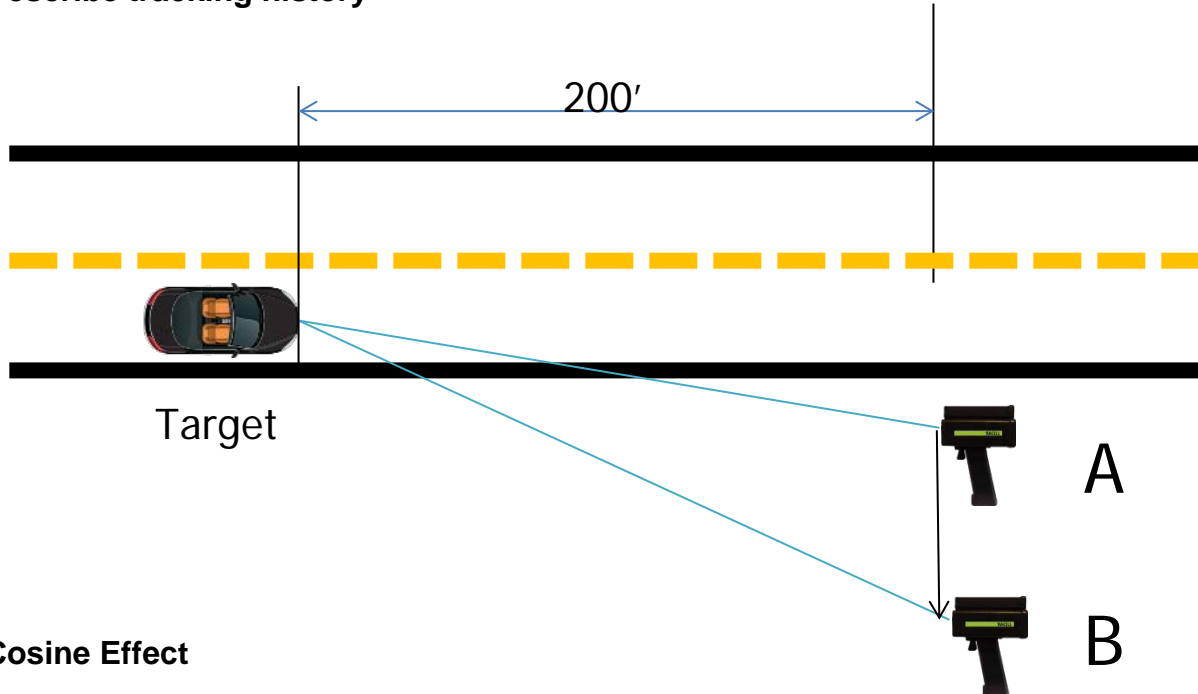

Cosine Effect

Using a control vehicle traveling at a set speed, pick a targeting point approximately 200 feet down the roadway.

Operate the LIDAR from a close yet safe distance from the roadway and note the speed readings obtained (point A).

Move from point A to a location creating a significant angle from the path of the target (point B).

Using the same target speed, what is the difference in speed readings?

_____mph

LIDAR PRACTICUM

Sweep Effect

During the course of monitoring traffic, if and when you observe a suitable vehicle capable of creating a sweep effect, an attempt should be made to create the effect. What was the change in speed?

_____mph

Beam Obstruction

Attempt to experience what happens when the LIDAR beam is interrupted. This can occur when the beam is passed across some object that momentarily obstructs the beam's path to the target. You should note how narrow the obstruction is and its affect on the LIDAR device. A variety of obstructions should be used, including obstructions on patrol vehicle glass.

Size of obstruction_____

Affect on device:

Radio Frequency Interference (RFI)

Determine from the manufacturer's operation manual if the LIDAR has an RFI indicator or how the device reacts to RFI. Attempt to create a situation where RFI affects the device and note the results. (Refer to Chapter 4: LIDAR Effects for sources of RFI.)

Results from RFI on device:

Adverse Weather Conditions

Adverse weather conditions may result in the LIDAR's ability to acquire a target. Although difficult to create, the simulation of fog, dust, and rain can be demonstrated and their affects noted.

This Page Intentionally Left Blank

L.I.D.A.R. Module Test
Speed Measuring Device Operator Training

Name _____ Date _____

Agency _____

1. What does the acronym L.A.S.E.R. mean?
 - A. Light Amplified and Saturated with Energized Radiation
 - B. Light Amplification by Stimulated Emission of Radiation
 - C. Low Altitude Simulated Energy Radiation
 - D. Low Alternate Sound Emitted and Regulated

2. What does the acronym L.I.D.A.R. mean?
 - A. Light Doppler and Ranging
 - B. Last Interference Detected at Range
 - C. Light Detection and Ranging
 - D. Low Interference Detected and Reflected

3. What type of Optical Resonator Device is a traffic L.A.S.E.R.?
 - A. Semi-Conductor L.A.S.E.R.
 - B. Gas L.A.S.E.R.
 - C. Chemical L.A.S.E.R.
 - D. Free Electron L.A.S.E.R.

4. The speed of a L.A.S.E.R. signal is
 - A. 186,000 meters per second
 - B. equal to the speed of light
 - C. faster than a radar beam
 - D. slightly slower than the speed of light

5. Approximately how wide is the L.I.D.A.R. signal at 1,000 feet?
 - A. 10 feet
 - B. 3 feet
 - C. 6 feet
 - D. 15 feet

L.I.D.A.R. Module Test
Speed Measuring Device Operator Training

6. Which statement below does **not** describe Limited Divergence.
 - A. Coherent: refers to the synchronized phase of the light waves
 - B. Collimated: refers to the parallel nature of the L.A.S.E.R. beam
 - C. Monochromatic: refers to the single (wavelength) color of a L.A.S.E.R. beam
 - D. Electromagnetic Spectrum: refers to intensity of the L.A.S.E.R. beam

7. L.A.S.E.R.s measure distance by knowing the total time a pulse travels from the device, reflects off the target and returns to the device.
 - A. True
 - B. False

8. If the round-trip time for a L.A.S.E.R. pulse is 1200 ns (to the target and back to the device) we can calculate the distance to the target by dividing the round trip by 2.
 - A. True
 - B. False

9. Which statement does not describe the Average of Least Squares?
 - A. Sudden changes in targeting points can result in an erroneous speed display.
 - B. Will produce a speed reading higher than actual speed.
 - C. Data will fall outside the limits set by the L.I.D.A.R.
 - D. Speed reading is not displayed when time data falls outside the limits.

10. The sweep effect is caused by:
 - A. a mechanical error within the L.I.D.A.R. unit's circuitry
 - B. high voltage electrical lines, electrical transformers or substations that produce R.F.I.
 - C. reflective surfaces on the roadway
 - D. changing the targeting point while transmitting L.A.S.E.R. pulses

L.I.D.A.R. Module Test
Speed Measuring Device Operator Training

11. The cosine effect does not become a factor until the angle reaches about:
 - A. 5 degrees
 - B. 10 degrees
 - C. 15 degrees
 - D. 20 degrees

12. It is advisable to sight the L.I.D.A.R. unit on the sun if there are no poles or other suitable objects available.
 - A. True
 - B. False

13. During unit confirmation, the read-out has to be consistent with the operator's visual estimate and there has to be a steady read-out.
 - A. True
 - B. False

14. All L.I.D.A.R. units are classified as Class 2 L.A.S.E.R. devices.
 - A. True
 - B. False

15. Atmospheric conditions can cause a L.I.D.A.R. device to measure a vehicle speed incorrectly.
 - A. True
 - B. False

This Page Intentionally Left Blank

L.I.D.A.R. Module Test
(Answer Sheet)
Speed Measuring Device Operator Training

1. What does the acronym L.A.S.E.R. mean? (Ch. 1, Pg 9)
 - A. Light Amplified and Saturated with Energized Radiation
 - B. Light Amplification by Stimulated Emission of Radiation**
 - C. Low Altitude Simulated Energy Radiation
 - D. Low Alternate Sound Emitted and Regulated

2. What does the acronym L.I.D.A.R. mean? (Ch. 1, Pg 8)
 - A. Light Doppler and Ranging
 - B. Last Interference Detected at Range
 - C. Light Detection and Ranging**
 - D. Low Interference Detected and Reflected

3. What type of Optical Resonator Device is a traffic L.A.S.E.R.? (Ch. 1, Pg 10)
 - A. Semi-Conductor L.A.S.E.R.**
 - B. Gas L.A.S.E.R.
 - C. Chemical L.A.S.E.R.
 - D. Free Electron L.A.S.E.R.

4. The speed of a L.A.S.E.R. signal is (Ch. 2, Pg 14)
 - A. 186,000 meters per second
 - B. equal to the speed of light**
 - C. faster than a radar beam
 - D. slightly slower than the speed of light

5. Approximately how wide is the L.I.D.A.R. signal at 1,000 feet? (Ch. 3, Pg 37)
 - A. 10 feet
 - B. 3 feet**
 - C. 6 feet
 - D. 15 feet

L.I.D.A.R. Module Test

(Answer Sheet)

Speed Measuring Device Operator Training

6. Which statement below does **not** describe Limited Divergence. (Ch. 3, Pg 25)
- A. Coherent: refers to the synchronized phase of the light waves
 - B. Collimated: refers to the parallel nature of the L.A.S.E.R. beam
 - C. Monochromatic: refers to the single (wavelength) color of a L.A.S.E.R. beam
 - D. **Electromagnetic Spectrum: refers to intensity of the L.A.S.E.R. beam**
7. L.A.S.E.R.s measure distance by knowing the total time a pulse travels from the device, reflects off the target and returns to the device. (Ch. 3, Pg 26)
- A. **True**
 - B. False
8. If the round-trip time for a L.A.S.E.R. pulse is 1200 ns (to the target and back to the device) we can calculate the distance to the target by dividing the round trip by 2. (Ch. 3, Pp 28-29)
- A. **True**
 - B. False
9. Which statement does not describe the Average of Least Squares? (Ch. 3, Pp 43-45)
- A. Sudden changes in targeting points can result in an erroneous speed display.
 - B. **Will produce a speed reading higher than actual speed.**
 - C. Data will fall outside the limits set by the L.I.D.A.R.
 - D. Speed reading is not displayed when time data falls outside the limits.
10. The sweep effect is caused by: (Ch. 4, Pg 49)
- A. a mechanical error within the L.I.D.A.R. unit's circuitry
 - B. high voltage electrical lines, electrical transformers or substations that produce R.F.I.
 - C. reflective surfaces on the roadway
 - D. **changing the targeting point while transmitting L.A.S.E.R. pulses**

L.I.D.A.R. Module Test

(Answer Sheet)

Speed Measuring Device Operator Training

11. The cosine effect does not become a factor until the angle reaches about: (Ch. 4, Pg 52)
- A. 5 degrees
 - B. 10 degrees**
 - C. 15 degrees
 - D. 20 degrees
12. It is advisable to sight the L.I.D.A.R. unit on the sun if there are no poles or other suitable objects available. (Ch 5, Pg 57)
- A. True
 - B. False**
13. During unit confirmation, the read-out has to be consistent with the operator's visual estimate and there has to be a steady read-out. (Ch. 3, Pg 48)
- A. *True***
 - B. False
14. All L.I.D.A.R. units are classified as Class 2 L.A.S.E.R. devices. (Ch 6, Pg 71)
- A. True
 - B. False**
15. Atmospheric conditions can cause a L.I.D.A.R. device to measure a vehicle speed incorrectly. (Ch 4, Pg 48)
- A. True
 - B. False**