



**Technical Service  
BULLETIN**

September 21, 2007

Title:

# FLOOR MAT INSTALLATION DURING PDS

Models:

'08 Toyota

PD137-07

PRE-DELIVERY SERVICE

**Introduction** 2008 model year Toyota vehicles are equipped with floor mat retaining clips to help ensure that the floor mats stay in the correct position. Attach the floor mat to the vehicle carpet using the floor mat retaining clips during Pre-Delivery Service (PDS).

**CAUTION:**


- **ONLY** use floor mats that can be retained using the retaining clips. All OEM Toyota floor mats are specifically designed to fit correctly and be retained using the retaining clips.
- Make sure the floor mat is properly placed on the vehicle carpet and secured with the retaining clips. If the floor mat is **NOT** properly placed and secured, it could slip and interfere with the movement of the pedals during driving and may cause an accident.
- Verify the operation of the accelerator, brake, and clutch (if equipped) pedals and clearance to the mat.
- **NEVER** install more than one floor mat at a time in the driver's seating position.
- If applicable, any secondary set of floor mats (based upon customer preference, such as the all weather floor mats or other floor mats) **MUST** be placed in the trunk with all the packaging material intact. Do **NOT** install the secondary mat on top of the primary floor mat already installed in the driver's seating position.

**Applicable Vehicles**

- 2008 model year Toyota vehicles.

**Installation Procedure**

Attach the floor mat to the vehicle carpet using the clips. Secure the mat by inserting the retaining clips through the grommet holes.

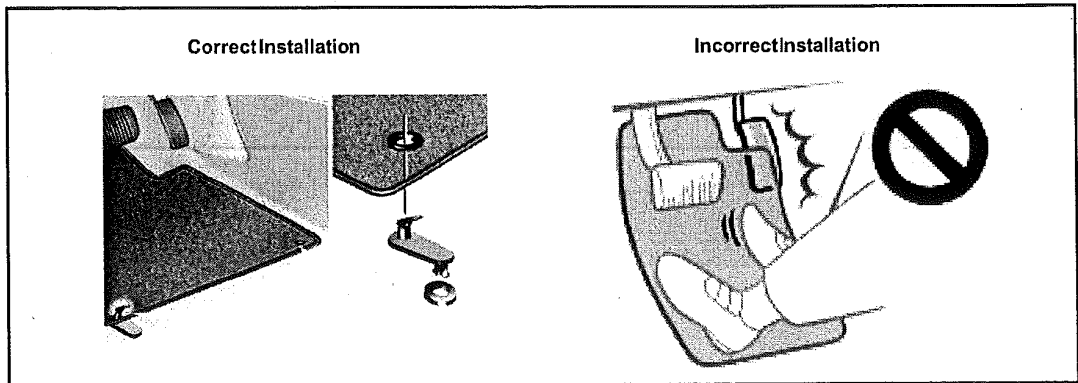

**Warranty Information**

OP CODE	DESCRIPTION	TIME	OFF	T1	T2
N/A	Not Applicable to Warranty	-	-	-	-



Toyota Supports ASE Certification