

POSITION 7

GAWR, TIRE and Rim information

The following GAWR, tire and rim combinations are used on our trailers. The standard tires are indicated in Position 6. Optional tires, if used, are indicated in Position 12.

	<u>GAWR</u>	<u>TIRES</u>	<u>RIMS</u>	<u>PSI</u>
A	3500 lbs.	F78-14	14"	
B	_____	_____	_____	_____
C	_____	_____	_____	_____
D	_____	_____	_____	_____
E	_____	_____	_____	_____
F	_____	_____	_____	_____
G	_____	_____	_____	_____
H	_____	_____	_____	_____
J	_____	_____	_____	_____
K	_____	_____	_____	_____
L	_____	_____	_____	_____
M	_____	_____	_____	_____
N	_____	_____	_____	_____
P	_____	_____	_____	_____
R	_____	_____	_____	_____
S	_____	_____	_____	_____
T	_____	_____	_____	_____
U	_____	_____	_____	_____
V	_____	_____	_____	_____
W	_____	_____	_____	_____
X	_____	_____	_____	_____
Y	_____	_____	_____	_____
Z	_____	_____	_____	_____
1	_____	_____	_____	_____
2	_____	_____	_____	_____
3	_____	_____	_____	_____
4	_____	_____	_____	_____
5	_____	_____	_____	_____
6	_____	_____	_____	_____
7	_____	_____	_____	_____
8	_____	_____	_____	_____
9	_____	_____	_____	_____

Position 7

Length of Trailer

Trailer lengths to the nearest foot are to be coded as follows:

- | | | |
|-------------|--------------|--------------|
| A) - 6 Feet | M) - 17 Feet | Z) - 28 Feet |
| B) - 7 " | N) - 18 " | 1) - _____ " |
| C) - 8 " | P) - 19 " | 2) - _____ " |
| D) - 9 " | R) - 20 " | 3) - _____ " |
| E) - 10 " | S) - 21 " | 4) - _____ " |
| F) - 11 " | T) - 22 " | 5) - _____ " |
| G) - 12 " | U) - 23 " | 6) - _____ " |
| H) - 13 " | V) - 24 " | 7) - _____ " |
| J) - 14 " | W) - 25 " | 8) - _____ " |
| K) - 15 " | X) - 26 " | 9) - _____ " |
| L) - 16 " | Y) - 27 " | 0) - _____ " |

2

POSITION 8

The axle configurations that pertain to our trailers are coded as follows:

- 1) Semi trailer - single axle
- 2) Semi trailer - tandem axle
- 3) Semi trailer - tri-axle
- 4) Full trailer - one steerable and one trailing axle
- 5) Full trailer - one steerable and two trailing axles

Position 9 Check Digit

The Check digit is calculated as per Federal Standard 115.

Position 10 Model Year

The Model Year Code is taken from Table II of Federal Standard 115.

Position 11 Plant of Manufacture

List the name or city and state of the plant where the trailers are manufactured next to the number.

Plant Location

- | | |
|--------------------------------|----------|
| 1) <u>Nashville, Tennessee</u> | 2) _____ |
| 3) _____ | 4) _____ |
| 5) _____ | 6) _____ |

Position 12

Position 12 indicates alternate tire and rim information, if such is to be indicated on the trailer certification plate, using the appropriate character established in Position 6. A Zero will indicate no alternate tire and rim information.

Positions 13-17

Number sequentially assigned in the production process, if 500 or more trailers are manufactured annually.

ALTERNATE SYSTEM REQUIRED

If less than 500 trailers are manufactured annually.


Positions 12-14

Unique characters assigned by SAE in addition to Positions 1-3.

Positions 15-17

Number sequentially assigned in the production process.

COPY

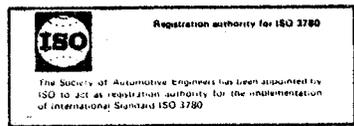

SAE The Engineering
Resource For
Advancing Mobility®

400 COMMONWEALTH DRIVE, WARRENDALE, PA. 15096-0001 U.S.A.
(412) 776-4841 FAX NO. (412) 776-5760

CABLE ADDRESS: SOCAUTOENG, PA.
TELEX NO. 866-355

October 26, 1984

Mr. Mark Newton
Hydra-Sports, Inc.
100 Oceanside Drive
Nashville, TN 37204

Dear Mr. Newton:

This letter confirms our telephone conversation of October 19, 1984 regarding the assignment of a World Manufacturer (Maker) Identifier (WMI) Code. As the agent of the NHTSA for the assignment of manufacturer identifiers pursuant to CFR 49 Part 565.5C, we hereby confirm the following code:

Hydra-Sports, Inc.
100 Oceanside Drive
Nashville, TN 37204
United States

1 7 1

Reserved/Trailers

Sincerely,

Debbie Bisch
WMI Coordinator

/db

Enclosure

cc: M. W. Dixon
A. Burgett
B. P. Hickey

4