




**National
Automotive
Sampling
System**

**Crashworthiness
Data
System**

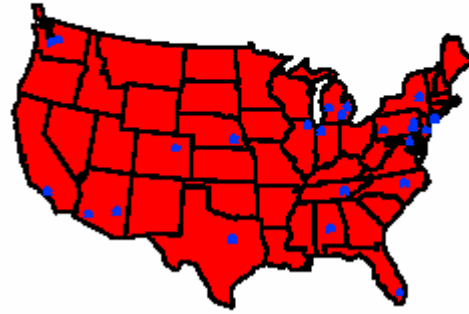

**2009
Coding and
Editing Manual**



**United States Department of Transportation
National Highway Traffic Safety Administration**

Table of Contents

2009 Changes

CASE FORM

Case Form Overview

CF-1

Required Forms

CF-2

Vehicle Fully Repaired-No Damage Evident

CF-7

CRASH

CF-9

Case Number

CF-10

Stratum

CF-11

Date of Crash (Month/Day/Year)

CF-12

Time of Crash

CF-13

PSU

CF-14

Police Jurisdiction

CF-15

PAR Number

CF-16

Researcher Assigned To Case

CF-17

Status of Case

CF-18

Special Studies

CF-21

Case Due Date

CF-22

Case Identification Number

CF-23

Type of Case

CF-24

Case Owner

CF-26

STRUCTURE OVERVIEW

CF-27

STRUCTURE/CASE

CF-29

Total Number of Vehicles in Crash

CF-30

Number of CDS In Transport Vehicles in Crash

CF-32

Number of CDS Not In Transport Vehicles in Crash

CF-33

Number of Non CDS In Transport Vehicles in Crash

CF-34

Total Number of Occupants in CDS Vehicles In Transport

CF-35

Total Number of Medical Records in Case

CF-36

STRUCTURE/VEHICLES

CF-37

Vehicle Number

CF-38

Type of Vehicle

CF-39

Date of Vehicle Inspection

CF-40

Number of Occupants in This Vehicle

CF-41

STRUCTURE/OCCUPANTS

CF-42

Vehicle Number

CF-43

Occupant Number

CF-44

Interview Required

CF-45

Interview Completion Date

CF-46

Interview Results

CF-47

STRUCTURE/MEDICAL RECORDS

CF-48

STRUCTURE/MEDICAL RECORDS/DETAIL

CF-49

Vehicle Number

CF-50

Occupant Number

CF-51

Medical Record

CF-52

Medical Facility

CF-57

Medical Release

CF-58

Date that Medical Record was Requested

CF-59

Date that Medical Record was Received

CF-60

Date that Medical Record was Forwarded to Zone Center

CF-61

Medical Record Obtained or Reason Why Not

CF-62

STRUCTURE/COMMENT

CF-63

SUMMARY/CASE SUMMARY

CF-64

Crash Type	CF-65
Crash Configuration	CF-66
Case Summary Overview	CF-68
Data Entry Field for Case Summary	CF-69
Case Summary	CF-70
SUMMARY/VEHICLES	CF-71
Vehicle Number	CF-72
Vehicle Year	CF-73
Vehicle Make	CF-74
Vehicle Model	CF-75
Damage Plane	CF-76
Damage Severity	CF-77
Component Failure	CF-78
SUMMARY/OCCUPANTS	CF-81
Vehicle Number	CF-82
Person Role	CF-83
Seat Position	CF-84
Restraints Use	CF-85
AIS Code	CF-86
Injury Severity	CF-87
Injury Source	CF-88
EVENTS/SUMMARY	CF-89
EVENTS/DETAIL	CF-90
Crash Events Overview	CF-91
Event Number	CF-93
Vehicle Number	CF-94
Class of Vehicle	CF-95
General Area of Damage	CF-100
Object Contacted	CF-102
Class of Vehicle Contacted	CF-112
General Area of Damage of Vehicle Contacted	CF-114
SCENE	CF-115
Date Scene Completed	CF-116
ANNOTATIONS	CF-117
REVIEW/PSU REVIEW	CF-119
REVIEW/ZONEIEW	CF-121
OTHER RESPONSES	CF-123

GENERAL VEHICLE FORM

General Vehicle Form Overview

VEHICLE	GV-1
Vehicle Number	GV-3
Vehicle Model Year	GV-4
Vehicle Make	GV-5
Vehicle Model	GV-6
Vehicle Body Category	GV-7
Body Type	GV-8
Class of Vehicle	GV-10
Vehicle Identification Number (VIN)	GV-22
Vehicle Special Use	GV-27
Transport Status	GV-29
Curb Weight	GV-32
Source of Curb Weight Information	GV-35
Cargo Weight	GV-36
Source of Cargo Weight Information	GV-38
Inspection Type	GV-39
Date of Inspection	GV-40
SPECIFICATIONS	GV-42
Wheelbase	GV-43
Overall Length	GV-44
Maximum Width	GV-46
Curb Weight	GV-47
Average Track Width	GV-48
Front Overhang	GV-49
Rear Overhang	GV-50
Undeformed End Width	GV-51
Engine Cylinders	GV-52
Engine Displacement	GV-53
Type of Transmission	GV-54
Drive Wheels	GV-55
Researcher's Assessment of Vehicle Disposition	GV-56
Justification for Researcher's Assessment of Vehicle Disposition	GV-57
Multi-Stage or Altered Vehicle	GV-58
Suspected Post Manufacturer Modifications	GV-59
OFFICIAL RECORDS	GV-62
Police Reported Tow Status	GV-63
Police Reported Travel Speed	GV-64
Posted Speed Limit	GV-66
Is the Driver Present?	GV-67
Occupant Number	GV-68
[Number of Occupant Forms]	GV-69
Police Reported Alcohol Presence	GV-71
Alcohol Test for Driver	GV-72
Alcohol Test Result	GV-74
Source of Alcohol Test Result	GV-76
Other Drugs Overview	GV-77
Police Reported Other Drug Presence	GV-78
Other Drug Test Result	GV-79
Driver's Zip Code	GV-81
Race	GV-83
Ethnicity	GV-85
PRECRASH	GV-88
ENVIRONMENT	GV-90

PreCrash Data Overview	GV-90
Relation to Interchange or Junction	GV-91
Trafficway Flow	GV-97
Number of Travel Lanes	GV-99
Roadway Alignment	GV-101
Roadway Profile	GV-102
Roadway Surface Type	GV-104
Roadway Surface Condition	GV-106
Lighting Conditions	GV-107
Weather Conditions	GV-108
Traffic Control Device	GV-111
Traffic Control Device Functioning	GV-116
MOVEMENT	GV-117
Precrash Data Overview	GV-118
Crash Envelope	GV-118
Simple Single Critical Crash Envelope	GV-119
Complex Single Critical Crash Envelope	GV-119
Multiple Critical Crash Envelopes	GV-120
Precrash Methodology Flowchart	GV-123
Precrash General Rules	GV-124
Example 1	GV-126
Example 2	GV-128
Example 3	GV-130
Example 4	GV-132
Example 5	GV-133
Example 6	GV-135
Example 7	GV-137
Pre-Event Movement (Prior to Recognition of Critical Event)	GV-138
Critical Pre Crash Category	GV-141
Critical Pre-Crash Event	GV-143
This Vehicle Loss Of Control	GV-144
This Vehicle Traveling	GV-145
Other Motor Vehicle In Lane	GV-146
Other Motor Vehicle Encroaching Into Lane	GV-147
Pedestrian or Pedalcyclist, or Other Nonmotorist	GV-149
Object or Animal	GV-150
Precrash Event Scenarios for Different Rear-End Collision Situations	GV-151
Attempted Avoidance Maneuver	GV-153
Pre-Impact Stability	GV-155
Pre-Impact Location	GV-157
Crash Type	GV-159
Crash Types Chart	GV-161
Crash Category	GV-163
Crash Configuration	GV-165
Single Driver	GV-166
Same Trafficway, Same Direction	GV-166
Same Trafficway, Opposite Direction	GV-166
Changing Trafficway, Vehicle Turning	GV-166
Intersecting Paths (Vehicle Damage)	GV-167
Miscellaneous	GV-167
Crash Types	GV-168
Crash Category: Single Driver	GV-171
Crash Category: Same Trafficway, Same Direction	GV-175
Crash Category: Same Trafficway, Opposite Direction	GV-182
Crash Category: Changing Trafficway, Vehicle Turning	GV-186
Crash Category: Intersecting Paths (Vehicle Damage)	GV-190

Crash Category: Miscellaneous	GV-191
DRIVER / DISTRACTIONS	GV-193
Driver's Distraction/Inattention to Driving	GV-194
Driver's Distraction	GV-196
ROLLOVER	GV-199
Rollover Data Overview	GV-200
Rollover Type	GV-202
Number of Quarter Turns	GV-204
Interrupted Roll	GV-205
Pre-rollover Maneuver	GV-207
Rollover Initiation Type	GV-212
Location of Rollover Initiation	GV-214
Rollover Initiation Object Contacted Class	GV-216
Rollover Initiation Object Contacted	GV-224
Location on Vehicle Where Initiating Rollover Force is Applied	GV-226
Direction of Initial Roll	GV-227
Estimated distance from trip point to final rest position	GV-229
RECONSTRUCTION	GV-229
Type of Impact for Highest Delta V	GV-230
Heading Angle for This Vehicle	GV-232
Heading Angle for Other Vehicle	GV-234
Towed Trailing Unit	GV-235
Documentation of Trajectory Data	GV-236
Post Collision Condition of Tree or Pole	GV-238
DELTAV	GV-239
Event Number for Highest Severity Impact	GV-240
Basis for Computer Generated Delta V for Highest Severity Impact	GV-244
Total Delta V for Highest Severity Impact	GV-245
Longitudinal Delta V for Highest Severity Impact	GV-246
Lateral Delta V for Highest Severity Impact	GV-247
Energy Absorption for Highest Severity Impact	GV-248
Impact Speed for Highest Severity Impact	GV-249
Confidence Level for Highest Severity Impact	GV-251
Barrier Equivalent Speed for Highest Severity Impact	GV-252
Estimated Severity for Highest Severity Impact	GV-253
LOG/PSU	GV-254
Reason Vehicle Inspection Not Completed	GV-255
REVIEW	GV-258
PSU Review	GV-259
ZONE Review	GV-260

EXTERIOR VEHICLE FORM	EV-1
Vehicle Number	EV-2
Vehicle Model Year	EV-3
Vehicle Make	EV-4
Vehicle Model	EV-5
Vehicle Body Category	EV-6
Body Type	EV-8
Class of Vehicle	EV-20
Vehicle Identification Number (VIN)	EV-25
Vehicle Special Use	EV-27
In Transport	EV-30
Curb Weight	EV-33
Source of Curb Weight Information	EV-35
Cargo Weight	EV-37
Source of Cargo Weight Information	EV-38
Inspection Type	EV-39
Date of Inspection	EV-40
TIRE OVERVIEW	EV-41
TIRES GENERAL	EV-47
Total Gross Vehicle Weight Rating (kgs)	EV-48
Front Gross Axle Weight Rating (kgs)	EV-49
Rear Gross Axle Weight Rating (kgs)	EV-50
Manufacturer's Recommended Front/Rear Tire Size	EV-51
Manufacturer Recommended Tire Pressure – Cold – Front/Rear (kilopascals)	EV-54
TIRE / TIRES / LIST	EV-55
TIRE / TIRES / DETAIL	EV-55
Tire Location	EV-56
Tire manufacturer	EV-57
Tire Manufacturer List	EV-58
Tire model	EV-60
Tire type On Vehicle	EV-61
Tire size On Vehicle	EV-62
Tire Identification Number	EV-64
Minimum Tread Depth (mm)	EV-67
Tire Measured Pressure (kilopascals)	EV-68
Tire Restricted	EV-69
Tire Damage	EV-70
SPECIFICATIONS	EV-72
Wheelbase	EV-73
Overall Length	EV-74
Maximum Width	EV-75
Curb Weight	EV-76
Average Track Width	EV-77
Front Overhang	EV-78
Rear Overhang	EV-79
Undeformed End Width	EV-80
Engine Cylinders	EV-81
Engine Displacement	EV-82
Type of Transmission	EV-83
Drive Wheels	EV-84
Researcher's Assessment of Vehicle Disposition	EV-85
Justification for Researcher's Assessment of Vehicle Disposition	EV-86
Multi-Stage or Altered Vehicle	EV-87
Suspected Post Manufacturer Modifications	EV-90
FUEL SYSTEMS	EV-91

Fuel System Number	EV-92
Fuel Type	EV-93
Damage to Fuel Cell	EV-96
Fuel System Leakage Location	EV-98
Location of Fuel Cell	EV-100
Type of Fuel Cell	EV-102
Location of Filler Cap	EV-106
PreCrash Condition of Fuel Cell	EV-108
FIRE	EV-110
Fire Occurrence	EV-111
Origin of Fire	EV-113
CRUSH LOCATION	EV-116
Profile Number	EV-117
Event Number	EV-118
Direct Damage Location	EV-119
Location of Field L	EV-120
Location of Max Crush	EV-121
CRUSH PROFILE	EV-122
Profile Number	EV-123
CDC Number	EV-124
Field L	EV-125
WinSMASH L	EV-126
Field L +/- D	EV-127
Direct +/- D	EV-128
Category	EV-129
Width (CDC)	EV-130
Vertical level at which crush measurements are taken for a particular crush profile.	EV-131
Maximum crush for this vertical level of crush measurements for this crush profile	EV-135
C1, C2, C3, C4, C5, C6	EV-136
Rollover Documentation	EV-137
CDC / SUMMARY	EV-138
CDC / DETAIL	EV-138
Event Number	EV-139
[Deformation Number]	EV-140
General Area of Damage	EV-140
Object Contacted Category and Object	EV-142
Direction of Force	EV-144
[Clock]	EV-145
Increment of Clock Direction	EV-146
Override/Override (this vehicle)	EV-148
Heading Angle	EV-151
Deformation Location	EV-153
Specific Longitudinal or Lateral Location	EV-154
Specific Vertical or Lateral Location	EV-155
Type of Damage Distribution	EV-156
Deformation Extent Guide	EV-157
Side Impact Data	EV-158
Direct Damage to Pillar(s)	EV-159
Vertical Height of Sill	EV-161
Height of Max Door Crush	EV-163
Door Sill Differential	EV-165
WinSMASH Overview	EV-167
Table Of Weights To Be Used For Known Occupants With Unknown Weight	EV-174
Male	EV-174
Female	EV-174
NassMain WinSMASH	EV-176

Delta V, Barrier Equivalent And Speed Estimate Decision Rules	EV-176
Definitions for Minor, Moderate, or Severe	EV-178
Total Delta V	EV-180
Longitudinal Delta V	EV-181
Lateral Delta V	EV-182
Energy Absorption	EV-183
Impact Speed or change to Impact	EV-184
Barrier Equivalent Speed	EV-185
Estimated Severity	EV-186
Severity Rank	EV-189
Basis for Delta V Entry	EV-190
EDR DATA	EV-193
EDR Information Obtained	EV-195
CDR/EDR Version Number	EV-198
Warning Lamp Status	EV-199
Accident Event Sequence Number	EV-200
Type of event	EV-201
Number Of Ignition Cycles At Event Occurrence	EV-202
Number Of Ignition Cycles At Investigation	EV-203
Driver's Belt Status	EV-204
Time For Driver Pretensioner Actuation	EV-205
Driver Seat Track In Forward Position	EV-206
Passenger's Belt Status	EV-207
Passenger's Seat Weight Sensor Position	EV-208
Time For Passenger Pretensioner Actuation	EV-209
Passenger Air Bag Suppression Switch Position	EV-210
AIR BAG DEPLOYMENT TIMES	EV-211
Air Bag Location	EV-212
Position	EV-214
Time For First Stage Air Bag Deployment	EV-215
Time For Second Stage Air Bag Deployment	EV-216
EDR Pre-Crash Data	EV-217
Number of seconds Prior to Crash	EV-218
Pre-crash Vehicle Speed Reading (-5, -4, -3, -2, -1)	EV-219
Pre-crash Engine Speed Reading (-5, -4, -3, -2, -1)	EV-220
Pre-crash Engine Throttle Percentage (-5, -4, -3, -2, -1)	EV-221
Pre-crash Brake Status (-5, -4, -3, -2, -1)	EV-222
EDR Crash Data	EV-223
Longitudinal Delta V	EV-223
Number of Milliseconds After Crash	EV-224
Longitudinal Delta V Reading	EV-225
Time For Lateral Delta V	EV-226
Lateral Delta V Reading	EV-227
INSTRUCTIONS FOR COMPLETION OF VEHICLE DAMAGE SKETCH	EV-228
Vehicle Types	EV-229
Top View Example	EV-230
Side View Example	EV-231
End View Example	EV-232
SKETCHES/MEASUREMENTS	EV-233
Side Door Lateral Width	EV-234
Side Glass Later Width	EV-235
Roof Lateral Width	EV-236
Side Door Vertical Height	EV-237
Side Glass Vertical Height	EV-238
Roof Vertical Height	EV-239
Original Front Bumper Height	EV-240

Original Rear Bumper Height	EV-241
Front Track Width (Post Crash)	EV-242
Rear Track Width (Post Crash)	EV-243
Original Hood Extent	EV-244
Original Windshield Extent	EV-245
Original Windshield to B-pillar	EV-246
Original Backlight to B-pillar Length	EV-247
Original Backlight Length	EV-248
Original Trunk Length	EV-249
Original Pick-up Rear Extent	EV-250
Original Pick-up Bed Length	EV-251
Baseline Measurement-Left/Right Side Front Stringline	EV-252
Baseline Measurement-Left/Right Side Front Corner	EV-253
Baseline Measurement-Left/Right Side Wheelbase	EV-254
Baseline Measurement-Left/Right Side Corner	EV-255
Baseline Measurement-Left/Right Side Rear Stringline	EV-256
LOG	EV-257
Applicable Pre-Crash Measurements	EV-259
Reference Line Placement	EV-260
Impact Damage Documentation	EV-261
Quality of Vehicle Damage Sketch	EV-262
Exterior Images Subject Quality	EV-263
Exterior Image Quality	EV-264
Primary Error Source (Vehicle Plane)	EV-265
REVIEW	EV-266
PSU List	EV-266
PSU Detail	EV-267

INTERIOR VEHICLE FORM	IV-1
INTEGRITY	IV-1
[Is There Passenger Compartment Integrity Loss?]	IV-2
Passenger Compartment Integrity	IV-3
Post Crash Integrity Loss	IV-5
Door; Tailgate; or Hatch Opening Review	IV-6
Door, Tailgate, or Hatch Location	IV-7
Door, Tailgate, or Hatch Opening	IV-8
Damage/Separation Associated with Door, Tailgate, or Hatch Opening in Collision	IV-10
GLAZING	IV-12
Glazing Type and Damage Overview	IV-13
Location of Window/Windshield Glazing	IV-15
Type of Window/Windshield Glazing	IV-16
Window Pre-crash Status	IV-19
Glazing Damage From Impact Forces	IV-21
Glazing Damage from Occupant Contact	IV-24
INTRUSION/OCCUPANT AREA INTRUSION OVERVIEW	IV-26
Row Widths	IV-30
INTRUSIONS	IV-32
INTRUSIONS DETAIL	IV-32
[Intrusion Number]	IV-33
Row	IV-34
Position	IV-37
[Intrusion Location]	IV-39
Area	IV-42
Intruded Component	IV-43
Comparison Value (of intrusion)	IV-48
Intruded Value (of intrusion)	IV-49
Intrusion	IV-50
Magnitude of Intrusion	IV-51
Crush Direction	IV-52
INTRUSION/SKETCH	IV-53
Intrusion Sketch Completion	IV-54
INSTRUMENT	IV-55
Odometer Reading	IV-56
Odometer Source	IV-57
Adjustable Pedals	IV-58
Adaptive (Assistive) Driving Equipment Yes/No/Unknown	IV-59
Adaptive (Assistive) Driving Equipment	IV-60
STERRING COLUMN	IV-62
Steering Column Type	IV-63
Tilt Steering Column Adjustment	IV-65
Telescoping Steering Column Adjustment	IV-67
Location of Rim / Spoke Deformation	IV-69
Steering Rim / Spoke Deformation	IV-71
STEERING WORKSHEET	IV-73
Comparison Value	IV-74
Damage Value	IV-75
Deformation	IV-76
STEERING DRAWING	IV-77
CONTACT/LIST	IV-78
CONTACT/CONTACT	IV-78
Contact Overview	IV-79
Contact	IV-81
Contact Area Label	IV-82
Contacted Component	IV-83

Occupant Number	IV-89
Body Region	IV-90
Evidence	IV-92
Confidence Level of Occupant Contact	IV-95
CONTACT / SKETCH 1 AND SKETCH 2	IV-96
Instructions for Completion of Vehicle Interior Sketches	IV-97
EJECTION OVERVIEW	IV-100
EJECTION LIST	IV-102
Ejection List Tab	IV-102
EJECTION DETAIL	IV-103
Ejection Number	IV-104
Ejection - Type	IV-105
Ejection Area	IV-107
Ejection Medium	IV-109
Ejection Medium Status	IV-111
ENTRAPMENT OVERVIEW	IV-113
Entrapment Comment	IV-114
LOG	IV-115
REVIEW	IV-116
PSU Review	IV-116
Zone Review	IV-117

SAFETY SYSTEMS FORM	SS-1
SAFETY SYSTEMS FORM OVERVIEW	SS-2
SEAT	SS-3
SEAT DEFINITION	SS-4
Occupant's Seat Position	SS-5
Restraint Type at This Occupant Position	SS-7
Head Restraint Damage by Occupant at This Occupant Position	SS-9
Active Head Restraint	SS-10
Rollover Protection	SS-11
Seat Type	SS-12
Seat Orientation	SS-16
Seat Track Position	SS-17
Seat Performance	SS-19
Does the Seat Have Integrated Passenger Belts?	SS-22
Seat back Incline Prior to Impact	SS-23
Seat Back Incline Position Post Impact	SS-24
Air Bag ever Available	SS-25
RESTRAINTS MANUAL BELT	SS-26
Manual (Active) Belt System Availability	SS-27
Manual (Active) Belt System Used in this Crash?	SS-29
Manual (Active) Belt Malfunction Modes During Crash	SS-31
Manual Shoulder Belt Upper Anchorage Adjustment	SS-33
RESTRAINTS/MANUAL/COMPONENTS	SS-35
Pretensioner Presence/Actuation	SS-36
Pretensioner Distance	SS-38
Seat Belt Positioning Device Presence	SS-39
RESTRAINTS/AUTOMATIC	SS-41
Automatic (Passive) Belt System Availability/Function	SS-42
Automatic (Passive) Belt System Use	SS-45
Automatic (Passive) Belt System Type	SS-47
Automatic (Passive) Belt Malfunction Modes During Crash	SS-48
AIR BAG OVERVIEW	SS-50
AIR BAG	SS-52
Air Bag Number for this Vehicle	SS-53
Seat Location for Air bag(s) Data	SS-54
Deployment Location of Air Bag	SS-55
Air Bag Status	SS-57
Type of Air Bag	SS-58
Air Bag Deployment	SS-59
Indications of Air Bag Malfunction	SS-61
Type of Cutoff Switch	SS-62
Cutoff Switch Position Status	SS-63
Did Air Bag Module Cover Flap(s) / Seams Open at Designated Tear Points?	SS-64
Were the Cover Flap(s) Damaged	SS-65
Was there damage to the air bag?	SS-66
Source of Air Bag Damage	SS-68
AIR BAG SKETCHES	SS-70
CHILD RESTRAINT OVERVIEW	SS-81
CHILD SEAT LIST	SS-83
CHILD SEAT DETAIL	SS-84
[Child Restraint Number]	SS-85
Child Restraint Make	SS-86
Child Restraint Model	SS-87
Child Restraint Type	SS-88
Date of manufacture	SS-96
Model Number	SS-97

Source of Data	SS-98
Child Restraint Harness/Shield Design	SS-99
Child Restraint Harness Retainer Clip	SS-101
Child Restraint Tether Design	SS-103
Child Restraint LATCH Design	SS-104
Child Restraint Usage Orientation	SS-105
Child Restraint Harness/Shield Use	SS-106
Child Restraint Retainer Clip Use	SS-108
Child Restraint Tether Use	SS-109
Child Seat LATCH Use	SS-110
Belt Routing/Use	SS-111
Use of Locking Clip on Vehicle Belt	SS-113
Seat Location for Child Restraint	SS-115
Child Restraint Placement	SS-117
Child Position In Child Restraint	SS-118
VEHICLE	SS-120
Belt Retractor Type	SS-121
Latch Plate Type	SS-123
Latch Anchor	SS-125
Latch Tether	SS-126
LOG	SS-127
REVIEW PSU	SS-128
REVIEW ZONE	SS-129

Occupant FORM	OF-1
OCCUPANT OVERVIEW	OF-2
Occupant Number	OF-3
Occupant's Age	OF-4
Occupant's Height	OF-5
Occupant's Weight	OF-6
Occupant's Sex	OF-7
Fetal Mortality	OF-9
Occupant's Role	OF-10
Race	OF-11
Ethnicity	OF-13
Occupant's Eye Wear	OF-15
Child Safety Seat Used	OF-16
Police Reported Air Bag Availability/Function	OF-17
Police Reported Belt Use	OF-18
Police Injury Severity	OF-19
EJECTION OVERVIEW	OF-26
EJECTION LIST	OF-28
EJECTION DETAIL	OF-28
Type of Ejection	OF-29
Ejection Area	OF-31
Ejection Medium	OF-33
Ejection Medium Status	OF-35
EJECTION COMMENTS	OF-37
ENTRAPMENT OVERVIEW	OF-38
ENTRAPMENT DETAILS	OF-39
Entrapment	OF-40
Occupant Mobility	OF-42
ENTRAPMENT COMMENTS	OF-44
SEAT DEFINITION	OF-45
Occupant's Seat Position	OF-46
Occupant's Posture	OF-48
Occupant's Role	OF-51
SEAT ATTRIBUTES	OF-52
Head Restraint Type at This Occupant Position	OF-53
Head Restraint Damage by Occupant at This Occupant Position	OF-55
Active Head Restraint	OF-56
Rollover Protection	OF-57
Seat Type	OF-58
Seat Orientation	OF-62
Seat Track Position	OF-64
Seat Performance	OF-66
Does the Seat Have Integrated Passenger Belts?	OF-69
Seat back Incline Prior to Impact	OF-70
Seat Back Incline Position Post Impact	OF-71
Air Bag Ever Available	OF-72
AIR BAG FUNCTION	OF-73
[Air Bag Number for this Vehicle]	OF-74
Location of Air Bag	OF-75
Air Bag Status	OF-77
Type of Air Bag	OF-78
Air Bag Deployment	OF-79
Indications of Air Bag Malfunction	OF-81
Type of Cutoff Switch	OF-82
Cutoff Switch Position Status	OF-84
AIR BAG DAMAGE	OF-85

Did Air Bag Module Cover Flap(s)/Seam(s) Open at Designated Tear Points?	OF-86
Were the Cover Flap(s) Damaged	OF-87
Was There Damage To The Air Bag?	OF-88
Source of Air Bag Damage	OF-90
Air Bag/Evaluation	OF-92
Had the Vehicle Been in Previous Crashes?	OF-94
Had Any Prior Maintenance/Service Been Performed On This Air Bag System?	OF-95
Air Bag Deployment Accident Event Sequence Number	OF-96
CDC For Air Bag Deployment Impact	OF-97
CHILD RESTRAINT OVERVIEW	OF-98
CHILD SEAT LIST	OF-100
CHILD SEAT DETAIL	OF-101
[Child Restraint Number]	OF-102
Child Restraint Make	OF-103
Child Restraint Model	OF-104
Child Restraint Type	OF-105
Date of manufacture	OF-113
Model Number	OF-114
Source of Data	OF-115
Child Restraint Harness/Shield Design	OF-116
Child Restraint Harness Retainer Clip	OF-119
Child Restraint Tether Design	OF-120
Child Restraint LATCH Design	OF-121
Child Restraint Usage Orientation	OF-122
Child Restraint Harness/Shield Use	OF-123
Child Restraint Retainer Clip Use	OF-125
Child Restraint Tether Use	OF-126
Child Seat LATCH Use	OF-127
Belt Routing/Use	OF-128
Use of Locking Clip on Vehicle Belt	OF-130
Seat Location for Child Restraint	OF-132
Child Restraint Placement	OF-134
Child Position In Child Restraint	OF-135
VEHICLE	OF-137
Belt Retractor Type	OF-138
Latch Plate Type	OF-140
LATCH Anchor Availability	OF-142
LATCH Tether Availability	OF-143
MANUAL SEAT BELT	OF-144
Manual (Active) Belt System Availability	OF-145
Manual (Active) Belt System Used in This Crash?	OF-148
Position of Manual Belt/Lap Portion	OF-151
Position of Manual Belt/Shoulder Portion	OF-153
Manual (Active) Belt Failure Modes During Crash	OF-155
Manual Shoulder Belt Upper Anchorage Adjustment	OF-157
Source of Researcher's Determination of Belt Use	OF-159
MANUAL SEAT BELT COMPONENTS	OF 160
Seat Belt Positioning Device Presence	OF-161
Seat Belt Positioning Device Use	OF-162
AUTOMATIC SEAT BELT	OF-163
Automatic (Passive) Belt System Availability/Function	OF-165
Automatic (Passive) Belt System Use	OF-168
Automatic (Passive) Belt System Type	OF-170
Position of Automatic Lap Belt/Lap Portion of Belt	OF-171
Position of Automatic Shoulder Belt/Shoulder Portion of Belt	OF-173
Automatic (Passive) Belt Malfunction Modes During Crash	OF-175

Source of Researcher's Determination of Automatic Belt Use	OF-177
INJURY/PSU	OF-178
[Police Injury Severity]	OF-179
Mortality	OF-186
Treatment	OF-187
Type of Medical Facility (for Initial Treatment)	OF-189
Hospital Stay	OF-192
Working Days Lost	OF-194
INJURY-ZONE	OF-196
Death Date	OF-197
Death Time	OF-198
[Time to Death]	OF-199
[Number of Injuries for This Occupant]	OF-200
Glasgow Coma Scale (GCS) Score (at Medical Facility)	OF-201
Was the Occupant Given Blood?	OF-203
Arterial Blood Gases -- ABG (HCO3)	OF-205
Medically Reported Cause of Death	OF-208
INJURY CODES LIST	OF-210
INJURY CODES DETAIL	OF-210
Injury Number	OF-211
AIS Code	OF-212
Injury Description	OF-213
Aspect	OF-214
Source of Data	OF-216
Air Bag Location	OF-218
Injury Source	OF-219
Confidence Level	OF-224
Direct Intrusion	OF-226
Indirect Intrusion	OF-227
Air Bag Related	OF-228
Direct/Indirect Injury	OF-229
Injury Rank	OF-231
Medical Record Type	OF-232
VITAL SIGNS	OF-234
MANNEQUINS	OF-235
LOG/INTERVIEW	OF-236
LOG/MEDICAL	OF-237
PSU REVIEW	OF-238
ZONE REVIEW	OF-239
EMERGENCY MEDICAL SERVICE (EMS) OVERVIEW	OF-240
VEHICLES	OF-241
[EMS Unit Number]	OF-242
Responding Agency	OF-243
Responding Emergency Vehicle Type	OF-245
Transportation Mode	OF-246
FIRST Notification Time	OF-247
FIRST Arrival Time	OF-248
Time of Departure From the Scene	OF-249
Arrived at Medical Facility	OF-250
EMS CARE	OF-251
Vehicle #	OF-252
Occupant #	OF-253
Type of EMS Care Administered	OF-254
VITAL SIGNS	OF-256
[Vital Sign Number]	OF-257
Time of Reading	OF-258

Pulse	OF-259
[Elapsed Time since Crash of Vital time Reading]	OF-260
Systolic Blood Pressure	OF-261
Diastolic Blood Pressure	OF-262
Respiratory Rate	OF-263

Appendices

Appendix A

Make Model List

Appendix B

Stiffness Values

Appendix C

Child Safety Seats/Make Model

Appendix D

Table A-15 Intruded Component

Appendix E

Symbols for Crash Diagramming

2009 MANUAL CHANGES

Below is a list of CDS variables that have substantive changes for 2009.
IT IS RECOMMENDED THAT YOU REVIEW THE ENTIRE MANUAL FOR ALL CHANGES.

FORM	TAB	PAGE #	VARIABLE	COMMENTS
				Oracle and SAS values added
Case		CF-2	Required Forms	10 Years or Newer Model Years and Model Years Older than 10 Years form requirements
Case		CF-3	Vehicle Fully Repaired/No Damage Evident	Additional remarks to Exterior Vehicle Form/Crush
Case	Crash	CF-9	Time of Crash	Element attributes changed
Case	Structure/Medical Records	CF-48	Medical Record	Retired attributes: Interviewee and Police Report Death Certificate definition
Case	Summary/Vehicles	CF-74	Component Failure	Removed a Crash Avoidance item: Motorcycle mirrors
Case	Events/Detail	CF-106	Object Contacted	Retire: Train Add: Railway vehicle and definition
GV	Vehicle	GV-29	Special Use	Retired attribute Added attributes New definitions
GV	Vehicle	GV-40	Inspection Type	Added attribute
GV	PreCrash	GV-106	Roadway Surface Condition	Retired attributes Added attributes Due to compatibility
GV	PreCrash/Movement	GV-125	Data Overview	Additional remarks: Trafficway New Examples
GV	Precrash	GV-126	Precrash Data Overview	Examples changed
GV	Precrash	GV-169	Crash Configuration	Single Driver; Forward Impact definition change
GV	Precrash	GV-177	Crash Type	Forward Impact: Pedestrian/Animal definition change
GV	Delta V	GV-252	Confidence Level for Highest Severity Impact	Attribute change and definition Borderline Reconstruction
EV	Vehicle	EV-27	Special Use	Retired attribute Added attributes New definitions
EV	Vehicle	EV-38	Inspection Type	Added attribute
EV	Tire/General	EV-51	Manufacturer's Recommended Front/Rear Tire Size	Additional remarks
EV	Tire/Tires/Detail	EV-64	Tire Identification Number	Range change Additional remarks
EV	Tire/Tires/Detail	EV-66	Tire Maximum Pressure	Deleted variable
EV	CDC/Details	EV-160	Direct Damage to Pillar(s)	Additional remarks

FORM	TAB	PAGE #	VARIABLE	COMMENTS
EV	CDC/Details	EV-164	Height of Max Door Crush	Additional remarks
EV	CDC/Details	EV-166	Door Sill Differential	Additional remarks

IV	Intrusion/Worksheet	IV-47	Intruded Component	Additional remarks
IV	Intrusion/Sketch	IV-55	Intrusion Sketch Completion	Additional remarks Sketch change
IV	Contact	IV-89	Air Bag	Additional remarks Air Bag-driver side Air Bag-passenger side Other air bag (specify)

SS	Seat/Definition/Row Number	SS-8	Head Restraint Type at This Occupant Position	Additional remarks for Integral Head Restraint
SS	Seat/Definition/Row Number	SS-11	Rollover Protection	New variable
SS	Air Bag	SS-58	Type of Air Bag	Re-order attributes
SS	Air Bag	SS-59	Indications of Air Bag Malfunction	Attribute: Yes (specify) Definition change
SS	Air Bag	SS-68	Source of Air Bag Damage	Retire attribute: Windshield Add attribute: Glazing
SS	Child Seat	SS-98	Source of Data	Retire attribute: Medical Records Add attribute: Official Records and definition
SS	Child Seat	SS-106	Child Restraint Harness/Shield Use	Attribute change and definitions

OA	Occupant	OF-18	Police Reported Belt Use	Definition: None Used
OA	Occupant	OF-19	Police Injury Severity (Police Rating)	Moved from Injury Tab
OA	Seat	OF-47	Head Restraint Type at This Occupant Position	Additional remarks for Integral Head Restraint
OA	Seat	OF-50	Rollover Protection	New Variable
OA	Air Bag/Function	OF-67	Location of Air Bag	Source change
OA	Air Bag/Function	OF-74	Indications of Air Bag Malfunction	Attribute: Yes (specify) Definition change
OA	Air Bag/Damage	OF-81	Source of Air Bag Damage	Retire attribute: Windshield Add attribute: Glazing
OA	Child Seat/Detail	OF-105	Source of Data	Retire attribute: Medical Records Add attribute: Official Records and definition
OA	Child Seat/Detail	OF-116	Child Restraint Harness/Shield Use	Attribute change and definitions

	Appendix			Added Uniform Symbols for Crash Diagramming
--	----------	--	--	---

CASE FORM OVERVIEW

The Case Form provides a basic overall view of the case. It provides a description of the crash sequence and case peculiarities (vehicle or environment). It also provides information regarding the vehicle(s) and person(s) involved in the crash.

Through this form, the researcher is able to provide the zone center, a clinical user, or any other person interested in the NASS CDS case a quick reference of the crash particulars.

The form is divided into several main tabs:

- Crash
- Structure
- Summary
- Events
- Vehicle
- Persons
- Scene

The Crash tab provides basic overview information about the case. This includes the case number and stratum, date and time of the crash, location, researcher and association to any special study.

The Structure tab provides the researcher a means of structuring the case after case assignment. All case applicable vehicles and occupants are inserted into this tab before further data entry on other forms is accomplished. In addition, this tab provides a tracking mechanism for medical records. The tab also tracks dates associated with the case.

The Summary tab provides the researcher a means for giving a textual description of the crash. The Summary should provide a non-jargon account of the crash.


The Events tab lists all harmful events associated with the crash.

The Vehicle tab lists and provides a basic description of all motor vehicles involved in the crash.


The Persons tab lists all occupants of CDS applicable vehicles found in the Vehicles tab. It provides information regarding their position within the vehicle, their restraint use and the maximum injury they suffered during the crash. In addition, it also lists the drivers of non-CDS applicable vehicles.

The Scene tab contains the scene diagram for the case. For field personnel, the tab will contain a link to the actual diagramming software file. For other personnel, the tab may only contain a JPEG representation of the final diagram.


Required Forms and Tabs
10 years or Newer Model Year
Inspected

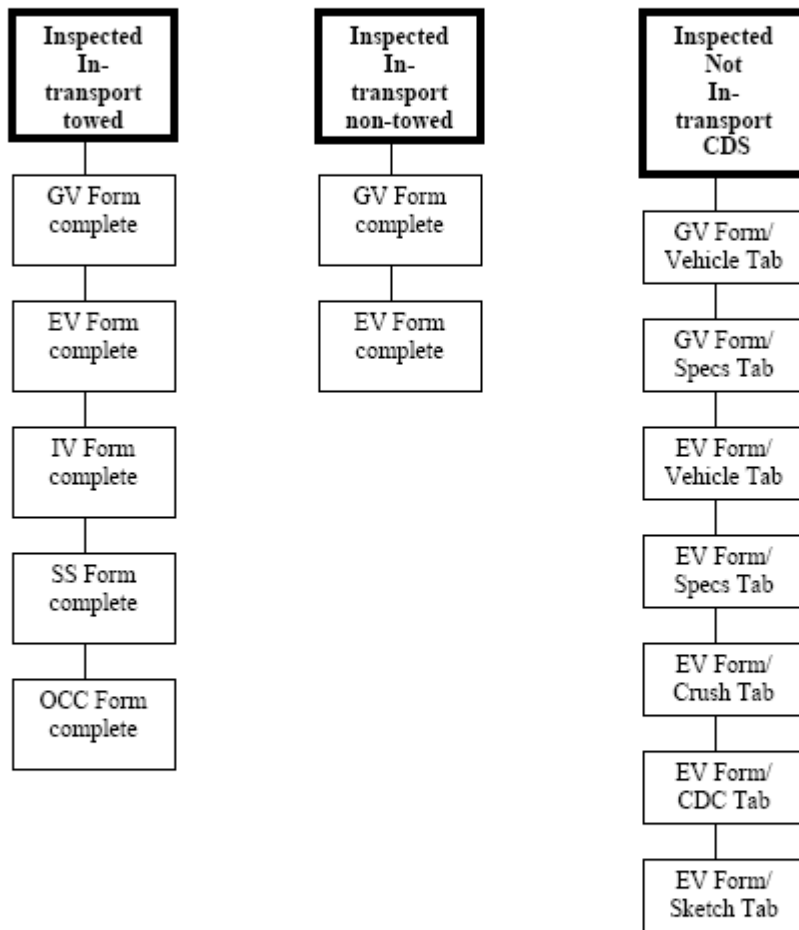


Required Forms and Tabs
10 years or Newer Model Year
Not Inspected

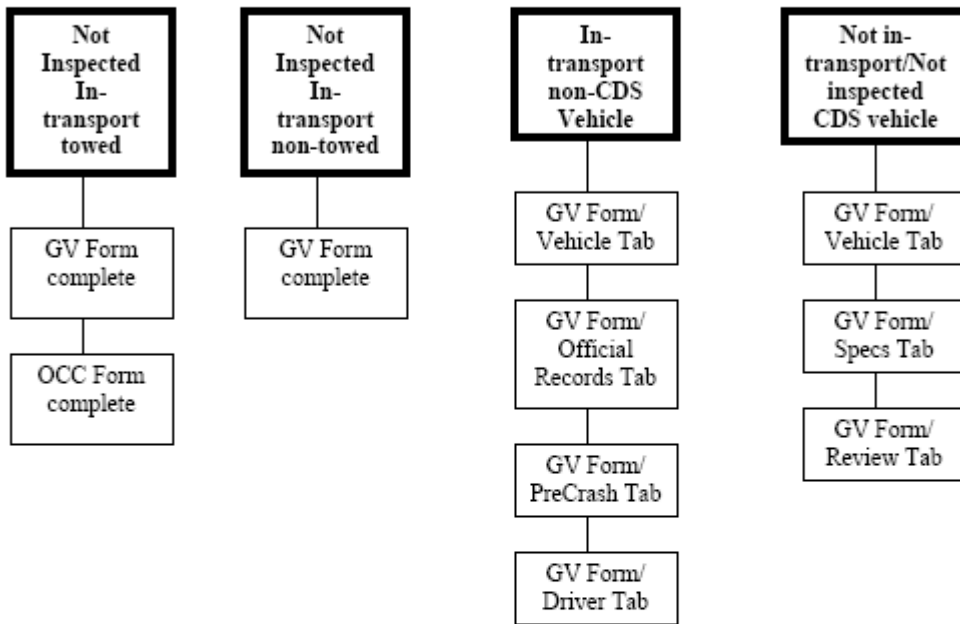


Required Forms and Tabs
Model Year Older Than 10 Years
Inspected

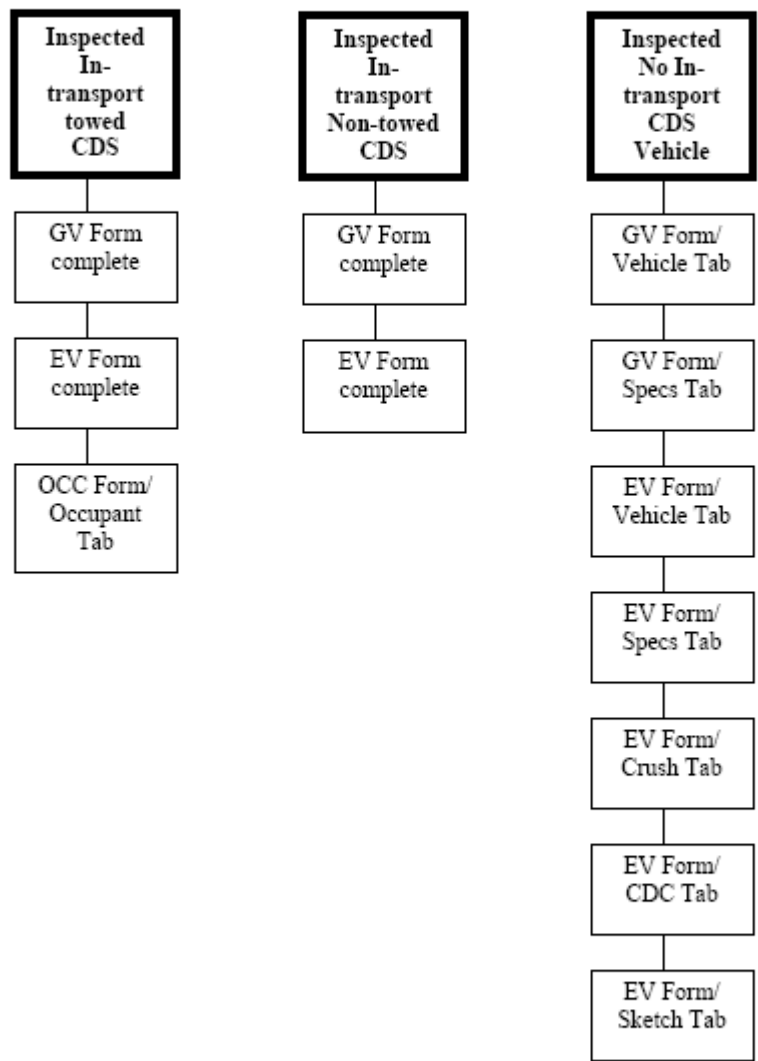

Required Forms and Tabs
Model Year Older Than 10 Years
Not Inspected

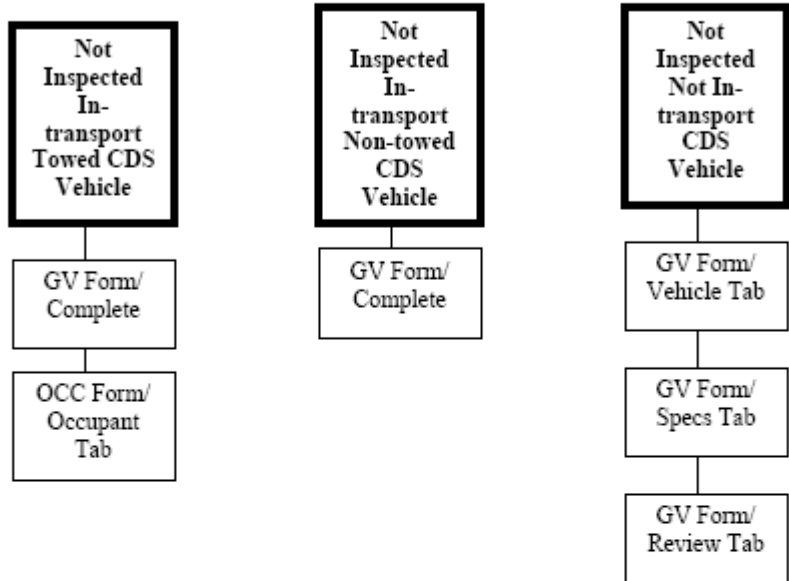

Required Forms and Tabs
Working Vehicles

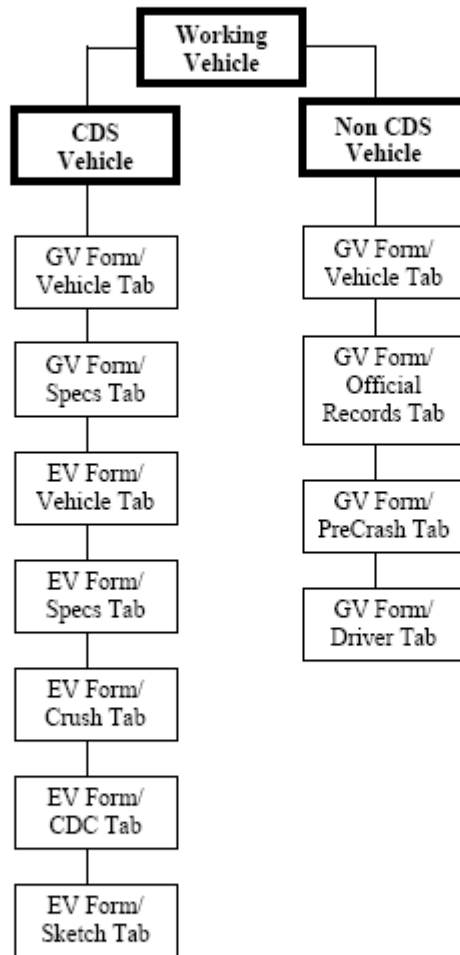

VEHICLE FULLY REPAIRED – NO DAMAGE EVIDENT**Exterior Vehicle form** –

This protocol should be used to complete the inspection of a completely repaired vehicle. **NOTE: If damaged parts can be inspected and photographed, all applicable data should be coded - the vehicle should not be considered “fully repaired.” If images of the damaged vehicle are obtained, all applicable data should be coded - the vehicle should not be considered “fully repaired.”**

Tires – If it can be determined that tires have not been replaced, code data for all variables. If the tire has been replaced, code “unknown” for all variables.

Fuel – If it can be determined that fuel system components have not been repaired, code all variables according to the NASS protocol (i.e., if damage exists, code all variables). If damage is detected the vehicle cannot be considered “fully repaired.” If fuel system was repaired, code all variables “unknown.”

Crush – Code all variables “unknown,” except for Category, code as Not Applicable.

CDC – Code all variables “unknown” for each event.

EDR – Code all data if obtained from the vehicle’s original EDR module. If the module was replaced, there is no need to perform the download.

Sketches – Annotate all sketches “completely repaired.”

Interior Vehicle form –

Integrity – If it can be determined that no integrity-related components have been repaired or replaced, code all variables. Otherwise, code integrity and all applicable openings “unknown.”

Glazing – If it can be determined that no glazing has been replaced, code all variables. Otherwise, code all applicable glazing “unknown.”

Intrusions – Code one intrusion with “unknown” for all variables. Annotate sketch “completely repaired.”

Instrument – Code odometer reading and source. Indicate all adaptive equipment. Code all other variables “unknown.” If damage from occupant contact is detected, the vehicle cannot be considered “fully repaired.”

Steering – Code column type. Code all other variables “unknown.”

Contact – If contact evidence is detected, the vehicle cannot be considered “fully repaired.” Otherwise, annotate sketches “completely repaired.”

Ejection – Code ejection according to all known data (PAR, interview, etc). If no other data are available at the inspection, code the ejection as “unknown.”

Entrapment - Annotate entrapment according to all known data (PAR, interview, etc). If no other data are available at the inspection, annotate “unknown.” Check "No Entrapment."

Safety Systems form –

Seat – Define all seating positions. If it can be determined that no seat repairs have been conducted, code all variables. Otherwise, code head restraint type, seat type and orientation, integrated restraints, and air bag ever available. Code all other variables “unknown.”

Restraints – If it can be determined that no safety belt system repairs have been conducted, code all variables. If belt damage or deployed pretensioners are detected, the vehicle cannot be considered “fully repaired.” Otherwise, code all variables “unknown.”

Air Bag – If it can be determined that the airbags have not been replaced, code all variables. Otherwise, code location for each air bag. Code all other variables “unknown.”

Child Seat – Code all variables according to the NASS protocol (see SS-76 in CDS Manual).

CRASH

CaseForm, Case #2007-996-900015

CRASH | STRUCTURE | SUMMARY | EVENTS | SCENE | ANNOTATION | REVIEW | OTHER RESPONSE

Case Number: 90001 Status: Open

Stratum: S

Date of Crash: 1/14/2007 Sunday

Time of Crash: :

PSU: Developer PSU Server w/Oracle 9 #2

Jurisdiction: Due Date: 02/15/2007

PAR Number: 999075985 Case ID: 999003665

Type: TEST

Researcher: Owner:

Special Studies
 SS15: Administrative Use

Save Close

CASE NUMBER

Screen Name: Case Number

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: **NASS_CASE.CASENUMBER**

Element Attributes:

Range: 001-499

Source: Assigned by Automated Case Selection System

Remarks:

This variable is assigned by ACSS (Automated Case Selection System) and cannot be changed.

The three digits are numbers ranging from 001 to 499. No numbers will be skipped. If a case must be dropped, the number will not be reused.

Cases sampled within the NASS CDS sampling frame are numbered 001-499. Cases selected outside of the NASS CDS sampling frame as part of a special study data collection effort are numbered outside of the normal range by the ACSS.

STRATUM

Screen Name: **Stratum**

SAS Data Set: *N/A*

SAS Variable: *N/A*

Oracle Name: *NASS_CASE.STRATUM*

Element Attributes:

Range: CDS Sampling Stratum — A, B, C, D, E, F, G, H, J, K

Source: Assigned by Automated Case Selection System

Remarks:

This variable is generated by the ACSS (Automated Case Selection System) and cannot be changed.

The Stratum is the letter identifying which CDS sampling classification the case is assigned.

For further information refer to the NASS Sampling Manual.

DATE OF CRASH (MONTH/DAY/YEAR)

Screen Name: Date of Crash

SAS Data Set: *ACCIDENT*

SAS Variable: *MONTH, DAYWEEK, YEAR*

Oracle Name: *ACCIDENT.ACCIDENTDATETIME*

Element Attributes:

Month: 01-12
Day: 01 through 31
Year: Calendar year of the crash

Source: Rolled up from the PAR prog and Assigned by Automated Case Selection System.

Remarks:

This variable is assigned by the ACSS (Automated Case Selection System) and cannot be changed.

TIME OF CRASH

Screen Name: Time of Crash

SAS Data Set: *ACCIDENT*

SAS Variable: *TIME*

Oracle Name: *ACCIDENT.ACCIDENTTIME*

Element Attributes:

0000-2359

9999 Unknown

Source: Rolled up from the PAR prog and Assigned by Automated Case Selection System.

Remarks:

This variable is assigned by the ACSS (Automated Case Selection System) and cannot be changed.

PSU

Screen Name: PSU

SAS Data Set: *ACCIDENT*

SAS Variable: *PSU*

Oracle Name: *NASS_CASE.ORGID*

Element Attributes:

PSU number

Source: Rolled up from the PAR prog and Assigned by Automated Case Selection System.

Remarks:

This variable reports the PSU (Primary Sampling Unit) that selected the case. This variable is assigned by the ACSS and cannot be changed.

POLICE JURISDICTION

Screen Name: Jurisdiction

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *PARDATA.JURISDICTION*

Element Attributes:

PSU specific list of sampled Police Jurisdiction

Source: Rolled up from the PAR prog and Assigned by Automated Case Selection System.

Remarks:

This variable reports the sampled police jurisdiction from which the case was selected. This variable is selected in the ACSS and cannot be changed.

PAR NUMBER

Screen Name: PAR Number

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *PARDATA.PARNUMBER*

Element Attributes:

Police report number recorded from the PAR

Source: Police Report

Remarks:

This variable reports the police report number as entered into the ACSS and cannot be changed. For further information refer to the NASS Sampling Manual.

RESEARCHER ASSIGNED TO CASE

Screen Name: Researcher

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: **NASS_CASE.RESEARCHERID**

Element Attributes:
 PSU Specific

Source: NASS Personnel Roster.

Remarks:

Select the name of the Researcher assigned the case.

STATUS OF CASE

Page 1 of 3

Screen Name: Status**SAS Data Set:** N/A**SAS Variable:** N/A**Oracle Name:** *NASS_CASE.STATUSID***Element Attributes:**

Oracle	SAS
1	New
2	Open
3	Closed
5	Released
6	Unreleased
7	Transmit
8	Copy
9	QC Review
10	Approved
11	Unapproved
12	QC Complete
13	Dropped
14	Structure
20	Published

Source: System Assigned.**Remarks:**

The Case Status is an indicator of a case's status within the EDS system. It is a system assigned variable which is dependent upon the creation of the case or other user actions (i.e. case release, approval, etc). Some of the attributes are program specific. A case will only be editable when it is in one of the following two statuses: New (initially) and Open.

New

indicates the case has been selected for research by the sampling algorithm, however it has not yet been structured.

Open

indicates the case is available for editing. A case can only be “Open” at one site. Usually this is a field site.

Closed

indicates the case has been released by the PSU and is awaiting migration of its ownership to the Zone Center. The Closed status should only appear at the PSU, no other type of site should have this type of Status associated with a case.

Released

indicates the case has been released by the PSU and that ownership has been transferred to the Zone Center. The Released status is unique to the PSU. No other type of site should have this type of status associated with a case.

Unreleased

indicates the case has been released back to the PSU for further work. The Unreleased status is unique to the Zone Center. Once a case has been unreleased, the Status will show Open at the PSU and Unreleased at the Zone Center.

Transmit

indicates the case ownership is currently migrating and is not yet complete. Once ownership migration is complete, the Status will change to a different status.

Copy

indicates the case is a static copy of a case sent from another site. Any changes made to a case by the owner of the case after being copied will not appear in the copied case until it is re-copied. All cases in a Copy status are non-editable.

QC Review

Is a CIREN specific status which indicates the case has been copied to the CIREN QC contractor.

Approved

indicates that the case has been approved by the Zone Center and is no longer editable.

Unapproved

indicates that the case previously had the status of Approved, but the case required further update.

QC Complete

Is a CIREN specific status which indicates the CIREN QC contractor has completed their review.

Dropped

indicates the case has been dropped from the study and is no longer being researched. If the case is a CDS case, it will not be included in the final analysis file. The case will not be editable once this status is assigned.

Structure

indicates the case is in an Open status at a lower level of the system hierarchy. For example, a NHTSA user will see a case in the Structure status until it is Approved by the Zone Center.

Published

indicates the case has been approved by all levels of the system and is available for public viewing.

SPECIAL STUDIES

Screen Name: Special Studies

SAS Data Set: *SPECSTDY*

SAS Variable: *STUDY*

Oracle Name: *SPECIALSTUDIES.STUDYID*

Element Attributes: Special Studies to be determined by NHTSA HQ Staff.

Source: Special study procedures.

Remarks:

A checkmark in the box adjacent to the Special Study identifier means the case qualifies for that special study.

A blank box adjacent to the Special Study identifier means the case does not qualify for this special study.

CASE DUE DATE

Screen Name: Due Date

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *Derived from Sample Date + 32 days*

Element Attributes:

Date generated by Automated Case Selection System

Source: Automated Case Selection System

Remarks:

This variable is generated by the ACSS (Automated Case Selection System) and cannot be changed. The case due date is generally five weeks after sampling date.

CASE IDENTIFICATION NUMBER

Screen Name: Case ID

SAS Data Set: *ACCIDENT*

SAS Variable: *SCASEID*

Oracle Name: *NASS_CASE.CASEID*

Element Attributes:

Unique Number generated by the NASSMAIN Program

Source: NASSMAIN Program

Remarks:

This variable is generated by the NASSMAIN Program and cannot be changed.

TYPE OF CASE

Page 1 of 2

Screen Name: Type**SAS Data Set:** N/A**SAS Variable:** N/A**Oracle Name:** *NASS_CASE.CASETYPE***Element Attributes:**

Oracle	SAS
0	SCI
1	CDS
2	CIREN
3	TEST
4	TRAINING
5	SCI-CDS
9	SCI-TEST

Source: System Assigned – primary, Researcher - secondary.**Remarks:**

Case Type is assigned by the system during the case creation process. It may also be updated to one of the combination types (e.g. SCI-CDS, etc). The Case Type determines the structure of the case within NASSMAIN. Due to the differing structure of the different Case Types, it also affects which consistency checks will be applicable to the case.

SCI

Is assigned to cases created thru the NASSMAIN Create – SCI Case feature. Cases assigned to this Case Type belong solely to the SCI program.

CDS

Is assigned to cases created by the NASS CDS program. Cases assigned to this Case Type belong solely to the CDS program.

CIREN

Is assigned to cases created thru the NASSMAIN Create – CIREN Case feature. Cases assigned to this Case Type belong solely to the SCI program.

TEST

Is assigned to cases created thru the NASSMAIN Create – Test Case feature. Cases assigned to this case type follow the CDS structure.

TRAINING

Is assigned to cases created thru the NASSMAIN Create – Training Case feature. Cases assigned to this case type are generally used by new CDS researchers during their training phase. These cases will follow the CDS structure.

SCI-CDS

Is assigned to cases originally assigned to CDS, however the case is later picked up and augmented by the SCI program. This Case Type is assigned by the user ...

SCI-TEST

Is assigned to cases created thru the NASSMAIN Create – SCI Test Case feature. These cases will follow the SCI Case Type structure.

CASE OWNER

Screen Name: Owner

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *NASS_CASE.OWNERID*

Element Attributes:

Selected from list of active personnel in drop down list.

Source: Researcher coded.

Remarks:

The Owner field is initially assigned to the researcher assigned to the case. As the case proceeds thru the review process, the Owner is updated to reflect the last user to have reviewed the case.

The Owner field is normally updated during the following phases of case review: peer review, zone center case review and zone center senior level review. The Owner field should reflect the individual performing the highest level of review.

The Owner field should not be updated to reflect the following types of reviews: Case Registry, Injury Coding,

CASE FORM STRUCTURE OVERVIEW

Page 1 of 2

The case form serves as the foundation of a NASS case; the structure is established and several variable selections are preset based upon data entered in the case form.

Any time data on the case form needs to be changed all field collection forms (EV, IV, etc) must be closed before changes are made on the case form. For instance, it may be determined from the PAR that the crash involved the frontal plane of vehicle 1; the case form would reflect a frontal impact. However, at the time of inspection, it is determined that the left plane is involved. If the EV form for vehicle 1 is already opened, the researcher will need to save then exit the form. The change can now be made on the case form and the EV form re-opened.

When the sampling procedure is complete and cases have been selected, the new cases will be listed in the NASSMAIN program. The new cases should be structured on the same day as selection: 1) to remove them from the new cases list and activate them and 2) to prepare the cases to receive data. The following is a summary to assist in structuring a case.

- Open NASSMAIN and go to “File” on the tool bar. Select “New” from the drop-down list to reveal the cases awaiting the structure process. Select the case to be structured and open it.
- The Crash tab opens first; most of the variables will be filtered in from the sampling program. Only the researcher and owner variables need to be completed. Click on the drop-down arrow and select name from the drop-down list.
- The Structure tab has several sub-tabs, but only the case, vehicle, and occupant sub-tabs need data entered to structure a case.
 - The case sub-tab has only two boxes that require data entry.
 - The scene complete box is filled in when a majority of the scene is inspected.
 - The total number of vehicles (both CDS and non-CDS) in the case is entered in the Vehicles/Total All Vehicles box. All other fields are rolled in from corresponding sub-tabs.
 - The vehicle sub-tab allows the vehicle types to be identified as CDS in transport, CDS not in transport, and non-CDS. The vehicle type assigned will determine what options are made available in the field forms.
 - The occupant sub-tab allows the number of vehicle occupants to be entered in the case. Click on “Edit” on the menu bar and select the “Insert” option. Select the vehicle number for the occupant being listed and assign an occupant number. The current protocol is to use the police assigned occupant numbers. It is important to understand that the column under **Occ #** refers to the number assigned to that occupant, not the total

- number of occupants in the vehicle. For instance, if vehicle 1 was a CDS towed vehicle and had three occupants, the form would look like this:

Veh #	Occ #	Interview Reqd
1	1	Yes
1	2	Yes
1	3	Yes

- The Events tab allows for the entry a single or multiple events that occur in a crash sequence. The events are entered in the order that they occurred by clicking on “Edit” on the menu bar and selecting the “Insert” option. An event between two vehicles should be listed with the lower numbered vehicle first. This event does not need to be listed twice, once from each vehicle’s perspective. For instance, if an event is listed with the front of vehicle 1 impacting the left of vehicle 2, it does not need to be listed again with the left of vehicle 2 impacting the front of vehicle 1.

With these steps completed, the case is structured and ready for data entry. There are other variables on the Case form that need to be completed; refer to the specific sections of the manual for assistance in their completion.

CASE

CaseForm, Case #2007-996-900015

CRASH | STRUCTURE | SUMMARY | EVENTS | SCENE | ANNOTATION | REVIEW | OTHER RESPONSE

CASE | VEHICLES | OCCUPANTS | COMMENT | DATES

Vehicles

Total All Vehicles	<input type="text" value="2"/>
CDS in Transport	<input type="text" value="2"/>
CDS not in Transport	<input type="text" value="0"/>
Non CDS in Transport	<input type="text" value="0"/>

Occupants

Total Number	<input type="text" value="2"/>
--------------	--------------------------------

Medical Records

Total Number	<input type="text"/>
--------------	----------------------

TOTAL NUMBER OF VEHICLES IN CRASH

Page 1 of 2

Screen Name: Vehicles – Total All Vehicles**SAS Data Set:** N/A**SAS Variable:** N/A**Oracle Name:** *CASESTRUCTURE.NUMOFVEHICLES***Element Attributes:**

The total number of vehicles (in-transport, CDS, and non-CDS) in the crash

Source: Researcher determined**Remarks:**

- Structure all vehicles that are listed on the PAR.
- All in-transport motor vehicles involved in the crash (regardless of body type) must be counted.
- Any parked motor vehicles that are struck by an in-transport motor vehicle must also be counted.
- If an in-transport motor vehicle strikes a parked motor vehicle that is pushed into another parked motor vehicle, all vehicles are structured.

Examples:

The PAR stated that the front of Vehicle 1, a med/heavy truck, rear-ended Vehicle 2, a CDS-applicable vehicle. Vehicle 1 traveled onto the shoulder and the front struck the left side of Vehicle 3, a legally parked CDS-applicable vehicle. Vehicle 3 was launched into traffic and its front struck the left side of Vehicle 4, an in-transport CDS-applicable vehicle. In this case all vehicles are structured.

Each case must have at least one in-transport/towed CDS applicable vehicle.

Vehicle information must be entered for each motor vehicle involved in the crash. For example, one CDS applicable vehicle is towing another by a nonfixed linkage (e.g., rope, chain, etc.). Assuming both vehicles are involved in the crash, data are required for both vehicles. If the linkage was fixed (see below for "fixed linkage"), only the power unit would be considered in-transport and only one form required.

When one motor vehicle is towing another, the number of vehicles depends on the crash circumstances and the type of linkage between the vehicles. A fixed linkage is defined as one which

has the purpose of keeping the towed unit separated from the power unit by a distance which is essentially constant. Included within this definition are cradle linkages where the towed unit has two or more wheels off the ground. A nonfixed linkage (such as a rope or a chain) required the towed unit to be manually controlled. If the linkage between the units is fixed, consider only the vehicle that is the power (i.e., towing) unit and consider the towed unit as cargo throughout the entire crash sequence, regardless of subsequent events/impacts sustained by the towed unit. In other words, a vehicle towed by a fixed linkage:

- (1) is never considered as an in-transport vehicle,
- (2) will not have vehicle information entered, and
- (3) will be considered as cargo associated with the power unit.

If the linkage between the units is nonfixed, each vehicle is considered in-transport, and all vehicle(s) involved in the crash sequence should be recorded individually. Hit-and-run crashes occasionally cause some confusion. Vehicle information is entered for each in-transport motor vehicle involved in the crash independent of the amount of information collected on the vehicles by the police.

NUMBER OF CDS IN TRANSPORT VEHICLES IN CRASH

Screen Name: Vehicles -- CDS in Transport

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *CASESTRUCTURE.CDSTRANS*

Element Attributes:

The total number of CDS in Transport vehicles in the crash

Source: Researcher determined

Remarks:

The number of CDS in transport vehicles is rolled up from the Structure/Vehicles screen.

NUMBER OF CDS NOT IN TRANSPORT VEHICLES IN CRASH

Screen Name: Vehicles -- CDS not in Transport

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *CASESTRUCTURE.CDSNOTRANS*

Element Attributes:

The total number of CDS not in Transport vehicles in the crash

Source: Researcher determined

Remarks:

The number of CDS not in transport vehicles is rolled up from the Structure/Vehicles screen.

NUMBER OF NON CDS IN TRANSPORT VEHICLES IN CRASH

Screen Name: Vehicles -- Non CDS in Transport

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: CASESTRUCTURE.NONCDS

Element Attributes:

The total number of Non CDS in Transport vehicles in the crash

Source: Researcher determined

Remarks:

The number of non CDS in transport vehicles is rolled up from the Structure/Vehicles screen.

TOTAL NUMBER OF OCCUPANTS IN CDS VEHICLES IN TRANSPORT

Screen Name: Occupants – Total Number of Occupants in CDS Vehicles in Transport

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *CASESTRUCTURE.TOTALNUMOCCS*

Element Attributes:

The total number of Occupants in vehicles in the crash

Source: Researcher determined

Remarks:

This total number of occupants in vehicles is rolled up from the Structure/Occupants screen.

TOTAL NUMBER OF MEDICAL RECORDS IN CASE

Screen Name: Medical Records – Total Number

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *CASESTRUCTURE.NUMMEDRECORDS*

Element Attributes:

The total number of Medical Records required for occupants of CDS in Transport vehicles in the crash

Source: Researcher determined

Remarks:

This total number of medical records requested or received for occupants of CDS vehicles in transport is rolled up from the Structure/Medical Records screens.

VEHICLES

CaseForm, Case #2007-996-900015

CRASH | STRUCTURE | SUMMARY | EVENTS | SCENE | ANNOTATION | REVIEW | OTHER RESPONSE

CASE | VEHICLES | OCCUPANTS | COMMENT | DATES

Veh #	Type	Inspected	Occupants	Comment
1	CDS in transport	01/14/2007	1	
2	CDS in transport		1	

Save Close

VEHICLE NUMBER**Screen Name:** Veh #**SAS Data Set:** N/A**SAS Variable:** N/A**Oracle Name:** *CASESTRUCTUREVEHICLES.VEHICLENUMBER***Element Attributes:** As numbered**Source:** Researcher determined**Remarks:**

Each motor vehicle (regardless of body type) listed on the PAR is assigned a unique number. Vehicle numbers are to be assigned consecutively according to the order listed on the PAR. Any parked CDS applicable vehicles that are struck by an in-transport CDS-applicable vehicle are also assigned a number.

TYPE OF VEHICLE**Screen Name:** Type**SAS Data Set:** N/A**SAS Variable:** N/A**Oracle Name:** *CASESTRUCTUREVEHICLES.CDSTYPE***Element Attributes:**

Oracle	SAS	
1		CDS in-transport
3		NON CDS
2		CDS NOT in-transport

Source: Researcher determined**Remarks:**

All vehicles involved in the crash must be counted. All in-transport CDS, Non CDS, and inspected not-in-transport vehicles that are struck by any CDC- applicable in-transport vehicle must be counted.

CDS in-transport

Is used when the vehicle has been determined to be a CDS applicable vehicle that is in-transport. This is researcher determined and may not necessarily agree with the police report. For example, the PAR may list a “parked vehicle” as a struck vehicle: upon inspecting the scene the researcher determines there is no “legal’ parking at the scene, so the PAR-reported parked vehicle becomes an in-transport vehicle.

NON CDS

Is used when the in-transport vehicle is not a CDS applicable vehicle.

CDS NOT in-transport

Is used when the inspected vehicle has been determined to be a CDS applicable vehicle that is not-in-transport. This is researcher determined and may not necessarily agree with the police report. For example, the PAR may list a “parked vehicle” as a struck vehicle: upon inspecting the scene the researcher determines there is no “legal’ parking at the scene, so the PAR-reported parked vehicle becomes an in-transport vehicle.

DATE OF VEHICLE INSPECTION

Screen Name: Inspected

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *VEHICLECRASH.INSPECTIONDATE*

Element Attributes:

Month: 01-12
Day: 01 through 31
Year: As appropriate

Source: Date is rolled up from the Vehicle Exterior Form, Vehicle screen.

Remarks:

Inspection date - the date the inspection was begun. This does not count unsuccessful attempts to locate the vehicle. Some data must be collected from the vehicle

The researcher enters the date on the Vehicle Exterior Form, Vehicle screen and it automatically rolls up to this variable.

NUMBER OF OCCUPANTS IN THIS VEHICLE

Screen Name: Occupants

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *CASESTRUCTUREVEHICLES.NUMOFOCCUPANTS*

Element Attributes:

Total number of occupants in this vehicle

Source: The number of Occupants is rolled up from the Case Form, Structure, Occupant screen.

Remarks:

OCCUPANTS

CaseForm, Case #2007-996-900015

CRASH | STRUCTURE | SUMMARY | EVENTS | SCENE | ANNOTATION | REVIEW | OTHER RESPONSE

CASE | VEHICLES | OCCUPANTS | COMMENT | DATES

Veh #	Occ #	Interview Reqd	Completed	Reason
1	1	Yes	1/14/2007	Complete interview
2	1	Yes	1/14/2007	Partial interview

Save Close

VEHICLE NUMBER

Screen Name: Veh #

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *CASESTRUCTUREVEHICLE.VEHICLENUMBER*

Element Attributes:

As numbered from vehicle tab

Source: Researcher determined

Remarks:

Researcher selects edit/insert from main menu. This opens a drop down list of all the vehicles entered on the Structure/Vehicles screen. The researcher then selects the vehicle number for which to enter the rest of the data.

OCCUPANT NUMBER

Screen Name: Occ #

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *CASESTRUCTUREOCCUPANTS.OCCNUMBER*

Element Attributes:

As numbered

Source: Researcher determined

Remarks:

Researcher selects edit/insert from main menu. This opens a drop down list of all the vehicles entered on the Structure/Vehicles screen. The researcher then selects the vehicle number for which to enter the rest of the data. This automatically inserts the next available occupant number for this vehicle.

INTERVIEW REQUIRED

Screen Name: Interview Reqd

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *CASESTRUCTUROCCUPANTS.INTERVIEWREQD*

Element Attributes:

Oracle	SAS	
1	02	Yes
0	01	No

Source: Researcher determined

Remarks:

This application automatically places a “Yes” in this variable. To change it to “No” the researcher must click on the variable box, a drop down list will appear.

No

is used for all occupants of non-CDS applicable vehicles.

INTERVIEW COMPLETION DATE

Screen Name: Completed

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name:

CASESTRUCTUREOCCUPANTS.INTERVIEWCOMPLETEDDATE

Element Attributes:

Month: 01-12
Day: 01 through 31
Year: As appropriate

Source: Researcher determined

Remarks:

When the researcher completes the interview the date of completion is entered here.

INTERVIEW RESULTS

Screen Name: Reason

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: CASESTRUCTUREOCCUPANTS.INTERVIEWREASONID

Element Attributes:

Oracle	SAS
1	Unable to contact or locate
2	Hit and Run
3	Fatal-surrogate not available
4	In intensive care-surrogate not available
6	Refused interview
7	Insurance company refusal
8	Attorney refusal or litigation
9	No return of questionnaire
10	Other (specify)
11	Partial interview
12	Complete interview
-8887	Not applicable

Source: System Assigned – primary, Researcher - secondary.

Remarks:

Select the last response from the appropriate driver or occupant interview section of the Interview Contact Log.

Unable to contact or locate

is used only when an appropriate response cannot be selected from the other attributes.

Hit and Run

is used when the occupant’s vehicle left the scene of the crash and no data are available about to the identity of the occupant(s).

Fatal - surrogate not available

is used when this occupant was fatally injured in the crash and no surrogates exist to obtain a partial interview.

In intensive care - surrogate not available

is used when this occupant was admitted into intensive care as a result of this crash and no surrogates exist to obtain a partial interview before file close-out.

Refused interview

is used when the owner of the vehicle has been contacted and refuses to allow an interview.

Insurance company refusal

is used when the insurance company responsible for the vehicle is contacted and refuses to authorize an interview of the occupant.

Attorney refusal or litigation

is used when an interview is denied by an attorney, generally as a result of litigation.

No return of questionnaire

is used when the only contact to the occupant is via a questionnaire, and the questionnaire is not returned before file close-out.

Other (specify)

is used when no interview was obtained and the above attributes do not adequately capture the reason an interview was not obtained.

Partial interview

is used when an interview is obtained but all required questions (listed under the "Complete interview" definition) have not been answered.


Complete interview

is used when all required data with respect to crash sequence, vehicle information and injuries are obtained from either the driver or another occupant of the same vehicle.

Not Applicable


is used when an interview is not required for this occupant.

MEDICAL RECORDS/SUMMARY

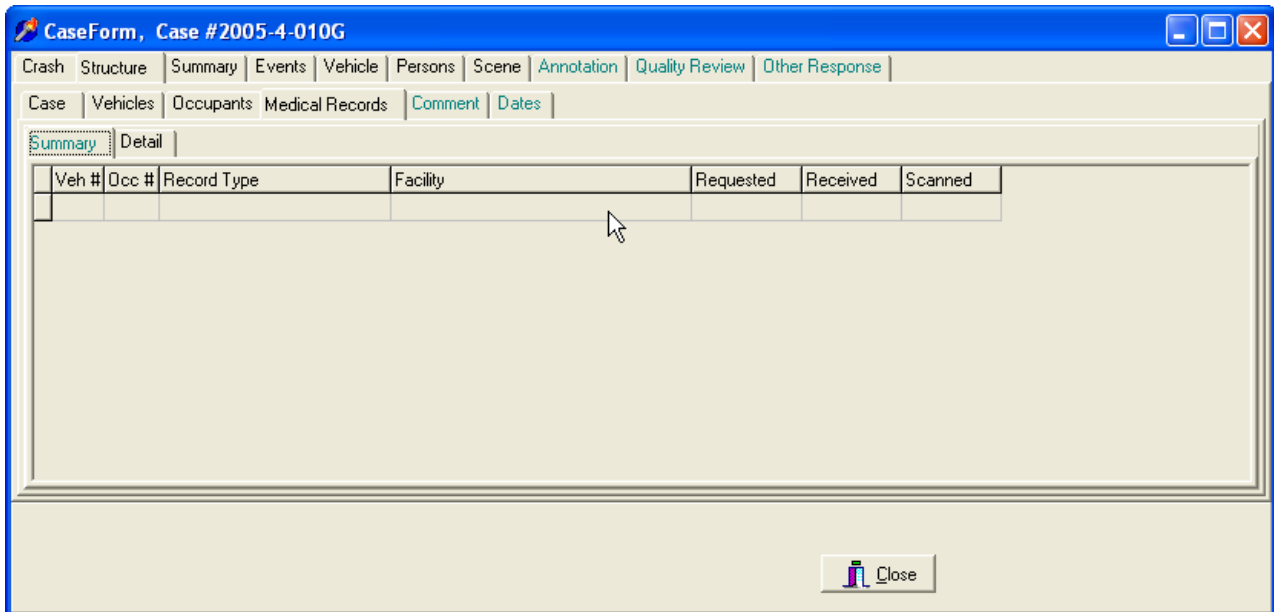

The screenshot shows a software window titled "CaseForm, Case #2005-4-010G". The window has a menu bar with options: Crash, Structure, Summary, Events, Vehicle, Persons, Scene, Annotation, Quality Review, and Other Response. Below the menu bar is a sub-menu bar with Case, Vehicles, Occupants, Medical Records, Comment, and Dates. The "Medical Records" sub-menu is active, showing "Summary" and "Detail" options. The main area contains a table with the following columns: Veh #, Occ #, Record Type, Facility, Requested, Received, and Scanned. The table is currently empty. A mouse cursor is positioned over the table. At the bottom right of the window is a "Close" button.

STRUCTURE/MEDICAL RECORDS/DETAIL

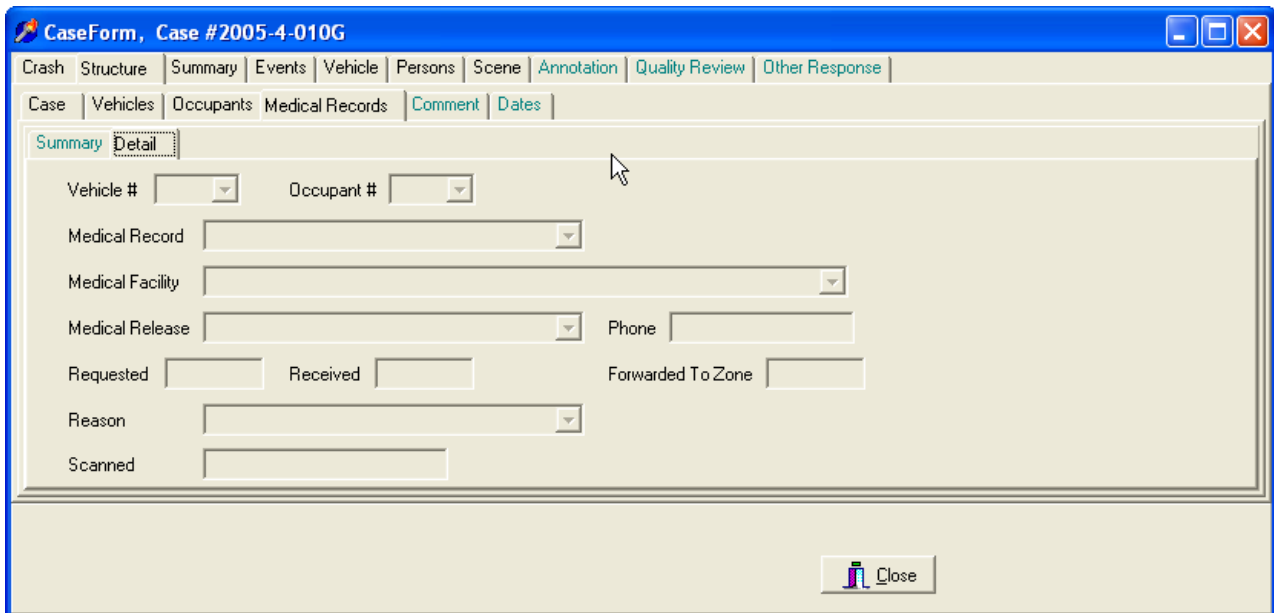

The screenshot shows the same software window as above, but in the "Detail" view. The "Summary" and "Detail" tabs are visible at the top. The main area contains several input fields: "Vehicle #" and "Occupant #" are dropdown menus; "Medical Record" is a dropdown menu; "Medical Facility" is a text input field; "Medical Release" is a dropdown menu; "Phone" is a text input field; "Requested" and "Received" are text input fields; "Forwarded To Zone" is a text input field; "Reason" is a dropdown menu; and "Scanned" is a text input field. A mouse cursor is positioned over the "Medical Record" dropdown. At the bottom right of the window is a "Close" button.

VEHICLE NUMBER

Screen Name: Vehicle #

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *CASESTRUCTUREVEHICLE.VEHICLENUMBER*

Element Attributes:

As numbered

Source: Researcher determined

Remarks:

Researcher selects the appropriate vehicle from the drop down list which lists a number for each CDS vehicle in transport in the case.

OCCUPANT NUMBER

Screen Name: Occupant #

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: **CASESTRUCTUREOCCUPANT.OCCUPANTNUMBER**

Element Attributes:

As numbered

Source: Researcher determined

Remarks:

Researcher selects the appropriate occupant from the drop down list which lists a number for each occupant in the vehicle selected in the previous variable.

MEDICAL RECORD

Page 1 of 4

Screen Name: Medical Record**SAS Data Set:** N/A**SAS Variable:** N/A**Oracle Name:** *CASESTRUCTUREMEDICAL.MEDRECORDTYPE***Element Attributes:**

Oracle	SAS
16	Internal Autopsy
17	External Autopsy
18	Death Certificate
2	Post-ER Medical Record
3	Admission Records
15	Discharge Face Sheet
4	Discharge Summary
5	Operative Report
6	Radiographic
7	History/Physical Examination
8	Emergency Room records
9	Private Physician
10	Lay Coroner (Non Medical Doctor)
11	EMS Record
14	Other (specify)

Source: Researcher determined**Remarks:**

Researcher selects the medical record(s) from the drop down list that are needed for this occupant. If more than one type medical record is needed the researcher must select Edit/Insert for each additional record.

Internal Autopsy

Internal examination of a deceased individual by a licensed or official medical examiner. The examination should be a systematic review all major body regions and organs. Overall anatomical

structure and condition should be detailed in conjunction with injury detail (location and measurement) and evidence of possible pre-morbid conditions. An accurate cause of death should be documented.

External Autopsy

External examination of a deceased individual by a licensed or official medical examiner. The examination will consist of a visual record of the individual from general body build and features to details of visible external injury (lacerations, contusions, open fractures...). A cause of death will be determined from the examiners external findings.

Death Certificate

A document giving pertinent identifying information about a deceased person and certifying the manner of death.

Post-ER Medical Record

Medical chart documentation for an individual admitted to a hospital after initial evaluation in the Emergency Room (ER) or Trauma Resuscitation Unit (TRU). Documentation may be from physicians, nurses, therapists or other health care providers who provide services for the individual during their stay in the hospital. This documentation will cover the period of time from transfer from the ER/TRU till discharge.

Admission Records

Initial documentation for an individual that is admitted to a health care facility. The documentation usually includes insurance information and permissions for the admitting facility to treat the individual. Right's of the individual as they relate to their treatment and stay are outlined. The individual's admitting physician will be recorded in this document. Issues related to advance directives and living wills are often documented in these records.

Discharge Face Sheet

This documentation is typically only one sheet in length and identifies the individual discharged with post discharge instructions. Details on the sheet usually include dates of admission and discharge, reason for admission, diagnostic codes, medications and post discharge plans. Post discharge plans may refer to prescriptions, therapies, follow-up visits or other related issues still pending related to the individual's discharge.

Discharge Summary

A broad overview of an individual's hospital course for a unique admission. The summary usually contains the individual's medical doctor of record, admission and discharge dates, diagnosis's, medical history, procedures preformed, complications and discharge status. With the exception of the individual's complete chart this document typically provides the best overall review of hospital experience for an individual.

Operative Report

A detailed narrative of a medical procedure performed on an individual. The document should identify the medical staff performing the procedure, date and times of the procedure, reason for procedure (diagnosis) and a detailed narrative of the procedure from start to finish.

Radiographic

A report generated by a radiologist (M.D.) on the findings of a radiologic image or procedure. Typically, these reports are on the contents of X-rays, CAT scans or MRI's.

History/Physical Examination (H&P)

Documentation of an initial medical evaluation of an individual by a health care provider. The examination should contain a chief complaint (why the individual is seeking medical attention). The individual's medical history should be included and a complete physical assessment of each body section should be detailed. Basic vitals should be included and the H&P should conclude with a care plan. This includes consultations.

Emergency Room Records

Medical chart documentation for an individual during their stay in the Emergency Room. Documentation may be from physicians, nurses, therapists or other health care providers. Documentation should include an H&P and a disposition plan.

Private Physician

Documentation from a physician encounter in a private office or other non-hospital, clinic, or out-patient facility.

Lay Coroner

Documentation from an individual appointed by local government to assign cause of death in fatal injury cases in their jurisdiction. These individuals are usually not medical doctors and the injury/cause of death is typically derived from an external exam of the expired individual.

EMS record

A report from the transporting emergency team detailing an individual's health status at the crash scene and during transport to a health care facility. The report may document visible injury (lacerations) and possible injury (deformed ankle). Vital signs are generally documented as well. Details related to extrication and restraint status might be included in this record.

Medical Record (cont'd)

Page 4 of 4

Other (specify)

Documentation of medical or injury status not previously mentioned, this includes Death Certificates. Specify source.

MEDICAL FACILITY

Screen Name: Medical Facility

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *CASESTRUCTUREMEDICAL.MEDFACILITYID*

Element Attributes:
Site specific

Source: Researcher determined

Remarks:

Researcher selects the appropriate medical facility from the drop down list. If more than one facility is used by this occupant, the researcher must select Edit/Insert for each additional facility.

MEDICAL RELEASE

Screen Name: Medical Release

SAS Data Set: N/A

SAS Variable: N/A

Oraclename: *CASESTRUCTUREMEDICAL.MEDREQUIRED*

Element Attributes:

Oracle	SAS
1	Not Required
2	Required-not obtained
3	Required-obtained

Source: Researcher determined

Remarks:

The researcher selects the appropriate response from the drop down list.

DATE THAT MEDICAL RECORD WAS REQUESTED

Screen Name: Requested

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *CASESTRUCTUREMEDICAL.MEDREQDATE*

Element Attributes:

Month: 01-12
Day: 01 through 31
Year: As appropriate

Source: Researcher determined

Remarks:

Researcher enters the date that the medical record was requested.

DATE THAT MEDICAL RECORD WAS RECEIVED

Screen Name: Received

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *CASESTRUCTUREMEDICAL.MEDRECDDATE*

Element Attributes:

Month: 01-12
Day: 01 through 31
Year: As appropriate

Source: Researcher determined

Remarks:

Researcher enters the date that the medical record was received.

DATE THAT MEDICAL RECORD WAS FORWARDED TO THE ZONE CENTER

Screen Name: Forwarded to Zone

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *CASESTRUCTUREMEDICAL.MEDSENDDATE*

Element Attributes:

Month: 01-12
Day: 01 through 31
Year: As appropriate

Source: Researcher determined

Remarks:

Researcher enters the date that the medical record was forwarded to the Zone Center.

MEDICAL RECORD OBTAINED OR REASON WHY NOT

Screen Name: Reason

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *CASESTRUCTUREMEDICAL.MEDREASONID*

Element Attributes:

Oracle	SAS
1	No record of treatment at medical facility
2	Medical release required-not obtained
4	Non-cooperative hospital
5	Hospital out-of-study area
6	Private Physician would not release data
7	Unknown if medically treated
8	Update pending
9	Record not received before file closeout
10	Record not obtained
11	Record obtained
12	Partial record obtained - no update pending
13	Partial record obtained - update pending

Source: Researcher determined

Remarks:

Researcher selects the appropriate response from the drop down list.

COMMENT

The screenshot shows a software window titled "CaseForm, Case #2007-996-900015". The window has a menu bar with options: CRASH, STRUCTURE, SUMMARY, EVENTS, SCENE, ANNOTATION, REVIEW, and OTHER RESPONSE. Below the menu bar is a sub-menu bar with options: CASE, VEHICLES, OCCUPANTS, COMMENT, and DATES. The "COMMENT" option is highlighted. The main area of the window is a large, empty text input field. Below the input field, there is a note: "Please Note - Limited to 250 characters". At the bottom right of the window, there are two buttons: "Save" (with a green checkmark icon) and "Close" (with a red 'X' icon).

Any comments about the case structure should be entered on this screen.

Note: No personal identifying information is to be included.

CASE SUMMARY

CaseForm, Case #2007-8701-009K

CRASH | STRUCTURE | SUMMARY | EVENTS | SCENE | ANNOTATION | **QUALITY REVIEW** | OTHER RESPONSE

Crash Type: Vehicle to vehicle Configuration: Head-on

Vehicles

#	Year	Make	Model	Damage Plane	Severity	FSN
▶ 1	2007	TOYOTA	CAMRY			<input type="checkbox"/>
2						<input type="checkbox"/>

Occupants

Vehicle	Role	Seat	Restraints	AIS Code	Severity	Injury Source
▶ 1	Driver	Not Defined				
1		Not Defined				
2		Not Defined				
2		Not Defined				

Save Close

CRASH TYPE

Screen Name: Crash Type

SAS Data Set: *ACCIDENT*

SAS Variable: *CRSHDSC1*

Oracle Name: *ACCIDENT.VEHICLETYPE*

Element Attributes:

Oracle	SAS	
1	01	Vehicle to vehicle
2	02	Vehicle to object(s)
3	03	Multi-vehicle
4	04	Multi-vehicle to object(s)

Source: Researcher determined

Remarks:

The researcher selects the crash type which best describes the overall crash scenario.

Vehicle to vehicle

is selected when the overall configuration of the crash is limited to interaction between two vehicles.

Vehicle to object(s)

is selected when a single vehicle is involved and has interaction with one or more fixed or non-fixed objects.

Multi-vehicles

is selected when there are more than two vehicles involved.

Multi-vehicles to object(s)

is selected when there are two or more vehicles involved **AND** there is an impact with at least one object.

CRASH CONFIGURATION

Screen Name: Configuration
SAS Data Set: *ACCIDENT*
SAS Variable: *CRSHDSC2*
Oracle Name: *ACCIDENT.CONFIGTYPE*

Element Attributes:

Oracle	SAS	
1	01	Head-on
2	02	Angle / sideswipe
3	03	Rear end
4	04	Rollover
5	05	Object off road
6	06	Object on road
7	07	Noncollision

Source: Researcher determined

Remarks:

The Researcher selects the attribute which best describes the type of collision for this crash. **The attributes are prioritized in descending order**, so if two apply, select the first one on the list. For example, two vehicles collide in an intersection at an angle, then one of the vehicles rolls over. The Researcher selects “**Angle / sideswipe**” for the configuration. This variable is used for the first vehicle listed in the first event.

Head-on

is selected when two vehicles impact each other, and generally the front of one vehicle contacts the front of the other vehicle.

Angle / sideswipe

is selected when two vehicles impact each other, and generally:

- the front of one vehicle contacts the side of the other vehicle
- OR**
- the two vehicles are involved in a “swiping” type configuration (either sideswipe or endswipe).

Rear end

is selected when two vehicles impact each other, and generally the front of one vehicle contacts the rear of the other vehicle.

Rollover

is selected for single vehicle crashes when the vehicle rolls over either on the road or off the road. For crashes involving a vehicle contacting an object off the roadway, and then rolling over, select this attribute based on the above referenced prioritization.

Object off road

is selected when a vehicle strikes a fixed or non-fixed object that is located off the road.

Object on road

is selected when a vehicle strikes a non-fixed object on the road.

Noncollision

is selected when the crash configuration involves some type of noncollision event (i.e., jackknife).

CASE SUMMARY OVERVIEW

Through the summary, the researcher is able to provide the zone center, a clinical user, or any other person interested in the NASS CDS case a quick reference of crash particulars by providing a non-jargon account of the crash.

The summary should provide a brief synopsis of the crash sequence as reconstructed by the researcher. Do not identify vehicle/driver culpability. For example, suppose vehicle #1 ran a stop sign and struck vehicle #2 in its left side. This situation should be described as follows:

Vehicle #1 was going north and vehicle # 2 was going east on an intersecting roadway. The front of vehicle #1 impacted the right side of vehicle #2.

Thus, the impact configuration is emphasized rather than who was at fault. Any particulars concerning vehicle crashworthiness should be highlighted. Include any abnormal crash occurrences that may be of interest to quality control or the data user. Make sure personal identifiers are not used (i.e., highway/road/street names or names of persons).

Items that are listed on the vehicle and person summary screens should not be included unless unusual circumstances are involved.

[DATA ENTRY FIELD FOR CASE SUMMARY]

Screen Name: N/A

SAS Data Set: ACCDESC

SAS Variable: LINENO

Oracle Name: N/A

Element Attributes:

The narrative summary of the crash as developed by the researcher.

Source: SAS generated number

Remarks:

CASE SUMMARY

Screen Name: Case Summary

SAS Data Set: *ACCDESC*

SAS Variable: *SUMTEXT*

Oracle Name: *CASESUMMARY.SUMMARY*

Element Attributes:

The narrative summary of the crash as developed by the researcher.

Source: Researcher determined

Remarks:

CaseForm, Case #2007-8701-009K

CRASH | STRUCTURE | SUMMARY | EVENTS | SCENE | ANNOTATION | **QUALITY REVIEW** | OTHER RESPONSE

Crash Type: Vehicle to vehicle Configuration: Head-on

Vehicles

#	Year	Make	Model	Damage Plane	Severity	FSN
▶ 1	2007	TOYOTA	CAMRY			<input type="checkbox"/>
2						<input type="checkbox"/>

Occupants

Vehicle	Role	Seat	Restraints	AIS Code	Severity	Injury Source
▶ 1	Driver	Not Defined				
1		Not Defined				
2		Not Defined				
2		Not Defined				

Save Close

VEHICLE NUMBER**Screen Name:** #**SAS Data Set:** N/A**SAS Variable:** N/A**Oracle Name:** *VEHICLE.VEHICLENUMBER***Element Attributes:****Source:** Rolled up from Case Structure/Vehicle Tab.**Remarks:**

The vehicle number of each in-transport vehicle and inspected not in-transport vehicle in the crash is indicated.

VEHICLE YEAR

Screen Name: Year

SAS Data Set: *ACCIDENT*

SAS Variable: *YEAR*

Oracle Name: *VEHICLE.MODELYEAR*

Element Attributes:

Source: Rolled up from General Vehicle form/Vehicle Tab.

Remarks:

Refer to the General Vehicle form/Model Year.

VEHICLE MAKE

Screen Name: Make

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *VEHICLE.MAKEID*

Element Attributes:

Source: Rolled up from General Vehicle form/Vehicle Tab.

Remarks:

Refer to the General Vehicle form/Make.

VEHICLE MODEL

Screen Name: Model

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *VEHICLE.MODELID*

Element Attributes:

Source: Rolled up from General Vehicle form/Vehicle Tab.

Remarks:

Refer to the General Vehicle form/Model.

DAMAGE PLANE

Screen Name: Damage Plane

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *VEHICLE.DAMAGEPLANE*

Element Attributes:

Oracle	SAS	
1	1	Front
2	2	Left
3	3	Right
4	4	Back
5	5	Top
6	6	Undercarriage
-99	99	Unknown

Source: Researcher determined

Remarks:

The Researcher must determine the most severe impact and choose the associated damage plane.

All efforts should be made to determine the plane of damage. The vehicle inspection, occupant interview, police report, tow yard operator, damage to other vehicles or objects should be considered.

If there is absolutely no information available, then "Unknown" may be used. However, it should rarely be selected.

DAMAGE SEVERITY

Screen Name: Severity

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *VEHICLE.SEVERITY*

Element Attributes:

Oracle	SAS	
1	1	Light
2	2	Moderate
3	3	Severe
9	9	Unknown

Source: Rolled up from General Vehicle form/Delta V tab.

Remarks:

Unknown
is used if no vehicle inspection is completed.

COMPONENT FAILURE

Page 1 of 3

Screen Name: Component Failure**SAS Data Set:** N/A**SAS Variable:** N/A**Oracle Name:** *Derived from entry on Field Safety Notification***Element Attributes:****Source:** Field Safety Notification**Remarks:**

This is not editable by the researcher. If a Field Safety Notification form has been completed by the researcher this field will indicate the presence of it attached to this case.

Any vehicular component that malfunctioned during the crash sequence should be noted. The components of special interest to the user may be noted by reviewing the field form variables (*e.g.*, steering columns, seat backs, restraints, glazing, etc.).

Below is an additional list of special interest component malfunction crashes:

The researcher should complete a Field Safety Notification (FSN) Form if any of the below described specific areas of interest are observed.

SPECIFIC AREAS OF INTEREST TO NHTSA RULE MAKING**CRASH AVOIDANCE**

1. Crashes involving vehicles being operated or equipped with adaptive equipment.
2. Crashes in which a malfunction of a multi piece rim (not a tire malfunction) caused or contributed to the severity of the crash.
3. Crashes involving malfunction of a speed governor or speed control unit.
4. Crashes where the driver reported confusion about the location of display or control elements of the vehicle.
5. Crashes where under inflation of tires caused or contributed to the severity of crash.

6. Crashes involving pedestrian and/or cyclist injured by impact with outside mirrors.
7. Crashes where commercial vehicle drivers reported that they could not see car, pedestrian, or cycle in a specific blind spot (such as in the right front area of large truck-tractors).
8. Crashes where driver or a passenger car or light truck reported that they could not see because of an obstruction of view by some part of the vehicle (such as inside mirror or roof support pillar).
9. Rollover crashes with vehicles equipped with electronic stability control
10. Crashes involving pickup trucks pulling fifth-wheel type trailer.
11. Crashes involving stalled vehicles.

CRASHWORTHINESS

1. Seat and/or seat back separations/malfunctions in crashes and their contributions to occupant injury.
2. Identify external vehicle components (i.e., hood, grill, windshield wiper, etc.) that penetrate the windshield and the degree of such penetration in crashes involving vans and light trucks.
3. Ejections through the hatchback or station wagon rear doors in rear impacts. Identify whether ejection was through window opening or through door or hatchback opening because of latch failure.
4. Cars involving child restraints that fracture or involve injury. Identify and document the restraint by make, model, and seat position.

Examples of defects considered safety-related:

- Steering components that break suddenly causing partial or complete loss of vehicle control.
- Problems with fuel system components, particularly in their susceptibility to crash damage, that result in leakage of fuel and possibly cause vehicle fires.
- Accelerator controls that may break or stick.
- Wheels that crack or break, resulting in loss of vehicle control.
- Windshield wiper assemblies that fail to operate properly.
- Seats and/or seat backs that fail unexpectedly during normal use.

- Critical vehicle components that break, fall apart, or separate from the vehicle, causing potential loss of vehicle control or injury to persons inside or outside the vehicle.
- Wiring system problems that result in a fire or loss of lighting.
- Air bags that deploy under conditions for which they are not intended to deploy.
- Child safety seats that contain defective safety belts, buckles, or components that create a risk of injury, not only in a vehicle crash but also in non-operational safety of a motor vehicle.

Examples of defects NOT considered safety-related:

- Air conditioners and radios that do not operate properly.
- Ordinary wear of equipment that has to be inspected, maintained and replaced periodically. Such equipment includes shock absorbers, batteries, brake pads and shoes, and exhaust systems.
- Nonstructural or body panel rust.
- Quality of paint or cosmetic blemishes.
- Excessive oil consumption.

CaseForm, Case #2007-8701-009K

CRASH | STRUCTURE | SUMMARY | EVENTS | SCENE | ANNOTATION | **QUALITY REVIEW** | OTHER RESPONSE

Crash Type: Vehicle to vehicle Configuration: Head-on

Vehicles

#	Year	Make	Model	Damage Plane	Severity	FSN
▶ 1	2007	TOYOTA	CAMRY			<input type="checkbox"/>
2						<input type="checkbox"/>

Occupants

Vehicle	Role	Seat	Restraints	AIS Code	Severity	Injury Source
▶ 1	Driver	Not Defined				
1		Not Defined				
2		Not Defined				
2		Not Defined				

Save Close

VEHICLE NUMBER

Screen Name: Vehicle

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *VEHICLE.VEHICLENUMBER*

Element Attributes:

Range: Numeric value

Source: Rolled up from General Vehicle form.

Remarks:

The vehicle number for each person of an in-transport CDS vehicle involved in the crash is indicated here.

PERSON ROLE

Screen Name: Role

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *OCCUPANT.PICKROLE*

Element Attributes:

Oracle	SAS	
1	1	Driver
2	2	Passenger
9	9	Unknown

Source: Rolled up from Occupant form.

Remarks:

Person Role indicates if the person was the *driver* or a *passenger*, or **unknown**.

SEAT POSITION**Screen Name:** Seat**SAS Data Set:** N/A**SAS Variable:** N/A**Oracle Name:** *SEATLOC.SEATROW/SEATLOC.SEATLOCATION***Element Attributes:****Range:****Source:** Rolled up from Occupant form**Remarks:**

The seat position of each person in the vehicle is indicated here. Seat position is indicated as "front left", "second middle", etc.

RESTRAINTS USE

Screen Name: Restraints

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *DERIVED FROM OCCUPANT FORM RESTRAINT ENTRY*

Element Attributes:**Range:**

Source: Rolled up from Occupant form.

Remarks:

The type of restraint "used" by the person during the crash (e.g., combinations of manual belts, automatic belts, air bags, and/or child seats) is indicated.

AIS CODE

Screen Name: AIS Code

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *INJURY.AISCODES*

Element Attributes:

Source: Rolled up from Occupant form.

Remarks:

The most severe (*i.e.*, highest AIS) injury to the person is indicated by the seven digit AIS90 code.

INJURY SEVERITY

Screen Name: Severity

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: ***DERIVED FROM THE MAXIMUM AIS SEVERITY***

Element Attributes:

Source: Rolled up from Occupant form.

Remarks:

The most severe (*i.e.*, highest AIS) injury to the person is indicated as minor, moderate, serious, severe, critical, maximum, or injured unknown severity.

INJURY SOURCE

Screen Name: Injury Source

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: ***INJURY.PICKINJURYSOURCE***

Element Attributes:

Source: Rolled up from Occupant form.

Remarks:

The source of the most severe (*i.e.*, highest AIS) injury to the person is indicated.

EVENTS/SUMMARY

The screenshot shows a software window titled "CaseForm, Case #2007-996-900015". The window has a menu bar with options: CRASH, STRUCTURE, SUMMARY, EVENTS, SCENE, ANNOTATION, REVIEW, and OTHER RESPONSE. Below the menu bar are two tabs: "SUMMARY" (selected) and "DETAIL". The main area contains a table with the following data:

Event	Veh #	Area of Damage	Contacted	Class	Area of Damage
▶ 1	2	Front	Vehicle#1	Intermediate (wheelbase >= 2	Front
1	2	Front	Vehicle#1	Intermediate (wheelbase >= 2	Front
2	1	Top	Overturn->rollover(excludes end-	Not a motor vehicle	Noncollision

At the bottom right of the window are two buttons: "Save" (with a green checkmark icon) and "Close" (with a red X icon).

Information rolls up from the “detail” tab to the “summary” tab. Use the arrow to the left of the event to highlight an event to focus on the “Detail” screen.

Note: If impact is between two vehicles, double click on the event line to view the vehicle angles, accident types, and CDC for this event.

EVENTS/DETAIL

CaseForm, Case #2007-8701-009K

CRASH | STRUCTURE | SUMMARY | EVENTS | SCENE | ANNOTATION | **QUALITY REVIEW** | OTHER RESPONSE

SUMMARY | **DETAIL**

Event No of 2 Previous Next

Vehicle No Class of Vehicle
General Area of Damage

VERSUS

Object Contacted
Class of Vehicle
General Area of Damage

Save Close

CRASH EVENTS OVERVIEW

Page 1 of 2

A "crash" is the total set of "events" (one or more) that results from an unstabilized situation such that at least one harmful event occurs not directly resulting from a cataclysm. The "crash" is concluded in time when all events which originated from the unstabilized situation have stabilized.

A crash is considered applicable to the NASS CDS if one of its events resulted in harm (except for nonqualifying noncollision events); and that event involved an in-transport CDS applicable vehicle which was reported on a police report as being towed from the scene of the crash due to damage.

Harm can be either an impact or a noncollision event. An impact is defined as any vehicle-to-vehicle or vehicle to object (fixed or nonfixed, stationary or nonstationary) contact which may or may not result in vehicle damage, injury or property damage. Noncollision events such as fire/explosion, occupant fell from vehicle, occupant injury without vehicle impact, etc., are included in these variables unless this noncollision event is the only event in the case.

Below are some examples of nonqualifying events and the researcher should not include them in the crash sequence.

Exclude events such as:

Not in-transport vehicle impacts pedestrian, pedalcyclist, or other nonmotorist.

Not in-transport vehicle impacts an object (fixed or nonfixed).

Pedestrian (pedalcyclist, other nonmotorist) impacts an object.

Pedestrian (pedalcyclist, other nonmotorist) impacts a not in-transport vehicle.

Pedestrian, pedalcyclist, or other nonmotorist inter-impact.

The crash events variables are designed to provide a description of all qualifying events which occurred in the crash sequence. Events are listed in chronological sequence. In events involving impacts with objects, the object is identified subsequent to the vehicle. Code events as they occur during the crash sequence.

With this chronological sequence of qualified crash events in the CDS database, analysts can review the entire series of events involving in-transport motor vehicles. Various areas of concern to

the highway safety community will be easily assessed using these variables. For instance, the injury severity in crashes can be assessed relative to the number and type of impacts involved.

Likewise, certain collision configurations may create a greater hazardous condition for the occupants. A possible area of analysis would be the mix of vehicle classes or the type(s) of object(s) the vehicles impact.

Complete these variables based upon an accurate and complete reconstruction of the vehicle dynamics involved in the crash. All of the injury or damage producing qualifying events or circumstances for the in-transport motor vehicle(s) are coded.

An example of a crash sequence follows:

Vehicle 1 (a compact passenger car) went out of control on a wet roadway and struck a median guardrail with its front {Event 1}. The vehicle was redirected by the guardrail and reentered the roadway, where it struck vehicle 2 (a large pickup truck) {Event 2} in the left side with its front. Vehicle 1 spun to a stop in the roadway. During event 2 the driver hit his head on the door pillar breaking his neck {not a coded event}. Vehicle 2, out-of-control, ran off the roadway and struck a pedestrian with its front {Event 3}.

Note: For the driver of vehicle 1, breaking his neck is not a separate codeable event. Rather, this injury, and almost all occupant injuries resulting from occupant interior contact, is a result of a collision event.

A vehicle is considered as being a rollover if it rotates at least 90 degrees.

EVENT NUMBER**Screen Name:** Event No**SAS Data Set:** *EVENT***SAS Variable:** *ACCSEQ***Oracle Name:** *EVENTS.EVENTSEQUENCENUMBER***Element Attributes:**

As assigned

Source: Researcher Determined**Remarks:**

The researcher selects edit/insert from the main menu, this opens a new detail tab for each event. This number is automatically assigned by the application as each event is entered. Events may be renumbered on associated Summary Tab. This will cause the events to be re-numbered, the researcher must ensure the events are in proper order. The events will be displayed in chronological sequence.

VEHICLE NUMBER

Screen Name: Vehicle

SAS Data Set: *EVENT*

SAS Variable: *VEHNUM*

Oracle Name: *EVENTS.VEHICLEID*

Element Attributes:

As entered into Case Form/Structure/Case Summary/Total All Vehicles

Source: Researcher determined by selecting the vehicle from the drop down list.

Remarks:

Vehicle numbers must be consecutive beginning with "1". Vehicle numbers are rolled up from those listed in the vehicle tab. A vehicle may be listed in more than one event.

[CLASS OF VEHICLE]

Page 1 of 5

Screen Name: Class of Vehicle**SAS Data Set:** *EVENT***SAS Variable:** *CLASS1***Oracle Name:** *VEHICLE.PICKVEHICLECLASS***Element Attributes:**

Oracle	SAS	
0	0	Not a motor vehicle
1	1	Subcompact/mini (wheelbase < 254 cm)
2	2	Compact (wheelbase ≥ 254 but < 265 cm)
3	3	Intermediate (wheelbase ≥ 265 but < 278 cm)
4	4	Full size (wheelbase ≥ 278 but < 291 cm)
5	5	Largest (wheelbase ≥ 291 cm)
9	9	Unknown passenger car size
14	14	Compact utility vehicle
15	15	Large utility vehicle (≤ 4,536 kgs GVWR)
16	16	Utility station wagon (≤ 4,536 kgs GVWR)
19	19	Unknown utility type
20	20	Minivan (≤ 4,536 kgs GVWR)
21	21	Large van (≤ 4,536 kgs GVWR)
24	24	Van based school bus (≤ 4,536 kgs GVWR)
28	28	Other van type (≤ 4,536 kgs GVWR)
29	29	Unknown van type (≤ 4,536 kgs GVWR)
30	30	Compact pickup truck (≤ 4,536 kgs GVWR)
31	31	Large pickup truck (≤ 4,536 kgs GVWR)
38	38	Other pickup truck (≤ 4,536 kgs GVWR)
39	39	Unknown pickup truck type (≤ 4,536 kgs GVWR)
45	45	Other light truck (≤ 4,536 kgs GVWR)
48	48	Unknown light truck type (≤ 4,536 kgs GVWR)
49	49	Unknown light vehicle type
50	50	School bus (excludes van based) (> 4,536 kgs GVWR)
58	58	Other bus (> 4,536 kgs GVWR)
59	59	Unknown bus type
60	60	Truck (> 4,536 kgs GVWR)
67	67	Tractor without trailer

Class of Vehicle (cont'd)

Oracle	SAS	
68	68	Tractor - trailer(s)
78	78	Unknown medium/heavy truck type
79	79	Unknown light/medium/heavy truck type
80	80	Motored cycle
90	90	Other vehicle
99	99	Unknown

Source: This variable is derived from application inputs from the GV form/Vehicle and Specifications Tab

Remarks:

The Passenger Car Classification Subcommittee, A3B11(1), of the Transportation Research Board, Traffic Records and Accident Analysis Committee, A3B11, assessed size based on the vehicle wheelbase. The guidelines for this classification can be found in the report entitled Recommended Definitions for Passenger Car Size Classification by Wheelbase and Weight, August 1984 by the previously mentioned subcommittee. This variable is the same variable that appears in the Identification section of the Vehicle Tab on the General Vehicle Form and Vehicle Exterior Form.

Subcompact/mini (wheelbase < 254 cm)

Choose based upon wheelbase

Compact (wheelbase >= 254 but < 265 cm)

Choose based upon wheelbase

Intermediate (wheelbase >= 265 but < 278 cm)

Choose based upon wheelbase

Full size (wheelbase >= 278 but < 291 cm)

Choose based upon wheelbase

Largest (wheelbase >= 291 cm)

Choose based upon wheelbase

Unknown passenger car size

is used when it is known that a vehicle is a passenger car but the wheelbase is unknown

Compact utility vehicle

refers to vehicle models defined as **Compact utility** under Body Type. Use this attribute if the size of the utility vehicle is unknown.

Large utility vehicle (<= 4,536 kgs GVWR)

refers to vehicle models defined as **Large utility** under Body Type. Refers to full-size multipurpose vehicles primarily designed around a shortened pickup truck chassis. While generally a station wagon body style, some models are equipped with a removable top.

Utility station wagon (<= 4,536 kgs GVWR)

refers to vehicle models defined as **Utility station wagon** under Body Type. Refers primarily to a pickup truck based chassis enlarged to a station wagon.

Unknown Utility type

is defined as **Utility, unknown body type** under Body Type. This attribute is used when it is known that the vehicle is a utility vehicle, but there is insufficient data to determine the specific type.

Minivan (<= 4536 kgs. GVWR)

Refers to vehicle models defined as **Minivan** under Body Type. Refers to down-sized passenger or cargo vans.

Large van (<= 4536 kgs. GVWR)

Refers vehicle models defined as **Large van** under Body Type. Refers to a standard size cargo or passenger van.

Van based school bus (<= 4,536 kgs GVWR)

is a passenger van designed to carry students (passengers) to and from educational facilities and/or related functions. The vehicles are characteristically painted yellow and clearly identified as school buses. Use this attribute regardless of whether the vehicle is owned by a school system or a private company. Van based school buses converted for other uses (e.g., church bus) also take this attribute. Refers to vehicles defined as **Van based school bus** under Body Type.

Other van type (<= 4,536 kgs GVWR)

Refers to vehicle models defined as **Step van or walk-in van, Van based motorhome, Van based other bus and code Other van type** under Body Type.

Unknown van type (<= 4,536 kgs GVWR)

is used when it is known that this vehicle is a light van, but its specific type cannot be determined. Refers to vehicles described as **Unknown van type** under Body Type.

Compact pickup truck

Refers to vehicle models defined as attributes of **Compact pickup truck** in Body Type. Used to describe a pickup truck having a width of 178 centimeters or less.

Large pickup truck

Refers to vehicle models defined as **Large pickup truck** under Body Type. Used to describe a pickup truck having a width greater than 178 centimeters.

Class of Vehicle (cont'd)

Page 4 of 5

Other pickup truck (<= 4536 kgs GVWR)

Refers to vehicle models defined as **Pickup with slide-in camper** and **Convertible pickup** under Body Type.

Unknown pickup truck (<= 4536 kgs GVWR)

Refers to vehicle models defined as **Unknown pickup style light conventional truck type** under Body Type.

Other light truck (<= 4536 kgs GVWR)

Refers to vehicle models defined as **Cab, chassis based (includes rescue vehicles, light stake, dump, and tow truck)**, **Truck based panel**, **Light truck based motorhome (chassis mounted)**, and **Other light conventional truck type** under Body Type.

Unknown light truck type

Refers to vehicle models defined as **Unknown light truck type** under Body Type.

Unknown light vehicle type (automobile, utility, van, or light truck)

Refers to vehicle models defined as **Unknown light vehicle type (automobile, utility, van, or light truck)** under Body Type.

School bus (excludes van based) (> 4536 kgs GVWR)

Refers to those vehicle models defined as **School bus (designed to carry students, not cross country or transit)** under Body Type.

Other bus (>4,536 kgs GVWR)

describes those vehicle models included in **Other bus type (e.g., transit, intercity, bus based motorhome)** under Body Type.

Unknown bus type

Refers to those vehicle models described as **Unknown bus type** under Body Type.

Truck (> 4,536 kgs GVWR)

is defined under Body Type, as **Step van (>4,536 kgs GVWR)**, **Single unit straight truck (4,536 kgs < GVWR = 8,845)**, **Single unit straight truck (8,845 kgs < GVWR = 11,793)**, **Single unit straight truck (>11,793 kgs GVWR)**, **Single unit straight truck, GVWR unknown** and **Medium/heavy truck based motorhome**.

Tractor without trailer

refers to **Truck-tractor with no cargo trailer** under Body Type.

Tractor-trailer(s)

is defined in attributes **Truck-tractor pulling one trailer**, **Truck-tractor pulling two or more trailers** and **Truck-tractor (unknown if pulling trailer)** under Body Type.

Class of Vehicle (cont'd)

Page 5 of 5

Unknown medium/heavy truck type)

is used when the only available information indicates a truck of medium/heavy size. Refer to **Unknown medium/heavy truck type** under Body Type.

Unknown truck type (light/medium/heavy)

Refers to those vehicles described by **Unknown truck type (light/medium/heavy)** under Body Type.

Motored cycle

refers to Body Type, **Motorcycle, Moped (motorized bicycle), Three-wheel motorcycle or moped, Other motored cycle (minibike, motorscooter)** and **Unknown motored cycle type**.

Other vehicle

refers to all vehicles described by **ATV (All-Terrain Vehicle) and ATC (All-Terrain Cycle), Snowmobile, Farm equipment other than trucks,** or **Other vehicle type** under Body Type.

Unknown

is used when there is a lack of information regarding the type of vehicle. This lack of information prohibits the accurate classification of this vehicle using one of the preceding codes. This attribute is equivalent to Body Type, **Unknown body type**.

GENERAL AREA OF DAMAGE

Screen Name: General Area of Damage

SAS Data Set: *EVENT*

SAS Variable: *GADEVI*

Oracle Name: *EVENTS.PICKAREAOFDAMAGE*

Element Attributes:

Oracle	SAS	
0	1/10	Not a motor vehicle
N	2/11	Noncollision
9	21/9	Unknown

CDC Applicable and Other Vehicles

Oracle	SAS	
F	3	Front
R	4	Right side
L	5	Left side
B	6	Back of unit with cargo area
T	7	Top
U	8	Undercarriage

TDC Applicable Vehicles

Oracle	SAS	
F	12	Front
R	13	Right side
L	14	Left side
B	15	Back of unit with cargo area (rear of trailer or straight truck)
D	16	Back (rear of tractor)
C	17	Rear of cab
V	18	Front of cargo area
T	19	Top
U	20	Undercarriage

Source: Researcher determined.

General Area of Damage (cont'd)

Page 2 of 2

Remarks:**Noncollision**

must be used whenever the corresponding Vehicle Number or Object Contacted Category is coded Noncollision.

Unknown

must be coded when the General Area of Damage - on a vehicle is not known from any reliable source.

For vehicles which are CDC applicable (e.g., pickups, light vans, and passenger cars) the guidelines from J224MAR80 must be applied, and the attributes provided under the "CDC Applicable and Other Vehicles" category must be used. This includes rollovers.

For vehicles which are TDC applicable (i.e., medium/heavy trucks) use the guidelines and the attributes provided under the "TDC Applicable Vehicles" category.

OBJECT CONTACTED

Screen Name: Object Contacted

SAS Data Set: *EVENT*

SAS Variable: *OBJCONT*

Oracle Name: *EVENTS.PICKOBJECTCONTACT*

Element Attributes:

Oracle/SAS

01-30 Vehicle Number

Noncollision

- 31 Overturn — rollover (excludes end-over-end)
- 32 Rollover - end-over-end
- 33 Fire or explosion
- 34 Jackknife
- 35 Other intraunit damage (specify):
- 36 Noncollision injury
- 38 Other noncollision (specify):
- 39 Noncollision — details unknown

Collision With Fixed Object

- 41 Tree (≤ 10 cm in diameter)
- 42 Tree (> 10 cm in diameter)
- 43 Shrubbery or bush
- 44 Embankment
- 45 Breakaway pole or post (any diameter)
- 50 Nonbreakaway Pole or post (≤ 10 cm in diameter)
- 51 Nonbreakaway Pole or post (> 10 cm but ≤ 30 cm in diameter)
- 52 Nonbreakaway Pole or post (> 30 cm in diameter)
- 53 Nonbreakaway Pole or post (diameter unknown)
- 54 Concrete traffic barrier
- 55 Impact attenuator
- 56 Other traffic barrier (specify):
- 57 Fence
- 58 Wall

Oracle/SAS

- 59 Building
- 60 Ditch or culvert
- 61 Ground
- 62 Fire hydrant
- 63 Curb
- 64 Bridge
- 68 Other fixed object (specify):
- 69 Unknown fixed object
 - Cable barrier guardrail
 - Metal guardrail

Collision with Nonfixed Object

- 72 Pedestrian
- 73 Cyclist or cycle
- 74 Other nonmotorist or conveyance (specify)
- 75 Vehicle occupant
- 76 Animal
- 78 Trailer, disconnected in transport
- 79 Object fell from vehicle in-transport
- 88 Other nonfixed object (specify):
- 89 Unknown nonfixed object

Other event (specify)

- 98 Other event (specify):

Unknown event or object

- 99 Unknown event or object

Object Contacted (cont'd)

Page 2 of 10

Source: Researcher determined. Primary sources are the scene and vehicle inspections; secondary sources include the police report and interviewees.

Remarks:**Vehicle Number**

If the object contacted by the vehicle under consideration was a motor vehicle, select the Vehicle Number assigned to that vehicle.

Noncollision

Crash circumstances, which result in nonimpact related damage or harm.

Overturn — rollover (excludes end-over-end)

is used whenever a vehicle rolls over or overturns primarily about the longitudinal axis.. This event is reported in the crash sequence variables on the Case Form. It is assumed a rollover will generally involve contact with the road surface or ground. In this situation, the object contacted is encoded **Overturn - rollover** and not **Ground**. In the event another object in the environment is contacted during the rollover sequence, the rollover event is, but may not be encoded in the CDC unless the rollover is applicable to CDC.

Rollover — end-over-end

is used whenever a vehicle rolls over or overturns primarily about the lateral axis of the vehicle.

Fire or explosion

is used whenever a vehicle fire or explosion occurs during the crash sequence or as a result of the crash.

Jackknife

is used whenever there is sufficient uncontrolled rotation (articulation) between a towing unit and a trailing unit such that they contact each other resulting in direct damage to the towing unit. Jackknife may occur to any vehicle which is pulling a trailing unit by a fixed linkage so long as the trailing unit and the pulling vehicle are capable of rotating (articulating) with respect to each other.

Other intraunit damage (specify):

is used whenever there is sufficient uncontrolled motion (other than **Jackknife**) between a towing unit and a trailing unit such that they contact each other resulting in direct damage to the towing unit.

Object Contacted (cont'd)

Page 3 of 10

Remarks:

Noncollision (cont'd)

Noncollision Injury

is used when the event is a noncollision injury (e.g., fell from vehicle)

Other noncollision (specify)

is used only in consultation with the zone center.

Noncollision — details unknown

is used when it is known that the event was a noncollision but specifics are not known.

Collision With Fixed Object

When a vehicle impacts a tree, shrubbery, bush, pole or post and causes the fixed object or any portion thereof to become dislodged or airborne such that the object or portion thereof subsequently falls on the vehicle, the appropriate object contacted attribute for the object in its dislodged or airborne state is the same as when the object was initially.

Tree (<= 10 centimeters in diameter) and Tree (> 10 centimeters in diameter)

refer to the diameter of the tree measured on the horizontal plane at the point of impact.

Shrubbery or bush

refers to vegetation which is usually of a woody multi-stemmed variety and in most instances is low growing rather than tall. Some common examples are boxwood, hawthorn, and mountain laurel.

Embankment

is used only when damage or injury results from a vehicle impacting an embankment.

Breakaway pole or post (any diameter)

refers to a pole or post which is mounted on a base designed to readily disengage or fracture from an impacting vehicle above a predetermined force level. A pole or post fitted with such a device is a breakaway pole or post; otherwise, it is a nonbreakaway pole. Common types of breakaway bases are illustrated on the following pages.


Examples of breakaway poles or posts follow:

Object Contacted (cont'd)

Collision With Fixed Object (cont'd)

Breakaway pole or post (any diameter)

Object Contacted (cont'd)

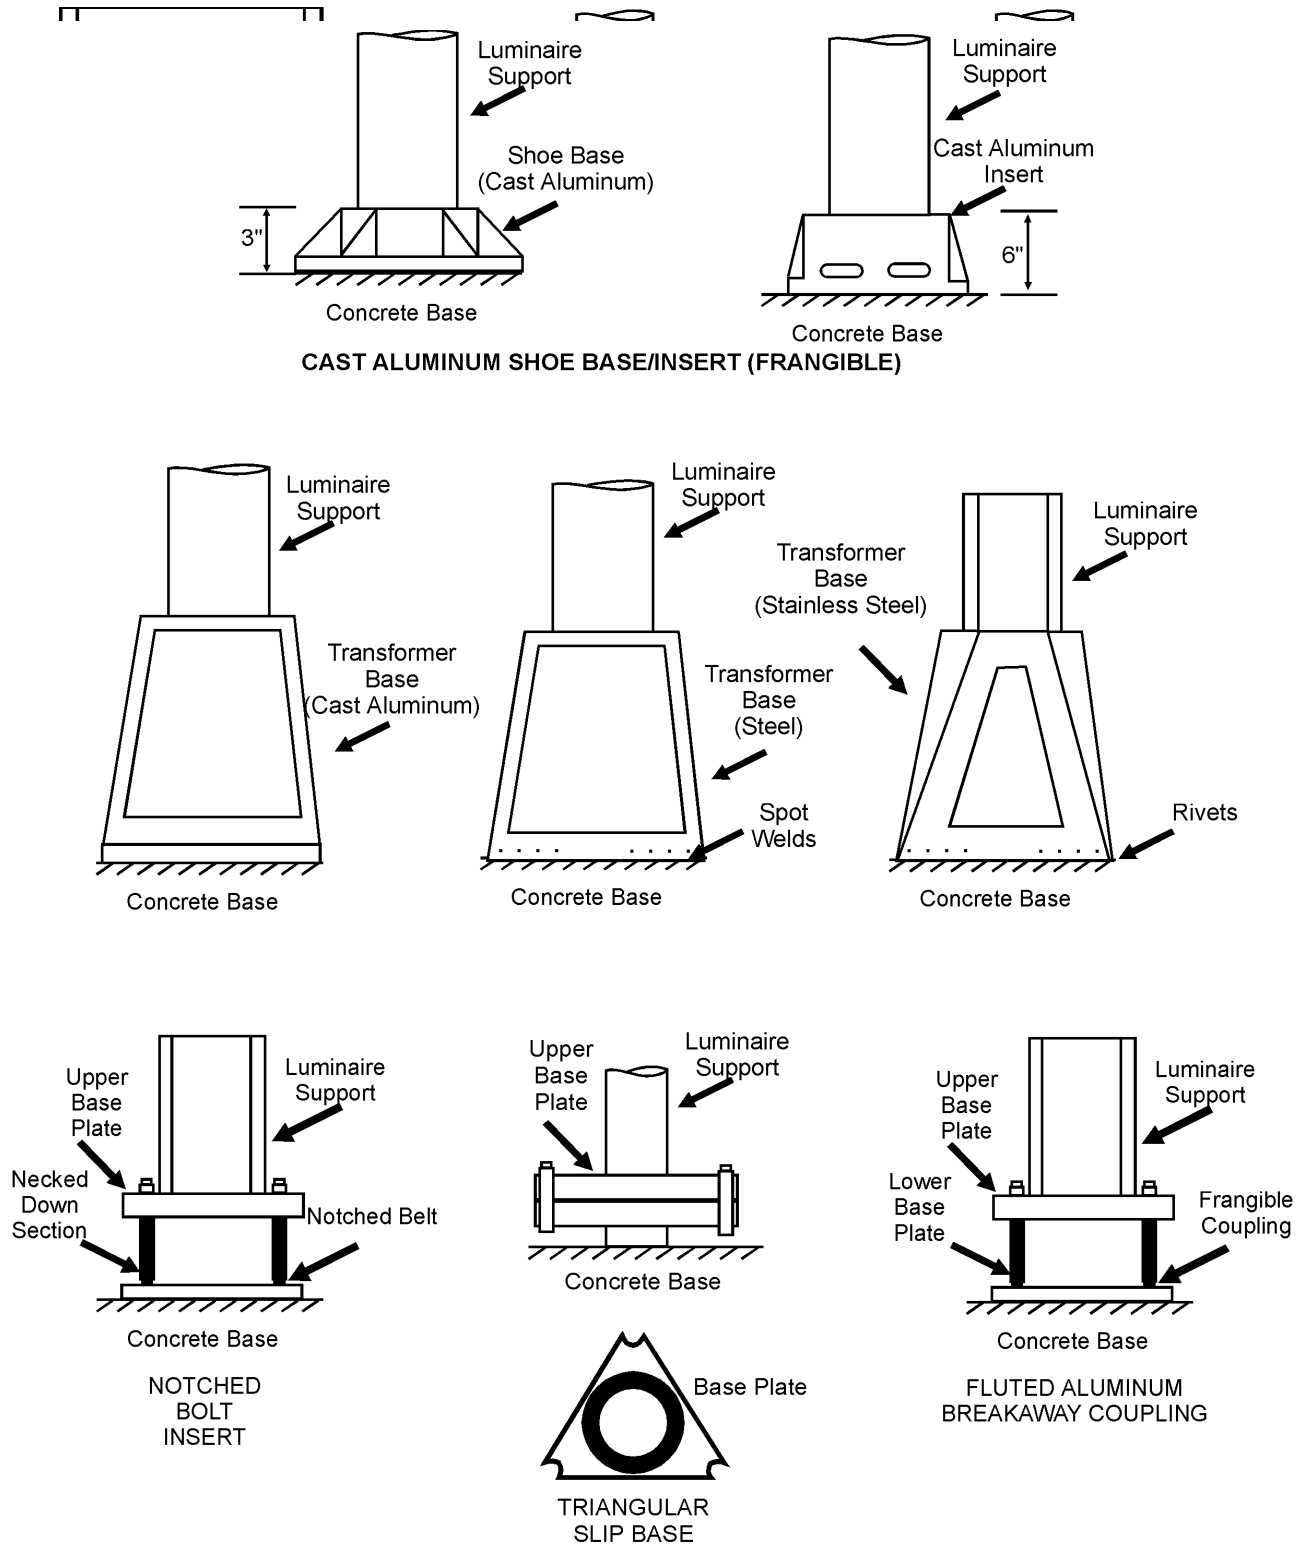


Object Contacted (cont'd)

Collision With Fixed Object (cont'd)


Concrete traffic barrier

refers to the longitudinal traffic barriers constructed of concrete and located: on the outside of the road surface, in a median, or in gore areas. This includes all temporary concrete barriers regardless of location (*e.g.*, temporary Jersey barrier on a bridge being used to control traffic during bridge repair/construction). Concrete walls (vertical side surfaces) do not apply here, see Wall. Below are a few of the common designs of concrete traffic barriers.

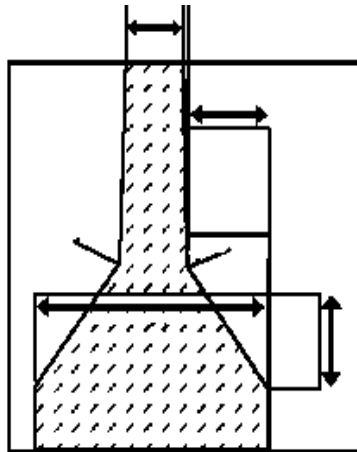

**(Footing & Reinforcing Varies)
MB 5
Concrete Median Barrier**

Continuously poured, reinforced, sloped faced, concrete section. Barrier can be anchored by dowels or an asphalt key.

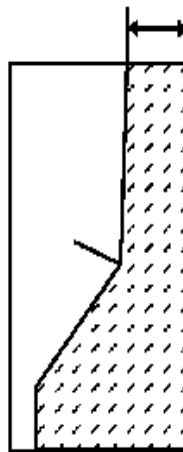

**Concrete
Safety
Shape**

Impact attenuator

refers to crash cushions which are barriers placed in front of fixed objects on the highway to absorb energy, and thus, to mitigate the injury effects of collisions at such sites. A number of common impact attenuating devices may be encountered; therefore, be sure to photograph them when encountered.

Other traffic barrier (specify)

refers to any type of barrier not described in the listed attributes.

Object Contacted (cont'd)

Page 6 of 10

Collision With Fixed Object (cont'd)**Fence**

includes both the fence material and the support posts.

Wall

refers to solid, vertical faced, concrete, brick, stone, or other structurally sound roadside devices which may act as a traffic barrier in some locations. Do not confuse this attribute with **Fence** or **Building**. In most instances a wall will be backfilled with soil and will act as a vertically faced embankment.

Building

is used when the vehicle impacts a roofed and walled structure built for permanent use. The type of construction material used is not of interest, nor is the use of the building.

Ditch or culvert

refers to: (1) a man-made structure for drainage purposes, or (2) a man-made structure that allows passage over a drainage area and is that part of the structure which is intended to channel flow through the structure and maintain the stability/integrity of the road bed. If the culvert structure has a portion above the road surface which is of sufficient height to engage above the wheels of an errant CDS applicable vehicle and redirect it, that part of the structure is considered an **Other traffic barrier**. When the sides of the ditch are approximately of equal height, it makes no difference which side of the ditch was struck; however, if the struck side is substantially higher than the other side, enter **Embankment** as the object contacted. Substantial means that an embankment exists with or without a ditch

Ground

refers to an impact with the ground. Collisions which may be classified using this attribute include (but are not limited to) vehicles which sustain undercarriage damage by (1) straddling the pavement and shoulder and impacting a prominent pavement lip, or (2) free falls or vaults from the road surface to the ground.

Fire hydrant

refers to the roadside device used by fire departments to provide water for fighting fires. Usually made of steel, these devices are also referred to as fire plugs or fire stand pipes in some areas.

Curb

is used when the vehicle contacts a raised element at the edge of a roadway. Curbs are used to: control drainage, act as deterrents to vehicles leaving the pavement at hazardous points, delineate the edge of the pavement, present a more finished appearance, and assist in the orderly development of the roadway edge. Often a curb serves two or more of these purposes.

Cable barrier guardrail

refers to a guardrail consisting of 2 to 4 wire cables supported by cable mounts that are attached to steel posts.



Metal guardrail


refers to a cold formed standard W Section or thrie-beam of steel rigid beam elements bolted to posts usually with offset blocks.



Collision With Fixed Object (cont'd)

Bridge

encompasses all structural members of an overpass structure used for vehicular or pedestrian traffic. This attribute includes guardrails, permanent concrete barriers, bridge rail/walls, bridge piers, bridge abutments, bridge parapet ends, wing walls associated with bridge abutments, and support columns.

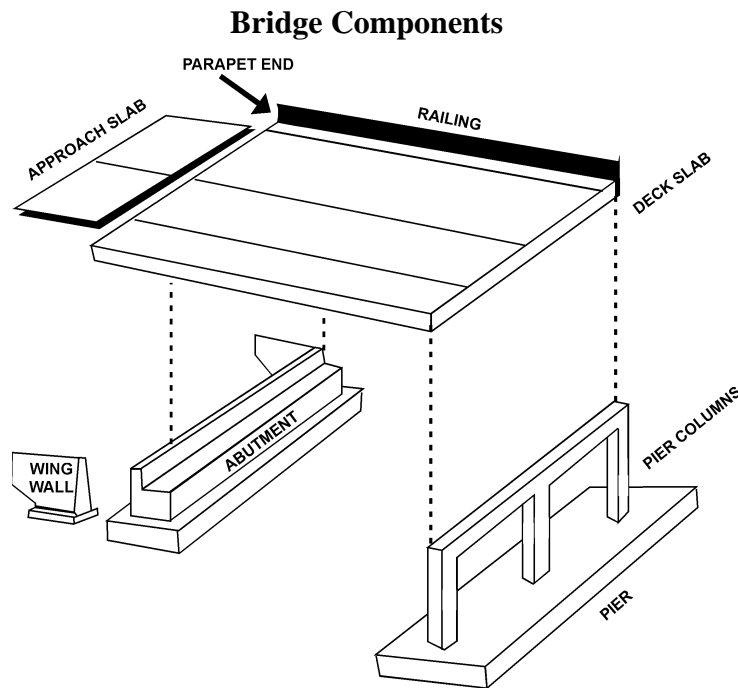

* Individual components of a bridge collectively become the bridge.

Other fixed object

is used for any other object of sufficient mass or anchored such that it is not readily movable; compare with **Other nonfixed object**. Examples include large boulders, large logs (fallen trees), etc.

Unknown fixed object

is used when it is known that the vehicle struck a fixed object but the specific type of object is not known.

Nonbreakaway Pole or Post

When a vehicle impacts a tree, shrubbery, bush, pole or post and causes the fixed object or any portion thereof to become dislodged or airborne such that the object or portion thereof subsequently falls on the vehicle, the appropriate object contacted attribute for the object in its dislodged or airborne state is the same as when the object was initially.

Pole or post (≤ 10 centimeters in diameter)

refers to a pole or post whose diameter, when measured using the method shown above, is less than or equal to ten centimeters, and the pole or post is not mounted on a breakaway base.

Pole or post (> 10 but ≤ 30 centimeters in diameter)

refers to a pole or post which is not mounted on a breakaway base and whose diameter is within the range specified.

Pole or post (> 30 centimeters in diameter)


refers to poles or posts which are of the correct size and are not mounted on a breakaway base.

Pole, post — diameter unknown

is used for any pole or post, not on a breakaway base, of unknown diameter.

Use the words "pole" and "post" in a general sense and include all types of supports for utility lines, light standards, post mounted mailboxes, warning devices, signs, and traffic control signals. Privately owned, as well as publicly owned, highway devices are included in these attributes. They may be made of wood, metal, or concrete and may have various cross-sectional shapes and dimensions. The pole or post must be nontemporary (i.e., have a permanent base or be anchored in the ground). Fence posts are not included in these attributes.

The following diagrams indicate the proper measurement for determining the "diameter" for use in coding pole/post:

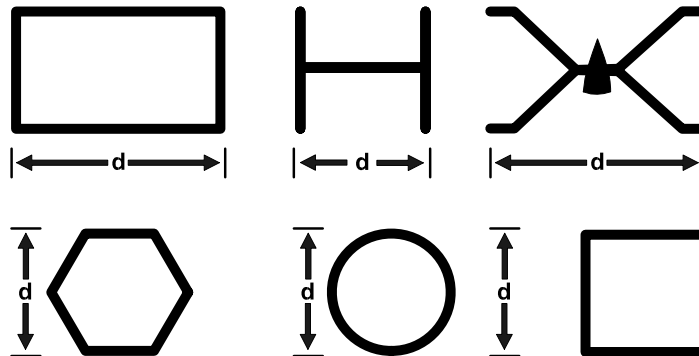

Object Contacted (cont'd)

Page 9 of 10

Collision with Nonfixed Object**Pedestrian**

is defined as any person who is on a traffic way or on a sidewalk or path contiguous with a traffic way, and who is not in or on a nonmotorist conveyance. This includes persons who are in contact with the ground, roadway, etc., but who are holding onto a vehicle. A nonmotorist conveyance is defined as any human-powered device by which a nonmotorist may move, or by which a pedestrian or nonmotorist may move another nonmotorist, other than by pedaling. A nonmotorist conveyance includes the following: baby carriage, coaster wagon, ice skates, roller skates, push cart, scooter, skate board, skis, sled, wheelchair, rickshaw, etc. This includes those persons in a nonmotorist conveyance who hold onto a motor vehicle in motion. Excluded are pedalcyclists.

Cyclist or cycle

refers to any occupant of a pedalcycle, the cycle, or both. This includes those cyclists who hold onto a motor vehicle in motion.

Other nonmotorist or conveyance

refers to a person who is not an occupant of a motor vehicle in-transport, a pedestrian, or a cyclist. A nonmotorist conveyance includes the following: baby carriage, coaster wagon, ice skates, roller skates, push cart, scooter, skate board, skis, sled, wheelchair, rickshaw, etc. This includes those persons in a nonmotorist conveyance who hold onto a motor vehicle in motion. Excluded are pedalcyclists. Use this attribute if the impact was with a nonmotorist conveyance or a nonmotorist associated with a nonmotorist conveyance [if an animal is associated with this impact, see **Animal**]. This attribute also would be used for the occupants of a motor vehicle not in-transport, but only if they become separated from the not in-transport vehicle.

Vehicle occupant

is used when the object contacted was any person who was an occupant of a motor vehicle in-transport; two examples follow. Use this attribute for an occupant who falls from a vehicle and is subsequently run over before stabilization occurred. In addition, use this attribute for any motorcyclist who separates from his/her motorcycle during impact and subsequently impacts a motor vehicle before stabilization occurred.

Animal

is used if the object contacted was an animal (stationary or nonstationary). Where a nonmotorist was associated with the animal (i.e., on the animal, or on or in an animal powered nonmotor vehicle transport device) use the following scheme. If the contact is to:

- (1) the animal; the animal and the person; the animal and the conveyance; or the animal, conveyance, and the person; use the attribute **Animal**;
- (2) the conveyance, or to the person, or to both the conveyance and the person, use the **Other nonmotorist or conveyance**.

Railway vehicle

refers to any moving or non-moving vehicle that travels on rails. This includes vehicles that are dual purpose, i.e., a vehicle designed to use both road and rail, if at the time of the crash the vehicle is on rails. Examples are, trolley's on rails and trains.

Object Contacted (cont'd)

Page 10 of 10

Collision with Nonfixed Object (cont'd)

Trailer, disconnected in transport

is used when the vehicle is contacted by or contacts a trailer which has become detached from its towing unit while the towing unit was in-transport. The type of trailer is not of interest; the only factors to consider are the detachment of the trailer and the transport status of the towing unit.

Object fell from vehicle in-transport

is used when the vehicle is contacted by or contacts an object that was being carried by or was attached to a vehicle in-transport but fell from or became detached from that vehicle. For example, a detached side mirror, spare tire, cargo, etc. Detached trailers are entered under trailer, disconnected in transport.

Other nonfixed object

refers to any moveable object that is either readily moveable or is moving and is not specifically named above. Examples include trash cans, grocery carts, unoccupied pedalcycles, small boulders, sheared poles, etc.

Other Event (specify)

is used when an event occurs which cannot be classified using one of the existing attributes or definitions. A complete description should be given as well as describing the event in the Case Summary.

Unknown Event or Object

is used whenever the object contacted is not known or if an unknown event occurs and the researcher cannot determine what the event consisted of and how to enter it.

[CLASS OF VEHICLE CONTACTED]

Page 1 of 2

Screen Name: Object Contacted-Class of Vehicle**SAS Data Set:** *EVENT***SAS Variable:** *CLASS2***Oracle Name:** *EVENTS.PICKCONTACTVEHICLECLASS***Element Attributes:**

Oracle	SAS	
0	0	Not a motor vehicle
1	1	Subcompact/mini (wheelbase <254 cm)
2	2	Compact (wheelbase ≥ 254 but <265 cm)
3	3	Intermediate (wheelbase ≥ 265 but <278 cm)
4	4	Full size (wheelbase ≥ 278 but <291 cm)
5	5	Largest (wheelbase ≥ 291 cm)
9	9	Unknown passenger car size
14	14	Compact utility vehicle
15	15	Large utility vehicle (≤ 4,536 kgs GVWR)
16	16	Utility station wagon (≤ 4,536 kgs GVWR)
19	19	Unknown utility type
20	20	Minivan (≤ 4,536 kgs GVWR)
21	21	Large van (≤ 4,536 kgs GVWR)
24	24	Van based school bus (≤ 4,536 kgs GVWR)
28	28	Other van type (≤ 4,536 kgs GVWR)
29	29	Unknown van type (≤ 4,536 kgs GVWR)
30	30	Compact pickup truck (≤ 4,536 kgs GVWR)
31	31	Large pickup truck (≤ 4,536 kgs GVWR)
38	38	Other pickup truck (≤ 4,536 kgs GVWR)
39	39	Unknown pickup truck type (≤ 4,536 kgs GVWR)
45	45	Other light truck (≤ 4,536 kgs GVWR)
48	48	Unknown light truck type (≤ 4,536 kgs GVWR)
49	49	Unknown light vehicle type
50	50	School bus (excludes van based) (>4,536 kgs GVWR)
58	58	Other bus (>4,536 kgs GVWR)
59	59	Unknown bus type
60	60	Truck (>4,536 kgs GVWR)
67	67	Tractor without trailer
68	68	Tractor - trailer(s)
78	78	Unknown medium/heavy truck type
79	79	Unknown light/medium/heavy truck type
80	80	Motored cycle
90	90	Other vehicle
99	99	Unknown

Class of Vehicle Contacted (cont'd)

Page 2 of 2

Source: This variable is derived from application inputs from the GV form/Vehicle and Specifications Tab

Remarks:

See the descriptions listed under Class of Vehicle.

Not a motor Vehicle

Is used when an object is struck.

GENERAL AREA OF DAMAGE OF VEHICLE CONTACTED

Screen Name: Object Contacted-General Area of Damage

SAS Data Set: *EVENT*

SAS Variable: *GADEV2*

Oracle Name: *EVENTS.PICKCONTACTVEHICLEDAMAGE*

Element Attributes:

Oracle	SAS	
0	1/10	Not a motor vehicle
N	2/11	Noncollision
9	21/9	Unknown

CDC Applicable and Other Vehicles

Oracle	SAS	
F	3	Front
R	4	Right side
L	5	Left side
B	6	Back of unit with cargo area
T	7	Top
U	8	Undercarriage

TDC Applicable Vehicles

Oracle	SAS	
F	12	Front
R	13	Right side
L	14	Left side
B	15	Back of unit with cargo area (rear of trailer or straight truck)
D	16	Back (rear of tractor)
C	17	Rear of cab
V	18	Front of cargo area
T	19	Top
U	20	Undercarriage

Source: Researcher determined.


Remarks:

See the choices listed under General Area of Damage

Not a motor Vehicle

Is used when an object is struck.

SCENE

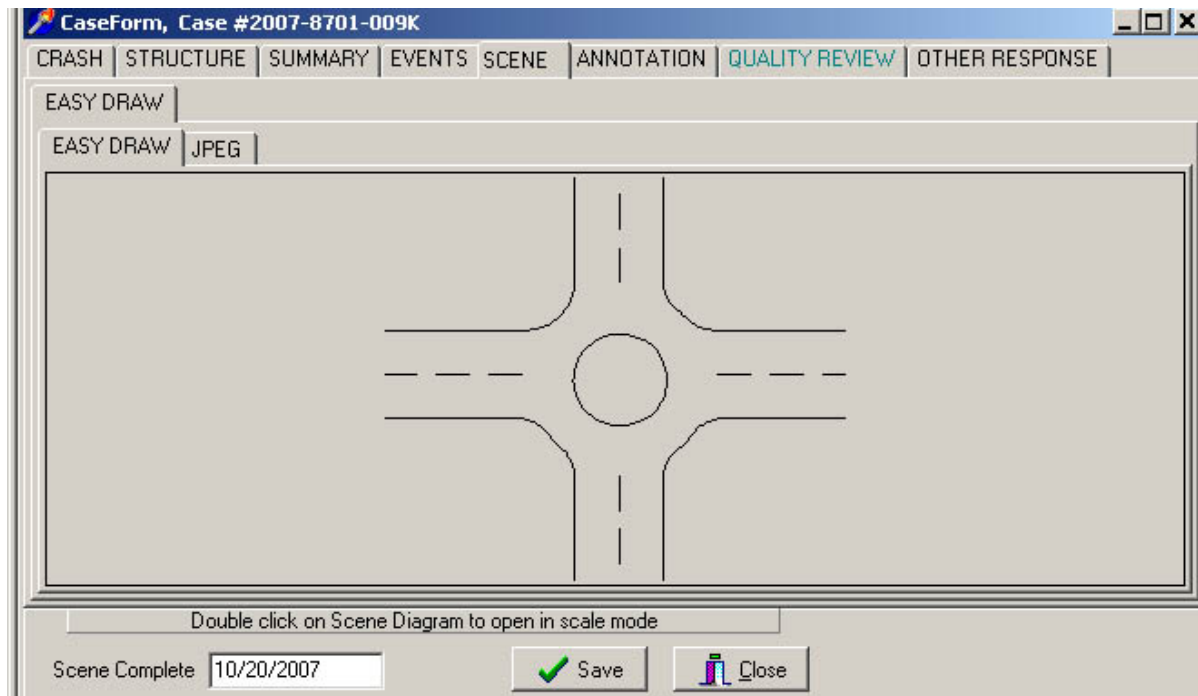

Scene Diagram

Once you have clicked on the Scene tab to open up a grey window, double click on the window to start.

Use reference materials or “Help” in the drawing program, for various techniques.

Appendix E contains the Uniform Symbols for Crash Diagramming for use in completing the scene diagram.

The scene diagram should include the following:

Document the physical plant:

- All appropriate road/roadway delineation (e.g., curbs/edge lines, lane markings, median markings, pavement markings, parked vehicles, poles, signs, etc.)
- All appropriate traffic controls (e.g., signs/signals, etc.)
- North arrow placed on diagram

Document vehicle dynamics including:

- Reference Point (RP) and Reference Line (RL) relative to the physical features present at the scene
- Scaled documentation of all crash induced physical evidence.
- Scaled documentation of all roadside objects contacted
- Scaled representations of the vehicle(s) at pre-impact, impact, and final rest based upon either physical evidence, and/or reconstructed crash dynamics.

DATE SCENE COMPLETED (MONTH/DAY/YEAR)

Screen Name: Scene Complete

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *CASESTRUCTURE.SCENECOMPLETEDATE*

Element Attributes:

Month: 01-12

Day: 01 through 31

Year: Calendar year of data collection

Source: Researcher

Remarks:

Enter the date that the required scene inspection (including field sketch) was completed.

ANNOTATIONS

CaseForm, Case #2007-996-900015

CRASH | STRUCTURE | SUMMARY | EVENTS | SCENE | ANNOTATION | REVIEW | OTHER RESPONSE

ANNOTATIONS | FIELD ANNOTATIONS (OLD)

Form Name	Class/Form	Veh#	Occ#
-----------	------------	------	------

Save Close

ANNOTATION

Screen Name: Annotations

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: ANNOTATION.ANNOTATIONTEXT


Element Attributes:

Source: Researcher

Remarks:

All annotations to the case are referenced here. Annotations can be deleted by highlighting the annotation and deleting.

PSU REVIEW

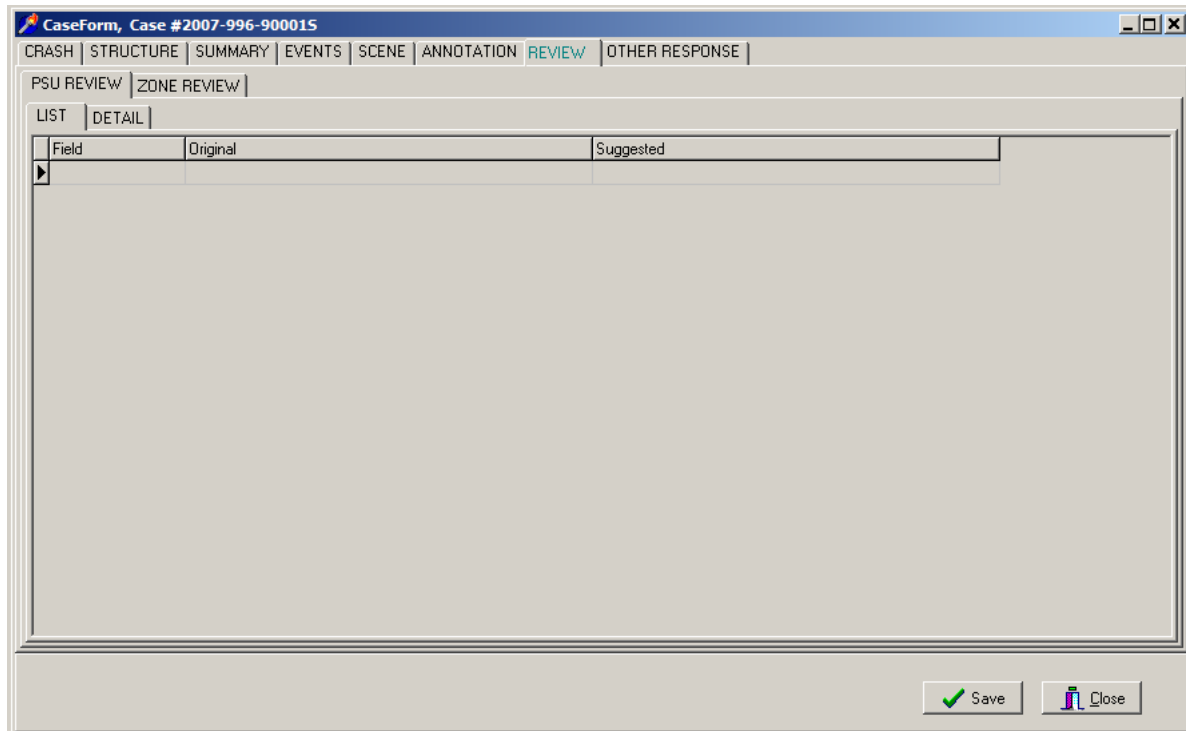

PSU Review

The case review process is a critical part of NASS quality control. Reviews are completed at the PSU, Zone Center, and NHTSA levels. The NASSMAIN program is equipped with an electronic case review that allows suggested changes to be entered and stored in the case. It is imperative that cases be reviewed in a tab-by-tab manner.

When conducting an electronic case review, it is important to enter the case in the “PSU Review” mode. Select “File” from the menu bar and select “PSU Review” from the opened window. All aspects of the case can be reviewed in this mode, but no changes can be made to the case. The method for suggesting changes varies with the type of data being reviewed.


Fixed variables have drop-down boxes that open a window of attributes from which to choose. In the “PSU Review” mode, select the variable for which a suggested change will be made. When the variable box is shaded blue, push the F5 key on the keyboard. A window will pop up displaying the coded attribute, a suggestion box for recommending a new attribute, and a comment box. The suggestion box will contain the same attribute choices available during data entry. Selected the proposed attribute change and, if needed, enter justification for the change in the comment box. A list of the suggested changes is compiled under “Review” on the menu bar.

Case components such as summaries, scene diagrams, or sketches can be viewed in the “PSU Review” mode, but suggestion boxes are not available. Select the “Review” option from the menu bar and select the “Notes” option. A text box appears in which any suggestions can be entered. It is recommended to enter each suggested change on a new line of text to allow for easier reading and for additional comments from the case researcher.

When the review is complete, the case researcher should enter the case through the “Researcher Entry” mode so that potential changes can be made. Suggested variable changes that are agreed upon should be changed in the case. For suggestions with which the case researcher disagrees, justification for retaining the variable as coded may be entered in the comment box. Similarly, justification may be entered for suggestions in the “Notes” section that are not acted upon.

It is important to leave all case review notes and suggestions in the case for use in zone center review.

ZONE REVIEW

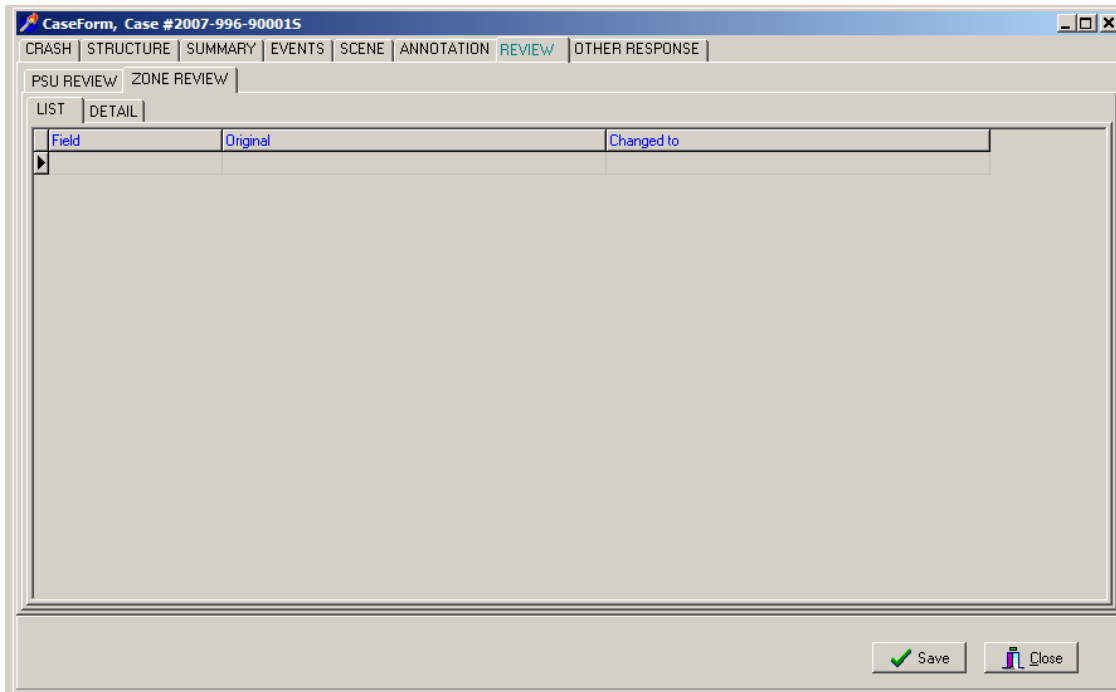

Zone Center Review

Two types of case review conducted at the zone center are:

1. All variable review OR
2. Key variable/specified review

All aspects of the case are reviewed (all variable review) based upon researcher status as follows:

- Novice (1st 20 cases completed)
- Probationary
- Twenty-five percent of experienced researcher cases are reviewed (excludes researchers on probation).

All variable review

All aspects of a case will be reviewed to assess accuracy, completeness, and quality of case with respect to NASS program standards as indicated by source documents and researcher training. Areas of exception as well as deficient performance will be assessed based on NHTSA’s established guideline for NASS using the following source documents:

- CDS Coding and Editing Manual
- SAE J224 MAR80 .
- Photography Guideline
- Vehicle Measurement Techniques
- WINSMASH Decision Rules

- Researcher training
- Established NASS Edit Checks

Key Variable/Specified review:

Key variable reviews are performed on cases with variables designated to be of special interest and will typically include the following:

- Pre crash
- Rollover
- WINSMASH
- Restraint systems

All cases are checked to ensure they are applicable and selected based on established sampling rules.

In addition to case review, Zone Center personnel are responsible for the coding and sourcing of official and unofficial medical/injury data.

CASE FORM

OTHER RESPONSE

CaseForm, Case #2007-996-900015

CRASH | STRUCTURE | SUMMARY | EVENTS | SCENE | ANNOTATION | REVIEW | OTHER RESPONSE

Veh #	Occ #	ID4	ID5	Table	Column	Other Specified

Save Close

OTHER RESPONSE

Screen Name: Other Response

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: ***OTHERRESPONSES.OTHERTEXT***

Element Attributes:

Source: Researcher

Remarks:

A list of all Other Specified information within the case. Used primarily for case review.

GENERAL VEHICLE FORM OVERVIEW

Page 1 of 2

The General Vehicle Form provides information for all motor vehicles involved in the case's harmful events.

The form is divided into several main tabs:

- Vehicle
- Specifications
- Official Records
- PreCrash
- Driver
- Rollover
- Reconstruction
- DeltaV
- Log

The Vehicle tab provides basic identification information regarding this vehicle, as well as the type of inspection completed. The amount of information completed on this form is determined by the vehicle type:

- CDS in-transport: All tabs are completed.
- CDS not in-transport, inspected: Vehicle and Specifications tabs only.
- non-CDS vehicle: Vehicle, Official Records, PreCrash, Driver and Log tabs.

The Specifications tab lists the dimensions of the vehicle.

The Official Records tab lists information normally gleaned from the police report or medical records.

The PreCrash tab provides information normally collected during the scene inspection. It details the different precrash characteristics of the roadway for this vehicle.

The Driver tab provides information about the movement of the vehicle during the precrash phase of the crash.

The Rollover tab provides information regarding any rollover a vehicle may have experienced during the crash. If no rollover event occurred for this vehicle, then all fields will be coded "No rollover."

The Reconstruction tab provides basic trajectory information regarding the vehicle.

The DeltaV tab provides delta V information for the vehicle's highest severity impact.

The Log tab includes management information regarding the case.

VEHICLE

General Vehicle Form, Case 2007-8701-009K/ Vehicle #1

VEHICLE | SPECIFICATIONS | OFFICIAL RECORDS | PRECRASH | DRIVER | ROLLOVER | RECONSTRUCTION | DELTA V | LOG | REVIEW

Identification

Number: 1 Identification Number:

Model Year: 2007 Vehicle Special Use: No Special Use

Make: TOYOTA Transport Status: In transport

Model: CAMRY

Body Category: Automobiles

Body Type: 3-door coupe

Class: Compact (wheelbase >= 254 but < 265 cm)

Weight

Curb Weight: 907 kgs Source:

Cargo Weight: kgs Source:

Inspection

Complete Inspection

Date: 01/03/2007

Save Close

VEHICLE NUMBER

Screen Name: Number

SAS Data Set: *GV*

SAS Variable: *VEHNO*

Oracle Name: *VEHICLE.VEHICLENUMBER*

Element Attributes:

Generated Number

Range:

Source: Generated when vehicle is selected to open General Vehicle Form

Remarks:**Note:**

Vehicles are entered on the Case Form/Structure Tab/Vehicles sub-tab.

Each motor vehicle (regardless of body type) listed on the PAR is assigned a unique number. Vehicle numbers are to be assigned consecutively according to the order listed on the PAR. Any parked CDS applicable vehicles that are struck by an in-transport CDS-applicable vehicle are also assigned a number.

VEHICLE MODEL YEAR

Screen Name: Identification--Model Year

SAS Data Set: *GV*

SAS Variable: *MODEL_YR*

Oracle Name: *VEHICLE.MODEL_YEAR*

Element Attributes:

Oracle	SAS	
	1900	current data collection year plus one
-9999	9999	Unknown

Range: 1900-current year+1

Source: Primary source is the VIN during vehicle inspection; secondary sources include the police report and interviews.

Remarks:**Unknown**

is used if the vehicle model year cannot be determined.

VEHICLE MAKE

Screen Name: Identification--Make

SAS Data Set: *GV*

SAS Variable: *MAKE (for SAS code); OMAKE (for Oracle code)*

Oracle Name: *VEHICLE.MAKEID*

Element Attributes:

Oracle SAS

		Vehicle Make-as Selected
99	99	Unknown Manufacturer

Source: Vehicle inspection, police report, and interview

Remarks:

Select the vehicle make for this vehicle. Make Model list is in the Appendix.

Unknown

is used for a "hit-and-run" vehicle unless reliable evidence indicates the make of the vehicle.

VEHICLE MODEL

Screen Name: Identification—Model

SAS Data Set: *GV*

SAS Variable: *MODEL (for SAS code); OMODEL (for Oracle code)*

Oracle Name: *VEHICLE.MODELID*

Element Attributes:

Oracle	SAS	
		Vehicle Model-as Selected
-9999	999	Unknown

Source: Vehicle inspection, police report, and interview

Remarks:

Select the vehicle model for this vehicle. Make Model list is in the Appendix.

Unknown

is used for a "hit-and-run" vehicle unless reliable evidence indicates the make of the vehicle.

VEHICLE BODY CATEGORY

Screen Name: Body Category
SAS Data Set: N/A
SAS Variable: N/A
Oracle Name: *VEHICLE.PICKVEHICLETYPE*

Element Attributes:

Oracle	SAS
1	Automobiles
2	Automobile Derivatives
3	Utility Vehicles
4	Van Based Light Trucks
5	Light Conventional Trucks
6	Other Light Trucks
7	Buses (Excludes Van Based)
8	Medium/heavy Trucks
9	Motored Cycles
10	Other Vehicles
-9999	Unknown Body Type

Source: Vehicle inspection, police report, interview, VIN

Remarks:

Automobiles

These light vehicles referred to as automobiles, are designed primarily to transport passengers.

Automobile Derivatives

This describes certain passenger cars that have been modified to perform cargo-related tasks.

Utility Vehicles (< 4,536 kgs GVWR)

Van Based Light Trucks (< 4,536 kgs GVWR)

Light Conventional Trucks (Pickup Style Cab, < 4,536 kgs GVWR)

Other Light Trucks (< 4,536 kgs. GVWR)

Other Light Trucks are used to describe vehicles that are based upon a conventional light pickup frame, but a commercial or recreational body has been affixed to the frame rather than a pickup box.

Buses (Excludes Van Based)

Buses are defined as any medium/heavy motor vehicle designed primarily to transport large groups of passengers.

Medium/Heavy Trucks (> 4,536 kgs GVWR)

Medium/Heavy Trucks describe a single unit truck specifically designed for carrying cargo on the same chassis as the cab. They pertain to a truck-tractor designed for towing trailers or semi-trailers. Although towing is their primary purpose, some truck-tractors are equipped with cargo areas located rearward of the cab.

Motored Cycles (Does Not Include All Terrain Vehicles/Cycles)**Other Vehicles**

Other Vehicles describe all motored vehicles that are designed primarily for off-road use. It is also selected when the body type of the vehicle is unknown.

BODY TYPE

Page 1 of 12

Screen Name: Body Type

SAS Data Set: GV

SAS Variable: BODYTYPE

Oracle Name: VEHICLE.BODYTYPEID

Element Attributes:**CDS APPLICABLE VEHICLES****Automobiles**

Oracle	SAS	
01	01	Convertible (excludes sun-roof, t-bar)
02	02	2-door sedan, hardtop, coupe
03	03	3-door/2-door hatchback
17	17	3-door coupe
04	04	4-door sedan, hardtop
05	05	5-door/4-door hatchback
06	06	Station wagon (excluding van and truck based)
07	07	Hatchback, number of doors unknown
08	08	Other automobile type (specify):
09	09	Unknown automobile type

Automobile Derivatives

Oracle	SAS	
10	10	Auto based pickup (includes El Camino, Caballero, Ranchero, Brat, and Rabbit pickup)
11	11	Auto based panel (cargo station wagon, auto based ambulance/hearse)
12	12	Large limousine - more than four side doors or stretched chassis
13	13	Three-wheel automobile or automobile derivative

Utility Vehicles (<=4,536 kgs GVWR)

Oracle	SAS	
14	14	Compact utility (examples include: 4-Runner, Amigo, Bravada, Bronco [76 and before], Bronco II, Cherokee [84 and after], Defender, Discovery, Dispatcher, Explorer, Geo Tracker, Golden Eagle, Grand Vitara, Jeep CJ-2 - CJ-7, Laredo, Montero, Mountaineer, Navajo, Passport, Pathfinder, Raider, RAV4, RX-300, Renegade, Rocky, Rodeo, S-10 Blazer, S-15 Jimmy, Samurai, Scrambler, Sidekick, Sportage, Thing, Trooper, Trooper II, Wrangler, Xterra, X-90)

Body Type (cont'd)

Page 2 of 12

Oracle	SAS	
15	15	Large utility (examples include: Bronco-full-size [78 and after], full-size Blazer, Expedition, full-size Jimmy, Hummer, Jeep Cherokee [83 and before], Durango, Escalade, Landcruiser, LX450, Navigator, Ramcharger, RangeRover, Scout, Tahoe, Trailduster, Yukon)
16	16	Utility station wagon (examples include: Chevrolet Suburban, Excursion, GMC Suburban, Grand Wagoneer includes suburban limousine, Travelall)
19	19	Utility, unknown body type

Van Based Light Trucks (<=4,536 kgs GVWR)

Oracle	SAS	
20	20	Minivan (examples include: Aerostar, Astro, Caravan, Expo Wagon, Grand Caravan, Grand Voyager, Lumina APV, Mazda MPV, Mini-Ram, Mitsubishi Minivan, Nissan Minivan, Odyssey, Previa, Quest, Safari, Sienna, Silhouette, Town and Country, Toyota Minivan, Toyota Van, Trans Sport, Vanagon/Camper, Venture, Villager, Vista, Voyager, Windstar)
21	21	Large van (examples include: B150-B350, Beauville, Chateau, Chevy Van, Clubwagon, E150- E350, Econoline, G10-G30, G15-G35, Maxiwagon, Rally Van, Ram, Royal, Sport Van, Sportsman, Tradesman, Vandura, Voyager [83 and before].)
22	22	Step van or walk-in van (<=4,536 kgs GVWR)
23	23	Van based motorhome (<=4,536 kgs GVWR)
24	24	Van based school bus (<=4,536 kgs GVWR)
25	25	Van based other bus (<=4,536 kgs GVWR)
28	28	Other van type (Hi-Cube Van, Kary) (specify):
29	29	Unknown van type

Light Conventional Trucks (Pickup style cab, <=4,536 kgs GVWR)

Oracle	SAS	
30	30	Compact pickup (examples include: Arrow Pickup [foreign], Colt P/U, Courier, D50, Dakota, Datsun/Nissan Pickup, Frontier, Hombre, LUV, Mazda Pickup, Mitsubishi Pickup, Pup, Ram 50, Ranger, S-10 , S-15, Sonoma, Sport Trac, T-10, T-15, Tacoma, Toyota Pickup)
31	31	Large Pickup (examples include: C10-C35, Comanche, D100-D350, F100-F350, Jeep Pickup, K10-K35, R100-R500, R10-R35, Ram Pickup, Sierra, Silverado, T100, V10-V35, W100-W350)
32	32	Pickup with slide-in camper
33	33	Convertible pickup
39	39	Unknown pickup style light conventional truck type

Body Type (cont'd)

Page 3 of 12

Other Light Trucks (<=4,536 kgs GVWR)

Oracle	SAS	
40	40	Cab chassis based (includes rescue vehicles, light stake, dump, and tow truck)
41	41	Truck based panel
42	42	Light truck based motorhome (chassis mounted)
45	45	Other light conventional truck type
48	48	Unknown light truck type
49	49	Unknown light vehicle type (automobile, utility, van, or light truck)

OTHER VEHICLES**Buses (Excludes Van Based)**

Oracle	SAS	
50	50	School bus (designed to carry students, not cross country or transit)
58	58	Other bus type (<i>e.g.</i> , transit, intercity, bus based motorhome) (specify)
59	59	Unknown bus type

Medium/Heavy Trucks (> 4,536 kgs GVWR)

Oracle	SAS	
60	60	Step van (> 4,536 kgs GVWR)
61	61	Single unit straight truck (4,536 kgs <GVWR<=8,845 kgs)
62	62	Single unit straight truck (8,845 kgs <GVWR<=11,793 kgs)
63	63	Single unit straight truck (> 11,793 kgs GVWR)
64	64	Single unit straight truck, GVWR unknown
65	65	Medium/heavy truck based motorhome
67	67	Truck-tractor with no cargo trailer
68	68	Truck-tractor pulling one trailer
69	69	Truck-tractor pulling two or more trailers
70	70	Truck-tractor (unknown if pulling trailer)
39462	74	Medium/Heavy Pickup >=4,536 kgs
78	78	Unknown medium/heavy truck type

Unknown truck type (light/medium/heavy)

Oracle	SAS	
79	79	Unknown truck type (light/medium/heavy)

Motored Cycles (Does Not Include All-Terrain Vehicles/Cycles)

Oracle	SAS	
80	80	Motorcycle
81	81	Moped (motorized bicycle)
82	82	Three-wheel motorcycle or moped
88	88	Other motored cycle (minibike, motor scooter) (specify):

Body Type (cont'd)

Page 4 of 12

Oracle	SAS	
89	89	Unknown motored cycle type

Other Vehicles

Oracle	SAS	
90	90	ATV (All-Terrain Vehicle) and ATC (All-Terrain Cycle)
91	91	Snowmobile
92	92	Farm equipment other than trucks
93	93	Construction equipment other than trucks
97	97	Other vehicle type

Unknown Vehicle Type

Oracle	SAS	
99	99	Unknown body type

Source: Vehicle inspection, police report, and interview**Remarks:****Automobiles**

These light vehicles referred to as automobiles, are designed primarily to transport passengers.

01 Convertible (excludes sun-roof, t-bar)

refers to a passenger car equipped with a removable or retractable roof. To qualify for this attribute, the entire roof must open. Convertible roofs are generally fabric; however, removable hardtops are also included. This attribute takes priority over 2-door or 4-door attributes.

02 2-door sedan, hardtop, coupe

refers to a passenger car equipped with two doors for ingress/egress and a separate trunk area for cargo (*i.e.*, trunk lid hinged below the backlight). Folding rear seats do not necessarily violate the separate "trunk area" concept.

03 3-door/2-door hatchback

refers to a passenger car equipped with two doors for ingress/egress and a rear hatch opening for cargo (*i.e.*, hinged above the backlight). The cargo area is not permanently partitioned from the passenger compartment area.

17 3-door coupe

refers to a passenger car equipped with three doors (two front seat and one rear seat) for ingress/egress and a separate trunk area for cargo (*i.e.*, trunk lid hinged below the backlight). Folding rear seats do not necessarily violate the separate "trunk area" concept.

Body Type (cont'd)

Page 5 of 12

04 4-door sedan, hardtop

refers to a passenger car equipped with four doors for ingress/egress and a separate trunk area for cargo (*i.e.*, trunk lid hinged below the backlight). Folding rear seats do not necessarily violate the separate "trunk area" concept.

05 5-door/4-door hatchback

refers to a passenger car equipped with four doors for ingress/egress and a rear hatch opening for cargo (*i.e.*, hinged above the backlight). The cargo area is not permanently partitioned from the passenger compartment area.

06 Station wagon (excluding van and truck based)

refers to a passenger car with an enlarged cargo area. The entire roof covering the cargo area is generally equal in height from front to rear and full height side glass is installed between the C and D-pillars. The rearmost area is not permanently partitioned from the forward passenger compartment area (*e.g.*, "horizontal window shades" to hide cargo do not constitute partitions).

07 Hatchback, number of doors unknown

refers to a passenger car with an unknown number of doors for ingress/egress and a rear hatch opening for cargo (*i.e.*, hinged above the backlight). The cargo area is not permanently partitioned from the passenger compartment area.

08 Other automobile type

refers to any passenger car that cannot be described by other automobile attributes.

09 Unknown automobile type

is used when it is known that the vehicle is a passenger car, but there is insufficient data to determine the type.

Automobile Derivatives

This describes certain passenger cars that have been modified to perform cargo-related tasks.

10 Auto based pickup

refers to a passenger car based, pickup type vehicle (includes El Camino, Caballero, Ranchero, Brat, and Rabbit pickup). The roof area (and side glass) rearward of the front seats on a station wagon have been removed and converted into a pickup-type cargo box.

11 Auto based panel

refers an automotive station wagon that may have sheet metal rearward of the B-pillar rather than glass (cargo station wagon, auto based ambulance/hearse).

Body Type (cont'd)

Page 6 of 12

12 Large limousine

refers to an automobile that has sections added within its wheelbase (more than four side doors) or stretched chassis to increase length and passenger/cargo carrying capacity .

13 Three-wheel automobile or automobile derivative

refers to three-wheel vehicles with an enclosed passenger compartment.

Utility Vehicles (<=4,536 kgs GVWR)

Multi-purpose vehicles (MPV)

are designed to have off-road capabilities. These vehicles are generally four wheel drive (4 x 4), have increased ground clearance, and are equipped with a strong frame. Four wheel drive automobiles are not considered MPVs.

14 Compact utility

refers to a short wheelbase and narrow tracked multi-purpose vehicle designed to operate in rugged terrain (examples include: 4-Runner, Amigo, Bravada, Bronco [76 and before], Bronco II, Cherokee [84 and after], Defender, Discovery, Dispatcher, Explorer, Geo Tracker, Golden Eagle, Grand Vitara, Jeep CJ-2 - CJ-7, Laredo, Montero, Mountaineer, Navajo, Passport, Pathfinder, Raider,

RAV4, RX-300, Renegade, Rocky, Rodeo, S-10 Blazer, S-15 Jimmy, Samurai, Scrambler, Sidekick, Sportage, Thing, Trooper, Trooper II, Wrangler, Xterra, X-90)

15 Large utility

refers to full-size multi-purpose vehicles primarily designed around a shortened pickup truck chassis. While generally a station wagon style body, some models are equipped with a removable top (examples include: Bronco-full-size [78 and after], full-size Blazer, Expedition, full-size Jimmy, Hummer, Jeep Cherokee [83 and before], Durango, Escalade, Landcruiser, LX450, Navigator, Ramcharger, RangeRover, Scout, Tahoe, Trailduster, Yukon).

16 Utility station wagon

refers primarily to a pickup truck based chassis enlarged to a station wagon (examples include: Chevrolet Suburban, Excursion, GMC Suburban, Travelall, Grand Wagoneer, includes suburban limousine).

19 Utility, unknown body type

is used when it is known that the vehicle is a utility vehicle, but there is insufficient data to determine the specific type. Class of Vehicle is entered as (**Compact utility vehicle**).

Body Type (cont'd)

Page 7 of 12

Van Based Light Trucks (<=4,536 kgs GVWR)

Light trucks (<=4,536 kgs GVWR) are designed to maximize cargo/passenger area versus overall length. Basically a "box on wheels" these vehicles are identifiable by their enclosed cargo/passenger area and relatively short (or non-existent) hood.

20 Minivan

refers to down-sized cargo or passenger vans examples include: Aerostar, Astro, Caravan, Expo Wagon, Grand Caravan, Grand Voyager, Lumina APV, Mazda MPV, Mini-Ram, Mitsubishi Minivan, Nissan Minivan, Odyssey, Previa, Quest, Safari, Sienna, Silhouette, Town and Country, Toyota Minivan, Toyota Van, Trans Sport, Vanagon/Camper, Venture, Villager, Vista, Voyager, Windstar).

21 Large van

refers to a standard cargo or passenger van (examples include: B150-B350, Sportsman, Royal, Maxiwagon, Ram, Tradesman, Voyager [83 and before], E150-E350, Econoline, Clubwagon, Chateau, G10-G30, Chevy Van, Beauville, Sport Van, G15-G35, Rally Van, Vandura). These vans will generally have a larger capacity in both volume and GVWR.

22 Step van or walk-in van (<=4,536 kgs GVWR)

refers to a multi-stop delivery vehicle with a GVWR less than or equal to 4,536 kilograms. Examples are the Grumman LLV used by the US Postal Service or the Aeromate manufactured by Utilimaster Motor Corporation.

23 Van based motorhome (<=4,536 kgs GVWR)

refers to a van where the chassis and cab portions from the B-pillar forward of this vehicle are the same as in attributes minivan, large van, step van, however, a frame mounted recreational unit is added behind the driver/cab area. This attribute takes priority over attributes minivan and large van.

24 Van based school bus (<=4,536 kgs GVWR)

is a passenger van designed to carry students (passengers) to and from educational facilities and/or related functions. The vehicles are characteristically painted yellow and clearly identified as school buses. Use this attribute regardless of whether the vehicle is owned by a school system or a private company. Van based school buses converted for other uses (*e.g.*, church bus) also take this attribute.

25 Van based other bus (<=4,536 kgs GVWR)

is a van derivative (*e.g.*, taxi, small local transit) designed to carry passengers for low occupancy functions or purposes. Van based school buses do not use this attribute.

Body Type (cont'd)

Page 8 of 12

28 Other van type (Hi-Cube Van, Kary)

refers to a cargo or delivery van where that chassis and cab portions from the B-pillar forward of this vehicle are the same as in Minivans and Large Vans with a frame mounted cargo area unit added behind the driver/cab area, or if the van cannot be described as a Minivan, Large Van, Step-van or a Van-based motorhome. Annotate the van type when using this attribute. This attribute takes priority over Minivans and Large Vans.

29 Unknown van type

is used when it is known that this vehicle is a light van, but its specific type cannot be determined.

Light Conventional Trucks (Pickup Style Cab, <=4,536 kgs GVWR)

Light Conventional Trucks are used to describe vehicles commonly referred to as pickup trucks and some of their derivatives. These light trucks are characteristically designed with a small cab containing a single row of seats (extended cabs with additional seats are available for some models), a large hood covering a conventional engine placement, and a separate open box area (approximately 180 to 240 centimeters long) for cargo.

30 Compact pickup

is used to describe a pickup truck having a width of 178 centimeters or less. (examples include: Arrow Pickup [foreign], Colt P/U, Courier, D50, Dakota, Datsun/Nissan Pickup, Frontier, Hombre, LUV, Mazda Pickup, Mitsubishi Pickup, Pup, Ram 50, Ranger, S-10 , S-15, Sonoma, T-10, T-15, Tacoma, Toyota Pickup)

31 Large Pickup

is used to describe a pickup truck having a width of greater than 178 centimeters (examples include: C10-C35, Comanche, D100-D350, F100-F350, Jeep Pickup, K10-K35, R100-R500, R10-R35, Ram Pickup, Sierra, Silverado, T100, V10-V35, W100-W350)

32 Pickup with slide-in camper

is used to describe any pickup truck that is equipped with a slide-in camper. A slide-in camper is a unit that mounts within a pickup bed. Pickup bed caps, tonneau covers, or frame mounted campers are not applicable for this attribute.

33 Convertible pickup

refers to a pickup truck equipped with a removable or retractable roof. To qualify for this attribute, the entire roof must open. Convertible roofs are generally fabric; however, removable hardtops are also included. This attribute takes priority over compact and large pickups.

39 Unknown pickup style light conventional truck

is used when this vehicle is a Light Conventional Trucks, but there is insufficient data to determine the specific attribute.

Body Type (cont'd)

Page 9 of 12

Other Light Trucks (<=4,536 kgs. GVWR)

Other Light Trucks are used to describe vehicles that are based upon a conventional light pickup frame, but a commercial or recreational body has been affixed to the frame rather than a pickup box.

40 Cab chassis based (includes rescue vehicles, light stake, dump, and tow truck) is used to describe a light vehicle with a pickup style cab and a commercial (non-pickup) body attached to the frame. Included are pickup based ambulances and tow trucks.

41 Truck based panel is used to describe a truck based station wagon that has sheet metal rather than glass above the beltline rearward of the B-pillars.

42 Light truck based motorhome (chassis mounted) is used to describe a frame mounted recreational unit attached to a light van or conventional chassis.

45 Other light conventional truck type is used for light conventional trucks that cannot be described elsewhere.

48 Unknown light truck type is used when it is known that the vehicle is a light truck chassis based vehicle but insufficient data exist to specify what type of light truck it is.

49 Unknown light vehicle type (automobile, utility, van, or light truck) is used when it is known that the vehicle is a light vehicle, but insufficient data exists to specify what type of light truck it is.

Buses (Excludes Van Based)

Buses are defined as any medium/heavy motor vehicle designed primarily to transport large groups of passengers.

50 School bus

(designed to carry students, not cross country or transit) is a bus designed to carry passengers to and from educational facilities and/or related functions. The vehicles are characteristically painted yellow and clearly identified as school buses. Use this attribute regardless of whether the vehicle is owned by a school system or a private company. School buses converted for other uses (*e.g.*, church bus) also take this attribute.

58 Other bus type

(*e.g.*, transit, intercity, bus based motorhome) is a transport device designed to carry passengers for longer periods of time. These vehicles may be classified as over-the-road, transit, intercity, bus related motorhome (other than school bus based), or other.

Body Type (cont'd)

Page 10 of 12

59 Unknown bus type

is used when it is known the transport device is a bus but there is insufficient data to choose between attributes School bus and Other bus type.

Medium/Heavy Trucks (> 4,536 kgs GVWR)

Medium/Heavy Trucks describe a single unit truck specifically designed for carrying cargo on the same chassis as the cab.

They pertain to a truck-tractor designed for towing trailers or semi-trailers. Although towing is their primary purpose, some truck-tractors are equipped with cargo areas located rearward of the cab.

60 Step van (> 4,536 kgs GVWR)

defines a single unit enclosed body with a GVWR greater than 4,536 kilograms and an integral driver's compartment and cargo area. Step vans are generally equipped with a folding driver seat mounted on a pedestal and a sliding door for easy ingress/egress.

61 Single unit straight truck (4,536 kgs <=GVWR <= 8,845 kgs)

describes a non-articulated truck designed to carry cargo. The gross vehicle weight rating of the vehicle must exceed 4,536 kilograms and be less than or equal to 8,845 kilograms.

62 Single unit straight truck (8,845 kgs <= GVWR <= 11,793 kgs)

describes a non-articulated truck designed to carry cargo. The gross vehicle weight rating of the vehicle must exceed 8,845 kilograms and be less than or equal to 11,793 kilograms.

63 Single unit straight truck (> 11,793 kgs GVWR)

describes a non-articulated truck designed to transport cargo with a gross vehicle weight rating in excess of 11,793 kilograms. Use this attribute if it is known that the GVWR of a single unit straight

truck is greater than 4,536 kilograms but there is insufficient data to specify the type of single unit truck.

64 Single unit straight truck, GVWR unknown

is used when the transport vehicle is a single unit straight truck but the GVWR is unknown.

65 Medium/heavy truck based motorhome

describes a recreational vehicle mounted on a single unit medium/heavy truck chassis.

67 Truck-tractor with no cargo trailer

describes a fifth wheel equipped tractor/trailer power unit with no trailer attached.

Body Type (cont'd)

Page 11 of 12

68 Truck-tractor pulling one trailer

describes a fifth wheel equipped tractor (*i.e.*, power unit of a tractor/trailer combination) pulling one semi-trailer.

69 Truck-tractor pulling two or more trailers

describes a fifth wheel equipped tractor (*i.e.*, power unit of a tractor/trailer combination) pulling a semi-trailer plus one or more trailers. These additional trailers may be attached with a standard hitch or a converter dolly (for semi-trailers).

70 Truck-tractor (unknown if pulling trailer)

is used when the vehicle is known to be a truck-tractor, but it is unknown if a trailer was being towed or if more than one trailer was being towed.

78 Unknown medium/heavy truck type

is used when the only available information indicates a truck of medium/heavy size.

79 Unknown truck type (light/medium/heavy)

is used when it is known that this vehicle is a truck, but there is insufficient data to classify the vehicle further.

Motorized Cycles (Does Not Include All Terrain Vehicles/Cycles)**80 Motorcycle**

is used when the vehicle is a two-wheeled open (*i.e.*, no enclosed body) vehicle propelled by an internal combustion engine. Motorcycles equipped with a side car also take this attribute.

81 Moped (motorized bicycle)

is used when the vehicle is a motorized bicycle capable of moving either by pedaling or by an internal combustion engine.

82 Three-wheel motorcycle or moped

is used when the vehicle is a three-wheeled open vehicle propelled by an internal combustion engine or a three-wheeled motorized bicycle capable of moving either by pedaling or by an internal combustion engine.

88 Other motored cycle (minibike, motor scooter)

is used when the vehicle in question does not qualify for attributes **Motorcycles, moped, three wheeled motorcycle or moped** (*e.g.*, motor scooter).

89 Unknown motored cycle type

is used when it is known that the vehicle is a motored cycle, but no further data is available.

Body Type (cont'd)

Page 12 of 12

Other Vehicles

Other Vehicles describe all motored vehicles that are designed primarily for off-road use.

90 ATV (All-Terrain Vehicle) and ATC (All-Terrain Cycle)

is used for off-road recreational vehicles which cannot be licensed for use on public roadways. ATVs have 4 or more wheels and ATCs have 2 or 3 wheels. Generally, the tires have low pressure and wide profile (*i.e.*, flotation/balloon).

91 Snowmobile

refers to a vehicle designed to be operated over snow propelled by an internal combustion engine.

92 Farm equipment other than trucks

refers to farming implements other than trucks propelled by an internal combustion engine (*e.g.*, farm tractors, combines, etc.).

93 Construction equipment other than trucks

refers to construction equipment other than trucks propelled by an internal combustion engine (*e.g.*, bulldozer, road grader, etc.).

97 Other vehicle type

is used when the motorized vehicle in question does not qualify for **Construction equipment other than trucks, Farm equipment other than trucks, Snowmobile, ATV (All-Terrain Vehicle) and ATC (All-Terrain Cycle)** (*e.g.*, go-cart, dune buggy, "kit" car, etc.).

Unknown Vehicle Type

Unknown Vehicle Type describes all motored vehicles where the body type cannot be differentiated among a light vehicle type, bus, medium/heavy truck, motored cycle, or any other motored vehicle type.

99 Unknown body type

is used when there is no available information regarding the type of vehicle. This lack of information prohibits the accurate classification of this vehicle within one of the preceding attributes.

[CLASS OF VEHICLE]

Page 1 of 5

Screen Name: Class of Vehicle**SAS Data Set:** N/A**SAS Variable:** N/A**Oracle Name:** *VEHICLE.PICKVEHICLECLASS***Element Attributes:**

Oracle	SAS	
1	1	Subcompact/mini (wheelbase < 254 cm)
2	2	Compact (wheelbase ≥ 254 but < 265 cm)
3	3	Intermediate (wheelbase ≥ 265 but < 278 cm)
4	4	Full size (wheelbase ≥ 278 but < 291 cm)
5	5	Largest (wheelbase ≥ 291 cm)
9	9	Unknown passenger car size
14	14	Compact utility vehicle
15	15	Large utility vehicle (≤ 4,536 kgs GVWR)
16	16	Utility station wagon (≤ 4,536 kgs GVWR)
19	19	Unknown utility type
20	20	Minivan (≤ 4,536 kgs GVWR)
21	21	Large van (≤ 4,536 kgs GVWR)
24	24	Van based school bus (≤ 4,536 kgs GVWR)
28	28	Other van type (≤ 4,536 kgs GVWR)
29	29	Unknown van type (≤ 4,536 kgs GVWR)
30	30	Compact pickup truck (≤ 4,536 kgs GVWR)
31	31	Large pickup truck (≤ 4,536 kgs GVWR)
38	38	Other pickup truck (≤ 4,536 kgs GVWR)
39	39	Unknown pickup truck type (≤ 4,536 kgs GVWR)
45	45	Other light truck (≤ 4,536 kgs GVWR)
48	48	Unknown light truck type (≤ 4,536 kgs GVWR)
49	49	Unknown light vehicle type
50	50	School bus (excludes van based) (> 4,536 kgs GVWR)
58	58	Other bus (> 4,536 kgs GVWR)
59	59	Unknown bus type
60	60	Truck (> 4,536 kgs GVWR)
67	67	Tractor without trailer
68	68	Tractor - trailer(s)
78	78	Unknown medium/heavy truck type
79	79	Unknown light/medium/heavy truck type
80	80	Motored cycle

Class of Vehicle (cont'd)

Page 2 of 5

Oracle	SAS	
90	90	Other vehicle
99	99	Unknown

Source: This variable is derived from application inputs from the GV form/Vehicle and Specifications Tab

Remarks:

The Passenger Car Classification Subcommittee, A3B11(1), of the Transportation Research Board, Traffic Records and Accident Analysis Committee, A3B11, assessed size based on the vehicle wheelbase. The guidelines for this classification can be found in the report entitled Recommended Definitions for Passenger Car Size Classification by Wheelbase and Weight, August 1984 by the previously mentioned subcommittee. This variable is the same variable that appears in the Identification section of the Vehicle Tab on the General Vehicle Form and Vehicle Exterior Form.

Passenger Vehicles

Subcompact/mini (wheelbase < 254 cm)

Choose based upon wheelbase.

Compact (wheelbase \geq 254 but < 265 cm)

Choose based upon wheelbase.

Intermediate (wheelbase \geq 265 but < 278 cm)

Choose based upon wheelbase.

Full size (wheelbase \geq 278 but < 291 cm)

Choose based upon wheelbase.

Largest (wheelbase \geq 291 cm)

Choose based upon wheelbase.

Unknown passenger car size

is used when it is known that a vehicle is a passenger car but the wheelbase is unknown.

Utility Vehicles

Compact utility vehiclerefers to vehicle models defined as **Compact utility** under Body Type. Use this attribute if the size of the utility vehicle is unknown.

Class of vehicle (cont'd)

Page 3 of 5

Large utility vehicle (<= 4,536 kgs GVWR)

refers to vehicle models defined as **Large utility** under Body Type. Refers to full-size multipurpose vehicles primarily designed around a shortened pickup truck chassis. While generally a station wagon body style, some models are equipped with a removable top.

Utility station wagon (<= 4,536 kgs GVWR)

refers to vehicle models defined as **Utility station wagon** under Body Type. Refers primarily to a pickup truck based chassis enlarged to a station wagon.

Unknown Utility type

is defined as **Utility, unknown body type** under Body Type. This attribute is used when it is known that the vehicle is a utility vehicle, but there is insufficient data to determine the specific type.

Van Based Vehicles

Minivan (<= 4536 kgs. GVWR)

Refers to vehicle models defined as **Minivan** under Body Type. Refers to down-sized passenger or cargo vans.

Large van (<= 4536 kgs. GVWR)

Refers vehicle models defined as **Large van** under Body Type. Refers to a standard size cargo or passenger van.

Van based school bus (<= 4,536 kgs GVWR)

is a passenger van designed to carry students (passengers) to and from educational facilities and/or related functions. The vehicles are characteristically painted yellow and clearly identified as school buses. Use this attribute regardless of whether the vehicle is owned by a school system or a private company. Van based school buses converted for other uses (e.g., church bus) also take this attribute refers to vehicles defined as **Van based school bus** under Body Type.

Other van type (<= 4,536 kgs GVWR)

refers to vehicle models defined as Step van or walk-in van, Van based motorhome, Van based other bus and code Other van type under Body Type.

Unknown van type (<= 4,536 kgs GVWR)

is used when it is known that this vehicle is a light van, but its specific type cannot be determined. Refers to vehicles described as **Unknown van type** under Body Type.

Class of vehicle (cont'd)

Page 4 of 5

Pickup Trucks

Compact pickup truck

refers to vehicle models defined as attributes of **Compact pickup truck** in Body Type. Used to describe a pickup truck having a width of 178 centimeters or less.

Large pickup truck

refers to vehicle models defined as **Large pickup truck** under Body Type. Used to describe a pickup truck having a width greater than 178 centimeters.

Other pickup truck (<= 4536 kgs GVWR)

refers to vehicle models defined as **Pickup with slide-in camper** and **Convertible pickup** under Body Type.

Unknown pickup truck (<= 4536 kgs GVWR)

refers to vehicle models defined as **Unknown pickup style light conventional truck type** under Body Type.

Other light truck (<= 4536 kgs GVWR)

refers to vehicle models defined as **Cab, chassis based (includes rescue vehicles, light stake, dump, and tow truck), Truck based panel, Light truck based motorhome (chassis mounted), and Other light conventional truck type** under Body Type.

Unknown light truck type

refers to vehicle models defined as **Unknown light truck type** under Body Type.

Unknown light vehicle type (automobile, utility, van, or light truck)

refers to vehicle models defined as Unknown light vehicle type (automobile, utility, van, or light truck) under Body Type.

Bus

School bus (excludes van based) (> 4536 kgs GVWR)

refers to those vehicle models defined as School bus (designed to carry students, not cross country or transit) under Body Type.

Other bus (>4,536 kgs GVWR)

describes those vehicle models included in Other bus type (e.g., transit, intercity, bus based motorhome) under Body Type.

Unknown bus type

refers to those vehicle models described as **Unknown bus type** under Body Type.

Class of vehicle (cont'd)

Page 5 of 5

Medium/Heavy Truck

Truck (> 4,536 kgs GVWR)

is defined under Body Type, as **Step van (>4,536 kgs GVWR)**, **Single unit straight truck (4,536 kgs < GVWR <= 8,845)**, **Single unit straight truck (8,845 kgs < GVWR <= 11,793)**, **Single unit straight truck (>11,793 kgs GVWR)**, **Single unit straight truck, GVWR unknown** and **Medium/heavy truck based motorhome**.

Tractor without trailer

refers to **Truck-tractor with no cargo trailer** under Body Type.

Tractor-trailer(s)

is defined in attributes **Truck-tractor pulling one trailer**, **Truck-tractor pulling two or more trailers** and **Truck-tractor (unknown if pulling trailer)** under Body Type.

Unknown medium/heavy truck type)

is used when the only available information indicates a truck of medium/heavy size. Refer to **Unknown medium/heavy truck type** under Body Type.

Unknown truck type (light/medium/heavy)

Refers to those vehicles described by **Unknown truck type (light/medium/heavy)** under Body Type.

Motorcycle

Motored cycle

refers to Body Type, **Motorcycle**, **Moped (motorized bicycle)**, **Three-wheel motorcycle or moped**, **Other motored cycle (minibike, motorscooter)** and **Unknown motored cycle type**.

Other vehicle

refers to all vehicles described by **ATV (All-Terrain Vehicle)** and **ATC (All-Terrain Cycle)**, **Snowmobile**, **Farm equipment other than trucks**, or **Other vehicle type** under Body Type.

Unknown

is used when there is a lack of information regarding the type of vehicle. This lack of information prohibits the accurate classification of this vehicle using one of the preceding codes. This attribute is equivalent to Body Type, **Unknown body type**.

VEHICLE IDENTIFICATION NUMBER (VIN)

Screen Name: Identification--Identification Number

SAS Data Set: *GV*

SAS Variable: *VIN*

Oracle Name: *VEHICLE.VIN*

Element Attributes:

[11 character field in SAS]

000000000000000000

Enter the entire or partial VIN, left justify

999999999999999999.

000000000000 VIN not required on vehicle

Source: Primary source is vehicle inspection; a secondary source is the police report.

Remarks:

If a vehicle is inspected, the VIN must be obtained from the vehicle. The PAR may be used to obtain a VIN when a vehicle inspection is not obtained (*i.e.*, non-tow CDS applicable *and* WinSMASH is not applicable; or Body Category, equals **Buses, Medium/Heavy Trucks, Motorcycles, or Other Vehicles.**

Enter the entire VIN; leave "**blank**" any column which does not have a VIN character. If part of the VIN is missing or not decipherable, leave the missing or decipherable column blank. Use VIN Assist to check the VIN. Additionally, in NASSMAIN the VIN can be checked on the GV Form by going to *Process / VIN Check Routine.*

000000000000000000

enter a "0" in each position for vehicles not required to have a VIN (e.g., go cart).

999999999999999999

if the entire VIN is unknown, or missing enter a "9" in each position.

If the vehicle is a motor home or school bus, the vehicle chassis VIN is coded and the secondary manufacturer's number should be annotated if indicated on the PAR.

Vehicle Identification Number (cont'd)

Page 2 of 2

If the vehicle is manufactured by the Ford Motor Company (prior to 1980) and the VIN begins or ends with a script, "f", the "f" is not entered. Proceed to the next character, as in the example below.

VIN: *f*3 U 6 2 S 1 0 0 9 3 2 *f*
CODE: 3 U 6 2 S 1 0 0 9 3 2

In addition, if any hyphens, periods, or blank spaces are contained in the string of alphanumeric characters, ignore them as in the example below.

VIN: S M - E 3 0 7 6 4 2 1
CODE: S M E 3 0 7 6 4 2 1

VEHICLE SPECIAL USE

Page 1 of 3

Screen Name: Vehicle Special Use

SAS Data Set: *GV*SAS Variable: *VEHUSE*Oracle Name: *VEHICLEPRECRASH.PICKSPECIALUSE*

Element Attribute:

Oracle	SAS	
0	0	No special use
1	1	Taxi
2	2	Vehicle used as school bus
3	3	Vehicle used as other bus
4	4	Military
5	5	Police
6	6	Ambulance
		Fire Truck
		Emergency Services Vehicle
9	9	Unknown

Source: Researcher determined; primary source is the police report; secondary sources include vehicle inspection, and interviewees.

Remarks:**No special use**

is used when no source indicates or implies that this vehicle was applicable to any of the special uses listed below.

Taxi, Vehicle used as school bus, and Vehicle used as other bus

are "*this trip*" specific. The vehicle must be "on duty" as either a taxi or as a bus. External identification on the vehicle as a bus or taxi is not sufficient to determine its special use.

Taxi

is used when this vehicle was being used during this trip (at the time of the crash) on a "fee-for-hire" basis to transport persons. Most of these vehicles will be marked and formally registered as taxis; however, vehicles which are used as taxis, even though they are not registered (*e.g.*, "Gypsy Cabs"), are included here. *Taxis and drivers which are off-duty* at the time of the crash *are not included*.

Vehicle used as school bus

is used if this motor vehicle (**Body Type**, need not equal **School Bus**) satisfies all of the following criteria:

- externally identifiable to other traffic units as a school/pupil transport vehicle. The vehicle may be equipped with flashing lights and/or a sway stop arm, and traffic may be required to stop for the vehicle when occupants enter or exit;
- operated, leased, owned, or contracted by a public or private school-type institution;
- whose occupants, if any, are associated with the institution; and,
- the vehicle is in operation at the time of the crash to and from the school or on a school-sponsored activity or trip.

Vehicle used as other bus

is used when this motor vehicle is designed for transporting more than ten persons and does not satisfy all of the above criteria of a school bus.

Military, Police, Ambulance, and Fire truck or car

are considered to be in use at all times. Special use means "**in use**" and not necessarily emergency use. External identification to the normal driving public is the sole criterion.

Military

is used for any vehicle which is owned by any of the Armed Forces regardless of body type. This attribute includes:

- military police vehicles;
- military ambulances;
- military hearses; and
- military fire vehicles

Police

refers to a vehicle equipped with police emergency devices (lights and siren) that is owned or subsidized by any local, county, state or federal government entity. The police vehicle is presumed to be in special use at all times, although not necessarily in "emergency use." Vehicles not owned by a government entity that are used by law enforcement officers (e.g. undercover) are excluded.

Ambulance

is used for any readily identifiable (lights or markings) vehicles designed to transport sick or injured persons. The ambulance is presumed to be in special use at all times, although not necessarily in "emergency use."

Fire truck

is used for any readily identifiable (lights or markings) vehicles specially designed and equipped to respond to fire, hazmat, medical, and extrication incidents. This attribute includes medium and heavy vehicles such as engines, pumpers, ladder, platform aerial apparatus, heavy rescue vehicles, water tenders or tankers, brush or wilderness firefighting vehicles, etc. Privately owned vehicles, which are not in authorized use, even if equipped with lights, do not qualify (the volunteer firefighter's vehicle).

Emergency Services Vehicle

is used for any readily identifiable (lights or markings) vehicles that do not meet the criteria for Ambulance or Fire Truck and are specially designed and equipped to respond to fire, hazmat, medical, and extrication incidents. This attribute includes light vehicles such as sedans, vans, SUVs, pick-ups, trucks, motorcycles, etc. Privately owned vehicles, which are not in authorized use, even if equipped with lights, do not qualify (the volunteer firefighter's vehicle).

Unknown

is used when no information is available to determine special use for this trip (e.g., a hit-and-run vehicle).

TRANSPORT STATUS

Screen Name: Transport Status?
SAS Data Set: *GV*
SAS Variable: *TRANSTAT*
Oracle Name: *VEHICLE.INTRANSPORT*

Element Attributes:

Oracle	SAS	
1	1	In Transport
0	2	Not in transport
2	3	Working vehicle

Range:

Source: Researcher determined

Remarks:

This is researcher determined and may not necessarily agree with the police report.

If the PAR has conflicting information regarding the vehicle’s transport status, assume the vehicle is in-transport. For example: If the coded box indicates the vehicle was legally parked but the narrative states the vehicle was illegally parked, then consider this vehicle as in-transport.

If there is any doubt as to whether the vehicle is in-transport, notify your Zone Center immediately.

If the PAR is unclear whether the motor vehicle is actually in the act of performing work at the time of the crash, the default is to consider the motor vehicle as **not** working. Careful attention must be taken to review the narrative, diagram and coded boxes, for an accurate determination.

In Transport

Is selected when it is determined that the vehicle is in-transport. This means the vehicle is in motion on a Trafficway or any part of the vehicle is within the boundaries of the roadway.

Examples of In Transport vehicles seen in NASS:

1. A police vehicle used to indicate the roadway is closed due to a previous crash or the roadway is impassable because of a pothole or a tree fell across the roadway is

Transport Status (cont'd)

Page 2 of 3

considered to be in transport. The portion of the roadway past the police vehicle is considered to be closed; that is, outside the trafficway.

2. A cement truck depositing its load for a homeowner's driveway or walkway.
3. Friendly neighbor using his pickup truck to plow the roadway in their neighborhood.
4. A passenger vehicle located partially on the roadway and the shoulder.

Not In-Transport

Is selected when it is determined that the vehicle is not in-transport. Not in-transport vehicles are defined as:

1. Stationary vehicles outside the boundaries of the roadway.
2. Vehicles in motion outside the trafficway.

Examples of Not In-Transport Vehicles:

1. Lawn service truck spraying fertilizer, etc across homeowner's lawn.
2. Disabled passenger car pulled onto shoulder of roadway.
3. Minivan parked on the street during the hours parking is allowed.
4. Tractor plowing the corn field loses control and strikes the barn.

Working Vehicle

Is selected when it is determined that the vehicle was in the act of performing highway construction, maintenance or utility work when it became involved in the crash. This "work" may be located within or outside the trafficway boundaries, including portions of the trafficway closed for construction. This code does not include private construction/maintenance vehicles, or vehicles such as garbage trucks, delivery trucks, taxis, emergency vehicles, tow trucks, etc.

Examples of Working Vehicles include:

1. Steam roller working in a highway construction zone.
2. State highway maintenance crew mowing grass on the roadside.
3. Utility truck performing maintenance on the power lines along the roadway.
4. Highway maintenance vehicle removing ice/snow from the roadway.
5. Private contractor plowing ice/snow from the roadway.
6. Street sweeper sweeping the street.
7. Truck with cherry picker maintaining a traffic signal.
8. Maintenance vehicle painting lane lines on the road. Includes vehicle traveling behind with light(s) flashing.
9. Highway maintenance vehicle performing non-routine work. This includes repairing potholes, removing debris from the roadway, mowing grass in the median, etc.
10. Police vehicles re-directing traffic at a work zone. That is, the police vehicle is stopped across the lane(s) of traffic indicating a work zone is ahead.
11. Private contractor paving the roadway.

Working vehicles do not include personal motor vehicles performing a “neighborly” activity (such as plowing the neighborhood streets). Additionally, vehicles not specifically contracted to AND in the act of performing highway construction, maintenance or utility work are excluded.

When the vehicle is not in the act of performing “work” and involved in a crash, these highway construction, maintenance or utility vehicles are not working vehicles and can be:

1. In-transport when in motion or stopped on a roadway; or
2. Not in-transport when stopped off the roadway.

Examples:

Example #1: A vehicle removing ice/snow from the roadway is involved in a crash with a motor vehicle off the roadway. Does this crash qualify for NASS?

Answer: The vehicle is considered to be a working vehicle and therefore, not in-transport. The motor vehicle off the roadway is also considered to be not in-transport. Therefore, this crash does not qualify for the NASS.

Example #2: A highway maintenance vehicle is removing ice/snow from the roadway and strikes and kills a pedestrian. Does this crash qualify for NASS?

Answer: This crash does not qualify because the highway maintenance vehicle is considered a working motor vehicle and by definition is not in-transport as it was doing work at the time of the incident.

Example #3: A highway maintenance vehicle removing ice/snow from the roadway strikes a passenger vehicle also traveling on the roadway. The passenger vehicle sustains disabling damage and was towed from the scene of the crash. Does this crash qualify for NASS?

Answer: This crash qualifies because the passenger vehicle was in-transport and towed due to damage. This is a single vehicle crash.

Example #4: A passenger vehicle traveling along the roadway loses control and strikes a tractor plowing the corn field. Does this qualify for NASS?

Answer: This crash does indeed qualify for NASS. This is a single vehicle crash where the only vehicle involved in the crash is the passenger vehicle.

CURB WEIGHT

Screen Name: Weight--Curb Weight

SAS Data Set: *VEHSPEC*

SAS Variable: *CURBWGT*

Oracle Name: *VEHICLE.CURBWEIGHT*

Element Attributes:

999999 Curb weight of vehicle (kgs)
Unknown

Range: 450 – 100,000

Source: Researcher determined

Remarks:

Enter this vehicle's curb weight.

Do not confuse the rated Gross Vehicle Weight Rating (GVWR) with the curb weight since it is likely to be significantly greater than the curb weight.

"Vehicle" is defined in this variable to mean the same vehicle identified under **Body Type**.

If the **vehicle model** is known, but the engine size is unknown (*e.g.*, 6 or 8 cylinders), code the average between the high and low curb weights for the model and annotate that the "average" was reported.

When the vehicle specifications do not report the vehicle weight with the proper engine size, adjustments must be made. First, try to determine the weight differences from the vehicle specifications. If the weight difference cannot be determined from the specifications, then adjust as follows: 8 cyl. to 6 cyl. - subtract 100 lbs/45 kilograms; 6 cyl. to 4 cyl. - subtract 75 lbs/34 kilograms.

Add 100 lbs/45 kilograms to the shipping weight to obtain a curb weight on all CDS applicable vehicles.

Towed trailing units are considered cargo weight and not included in the vehicle curb weight

Unknown

is selected when the curb weight of this vehicle cannot be determined.

SOURCE OF CURB WEIGHT INFORMATION

Page 1 of 2

Screen Name: Curb Weight Source**SAS Data Set:** *VEHSPEC***SAS Variable:** *CURBSRC***Oracle Name:** *VEHICLE.PICKCURBWTSOURCE***Element Attributes:**

Oracle	SAS	
9999	0	[Curb weight unknown]
1	1	AAMA
2	2	Automotive News
3	3	Branham Automobile Reference Book
4	4	Gasoline Truck, Import, Truck and Diesel Truck Index
6	5	Canadian Specifications
5	8	Other (specify)

Source: See Remarks**Remarks:**

If the specification is not available in the sources listed below, then the automated Canadian specifications may be used for this variable.

If no other information is available, data from brochures obtained from vehicle dealers may be used. In addition, manufacturer on-line specifications and internet resources, such as, carsdirect.com or Edmunds.com maybe used with Zone Center approval. This will be entered under the “**Other**” attribute. This should then be listed in the “**Specify**” field.

Annotate the source used in the space provided on the General Vehicle Form/Vehicle tab for this variable.

The sources for obtaining curb weight information are listed below:

Passenger Vehicle Specifications

**American Automobile Manufacturers Association (AAMA)
of the U.S., Inc.**
300 New Center Building
Detroit, Michigan 48202

Source of Curb Weight Information (cont'd)

Page 2 of 2

Automotive News

Crain Automotive Group, Inc.

965 East Jefferson Avenue

Detroit, Michigan 48207

Branham Automobile Reference Book

Branham Publishing Company

Post Office Box 1948

Santa Monica, California 90406-1948

*Gasoline Truck Index, Import Truck Index, and
Diesel Truck Index*

Truck Index, Inc.

Post Office Box 10291

Santa Anna, California 92711

CARGO WEIGHT

Screen Name: Weight--Cargo Weight

SAS Data Set: *GV*

SAS Variable: *CARGOWGT*

Oracle Name: *VEHICLE.CARGOWEIGHT*

Element Attributes:

Oracle	SAS	
		Cargo weight of vehicle (kgs)
	8888	[Non CDS vehicle]
-9999	9999	Unknown

Source: Researcher determined — inputs include Vehicle Inspection, Interview, PAR, Tow Yard Operator

Remarks:

If Towed Trailing Unit, is Yes – towed trailing unit, then the weight of the trailer and its cargo is coded here. Cargo may also be located in the passenger compartment area and/or trunk.

If there is no cargo then enter the value as zero.

Do not include the weight of the occupants in the cargo weight. The weight of the occupants is included (along with cargo and vehicle curb weight) as a component of the single value which represents the vehicle’s combined weight in the integrated WinSMASH Program, if used.

Cargo weight includes optional add on equipment. The cumulative total of cargo weight that exceeds 100 lbs. is coded here. Examples are as follows:

Includes:

- Tools and tool box(es)
- Construction equipment
- Lumber
- Luggage

Excludes:

- Weight of occupants

Unknown

is selected if the cargo weight is unknown or if it is unknown if there is cargo in the vehicle.

SOURCE OF CARGO WEIGHT INFORMATION

Screen Name: Weight--Cargo Weight Source

SAS Data Set: *GV*

SAS Variable: *CARGOSRC*

Oracle Name: *VEHICLE.PICKCARGOWTSOURCE*

Element Attributes:

Oracle	SAS	
-9999	0	[Cargo weight unknown]
1	1	Vehicle Inspection
2	2	Interview
3	3	PAR
4	4	Tow Yard Operator
-8887	7	[Non CDS vehicle]
5	8	Other (specify)

Source: Researcher determined

Remarks:

This reports the source from which the cargo weight was obtained.

INSPECTION TYPE

Page 1 of 2

Screen Name: Inspection - Type of Inspection

SAS Data Set: *GV*

SAS Variable: *INSPTYPE*

Oracle Name: *VEHCILECRASH.PICKINSPECTIONTYPE*

Element Attributes:

Oracle	SAS	
1	0	No inspection
2	1	Vehicle fully repaired — no damage evident
7	2	Partial inspection-Non tow
3	3	Partial inspection-other (specify)
5	5	Partial inspection-Photos only
4	4	Complete inspection
8	8	[Non CDS vehicle]

Source: Researcher determined.

This variable is designed to allow users to identify cases with complete documentation of required damage data (exterior and interior).

No inspection

is selected when neither a complete nor a partial inspection of this vehicle was obtained, irrespective of the reason (*e.g.*, refusal, not required, etc.)

Vehicle fully repaired — no damage evident

is selected when a vehicle is inspected, but is completely repaired and no exterior or interior damage data is available.

Partial Inspection-Non Tow

is used when the vehicle is a non-towed CDS applicable vehicle and a complete exterior inspection was obtained.

Partial inspection-Other (Specify)

is selected when any significant aspect of the inspection is not completed. This includes inspection of partially repaired vehicles. This attribute is not used for non-towed CDS applicable vehicles where a complete exterior inspection was obtained. The reason for the partial inspection must be annotated in the “Specify” box.

Inspection Type (cont'd)

Page 2 of 2

If the vehicle interior is completely burned out and restraint use cannot be determined then **Partial Inspection** should be selected.

If the vehicle is older than 10 model years, use this attribute and specify. If the model year can not be determined consider the model year as less than 10 years old.

Partial inspection-Photos only

is selected when outside source photographs are used. For further information refer to the CDS Digital Photography Guidelines Manual.

Complete inspection

is selected when both the exterior and the interior of the unrepaired vehicle were inspected and all applicable measurements and photographs were obtained.

DATE OF INSPECTION

Screen Name: Inspection-Date of Inspection

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *VEHICLECRASH.INSPECTIONDATE*

Element Attributes:

Date that vehicle was inspected

Source: Researcher determined.

Remarks:

The inspection date is the date when a majority of the inspection is complete. This does not count unsuccessful attempts to locate the vehicle.

SPECIFICATIONS

General Vehicle Form, Case 2007-8701-009K/ Vehicle #1

VEHICLE **SPECIFICATIONS** OFFICIAL RECORDS PRECRASH DRIVER ROLLOVER RECONSTRUCTION DE

TOYOTA CAMRY 2007

Original Specifications

Wheelbase	<input type="text" value="254"/>	cms	Front Overhang	<input type="text" value="28"/>	cms
Overall Length	<input type="text" value="254"/>	cms	Rear Overhang	<input type="text" value="28"/>	cms
Maximum Width	<input type="text" value="254"/>	cms	Undeformed End Width	<input type="text" value="111"/>	cms
Curb Weight	<input type="text" value="907"/>	kgs	Engine	<input type="text"/>	
Average Track	<input type="text" value="123"/>	cms	Cylinders	<input type="text"/>	
			Displacement	<input type="text" value="3"/>	L

Transmission

Type Of Transmission Drive Wheels

Researcher's Assessment of Vehicle Disposition

Justification

Is This a Multi-Stage Manufactured Vehicle And/Or A Certified Altered Vehicle

Suspected Modifications:

WHEELBASE

Page 1 of 2

Screen Name: Original Specifications—Wheelbase**SAS Data Set:** *VEHSPEC***SAS Variable:** *WHEELBAS***Oracle Name:** *VEHICLE.WHEELBASE***Element Attributes:**

Oracle	SAS	
-9999	999	Enter to the nearest centimeter. Unknown

Range: 100 – 650 cms**Source:** Vehicle specifications, exemplar vehicle**Remarks:**

The coding of this variable reflects the length of the vehicle's original or undamaged wheelbase to the nearest centimeter.

If the specification is not available in the sources listed below, then the automated Canadian specifications may be used for this variable.

If no other information is available, data from brochures obtained from vehicle dealers may be used. In addition, manufacturer on-line specifications and internet resources, such as, carsdirect.com or Edmunds.com maybe used with Zone Center approval.

The sources for obtaining curb wheelbase information are listed below:

*Passenger Vehicle Specifications***American Automobile Manufacturers Association (AAMA)
of the U.S., Inc.**

300 New Center Building
Detroit, Michigan 48202

The wheelbase dimension is obtained from source materials and not from vehicle measurements. If written vehicle specifications cannot be found, after consultation of the zone center, the researcher may take the measurements from an exemplar vehicle.

Wheelbase (cont'd)

Page 2 of 2

Automotive News

Crain Automotive Group, Inc.

965 East Jefferson Avenue

Detroit, Michigan 48207

Branham Automobile Reference Book

Branham Publishing Company

Post Office Box 1948

Santa Monica, California 90406-1948

*Gasoline Truck Index, Import Truck Index, and
Diesel Truck Index*

Truck Index, Inc.

Post Office Box 10291

Santa Anna, California 92711

Unknown

is used when this vehicle's original wheelbase cannot be determined.

OVERALL LENGTH

Screen Name: Original Specifications—Overall Length

SAS Data Set: *VEHSPEC*

SAS Variable: *OVERALL*

Oracle Name: *VEHICLE.OVERALLLENGTH*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-9999	9999	Unknown

Range: 100 – 850 cms

Source: Vehicle specifications, exemplar vehicle

Remarks:

Enter the overall length of the vehicle, as determined from source materials, to the nearest centimeter.

Any add-on equipment is excluded from the overall length of the vehicle (i.e., a pick-up with an after-market bumper added).

Unknown

is used when this vehicle's original overall length cannot be determined.

MAXIMUM WIDTH

Screen Name: Original Specifications—Maximum Width

SAS Data Set: *VEHSPEC*

SAS Variable: *MAXWIDTH*

Oracle Name: *VEHICLE.MAXWIDTH*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-9999	999	Unknown

Range: 100 – 350 cms

Source: Vehicle specifications, exemplar vehicle

Remarks:

Enter the overall/maximum width of the vehicle, as determined from source materials, to the nearest centimeter.

Unknown

is used when this vehicle's original overall width cannot be determined.

CURB WEIGHT

Screen Name: Original Specifications—Curb Weight

SAS Data Set: *VEHSPEC*

SAS Variable: *CURBWGT*

Oracle Name: *VEHICLE.CURBWEIGHT*

Element Attributes:

Oracle	SAS	
		Curb weight of vehicle (kgs)
-9999	999999	Unknown

Range: 450 – 6,500

Source: Researcher determined

Remarks:

Enter this vehicle's curb weight.

Do not confuse the rated Gross Vehicle Weight Rating (GVWR) with the curb weight since it is likely to be significantly greater than the curb weight.

"Vehicle" is defined in this variable to mean the same vehicle identified under Body Type.

If the vehicle model is known, but the engine size is unknown (*e.g.*, 6 or 8 cylinders), code the average between the high and low curb weights for the model and annotate that the "average" was reported.

When the vehicle specifications do not report the vehicle weight with the proper engine size, adjustments must be made. First, try to determine the weight differences from the vehicle specifications. If the weight difference cannot be determined from the specifications, then adjust as follows: 8 cyl. to 6 cyl. - subtract 100 lbs/45 kilograms; 6 cyl. to 4 cyl. - subtract 75 lbs/34 kilograms.

If a source material reports "shipping weight" add 100lb/45 kilograms to obtain a curb weight on all CDS applicable vehicles.

Towed trailing units are considered cargo weight and not included in the vehicle curb weight.

Unknown

is entered when the curb weight of this vehicle cannot be determined.

AVERAGE TRACK WIDTH

Screen Name: Original Specifications—Average Track

SAS Data Set: *VEHSPEC*

SAS Variable: *ORIGAVTW*

Oracle Name: *VEHICLE.AVGTRACK*

Element Attributes:

Oracle	SAS	
		Code to the nearest centimeter
-9999	999	Unknown

Range: 100-200, 999

Source: Vehicle specifications, undamaged measurements

Remarks:

Enter the average track width of the vehicle to the nearest centimeter.

If vehicle specifications cannot be obtained, and there are no post manufacture modifications, and there is no significant damage to the axles, then you can get the value from the case vehicle. Measure both undamaged track widths on the vehicle and record the average.

If an axle is damaged such that an average value cannot be determined, use the measurement of the undamaged axle as the average encoded value.

If both axles are significantly damaged record the value from an exemplar vehicle.

If the vehicle is equipped with dual rear wheels (*i.e.*, some full-size pickup trucks) the track width is measured from the center of the space between the wheels on both sides.

Unknown

is used in the following situations:

- The axles are significantly damaged and there are no specifications available for this vehicle, and an exemplar vehicle was not measured.
- The axle is significantly damaged *and* there were post-manufacture modifications that would alter the track width.
- The measurements were not obtained from this vehicle or an exemplar vehicle and there are no specifications available.

FRONT OVERHANG

Screen Name: Original Specifications—Front Overhang

SAS Data Set: *VEHSPEC*

SAS Variable: *FTOVHANG*

Oracle Name: *VEHICLE.FRONTOVERHANG*

Element Attributes:

Oracle	SAS	
		Code to the nearest centimeter
-9999	999	Unknown

Range: 25-150, 999

Source: Vehicle specifications, undamaged measurements or an exemplar vehicle

Remarks:

Enter the front overhang, as determined from source materials, of the vehicle to the nearest centimeter.

NOTE: the researcher should record, on the sketch page, the front and rear stringline measurements. These measurements will closely represent the original overhang measurements provided a reference line was established and the axles were not moved.

This measurement is required for all end impacts. If it is a side impact and the front overhang is not available use **Unknown**.

Unknown

is used in the following situations:

- The axles are significantly damaged and there are no specifications available for this vehicle, and an exemplar vehicle was not measured.
- The axle is significantly damaged *and* there were post-manufacture modifications that would alter the front overhang.
- The measurements were not obtained from this vehicle or an exemplar vehicle and there are no specifications available.

REAR OVERHANG

Screen Name: Original Specifications—Rear Overhang

SAS Data Set: *VEHSPEC*

SAS Variable: *RROVHANG*

Oracle Name: *VEHICLE.REAROVERHANG*

Element Attributes:

Oracle	SAS	
		Code to the nearest centimeter
-9999	999	Unknown

Range: 25-200, 999

Source: Vehicle specifications, undamaged measurements or an exemplar vehicle.

Remarks:

Enter the rear overhang, as determined from source materials, of the vehicle to the nearest centimeter.

NOTE: the researcher should record, on the sketch page, the front and rear stringline measurements. These measurements will closely represent the original overhang measurements provided a reference line was established and the axles were not moved.

Unknown

is used in the following situations:

- The axles are significantly damaged and there are no specifications available for this vehicle, and an exemplar vehicle was not measured.
- The axle is significantly damaged *and* there were post-manufacture modifications that would alter the rear overhang.
- The measurements were not obtained from this vehicle or an exemplar vehicle and there are no specifications available.

UNDEFORMED END WIDTH

Screen Name: Original Specifications—Undeformed End Width

SAS Data Set: *VEHSPEC*

SAS Variable: *UNENDW*

Oracle Name: *VEHICLE.ENDWIDTH*

Element Attributes:

Oracle	SAS	
		Code to the nearest centimeter
-9999	999	Unknown

Range: 100-250, 999

Source: Vehicle inspection, or an exemplar vehicle

Remarks:

The undeformed end width is the undamaged dimension of the contacted end plane measured between the apex of both bumper corners.

Unknown

If the vehicle cannot be directly measured and an exemplar vehicle cannot be found, then enter unknown.

ENGINE CYLINDERS

Screen Name: Original Specifications—Engine Cylinders

SAS Data Set: *VEHSPEC*

SAS Variable: *ENGCYL*

Oracle Name: *VEHICLE.CYLINDERS*

Element Attributes:

Oracle	SAS	
		Code the number of cylinders
-9999	99	Unknown

Range: 1-14, 99

Source: Vehicle inspection, specifications, VIN

Remarks:

The coding of this variable reflects the number of cylinders in the vehicle. The information can be found in vehicle specifications. It may also be found in owner's manuals.

Unknown

If the number of engine cylinders cannot be determined, then enter unknown.

ENGINE DISPLACEMENT

Screen Name: Original Specifications—Engine Displacement

SAS Data Set: *VEHSPEC*

SAS Variable: *ENGDISP*

Oracle Name: *VEHICLE.ENGINEL*

Element Attributes:

Oracle	SAS	
		Code to the nearest tenth of a liter
-9999	99	Unknown

Range: 0-10, 99

Source: Vehicle inspection, specifications, VIN

Remarks:

The coding of this variable reflects the vehicle's engine displacement. The information can be found in vehicle specifications. It may also be found in owner's manuals, or from the vehicle inspection.

Enter the vehicle's engine displacement. It is recorded to the nearest tenth of a liter.

Unknown

If the displacement cannot be determined, then enter unknown.

TYPE OF TRANSMISSION

Screen Name: Type of Transmission

SAS Data Set: *VEHSPEC*

SAS Variable: *TRANS*

Oracle Name: *VEHICLE.PICKTRANSMISSIONCODE*

Element Attributes:

Oracle	SAS	
1	1	Manual
2	2	Automatic
3	9	Unknown

Source: Vehicle inspection

Remarks:

The coding of this variable reflects the type of transmission that is in the vehicle.
This variable is being collected for use in modifying input to the WINSMASH computer program.

Manual

The vehicle has a manual transmission.

Automatic

The vehicle has an automatic transmission.

Unknown

It cannot be determined what type of transmission is in the vehicle.

DRIVE WHEELS

Screen Name: Drive Wheels

SAS Data Set: *VEHSPEC*

SAS Variable: *DRIVE*

Oracle Name: *VEHICLE.PICKDRIVEWHEELSCODE*

Element Attributes:

Oracle	SAS	
1	1	Front Wheel Drive
2	2	Rear Wheel Drive
3	3	Four Wheel Drive
4	4	All Wheel Drive
5	9	Unknown

Source: Vehicle inspection

Remarks:

The coding of this variable reflects the type of drive wheels power the vehicle. This variable is being collected for use in modifying input to the WINSMASH computer program.

Front Wheel Drive

In a front-wheel drive vehicle, power from the engine is transferred to the front tires.

Rear Wheel Drive

In a rear-wheel drive vehicle, power from the engine is transferred to the rear tires.

4 Wheel Drive

In a four-wheel drive vehicle, power is delivered to all four wheels only when the driver requests it.

All Wheel Drive

In an all-wheel drive vehicle, power is distributed to all four of the vehicle's tires, all of the time.

Unknown

Use this when it cannot be determined what type of drive wheels power the vehicle.

RESEARCHER'S ASSESSMENT OF VEHICLE DISPOSITION

Screen Name: Researcher's Assessment of Vehicle Disposition

SAS Data Set: *GV*

SAS Variable: *TOWRES*

Oracle Name: *VEHICLE.PICKRESEARCHVEHDISPOSITION*

Element Attributes:

Oracle	SAS	
0	0	Not towed due to vehicle damage
1	1	Towed due to vehicle damage
N/A	7	Vehicle not inspected
9	9	Unknown
-8	8	Not a CDS vehicle [Not inspected]

Source: Primary source is the vehicle inspection; secondary source is interviewee(s).

Remarks:

Determine this variable based on vehicle inspection (which is supplemented by interview data for a repaired vehicle). **Under no circumstance should the PAR be used as a source for coding this variable.** "Towing" is defined identically to the definition in variable **Police Reported-Vehicle Disposition** (*i.e.*, towing must be a result of event-related disabling damage; towing must occur directly from the scene, etc.). A gray area exists, however, when attempting to define the term "disabling damage".

Determine the severity of the damage during the vehicle's inspection. Not towed due to vehicle damage if the damage is "**minor**" (*i.e.*, minor mechanical repairs *could* have been completed at the scene). "**Minor mechanical repairs**" refers to items such as: replacing headlights or taillights, changing tires, pulling sheet metal away which may be restricting a wheel, etc.

NOTE: These repairs need not have been completed at the scene. They are merely examples of situations which do *not* require the vehicle to be categorized "disabled" for the NASS CDS study.

Not towed due to vehicle damage

when the vehicle was driven from the scene, or when the vehicle was unnecessarily towed from the scene (*i.e.*, could have been driven).

Towed due to vehicle damage

when the vehicle sustained damage from the crash such that towing was required.

Unknown

when the vehicle was towed from the scene but the reason for the towing cannot be determined.

JUSTIFICATION FOR RESEARCHER'S ASSESSMENT OF VEHICLE DISPOSITION

Screen Name: Researcher's Assessment of Vehicle Disposition Justification

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *VEHICLE.SOURCEVEHICLEDISPOSITION*

Element Attributes:

Enter justification for tow status
[Not inspected]

Source: Primary source is the vehicle inspection; secondary source is interviewee(s).

Remarks:

Indicate the specific reason for the determination that the vehicle was or was not towed. Proper responses for a towed vehicle would include: severe damage, restricted tires, radiator involvement, passenger compartment intrusion, broken suspension assembly, etc. A vehicle found to be "not towed due to damage" might have responses such as: broken headlights require tow, tire flat, or minor bumper damage.

NOTE: "Vehicle Inspection" is the source of data and should not be entered here.

When there is a conflict between Police reported tow status and the researcher's assessment of tow status, include the reason for the choice. For example, a researcher selects Not towed due to vehicle damage and provides the following annotation: "The vehicle received only broken headlights in the collision; police required that the vehicle be towed".

MULTI-STAGE OR ALTERED VEHICLE

Page 1 of 3

Screen Name: Is This a Multi-Stage Manufactured Vehicle And/Or A Certified Altered Vehicle?

SAS Data Set: *VEHSPEC*

SAS Variable: *ALTVEH*

Oracle Name: *VEHICLE.MANUFACTURERCERTMODS*

Element Attributes:

Oracle	SAS	
1	0	No post manufacturer modifications
2	1	Yes-post manufacturer modifications (specify)
9	9	Unknown if vehicle is modified
-8	8	[Not inspected]

Source: Vehicle Inspection.

Remarks:

Under the "Code of Federal Regulations, Title 49 - Transportation" Chapter V Part 567, Sections 567.5 and 567.7, a label certifying compliance with all Federal Motor Vehicle Safety Standards must be affixed to a multi-stage manufactured vehicle or altered (post manufactured) vehicle.

A multi-stage manufactured vehicle will generally begin as a chassis-cab (incomplete vehicle) and subsequently end up in final-stage as a pickup based utility truck (dump truck, flat bed, stake body, tow truck, etc.) or a van derivative (*i.e.*, van conversion, Hi-cube, motor home, etc.).

Altered vehicles will generally involve a major modification of basic components such as suspension, frame, power plants, etc., with work generally performed by a recognized auto body shop. The lengthening of a standard automobile chassis to create a limousine would be one example of the type of alteration which would qualify for certification.

To determine if the vehicle qualifies, locate the certification label which should include one of the following statements:

Multi-stage vehicle

Incomplete manufactured vehicle (chassis-cab) certification label should include the statement: "**CHASSIS-CAB MANUFACTURED BY**" or "**CHASSIS-CAB MFD. BY**".

Intermediate manufactured vehicle certification label should have the following statement: "**INTERMEDIATE MANUFACTURED BY**" or "**INTERMEDIATE MFD. BY**".

inal manufactured vehicle certification label should have the following statements:

"MANUFACTURED BY" or "MFD. BY" and "INCOMPLETE VEHICLE MANUFACTURED BY" or "INC VEH MFD. BY".

Altered vehicle

An altered vehicle certification label should include the statement: **"This vehicle was altered by (individual or corporate name) in (month and year in which alterations were completed) and as altered it conforms to all applicable Federal Motor Vehicle Safety Standards affected by the alteration and in effect in (month, year).**

These labels are generally affixed in one of the following areas on the driver's side of the vehicle:

- hinge pillar
- door-latch post
- door edge that meets the door-latch post
- left side of the instrument panel
- inward-facing surface of driver's door

No post manufacturer modifications

is used when this vehicle was a full-line manufactured vehicle. Full-line is interpreted as a vehicle that is completely assembled at the end of a plant assembly line of its original manufacturer. This would include vehicles which only require cosmetic additions such as additional paint, mirrors, wheels, etc., to be customer ready.

Yes — post manufacturer modifications

is used for multi-stage vehicles and/or altered certified vehicles. This includes vehicles which were in various stages of completion (*i.e.*, incomplete, intermediate, final).

Vehicles that are altered via "backyard modification (*i.e.*, addition of air shocks, spring spacers, cosmetic alteration including sheet metal and paint, etc.) are not identified as certified altered vehicles. Only those businesses which specialize in vehicle alterations (*i.e.*, limo body shops, etc.) where a label of alteration is required by federal regulations and is present on the vehicle are identified in this element.

An image of the certification label(s) is essential and must be included with the case. Categorize this image in the Miscellaneous Category.

Unknown

is used in the following situations.


- The vehicle fits the description of a multi-stage or altered vehicle, but the researcher was not able to view the label(s) for positive identification.
- The label(s) was removed/destroyed so a clear determination of whether the vehicle was a certified multi-stage or altered vehicle could not be made.

GENERAL VEHICLE FORM

SPECIFICATIONS

Multi-Stage or Altered Vehicle (cont'd)

Photograph examples:

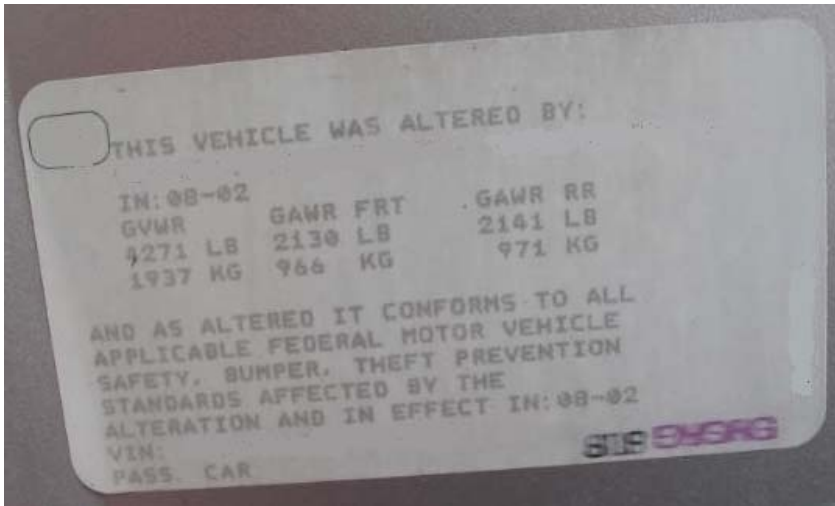

SUSPECTED POST MANUFACTURERER MODIFICATIONS

Screen Name: Suspected post manufacturer modifications

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLE.SUSPECTEDMODS*

Element Attributes:

Check Box

Range:

Source: Vehicle inspection, researcher determined

Remarks:

The purpose of this variable is to determine if the vehicle has been modified so that the handling and crashworthiness characteristics are affected. This is based upon a suspicion by the researcher at the time of the vehicle inspection.

Examples of modifications:

- Smaller or larger tires
- Body lift kit
- Lowered body
- Altered suspension
- Composite front body panels

Examples of modifications that are not considered:

- Changing the side rear view mirrors
- Aftermarket window tinting
- Additional lighting attached to the roof

OFFICIAL RECORDS

General Vehicle Form, Case 2007-996-900015/ Vehicle #1

VEHICLE | SPECIFICATIONS | OFFICIAL RECORDS | PRECRASH | DRIVER | ROLLOVER | RECONSTRUCTION | DELTA V | LOG | REVIEW

Police Reported

Tow Status: Towed due to vehicle damage

Travel Speed: 40 kmp **Posted** Speed Limit: 40 kmp

Driver

Driver Present?: Yes

Occupant Number: 1

PAR Alcohol Presence: No alcohol present

Alcohol Test: None Given

Test Result: Not Applicable Source: No BAC test

PAR Other Drug Present: No other drug(s) present

Other Drug Test Result: No specimen test given

Zip Code: 22306

Race: White

Ethnicity: Hispanic or Latino

Save Close

POLICE REPORTED TOW STATUS

Page 1 of 2

Screen Name: Police Reported-Tow Status

SAS Data Set: *GV*SAS Variable: *TOWPAR*Oracle Name: *VEHICLE.PICKVEHICLEDISPOSITION*

Element Attributes:

Oracle	SAS	
0	0	Not towed due to vehicle damage
1	1	Towed due to vehicle damage
9	9	Unknown

Source: Police report

Remarks:

The tow status as indicated in this variable is the same tow status that was used in determining the case stratification.

A "**towed**" vehicle is defined as a vehicle which is removed from the crash scene other than by means of its own power. For example, a vehicle which is reported by the police as towed out of a ditch and subsequently driven away, is *not* considered a towed vehicle. A vehicle which is driven from the scene and subsequently becomes disabled due to crash-related damage, such that towing is then required, is *not* a towed vehicle (even though that towing may be reported on the police report). Carefully scrutinize the PAR to determine the disposition of the vehicle directly from the scene and, if towing is indicated, the reason for the towing.

If after the crash, a vehicle is pushed (by hand or by another vehicle) then consider the vehicle as a towed vehicle.

When a police report indicates that more than one event has occurred (*i.e.*, stabilization is apparent), the disposition of this vehicle is based upon the event sequence selected for stratification. In other words, if the PAR indicates this vehicle was towed from the scene, and a researcher determines from the PAR that towing was *not* due to the damage sustained during *this* sequence, the correct response for this variable is **Not towed due to vehicle damage**.

When the PAR indicates that this vehicle was towed from the scene and it *cannot* be determined whether or not the towing was due to damage, the default response for this variable is **Towed due to vehicle damage**.

Police Reported Tow Status (cont'd)

Page 2 of 2

Not towed due to vehicle damage

is selected when:

- the PAR indicates this vehicle was not towed from the scene,
- or**
- the PAR indicates this vehicle was towed from the scene but *not* due to crash-related disabling damage.

Towed due to vehicle damage

is selected when:

- the PAR indicates this vehicle was towed from the scene due to crash-related disabling damage,
- or**
- the PAR indicates this vehicle was towed from the scene and a researcher cannot determine (from the PAR data) if the towing was due to crash-related disabling damage.

Unknown

is selected when the investigating officer reported that the disposition of the vehicle was unknown at the time the PAR was completed. Also, use this attribute if the PAR indicates the vehicle was abandoned. However, if the police report specifies that the vehicle was disabled due to crash-related damage, as well as indicating "unknown", "abandoned" or blank for the disposition, it can be **assumed** that the vehicle will eventually be towed from the scene. In these instances, enter **Towed due to vehicle damage**

POLICE REPORTED TRAVEL SPEED

Screen Name: Police Reported-Travel Speed

SAS Data Set: *GV*

SAS Variable: *TRAVELSP*

Oracle Name: *VEHICLEPRECRASH.SPECIFYTRAVELSPEED*

Element Attributes:

Oracle	SAS	
		Enter police reported travel speed
-9999	999	Unknown

Range: 0-240, 999

Source: Police report only

Remarks:

Enter the travel speed for this vehicle if indicated on the police report by the investigating officer. **Do not** use estimates by drivers or witnesses.

Enter the nearest mph/kmph, or if the travel speed is reported as a range, enter the average.

000 kmph

is entered if this vehicle is stopped or indicated by the police as traveling less than 0.5 mph.

Unknown

is selected if the estimated travel speed is unknown.

POSTED SPEED LIMIT

Screen Name: Posted Speed Limit

SAS Data Set: *GV*

SAS Variable: *SPLIMIT*

Oracle Name: *VEHICLEPRECRASH.SPECIFYSPEEDLIMIT*

Element Attributes:

Oracle	SAS	
		Enter posted speed limit in kmph
-8841	000	No statutory limit
-9999	999	Unknown

Range: 0-122, 999

Source: Primary sources are scene inspection or statutory law. ***Do not*** use the police report for selecting this variable's value.

Remarks:

A speed limit must be identified for all known crash scene locations.

If no speed limit sign is posted within a reasonable distance from the location of the first crash event along the approach leg of the roadway this vehicle was traveling on, then reference state statutes to obtain the applicable statutory maximum speed limit for the location (local or state).

Disregard advisory or other speed signs which do not indicate the legal speed limit. ***Do not confuse*** advisory signs on entrance/exit ramps or near intersections with the actual legal maximum speed limit.

If a state has a statute that uniformly reduces the maximum allowable speed within or near a construction zone, then code the indicated reduced limit.

No statutory limit

is selected for roadways which are neither posted nor have a statutory limit (*e.g.*, parking lot roadways or entrance/exits, service station entrance/exits, or driveways, etc.).

Unknown

is selected only in rare situations where a crash scene cannot be located.

IS THE DRIVER PRESENT?

Screen Name: Driver Present?

SAS Data Set: *GV*

SAS Variable: *DRPRES*

Oracle Name: *VEHICLE.DRIVERPRESENT*

Element Attributes:

Oracle	SAS	
1	0	No Driver Present
2	1	Yes
9	9	Unknown

Source: Researcher determined - inputs include the police report and interviews.

Remarks:

This variable serves as a flag to identify driverless motor vehicles in-transport.

No Driver Present

is selected if no driver was physically in the vehicle at the time that it was involved in the crash.

Selecting this attribute will preclude you from entering alcohol presence, other drug presence and precrash information for this vehicle.

Yes

includes those instances when the motor vehicle was a "hit-and-run" vehicle.

Unknown

is selected when it is not known if the driver was in the vehicle at the time of the crash.

OCCUPANT NUMBER

Screen Name: Occupant Number

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: ***OCCUPANT.OCCUPANTNUMBER***

Element Attributes:
Occupant Number

Source: Researcher determined

Remarks:

Select the occupant number of the person who is the driver.

Note: Occupants are entered on the Case Form/Structure Tab/Occupants sub-tab.

[NUMBER OF OCCUPANTS]

Screen Name: N/A

SAS Data Set: *GV*

SAS Variable: *OCCUPANTS*

Oracle Name: *Derived from STRUCTURE/OCCUPANTS*

Element Attributes:

This information rolls up from the number of occupants structured into the case for this vehicle.

88 Non CDS vehicle

Source: This information rolls up from the number of occupants

Remarks:

This information rolls up from the number of occupants and is NOT entered in the field.

[NUMBER OF OCCUPANT FORMS]

Screen Name: N/A

SAS Data Set: *GV*

SAS Variable: *OCCFORMS*

Oracle Name: *Derived from STRUCTURE/OCCUPANTS*

Element Values: This information rolls up from the number of occupants structured into the case for this vehicle.

88 Non CDS vehicle

Range: 1-30 Blank (GV07 = 50-99)
00 No driver present
88 Not a CDS vehicle

Source: Researcher determined – inputs include police report, vehicle inspection and interviews

Remarks:

If this vehicle is a police reported *towed* CDS applicable vehicle [*i.e.*, GV07, Body Type, equals “01”-“49” *and* GV10, Police Reported Vehicle Disposition, equals “1” (Towed due to vehicle damage)], then an Occupant Assessment Form must be completed for each occupant. Enter the number of forms encoded and submitted for this vehicle. If this vehicle is not a CDS applicable vehicle (*i.e.*, GV07 equals “50”-“99”), then this variable must be left “**blank**”.

Code “00” (Zero Occupant Assessment Forms submitted) when:

- This vehicle is a police reported *nontowed* CDS vehicle [*i.e.*, GV07 equals “01”-“49” *and* GV10 equals “0” (Not towed due to vehicle damage) or “9” (Unknown)], or

This vehicle was in-transport and unoccupied

Code “01” (One occupant) includes the case of a “hit-and-run” police reported towed CDS applicable vehicle, where it is assumed that only one occupant/driver was present. Additional Occupant Assessment Forms (and thus increase the number coded here) can be submitted if reliable evidence exists that additional occupants were present.

POLICE REPORTED ALCOHOL PRESENCE

Screen Name: PAR Alcohol Presence
SAS Data Set: *GV*
SAS Variable: *DRINKING*
Oracle Name: *DRIVER.ALCOHOLPRESENCE*

Element Attributes:

Oracle	SAS	
1	0	No alcohol present
2	1	Yes - alcohol present
3	7	Not reported
5	8	[No driver present]
4	9	Unknown

Source: Police report

Remarks:

The phrase "alcohol present" means that the police report indicates that the driver had consumed an alcoholic beverage. Presence is not an indication that alcohol was in any way a cause of the crash, even though it may have been. Finding opened or unopened alcoholic beverages in the vehicle does not by itself constitute presence.

No alcohol present

is selected if the investigating officer's assessment (as reported on the police report) is that no alcohol was present in the driver.

Yes alcohol present

is selected if the police indicate alcohol presence in the driver via: (1) a specific data element on the police report form, (2) the police charge the driver with DWI/DUI, (3) the police mention in the narrative section of the report that the driver had been drinking (or alcohol was present or involved), or (4) the police report has a positive blood alcohol concentration (BAC) test result (BAC > .00).

Not reported

is selected if there is a specific location on the police report for assessment of alcohol presence but the investigating officer fails to make either a positive or negative assessment.

Unknown

is selected if alcohol presence is indicated as unknown. In general, police reports have blocks to check either positive or negative alcohol presence. However, if a police report has a provision for the investigating officer to respond "unknown presence", then use unknown. In addition, use unknown for hit-and-run drivers unless clear evidence to the contrary exists.

Some PARs have a block labeled "**Alcohol/Drugs**". If "presence" is indicated, and it cannot be determined which was used (*e.g.*, narrative, arrest/charged section, etc.), then assume alcohol presence. If the police report indicates that a driver was charged with DWI (driving while intoxicated or driving while impaired) and no clarification is offered to indicate if the DWI was alcohol related or other drug related (*i.e.*, a specific data element; mentioned in the narrative section; BAC results), then assume alcohol presence.

ALCOHOL TEST FOR DRIVER

Screen Name: Alcohol Test

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *DRIVER.ALCOHOLTEST*

Element Attributes:

Oracle	SAS	
1	0	Test Performed
2	95	Test Refused
3	96	None Given
4	97	BAC test performed, results unknown
6	98	[No driver present]
5	99	Unknown if test given

Source: Police report, medical reports, or other official sources.

Remarks:

No psychomotor (police observation of driver actions) test results are coded here. Also, be aware of preliminary test results. These preliminary tests, including an instrumented field screening test, indicate the presence of alcohol, but not necessarily the particular content level. Preliminary tests are designed to segregate candidates for further testing from those persons where the suspected presence of alcohol is either nonexistent or too low for additional tests.

Test Performed

when a test for Blood Alcohol Concentration (BAC) is administered either by the police or at a treatment facility.

Test Refused

when the person refuses to voluntarily take a BAC test, and no subsequent test is given.

None Given

when no BAC test is administered.

BAC test performed, results unknown

when the BAC test has been administered, but the results are unknown. Selecting this attribute will automatically blank out the Test Result variable.

Alcohol test for driver (cont'd)

Page 2 of 2

Unknown

is selected when it is not known if a test was administered.

ALCOHOL TEST RESULT**Screen Name:** Test Result**SAS Data Set:** *GV***SAS Variable:** *ALCTEST***Oracle Name:** *DRIVER.ALCOHOLTESTRESULT***Element Attributes:**

Oracle	SAS	
		Enter BAC
2	[95	Test Refused]
3	[96	None Given]
4	[97	BAC test performed, results unknown]
6	[98	No driver present]
5	[99	Unknown if test given]

Range: 0-49 (0-.49), 95-99**Source:** Police report, medical reports, or other official sources.**Remarks:**

Blood Alcohol Concentration (BAC) measures, analytically, the mass of alcohol per unit volume of blood. The standard measure is expressed as the number of **milligrams per deciliter** (tenth of a liter) expressed as a decimal. (*e.g.*, .05 = 50 mg/100 ml; .15 = 150 mg/100 ml). A blood alcohol concentration (BAC) test could be a blood, breath, or urine test.

If the BAC was given on the police report or subsequently added after the case was initiated, enter the reported value. In essence, if any BAC is obtained, enter the reported value. For example, a BAC of 117 mg/dl is coded as 0.117.

Not Applicable

If the previous variable Driver- Alcohol Test is coded as "BAC Test performed, results "unknown" then this field is pre-filled.

SOURCE OF ALCOHOL TEST RESULT

Screen Name: Source

SAS Data Set: *GV*SAS Variable: *ALCSRC*Oracle Name: *DRIVER.ALCOHOLSOURCEID***Element Attributes:**

Oracle	SAS	
0	0	[No alcohol test result]
1	1	Police reported
2	2	Company reported
3	3	Medical record
4	4	Autopsy
5	5	Lay coroner
6	6	[No driver present]
8	7	Other (specify)
-8887	8	Not applicable

Source: Police report, medical reports, or other official sources.

Remarks:

Enter source of data used to code the Blood Alcohol Concentration (BAC). Examples include PAR and Medical Reports. Medical Reports include Autopsy Report, ER report, discharge summary, nurse's notes, etc.

Police reported

is used when the BAC information is obtained from any record associated with the police.

Medical Record

is used when the BAC information was obtained from any medical report (i.e., ER report, discharge summary, nurses notes, etc.).

Other (Specify)

is used when the BAC information is obtained from some source other than those listed above. An example is a verbal BAC from an **official** source.

OTHER DRUGS OVERVIEW

These variables focus upon "other drugs". For the purpose of these variables the word "drug" is defined in nonmedical terms. A "drug" is any chemical substance, natural or synthetic which, when taken into the human body, can impair the ability of the person to operate a motor vehicle safely. The word "other" in this phrase means all "drugs" except alcohol, nicotine, aspirin, and drugs administered post-crash.

No laboratory, no matter how modern its equipment or competent its staff, can identify all drugs that are currently abused. Add to this the fact that new drugs, both licit and illicit, become available every week, and it soon becomes evident that the capacity for drug abuse always stays ahead of the capacity for chemical drug detection. Even if the laboratory does have the capability of identifying a particular drug, it will require that the drug be present at a specific minimum **concentration** before it can conclude that a "real" chemical detection has occurred. This is referred to as the **detection threshold**, and it varies from drug to drug, and from one chemical analytic method to another. Some of the analytic methods used by some laboratories to detect certain drugs do not actually seek to find the drug itself, but look instead for a **metabolite** of the drug. A metabolite is a chemical breakdown product of the drug.

POLICE REPORTED OTHER DRUG PRESENCE

Page 1 of 2

Screen Name: PAR Other Drug Presence**SAS Data Set:** *GV***SAS Variable:** *DRUGS***Oracle Name:** *DRIVER.DRUGPRESENCE***Element Attributes:**

Oracle	SAS	
1	0	No other drug(s) present
2	1	Yes other drug(s) present
3	7	Not reported
5	8	[No driver present]
4	9	Unknown

Source: Police report.**Remarks:**

The phrase "other drug present" includes all prescription, "over-the-counter" medications, as well as "illicit" substances (*e.g.*, in most cases, marijuana, cocaine, heroin). Also, "other drug present" means that the driver had ingested an other drug prior to the crash, but it is not an indication that the drug usage was in any way the cause of the crash (or event), even though it may have been. Finding other drugs in the vehicle does not by itself constitute presence.

No other drug(s) present

is selected if the investigating officer's assessment (as reported on the police report) is that no other drugs were present in the driver.

Yes other drug(s) present

is selected if the police indicate an other drug presence in the driver via: (1) a specific data element on the PAR, or (2) the police mention in the narrative section of the report that the driver had ingested an other drug.

Not reported

is selected if there is a specific location on the police report for assessment of other drug presence but the investigating officer fails to make either a positive or negative assessment. In addition, use this attribute if the PAR does not have a specific location for reporting other drugs and the police do not mention other drugs in the narrative section.

Police Reported Other Drug Presence (cont'd)

Page 2 of 2

Unknown

is selected if other drug presence is indicated as unknown on the PAR. A growing number of police reports have blocks to check either positive or negative other drug presence. However, if a police report has a provision for the investigating officer to respond "unknown presence", then use this attribute. In addition, use this attribute for hit-and-run drivers unless clear evidence to the contrary exists.

NOTE: The police report must have a specific block on the PAR to report "Other Drug" presence, or it must be specifically mentioned in the narrative section. Some PARs have a block labeled "**Alcohol/Drugs**". If "presence" is indicated, and it cannot be determined which was used (*e.g.*, narrative, arrest/charged section, etc.), then assume alcohol presence. If the police report indicates that a driver was charged with DWI (driving while intoxicated or driving while impaired) and no clarification is offered to indicate if the DWI was alcohol related or other drug related (*i.e.*, a specific data element; mentioned in the narrative section; BAC results), then assume alcohol presence.

OTHER DRUG TEST RESULT

Page 1 of 2

Screen Name: Other Drug Test Result**SAS Data Set:** *GV***SAS Variable:** *SPECOTH***Oracle Name:** *DRIVER.DRUGTESTRESULT***Element Attributes:**

Oracle	SAS	
1	0	No specimen test given
2	1	Drug(s) not found in specimen
3	2	Drug(s) found in specimen, specify
4	3	Specimen test given, results unknown or not obtained
6	8	[No driver present]
5	9	Unknown if specimen test given

Source: Police report, medical reports, or other official sources.**Remarks:**

If a medical, police report, or other official source says that a certain drug was "screened for" or that it was "not detected", then you know that a specimen test was used. In addition, the presence of a measured quantity of an "other drug(s)" means that a specimen test was given. The specimen used in the test that obtained the measurement could be blood, urine, or an other specimen (*e.g.*, nasal swab, saliva). Some drugs are tested using a particular type of specimen; others can be tested in multiple ways. Researchers need to review toxicology (or other official) records carefully to determine which specimen or specimens were used for the driver's evaluation. Specimens are hierarchically ordered with a blood test taking preference over a urine test and urine over other.

Drug(s) not found in specimen

is selected if it is known that the driver had at least one type of specimen tested for other drugs *and* the test results came back "negative".

Drug(s) found in specimen, specify

is selected if it is known that the driver had at least one type of specimen tested for other drugs (excluding alcohol, nicotine, aspirin and drugs administered post-crash) and that the driver had a positive test result. A positive test result is any measured quantity that exceeds the detection threshold of the laboratory which performed the test.

Other drug test result (cont'd)

Page 2 of 2

Specimen test given, results unknown or not obtained

is selected if it is known that the driver had at least one type of specimen tested for other drugs, but the results of that test are unknown or not reported.

Unknown if specimen test given

is selected when it cannot be determined if the driver was administered a specimen test for other drugs. This attribute should also be selected if it is known that the driver received treatment at a medical facility but the medical records have not been obtained.

DRIVER'S ZIP CODE

Page 1 of 2

Screen Name: ZIP Code

SAS Data Set: GV

SAS Variable: DRZIP

Oracle Name: DRIVER.ZIPCODE

Element Attributes:

Oracle	SAS	
		Enter driver's ZIP code
1	00001	Driver not a resident of U.S. or territories
	99998	[No driver present]
-9999	99999	Unknown

Range: Range is a compilation of Sections 6 and 12 of the National Five Digit ZIP Code & Post Office Directory, Volume 2 N-W

Source: Primary source is the police report; secondary sources include interviewees, medical records, and other official documents.

Remarks:**Prioritization of data sources:**

First, use the PAR. For the purposes of this variable, a driver is considered to reside at the address listed on the police crash report. This address was most likely taken from the driver's license given to the police officer and/or from the licensing state's drivers license file.

If the driver's address is present and the ZIP code is missing or not available, then determine the correct ZIP code by using the two volume National Five Digit Zip Code & Post Office Directory.

Second, use official records (e.g., medical). If the driver's ZIP code cannot be obtained from the PAR, then use official records, if available, to determine the correct ZIP code.

Third, use interviewee data. When no address (i.e., street number/name, city, state) is present on the PAR, ask the interviewee the driver's ZIP code as a "specific question" during the interview (page one of the Interview Form). If the interviewee does not know the driver's ZIP but does know the driver's address, then use this information to determine the ZIP code. When obtaining address information, determine what the driver considers his/her current permanent mailing address to be.

Driver's ZIP Code (cont'd)

Page 2 of 2

During the process of obtaining the interview, the vehicle inspection, or the associated medical records, researchers will discover, for some drivers, a conflict between the address listed on the PAR and the driver's current address. In conflict situations, always enter the ZIP code for the address given on the PAR or on an official document before entering the ZIP code from the information obtained during the interview.

Driver not a resident of U.S. or territories

is selected when the address found on the PAR or obtained from medical records, or during the interview indicates that the driver resides at an address which has not been assigned a ZIP code by the U.S. Post Office.

Unknown

is selected whenever the ZIP cannot be determined. For example, use **Unknown** for "hit-and-run" drivers and for any driver's address that you discover is fictitious. In addition, use **Unknown** if the driver, licensed or not, has no permanent address. For example, the driver could be living out of his/her vehicle (camper, motorhome, etc.), or the driver could be "homeless".

RACE

Page 1 of 3

Screen Name: Driver Race**SAS Data Set:** *GV***SAS Variable:** *D_RACE***Oracle Name:** *OCCUPANT.RACE***Element Attributes:**

Oracle	SAS	
1	1	White
2	2	Black or African American
3	3	Asian
4	4	Native Hawaiian or Other Pacific Islander
5	5	American Indian or Alaska Native
7	7	Other (specify):
8	8	[No driver present]
-9999	9	Unknown

Source: Researcher determined; primary source is the interviewee; secondary sources include police report, medical records, and other official documents.

Remarks:

Note: Although this variable is on the **Official Records Tab**, this variable is a “self identification” by the occupant. This information can be obtained from any of the above sources, however is not always an “official record”. When using secondary sources, the ethnicity must be specifically mentioned in the document.

The concept of race as used by the U.S. Census Bureau reflects self-identification; it does not denote any clear-cut scientific definition of biological stock. Self-identification represents self-classification by people according to the race with which they identify themselves. For drivers with parents of different races who cannot provide a single response, use the race of the driver's mother; however, if a single response cannot be provided for the driver's mother, the first race reported by the driver is encoded.

Hispanic is not a race but rather an ethnic origin. Persons of Spanish origin may be of any race. For the purpose of this variable, race and Hispanic origin have been combined using the elements listed above.

Race (cont'd)

Page 2 of 3

Prioritization of data sources:

First, use interviewee data. Ask the interviewee what the driver considers their race and ethnic origin to be. If the response does not clearly fit into one of the race and ethnic origin categories,

then use the information provided by the interviewee concerning the driver's nationality/ethnic origin to select the correct element value.

Second, use the PAR. If race is given on the PAR and the PAR scheme is compatible with this variable, then use the PAR information.

In addition, the driver's *name* is not a reliable indicator of race and **cannot be used** when selecting the applicable element value for this variable.

Third, use official records (e.g., medical). If the data needed cannot be obtained from the interviewee and is not available or usable from the PAR, then use official records, if available, to determine the correct element attribute.

White

is selected for drivers who consider themselves a person having origins in any of the original peoples of Europe, the Middle East or North Africa.

Black or African American

is for drivers who consider themselves a person having origins in any of the black racial groups of Africa. Terms such as "Haitian" or "Negro" can be used in addition to "Black or African American."

Asian

is selected for drivers who consider themselves a person having origins in any of the original peoples of the Far East, Southeast Asia, or the Indian subcontinent including, for example, Cambodia, China, India, Japan, Korea, Malaysia, Pakistan, the Philippine Islands, Thailand and Vietnam.

Native Hawaiian or Other Pacific Islander

is selected for drivers who consider themselves a person having origins in any of the original peoples of Hawaii, Guam, Samoa, or other Pacific Islands.

American Indian or Alaska Native

is selected for drivers who consider themselves a person having origins in any of the original peoples of North and South America (including Central America), and who maintains tribal affiliation or community attachment.

Race (cont'd)

Page 3 of 3

Other

is selected for drivers who consider themselves to be of a race not described above. Use this attribute for descriptions such as: Eurasian, Cosmopolitan, inter-racial, etc

Unknown

is selected when the source(s) available do not provide sufficient information to classify the driver's race.

ETHNICITY

Page 1 of 2

Screen Name: Driver Ethnicity

SAS Data Set: *GV*SAS Variable: *D_ETHNIC*Oracle Name: *OCCUPANT.ETHNICITY*

Element Attributes:

Oracle	SAS	
1	1	Hispanic or Latino
2	2	Not Hispanic or Latino
8	8	[No driver present]
-9999	9	Unknown

Source: Researcher determined; primary source is the interviewee; secondary sources include police report, medical records, and other official documents.

Remarks:

Note: Although this variable is on the **Official Records Tab**, this variable is a “self identification” by the occupant. This information can be obtained from any of the above sources, however it is not always an “official record”. When using secondary sources, the ethnicity must be specifically mentioned in the document.

The concept of ethnicity as used by the U.S. Census Bureau reflects self-identification; it does not denote any clear-cut scientific definition of biological stock. Self-identification represents self-classification by people according to the ethnicity with which they identify themselves. For drivers with parents of different ethnicity who cannot provide a single response, use the ethnicity of the driver's mother; however, if a single response cannot be provided for the driver's mother, the first ethnicity reported by the driver is encoded.

Prioritization of data sources:

First, use interviewee data. Ask the interviewee what the driver considers their ethnicity to be. If the response does not clearly fit into one of the ethnicity categories, then use the information provided by the interviewee concerning the driver's nationality/ethnic origin to select the correct element value.

Ethnicity (cont'd)

Page 2 of 2

Second, use the PAR. If ethnicity is given on the PAR and the PAR scheme is compatible with this variable, then use the PAR information.

If the PAR only indicates White/Caucasian, Black/Negro, or Other, then the PAR contains insufficient information for this variable. Additional information is required to determine the ethnicity. In addition, the driver's *name* is not a reliable indicator of ethnicity and **cannot be used** when selecting the applicable element value for this variable. For example, a name such as: Hector Smith, does not indicate the ethnicity (*e.g.*, Hispanic or Not Hispanic) since the person may or may not consider themselves to be of Hispanic descent.

Third, use official records (*e.g.*, *medical*). If the data needed cannot be obtained from the interviewee and is not available or usable from the PAR, then use official records, if available, to determine the correct element attribute.

Element Attributes:**Hispanic or Latino**

is selected for drivers who consider themselves a person of Cuban, Mexican, Puerto Rico, South or Central American or other Spanish culture or origin, regardless of race. The term, "Spanish origin," can be used in addition to "Hispanic or Latino."

Not Hispanic or Latino

is selected for drivers who consider themselves as not being of Cuban, Mexican, Puerto Rico, South or Central American or other Spanish culture or origin, regardless of race.

Unknown

is selected when the source(s) available do not provide sufficient information to classify the driver's ethnic origin.

ENVIRONMENT

General Vehicle Form, Case 2008-43-093B / Vehicle #1

VEHICLE | SPECIFICATIONS | OFFICIAL RECORDS | PRECRASH | ROLLOVER | RECONSTRUCTION | DELTA V | LOG | REVIEW

ENVIRONMENT | MOVEMENT | DISTRACTIONS

Trafficway
Relation to ...
Junction: Intersection related / non-interchange | Flow: Divided trafficway-median strip without positive barri

Roadway
Travel Lanes: Two | Alignment: Straight | Profile: Level | Surface Type: Other (Specify) | Surface Condition: Other (Specify)

Conditions
Light: Daylight | Weather: Other (specify):

Traffic Control Devices
Device: Other regulatory sign (specify) | Functioning: Traffic control device not functioning (specify)

Save Close

PRECRASH DATA OVERVIEW

The PreCrash variables are selected separately for each vehicle involved in the crash. They should be coded for the characteristics of their roadway environment just prior to the critical precrash event.

RELATION TO INTERCHANGE OR JUNCTION

Screen Name: Trafficway-Relation to Junction

SAS Data Set: *GV*

SAS Variable: *RELINTER*

Oracle Name: *VEHICLEPRECRASH.NONINTERCHANGEJUNCTION*

Element Attributes:

Oracle	SAS	
1	0	Non-interchange area and non-junction
2	1	Interchange area related
3	2	Intersection related/non-interchange
4	3	Driveway, alley access related/non-interchange
5	4	Other junction (specify) / non-interchange
6	5	Unknown type of junction / non interchange
7	9	Unknown

Source: Researcher determined — Primary source is the scene inspection, secondary sources include the police report and interviews.


Remarks:

The attribute selected is based on the characteristics of the roadway environment just prior to the critical precrash event for this vehicle

ANSI D16.1 should be referred to for additional information about the characteristics of junctions and interchanges.

A junction is, in general, the area formed by the connection of two roadways. It includes: (1) all at-grade intersections, (2) connections between a driveway access or alley access and a roadway which is not a driveway access or an alley access, (3) connections between two alley accesses or driveway accesses, or (4) a connection between a driveway access and an alley access.

Figure GV- 1: Flowchart for Determining Interchange or Junction

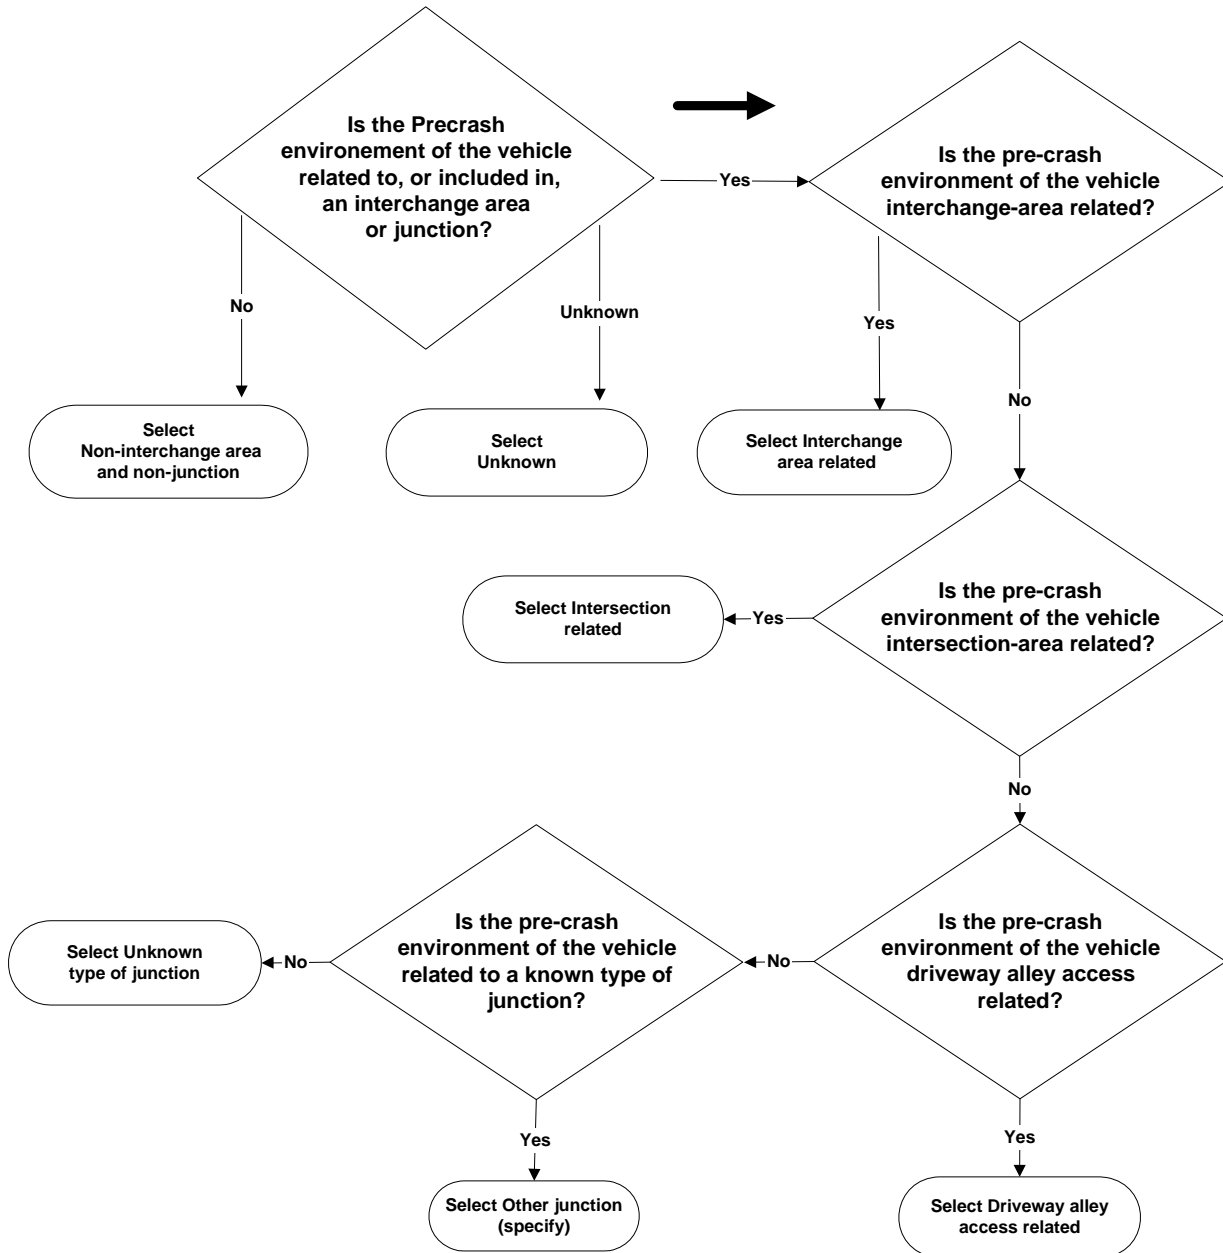

Relation to Interchange or Junction (cont'd)

Relation to Interchange or Junction (cont'd)

Page 3 of 6


Non-interchange area and non-junction

is selected when the vehicle's environment just prior to the critical precrash event does not occur within an interchange area or within a junction.

Interchange area related

is selected when the vehicle's environment just prior to the critical precrash event occurs within an interchange area. An interchange is the area around a grade separation which involves at least two trafficways. Included within its boundaries are: (1) all ramps which connect the roadways, and (2) each roadway entering or leaving the interchange to a point 30 meters (100 feet) beyond the gore or curb return at the outermost ramp connection for the roadway. One may find included within an interchange area intersections, driveway accesses, and, of course, roadway sections which are non-junction. See Figure.

Figure GV- 2: Interchange Area

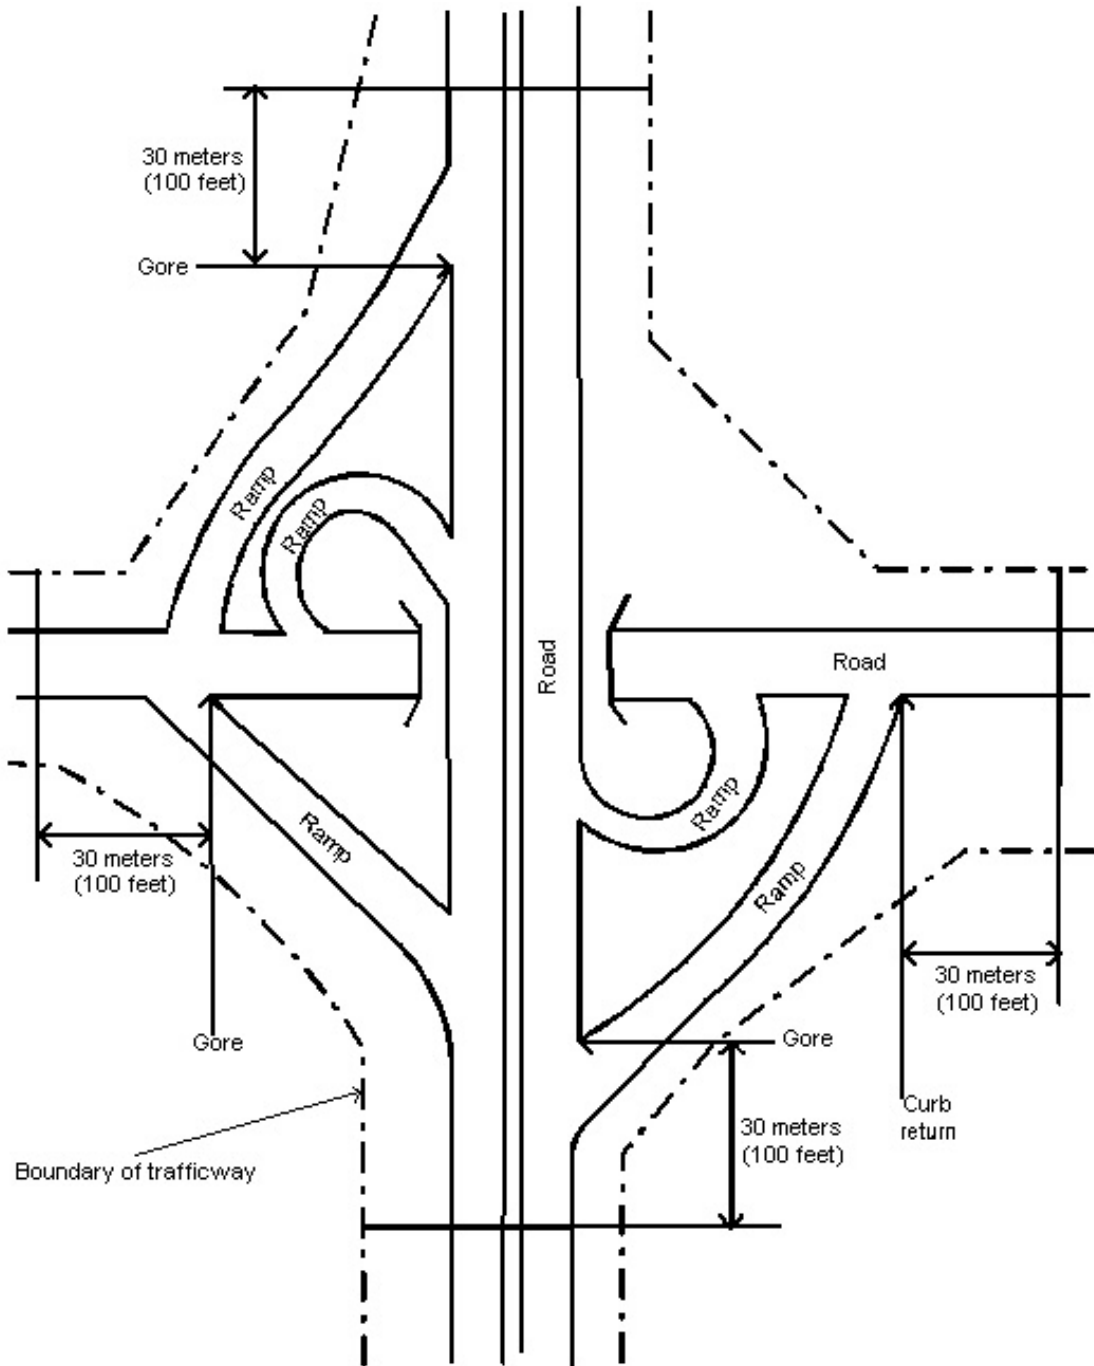

Intersection Related

is selected when the vehicle's environment just prior to the critical precrash event: (1) is in an intersection or is in an approach to or exit from an intersection; **and** (2) results from an activity, behavior, or control related to the movement of traffic units through the intersection.

"Traffic units" above means any traffic unit (involved or not involved in the crash). If the vehicle's environment just prior to the critical precrash event occurs outside but near an intersection and involves a vehicle which was engaged or should have been engaged in making an intersection-related maneuver such as turning, then **Intersection Related** must be selected. However, if the loss of control is unrelated to the intersection, then select **Non-interchange area and non-junction**.

An intersection is a type of junction which contains a crossing or connection of two or more roadways not classified as a driveway access or alley access.

Intersection related also includes any two leg intersections. To qualify for inclusion at least one of the two legs must be controlled by a regulatory sign (see **Traffic Control Device**) or traffic signal; otherwise, treat the area as a sharp curve.

A rotary or traffic circle is a specialized form of at-grade intersection. Traffic flows by entering and leaving a one-way roadway connecting all intersection approach legs and running continuously around a central island. Rotary intersections are commonly called *traffic circles*, but proper design can result in central islands of various rounded shapes.

Driveway, alley access related

is selected when the vehicle's environment just prior to the critical precrash event: (1) is an approach to or exit from the driveway or alley access; **and** (2) results from an activity, behavior, or control related to the movement of traffic units through the driveway or alley access. Use this attribute when the vehicle's environment just prior to the critical precrash event occurs on a NASS roadway which approaches or exits from the driveway or alley access junction and at least one involved pedestrian, other nonmotorist associated with a nonmotorist conveyance or road vehicle was entering or exiting from the driveway or alley. Do not use this attribute if the crash was precipitated by the action of a noncontact road vehicle or person.

Other junction (specify) / non-interchange

is selected when the vehicle's environment just prior to the critical precrash event is not interchange related, is not intersection related, is not driveway, alley access related, but does occur in a junction. The type of junction must be specified when this attribute is selected.

The following are examples of *non-interchange junctions*:

- A **channel** refers to any traffic lane that is directed into a path different than the through lanes by a traffic island. An **island** is defined as a raised or painted paved surface. The channel begins and ends at the extension of the island's lateral boundaries unless the channel is preceded or followed by an area of merge or divergence (see below). Select **Other junction**, specify- **channel** if the vehicle's roadway environment just prior to the critical precrash event was in the channel or on the traffic island (if the vehicle enters or strikes the island from within the channel).
- A **crossover** is a designated opening within a median used primarily for "U" turns". To be considered, the nearest lateral boundary line of the crossover must be greater than 10 meters (33 feet) from the nearest lateral boundary line of any roadway (highway, street, ramp, driveway, or alley) which intersects with either side of the roadways which the median divides. Select **Other junction**, specify-**crossover** if the characteristics of the vehicle's roadway environment just prior to the critical precrash event were in the junction of a crossover and a roadway. Do not use this attribute if the crash was precipitated by the actions of a noncontact road vehicle or person.
- **An area of merge or divergence** is in, and adjacent to an auxiliary lane, which is adjacent to the through lane(s) and follows an entrance ramp or channel or precedes an exit ramp or channel. A merge area extends longitudinally from where the ramp or channel ends and ends where the auxiliary lane ends. A divergence area extends longitudinally from where the auxiliary lane begins and ends where the ramp or channel begins. The area extends laterally across the through lane(s), for traffic in the same direction, ending at a centerline, median, or road edge/curb.

Unknown type of junction / non interchange

is selected when it is known that the vehicle's environment just prior to the critical event is in a junction, but the type of junction is unknown.

Unknown

is selected when the environment of the vehicle just prior to the critical event is unknown.

TRAFFICWAY FLOW

Page 1 of 2

Screen Name: Trafficway-Flow

SAS Data Set: *GV*SAS Variable: *TRAFFLOW*Oracle Name: *VEHICLEPRECRASH.PICKTRAFFICFLOW***Element Attributes:**

Oracle	SAS	
2	1	Divided trafficway-median strip without positive barrier
3	2	Divided trafficway-median strip with positive barrier
4	3	One way traffic
1	4	Not physically divided (two way traffic)
6	5	Not physically divided with two way left turn lane
5	9	Unknown

Source: Researcher determined-Primary source is the scene inspection; secondary sources include the police report and interviews.

Remarks:

A roadway is that part of a trafficway where vehicles travel. A divided trafficway is composed of two or more roadways. A trafficway which has a median that is designed as a two-way left turn lane is considered to be one roadway for lane identification purposes.

If the characteristics of the vehicle's roadway environment just prior to the critical precrash event is represented by the junction of two or more roadways, choose the trafficway flow on the basis of the most representative description of the approach leg to the junction for this vehicle.

If the collision occurred other than in a junction, select the attribute on the basis of the most representative description of the characteristics of the vehicle's roadway environment just prior to the critical precrash event. If this is off the roadway, select the attribute on the basis of the most representative description of the roadway leading to the point of departure.

The Researcher selects the descriptor that best represents the vehicle's environment just prior to the critical precrash event. If the flow is designed to separate traffic, then choose accordingly.

Not physically divided (two way traffic)

is selected whenever there is no median. Generally, medians are not designed to legally carry traffic. **NOTE:** Although gores separate roadways, and traffic islands (associated with channels) separate travel lanes, neither is involved in the determination of trafficway division.

Not physically divided with two-way left turn lane

is used whenever the trafficway is physically divided by a two-way left turn lane which is designed to allow left turns to driveways, shopping centers, businesses, etc., while at the same time providing a separation of opposing straight-through travel lanes.

Divided trafficway-median strip without positive barrier

is selected whenever the trafficway is physically divided, however, the division is unprotected [*e.g.*, vegetation, gravel, paved medians, trees, water, embankments and ravines that separate a trafficway (*i.e.*, all non-manufactured barriers)]. NOTE: Raised curbed medians **DO NOT** constitute a positive barrier in and by themselves. The unprotected medians can be of any width, however, painted paved flush areas, must be 1.2 meters in width to constitute a median strip.

Divided trafficway — median strip with positive barrier

is selected whenever the traffic is physically divided and the division is protected by any concrete, metal, or other type of longitudinal barrier (*i.e.*, all manufactured barriers). Also bridges or underpass support structures and bridge rails take this attribute.

One way trafficway

is selected primarily whenever the trafficway is undivided and traffic flows in one direction (*e.g.*, one-way streets). However, this attribute can also be selected where a median is present so long as all the traffic on the trafficway goes in the same direction. An example occurs where the opposing roadway of the same named trafficway had to be split by such a distance that the right-of-way divides to accommodate other property. If (rare) one of the trafficways is further divided into multiple roadways by a median, then in this instance **One way trafficway** should be selected. Included are entrance and exit ramps.

Unknown

is selected if the trafficway flow cannot be determined (*e.g.*, ongoing construction and movable traffic barriers moved or removed since the crash date).

NUMBER OF TRAVEL LANES

Screen Name: Roadway-Number of Travel Lanes

SAS Data Set: *GV*

SAS Variable: *LANES*

Oracle Name: *VEHICLEPRECRASH.NUMOFLANES*

Element Attributes:

Oracle	SAS	
1	1	One
2	2	Two
3	3	Three
4	4	Four
5	5	Five
6	6	Six
7	7	Seven or more
8	9	Unknown

Source: Researcher determined--Primary source is the scene inspection — secondary sources include the police report and interviews.

Remarks:

The attribute is determined from the same roadway which was used to determine the **Trafficway Flow**. If traffic flows in both directions and is undivided, select the number of lanes in both directions. If the trafficway is divided into two or more roadways, select only the number of lanes for the roadway on which the vehicle under consideration was traveling.

If turn bays, acceleration, deceleration, or center 2-way left turn lanes exist and are physically located within the cross section of the roadway, and these lanes are the most representative of the driver's environment just prior to the critical precrash event, then they are to be included in the number of lanes. Channelized lanes are separated from other through or turn related lanes. (NOTE: The separation normally will not involve a physical barrier.) Because a channelized lane is separated, it should not be included unless it is preceded by a turn bay or turn lane and this bay or lane is felt to be most representative of the driver's environment just prior to impact.

The number of lanes counted does not include any of which are rendered unusable by restriction of the right-of-way (e.g., closed due to construction). Show lanes on the scaled diagrams and annotate why a lane is closed.

Only those lanes ordinarily used for motor vehicle travel should be considered when completing this variable (*i.e.*, pedestrian/bicycle lanes are excluded).

In a number of instances, there will be uncertainty as to the number of lanes due to: (1) nonstandard roadway widths; (2) variability of width in the same roadway due to disrepair and other reasons; or (3) absence of lane, center, and edge lines, etc. The number selected in these cases should represent the number of operational lanes based on customary or observed usage.

On a road that has legal parking such that the legal parking area ends short of the junction of the roadway with another roadway or drive; and the space left between the end of the legal parking area and the beginning of the junction can be utilized for turning by a vehicle on the roadway, do not consider this additional area as another travel lane (regardless of customary or observed usage in this instance).

This area should be construed as additional width to the existing travel lane(s). The only time that another lane will be counted at a junction is when that space is expressly designated for turning, *e.g.*, by lane (line or turn arrow) marking, signs or signals.

The number of lanes for driveways, wide-mouth parking lots, etc. should be selected as follows:

- If it is possible to determine the number of lanes through either lane markings or observed or customary use, select the actual number of lanes present.
- If the number of lanes cannot be accurately established, select **Unknown**.

If the vehicle was on or in a driveway [see Relation to Junction, definitions for **Driveway, alley access related**, or in a crossover (primarily designed as an opening in a median used for "U" turns)] which is in essence a private way, select the number of lanes for that vehicle.

ROADWAY ALIGNMENT

Screen Name: Roadway-Alignment

SAS Data Set: *GV*

SAS Variable: *ALIGNMNT*

Oracle Name: *VEHICLEPRECRASH.PICKROADWAYALIGNMENT*

Element Attributes:

Oracle	SAS	
1	1	Straight
2	2	Curve Right
3	3	Curve Left
4	9	Unknown

Source: Researcher determined--Primary source is scene inspection; secondary sources include the police report and interviews.

Remarks:

This element is determined from the same roadway which was used to determine Trafficway Flow. Select the descriptor that best represents the vehicle's environment just prior to this vehicle's critical pre-crash event.

Any perceptually determined curvature of a roadway constitutes a curve.

Straight

Refers to a roadway which has no perceptually determined curvature.

Curve right and Curve left

Refer to a perceptually determined curvature of a roadway. The vehicle's direction of travel determines whether the curvature is right or left.

ROADWAY PROFILE

Screen Name: Roadway-Profile

SAS Data Set: *GV*

SAS Variable: *PROFILE*

Oracle Name: *VEHICLEPRECRASH.PICKROADWAYPROFILE*

Element Attributes:

Oracle	SAS	
1	1	Level
2	2	Uphill grade (> 2%)
3	3	Hillcrest
4	4	Downhill grade (> 2%)
5	5	Sag
6	9	Unknown

Source: Researcher determined--Primary source is scene inspection; secondary sources include police report and interviews.

Remarks:

The element attribute is determined from the same roadway which was used to determine **Trafficway Flow**. Measure the area most representative of the pre-crash environment. To determine the grade, the vertical measurement is divided by the horizontal value; the result is a percentage value of the grade.

Level

is selected when the roadway surface tangent gradient is less than or equal to 2%. [i.e. vertical divided by horizontal (vertical / horizontal)]

Uphill grade (> 2%)

is selected when the roadway profile is uphill or positive, relative to the direction of travel of this vehicle.

Hillcrest

refers to a surface in vertical transition between two points of tangency.




Downhill grade (> 2%)

is used when the roadway profile is downhill or negative, relative to the direction of travel for this vehicle.

Sag

refers to a surface in vertical transition between two points of tangency.

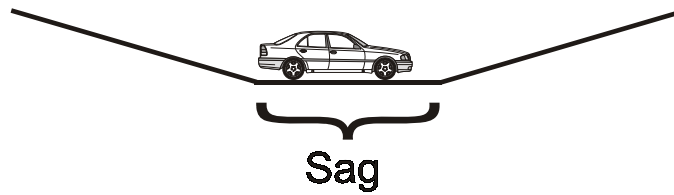

Screen Name: Roadway-Surface Type

SAS Data Set: *GV*

SAS Variable: *SURTYPE*

Oracle Name: *VEHICLEPRECRASH.PICKROAWAYSURFACE*

Element Attributes:

Oracle	SAS	
1	1	Concrete
2	2	Bituminous (asphalt)
3	3	Brick or block
4	4	Slag, gravel or stone
5	5	Dirt
6	8	Other, specify:
7	9	Unknown

Source: Researcher determined Primary source is scene inspection; secondary sources include police report and interviews.

Remarks:

This element attribute is determined from the same roadway which was used to determine the **Trafficway Flow**. If the lateral cross section contains lanes of more than one surface type, select the surface type of the lane the driver's vehicle was traveling on just prior to this vehicle's critical precrash event.

Concrete

is selected when the road surface is made of a material consisting of a conglomerate of gravel, pebbles, broken stone or slag, in a mortar or cement matrix.

Bituminous (asphalt)

is selected when the road surface is made of a product obtained by the distillation of coal and petroleum. Also referred to in non-technical terms as "blacktop."

Brick or block

is selected when the road surface is constructed of paving stone (*e.g.* cobblestone, paving bricks, etc.).

Slag, gravel or stone

is selected when the road surface is constructed of a loose material primarily consisting of the elements of slag, gravel or stone.

Dirt

is selected when the improved road surface is made of a natural earthen surface.

Other specify

is selected for another type of surface such as wood.

Unknown

is selected when the surface type is unknown.

ROADWAY SURFACE CONDITION

Screen Name: Surface Condition

SAS Data Set: *GV*

SAS Variable: *SURCOND*

Oracle Name: *VEHICLEPRECRASH.PICKROADWAYSURFACECOND*

Element Attributes:

Oracle	SAS	
1	1	Dry
2	2	Wet
		Snow
		Slush
		Ice/Frost
		Water (Standing, Moving)
		Sand
		Mud, Dirt, Gravel
		Oil
6	8	Other, (specify):
7	9	Unknown

Source: Researcher determined Primary source is the police report; secondary sources include interviews, and scene inspection.

Remarks:

This element attribute is based on the location which best represents the Pre-Crash Environment data. The element should be selected based on the same lanes used to select Trafficway Flow.

It is possible for different surface conditions to exist on the same roadway (*e.g.*, intermittent wet and dry sections). The researcher should consider the condition most representative of the roadway immediately prior to this vehicle's critical precrash event.

Sand; Mud, Dirt, Gravel or Oil

is selected when the attribute is present on another road surface. (*i.e.* a dirt road would not receive this attribute solely due to presence). If the sand; mud, dirt, gravel or oil occurs in combination with moisture conditions **Wet, Snow/Slush, Ice/Frost, or Water (Standing, Moving)** then select the moisture condition.

LIGHTING CONDITIONS

Screen Name: Conditions--Light

SAS Data Set: *GV*

SAS Variable: *LGTCOND*

Oracle Name: *VEHICLEPRECRASH.PICKLIGHTCONDITIONS*

Element Attributes:

Oracle	SAS	
1	1	Daylight
2	2	Dark
3	3	Dark, but lighted
4	4	Dawn
5	5	Dusk
6	9	Unknown

Source: Researcher determined — Primary source is the police report; secondary sources include interviews and scene inspection.

Remarks:

The light condition best representing the precrash conditions at the time of the crash is selected based on ambient and artificial sources.

Dark

should be selected when the crash occurred after dusk and before dawn, and no artificial light source is present at the scene.

Dark but lighted

should be selected when the crash occurred after dusk and before dawn, and artificial light source(s) are present at the scene.

NOTE: **Dark** and **Dark, but lighted** include crashes occurring in tunnels.

Unknown

should be selected when it cannot be reasonably determined what the light conditions were at the time of the crash.

WEATHER CONDITIONS

Screen Name: Conditions--Atmospheric

SAS Data Set: *GV*

SAS Variable: *WEATHER*

Oracle Name: *VEHICLEPRECRASH.PICKATMOSCONDITIONS*

Element Attributes:

Oracle	SAS	
11	11	Fog, Smog, Smoke
12	12	Rain
13	13	Sleet, Hail (freezing rain or drizzle)
14	14	Snow
15	15	Blowing Snow
16	16	Severe Crosswinds
17	17	Blowing Sand, Soil, Dirt
18	18	Clear
19	19	Cloudy
98	98	Other (specify):
99	99	Unknown

Source: Researcher determined — primary source is the police report; secondary sources include interviews and scene inspection.

Remarks:

The atmospheric condition is selected with respect to the conditions just prior to the critical event. Select the attribute that had the most affect on the visibility of the driver. The element attributes are oriented toward precipitation, or particle dispersion, which may affect the driver visibility.

It is possible for different drivers to experience different conditions.

Fog, Smog, Smoke

This attribute is selected when one of the below conditions affects driver visibility:

- 1) Fog is described as condensed water vapor in cloudlike masses lying close to the ground and limiting visibility.
- 2) Smog is described as a fog made heavier and darker by smoke and chemical fumes; *also:* a photochemical haze caused by the action of solar ultraviolet

Weather conditions (cont'd)

Page 2 of 3

radiation on atmosphere polluted with hydrocarbons and oxides of nitrogen from automobile exhaust.

- 3) Smoke is described as a vaporous system made up of small particles of carbonaceous matter in the air, resulting mainly from the burning of organic material, such as wood or coal.

Rain

is selected when the precipitation falling at the time of the crash is predominately in the form of water droplets.

Sleet, Hail (Freezing rain or drizzle)

is selected when the precipitation falling at the time of the crash is predominately in the form of frozen or partially frozen raindrops.

Snow

is selected when the precipitation falling at the time of the crash is predominately in the form of translucent ice crystals originating in the upper atmosphere as frozen particles of water vapor. This attribute includes rain mixed with snow. Accumulation is not necessary to select this attribute.

Blowing Snow

is selected when wind driven snow reduces visibility and causes significant drifting. Blowing snow may be snow that is falling and/or loose snow on the ground picked up by the wind.

Severe Crosswinds

is selected when the wind is blowing at right angles to the effected vehicle. Severe crosswinds are considered when the wind is blowing over 39 mph (63 kph).

Blowing Sand, Soil, Dirt

is selected when sand, soil or dirt particles are picked up from the surface of the earth by the wind, that affects driver visibility.

Clear

is selected when the sky has less than 50 % cloud cover.

Cloudy

is selected when the sky has more than 50 % cloud cover.

Other (specify)

is used when there is a relevant weather related factor that is not described in the preceding elements. Specify the nature of this factor in detail.

Weather conditions (cont'd)

Page 3 of 3

Unknown

is used when there is insufficient information to determine what weather conditions were present at the time of the crash.

TRAFFIC CONTROL DEVICE

Page 1 of 5

Screen Name: Traffic Control--Device

SAS Data Set: *GV*SAS Variable: *TRAFCONT*Oracle Name: *VEHICLEPRECRASH.PICKTRAFFICCTRLDEVICE***Element Attributes:**

Oracle	SAS	
1	0	No traffic control(s)
2	1	Traffic control signal (not RR crossing)

Regulatory:

Oracle	SAS	
3	2	Stop sign
4	3	Yield sign
5	4	School zone sign
6	5	Other regulatory sign (specify):
7	6	Warning sign (not RR crossing)
8	7	Unknown sign
9	8	Miscellaneous/other controls including RR controls (specify):
10	9	Unknown

Source: Researcher determined — primary source is scene inspection; secondary sources include the police report and interviews.

Remarks:

This attribute is determined from the same roadway used to define the Trafficway Flow. The Researcher should select the descriptor that best controls traffic in the vehicle's environment just prior to this vehicle's critical precrash event.

This variable measures the above-ground traffic control(s) which regulate vehicular traffic. Excluded are any controls which *solely* regulate pedestrians (*e.g.*, wait/walk signals).

Focus on the road segment just prior to the location of the critical pre-crash event and select the traffic control device(s) which is (are) *most related* to this event. In-junction crashes should be based on the presence of a traffic control device for the roadway on which the vehicle is traveling. For non-junction crashes, traffic control devices should be selected based on their relationship to the crash circumstances and *not* be based merely on presence.

Regulatory signs	Give notice of traffic laws or regulations.
Warning signs	Call attention to conditions on, or adjacent to, a highway or street that are potentially hazardous to traffic operations.
Guide signs	Show route designations, destinations, directions, distances, services, points of interest, and other geographical recreational or cultural information. Guide signs do not constitute traffic controls.

Signs come in standard shapes. The *octagon* is exclusively used for the STOP sign. The *equilateral triangle*, with one point downward, is used exclusively for the YIELD sign. The *round* shape is used for the advance warning of a railroad crossing and for the civil defense evacuation route marker. The *pennant* shape, an isosceles triangle, with its longest axis horizontal, is used to warn of no passing zones. The *diamond* shape is used only to warn of existing or possible hazards either on or adjacent to the roadway or adjacent thereto. The *(vertical) rectangle*, ordinarily with the longer dimension vertical, is used for regulatory signs, with the exception of STOP signs and Traffic Control Device YIELD signs. The *(horizontal) rectangle*, ordinarily with the longer dimension horizontal is used for route markers and recreational area guide signs.

The *pentagon*, point up, is used for School Advance and School Crossing signs. *Other* shapes are reserved for special purposes; for example, the shield or other characteristic design for route markers and crossbuck for railroad crossings.

Signs can be distinguished by their color. The following general rules apply. **Red** is used as a background color on prohibitory type regulatory signs (*e.g.*, STOP, Do Not Enter, Wrong Way). It is also used as the circular outline and diagonal bar prohibitory symbol. **BLACK** may be used as a background (*e.g.*, ONE WAY); it is used as a message on white, yellow and orange signs. **WHITE** is used as the background for route markers, guide signs, and regulatory signs (except STOP). It is used as the legend for brown, green, blue, black and red signs. **Orange** is used only as a background color for construction and maintenance signs. **Yellow** is used as a background color for warning signs and for school signs. **Brown, green, and Blue** are used as a background color for guide signs.

Pavement markings are used to supplement the regulations or warnings of other devices such as traffic signs or signals. In other instances, they are used alone and produce results that cannot be obtained by the use of any other device. Pavement markings can convey warnings or information to the driver without diverting his attention from the roadway. **Pavement markings are not considered when completing this variable.**

The Researcher should consider the intent of this question. If at the time of the crash there was no intent to control (regulate or warn) vehicle traffic, then select **No traffic controls**; otherwise, select the appropriate value.

Traffic Control Device (cont'd)

Page 3 of 5

For example, if the intersection is channelized and controlled differently on the channel than on the through lanes (*e.g.*, signal and yield sign), report the traffic controls depending on whether the roadway (Number of Travel Lanes) was chosen based on its through lanes or its channelized lanes.

The attributes are in prioritized order. This means that **Traffic Control Signal** takes precedence over **school zone signs, other regulatory signs, and warning signs**.

If a school guard, police officer, or other officially designated person controls both pedestrian and vehicular traffic, select **miscellaneous/other controls, including RR controls**.

NOTE: The only exception to the prioritization rule is that any *Officially-designated* person (**miscellaneous controls**) takes precedence over any other attribute.

No Traffic Control

is selected when there is no above ground sign or signal to regulate traffic flow. If a traffic control device has been deactivated (*e.g.* traffic signal that emits no signal) during certain times of the day, and was deactivated at the time of the crash select **No** used for regulatory signs.

Traffic Control Signal (Not RR crossing)

Includes a traffic control that has been recently installed, but not activated as of the time of the crash.

Use **Traffic Control Signal (Not RR crossing)** for all of the following:

- Any signal which processes through the green, amber, and red cycles. The source of the actuation is of no concern.
- A green, amber and red cycling signal which a signal is missing or inoperable.
- A green, amber, and red cycle capability, but is being used to flash amber/red or red/red.
- A flashing beacon — capable of only flashing amber/red or red/red signals.
- Lane use control signals including turn arrows and controls which govern the direction of traffic flow in lanes (*e.g.*, electrically controlled overhead "X" or arrow used at different times of the day or on bridges to govern the direction of traffic flow in the lane.)

Any portable signal that controls traffic flow (*i.e.*, gas-powered directional signal to divert traffic for an impending lane closure).

Traffic Control Device (cont'd)

A traffic control signal that is out (*e.g.* due to a power failure) and was related to the crash, should be indicated as present, unless a temporary control [*e.g.*, stop sign, police officer, miscellaneous controls etc.] has been inserted, in which case the temporary control should be selected.

NOTE: Regulatory signs which are *enhanced* by flashing lights should be selected based on their regulatory design. (*e.g.*, a stop sign with a flashing light should be coded as a stop sign - disregard the flashing light).

Stop sign

is selected when a trafficway is controlled by an octagon-shaped sign, with white letters and border on a red background.

Yield sign

is selected when a trafficway is controlled by an equilateral-shaped triangle, with one point downward, having a red border band and white interior and the word "YIELD" in red inside the border band.

School zone sign

is selected when a school zone warning sign is present. These signs may include a 5-sided sign with the point at the top, a rectangular, school speed zone sign, or some other black printing on a yellow background sign.

A school zone sign is selected only if the crash occurred during the time the sign was in effect (*i.e.*, school must be in-session). If the sign was in effect it does not matter whether or not children were present. The time of the crash should also be correlated to the day of the week and the effect of holidays, vacations, etc.

Other regulatory sign (Specify):

is selected when a regulatory sign other than a "stop" or "yield" sign is present. "Other" signs include speed limit signs, movement signs (*e.g.*, NO TURN, LEFT TURN ONLY, DO NOT ENTER, WRONG WAY, ONE WAY,), parking signs (*e.g.*, NO PARKING, EMERGENCY PARKING ONLY), and other miscellaneous signs (*e.g.*, ROAD CLOSED TO THROUGH TRAFFIC, WEIGHT LIMIT, etc.)

Warning sign (Not RR crossing)

is selected when a sign is used to warn of an existing or potentially hazardous condition on or adjacent to a highway or street. Generally warning signs are diamond-shaped with black legend and a border on a yellow background. Examples include TURN SIGNS, CURVE SIGNS, WINDING ROAD SIGN, STOP AHEAD SIGN, "T" SYMBOL SIGNS, etc. Some warning signs are horizontal rectangles, for example, a large arrow sign intended to give notice of a sharp change in alignment in the direction of travel.

Unknown sign

is used when a regulatory sign *was present* at the time of collision but was removed or not available during the scene inspection to determine its type and the PAR is not specific about a traffic control presence.

Miscellaneous/other controls including RR controls (Specify):

is selected when the following are present:

- A construction warning sign (any black on orange diamond shaped sign).
- Railroad crossing controls are present (e.g., any gates, flashing lights, bells, crossbuck, or railroad crossing sign, circle with a black "X" on a yellow background).
- *Officially designated* person controls both pedestrian and vehicular traffic (e.g., police officer, crossing guard, flag person, etc.)

NOTE: An *officially designated* person controlling traffic takes precedence over any other attributes.

TRAFFIC CONTROL DEVICE FUNCTIONING

Screen Name: Traffic Control--Functioning

SAS Data Set: *GV*

SAS Variable: *TRCTLFCT*

Oracle Name: *VEHICLEPRECRASH.PICKTRAFFICDEVICE*

Element Attributes:

Oracle	SAS	
1	0	[No traffic control(s)]
2	1	Traffic control device not functioning (specify):
3	2	Traffic control device functioning properly
4	9	Unknown

Source: Researcher determined--inputs include scene inspection, interviews, and police report.

Remarks:**Traffic control device not functioning (specify):**

is selected in the following situations:

- The traffic control device was not operating.
- The traffic control device reported has some function, but the function was improper, inadequate, or operating erratically (*e.g.*, signal works but was stuck on red).
- The traffic control device was defaced, badly worn, rotated so it could not be seen, covered with snow, lying on ground, etc.

Traffic control device functioning properly

is selected when the traffic control device was functioning as designed at the time of the crash.

Unknown

is selected when the status of the traffic control device, at the time of the crash, cannot be determined.

MOVEMENT

General Vehicle Form, Case 2008-43-093B/ Vehicle #1

VEHICLE | SPECIFICATIONS | OFFICIAL RECORDS | PRECRASH | ROLLOVER | RECONSTRUCTION | DELTA V | LOG | REVIEW

ENVIRONMENT | MOVEMENT | DISTRACTIONS

Pre-event Movement (Prior to Recognition of Critical Event) Other (specify) [v]


Critical Pre-Crash Category Other (specify) [v]

Critical Pre-Crash Event Other (Specify) [v]

Attempted Avoidance Maneuver Other action (specify) [v]

Pre-Impact Stability Tracking [v]

Pre-Impact Location Stayed in original travel lane [v]

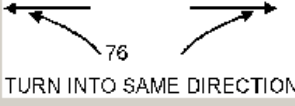Crash Type 76 

Turn Into Path [] Change Trafficway Vehicle Turning []

Save Close

PRECRASH DATA OVERVIEW

Page 1 of 20

Precrash variables are completed for each of the in-transport vehicles in the case. This means that the entire crash is first completed from the perspective of one vehicle, then from the perspective of a second vehicle, if any, and so forth. The precrash variables are:

Driver's Distraction/Inattention To Driving (Prior To Recognition Of Critical Event)
Pre-Event Movement (Prior to Recognition of Critical Event),
Critical Precrash Category
Critical Precrash Event,
Attempted Avoidance Maneuver,
Pre-Impact Stability
Pre-Impact Location
Crash Type

The precrash variables are designed to identify the following:

what was this vehicle doing just prior to the critical precrash event,
what made this vehicle's situation critical,
what was the avoidance response, if any, to this critical situation, and
what was the movement of the vehicle just prior to impact?

The most important determination that must be made for each in-transport vehicle is: what was this vehicle's Critical Precrash Event, (*i.e.*, what action by this vehicle, another vehicle, person, animal, or nonfixed object was critical to this vehicle's crash?). Once the critical event is determined, the remaining precrash variables are coded relative to this selected **Critical Precrash Event..**

Do not consider culpability as a factor for determining precrash data. Many crash scenarios will suggest fault, but this is considered coincidental rather than by design.

Critical Crash Envelope

The critical crash envelope begins at the point where:

- (1) the driver recognizes an impending danger (*e.g.*, deer runs into the roadway), or
- (2) the vehicle is in an imminent path of collision with another vehicle, pedestrian, pedalcyclist, other nonmotorist, object, or animal.

The critical crash envelope ends when:

- (1)
 - (a) the driver has made a successful avoidance maneuver and
 - (b) has full steering control, and
 - (c) the vehicle is tracking; or
- (2) the driver's vehicle impacts another vehicle, pedestrian, pedalcyclist, other nonmotorist, object, or animal.

Simple Single Critical Crash Envelope

Most crashes involve only a single critical crash envelope in which the object contacted is captured under the Critical Precrash Event, (*e.g.*, a vehicle is traveling straight on a roadway and a deer runs into the roadway and is struck by the vehicle). This scenario, and similar ones, are very straightforward and will not present many problems.

Complex Single Critical Crash Envelope

However, some single critical crash envelopes are more complex.

Example A: A driver avoids one obstacle and *immediately* impacts another vehicle, person, object, or animal. Because *immediate* is defined as **not** having an opportunity, or sufficient time, to take any additional avoidance actions, the Critical Precrash Event is related to the vehicle, person, object, or animal which the driver successfully avoided instead of the vehicle's first harmful event (*i.e.*, its impact); see examples 4 and 7 below.

Example B: The driver avoids an obstacle only to (a) lose steering control and/or (b) have the vehicle stop tracking, and the vehicle subsequently impacts another vehicle, person, object, or animal. Regardless of whether the driver:

- 1) attempted to regain steering control
- 2) caused the vehicle to resume a tracking posture or
- 3) avoided the impacted vehicle, person, object, or animal

the Critical Precrash Event is similarly related to the vehicle, person, object, or animal which the driver successfully avoided because the driver's critical crash envelope was never stabilized.

In both examples above, the Attempted Avoidance Maneuver records the successful action taken to avoid the Critical Precrash Event.

Vehicles that are not involved in an impact with another vehicle, person, object, or animal in the sequence of crash events (that define this crash) are not included in the CDS; data is not collected for these vehicles. However, these vehicles are included in the Crash Collision Diagram.


The coding order for a single critical crash envelope is illustrated below.

Multiple Critical Crash Envelopes


When a case involves multiple critical crash envelopes, select only the final critical crash envelope. In this situation, encode the variable Pre-Event Movement (Prior to Recognition of Critical Event)

as: **Successful avoidance maneuver to a previous critical event.** The final critical crash envelope is the one that resulted in this vehicle's first harmful event (*i.e.*, its impact) as shown in the following illustration.

Typical Order of a Single Critical Crash Envelope

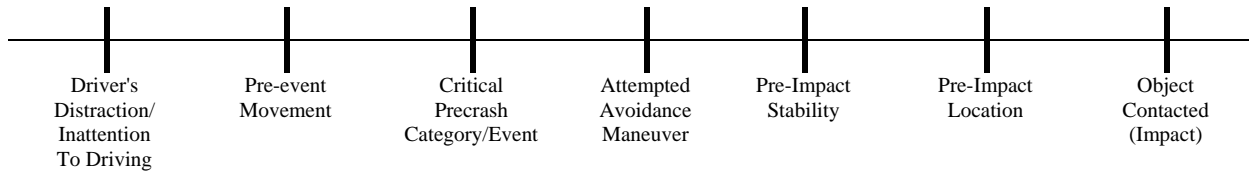

Typical Order of Multiple Critical Crash Envelopes

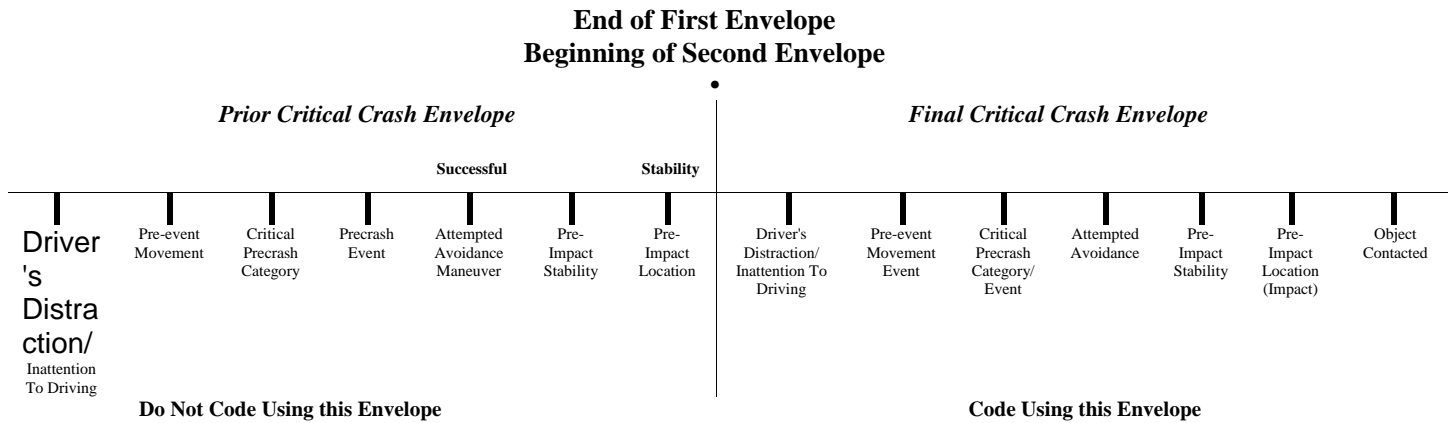

When there is doubt as to whether this vehicle had experienced a complex single, or multiple critical crash envelopes, choose the Critical Precrash Category/Event, to the vehicle, person, object, or animal which the driver successfully avoided (i.e., default to Complex Single). See Complex Single Critical Crash Envelope examples A and B above.

The following pages have: a method protocol, a flowchart illustrating the proper method and protocol for determining the precrash variables, and eight examples of various crash event sequences which contain one or more critical crash envelopes.

Method Protocol

Consider the information obtained from the Police Report, scene and vehicle inspections, and from the interviewee(s) as inputs to your decision making process.

1. Determine Critical Precrash Category / Critical Precrash Event.

What action by this vehicle, another vehicle, person, animal, or object was critical to this driver becoming involved in the crash (*i.e.*, use the "BUT FOR"* test)?

ASK yourself questions (a) through (f) below. Proceed through each question that applies to the crash you are researching. Stop when the answer to the questions is "Yes". This is the Critical Precrash Category.

- (a) Did the vehicle exhibit a control loss?
- (b) Does the evidence suggest that the vehicle was in an environmentally dangerous position?
- (c) Was another vehicle "in" this vehicle's lane?
- (d) Was another vehicle entering into this vehicle's lane?
- (e) Was a pedestrian, pedalcyclist, or other nonmotorist in or approaching this vehicle's path?
- (f) Was an animal in or approaching this vehicle's path or was an object in this vehicle's path?

2. Determine Attempted Avoidance Maneuver.

What does your information indicate that the driver tried to do to avoid the crash?

3. Determine Pre-Impact Stability, and Pre-Impact Location**4. Determine Driver's Distraction/Inattention and Pre-Event Movement (Prior to Recognition of Critical Event).**

* **FOR EXAMPLE :**


"But for" Vehicle # going left-of-center, this vehicle would not have been involved in this crash.

"But for" having entered into the intersection, this vehicle would not have been involved in this crash.

Precrash Methodology Flowchart

* FOR EXAMPLE :

"But for" Vehicle # going left-of-center, this vehicle would not have been involved in this crash.

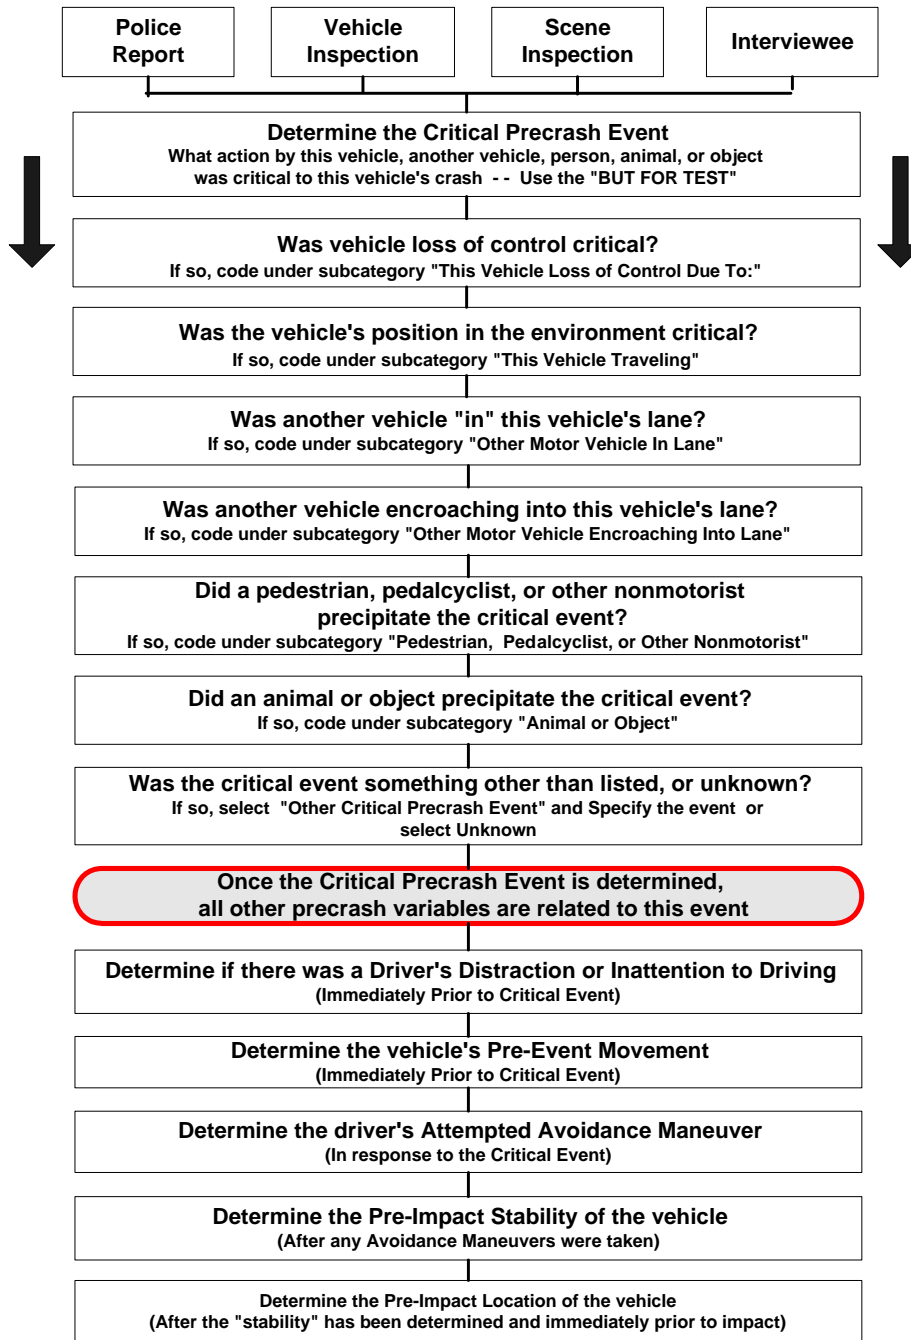

"But for" having entered into the intersection, this vehicle would not have been involved in this crash.

Precrash General Rules

1. Attempted Avoidance Maneuver assesses what the vehicle did rather than what the driver stated he/she tried to do.
2. A traffic control signal/sign can never make the situation critical when determining Critical Precrash Event.
3. When you know what the Critical Precrash Category, but are unable to select a specific Critical Precrash Event, use the following guideline:

Default to one of the “Other Specify” or unknown attributes within each Critical Precrash Event category, rather than coding the entire Critical Precrash Category as “Other critical precrash event”.

4. If control is loss due to driver illness such as heart attacks, diabetic comas, etc., then Critical Precrash Event should be coded as Other cause of control loss.
5. When coding Critical Precrash Category as “This vehicle loss of control”, the loss of control must have occurred prior to the driver doing any avoidance maneuver. If the driver attempts a maneuver (*i.e.*, brakes, steers, etc.) as a result of the driver's perception of a vehicle, object, pedestrian, or nonmotorist, then select the vehicle, object, pedestrian, or nonmotorist as the critical event because that is what made the situation critical. If the vehicle is in a yaw prior to the driver taking an avoidance action, then loss-of-control is what made it critical (*e.g.*, critical curve scuff, hydroplaning, etc.).
6. The Critical Precrash Category/Event can not be determined from available sources (*e.g.*, PAR, scene inspections, interviews, etc.) which driver had the right-of-way at a controlled or uncontrolled intersection, then use the following as a guideline:
 - a. If the junction is controlled by a 3-way / 4-way stop sign, or is uncontrolled, then use the common rule that ***the vehicle on the right has the right-of-way*** for determining encroachment.
 - b. If the junction is controlled by an on-colors traffic control device, and both drivers claim a green light, then both vehicles are in an environmentally dangerous position, and Critical Precrash Event for both vehicles should be **This Vehicle Traveling** (Critical Precrash category) Crossing over (passing through) intersection (Critical Precrash Event).

7. For vehicles executing a left turn with the right-of-way, use **Other Motor Vehicle Encroaching Into Lane - From opposite direction-over left lane line**, or **Other Motor Vehicle Encroaching Into Lane - From opposite direction-over right lane line**.
8. "Fixed" objects (e.g., trees, poles, fire hydrants, etc.,) cannot be in the roadway.
9. A motor vehicle is stopped in a travel lane and is impacted by another motor vehicle ricocheting off a vehicle. The Critical Precrash Event for the vehicle struck by the ricocheting vehicle is in the category of either: **Other Motor Vehicle In Lane** or **Other Motor Vehicle Encroaching Into Lane**.
10. Pre-Impact stability should be indicated as "**Tracking**" if the following are met:
 - a. no skid marks are present at the scene
 - b. the PAR or the interviewee does not indicate skidding **AND**
 - c. the vehicle did not rotate 30 degrees or more (either clockwise or counterclockwise).

Trafficway and its component definitions (i.e., roadway, road, shoulder and median) can be found in the NASS CDS Sampling Manual.

Example 1


Vehicle 2 is northbound and passing through an intersection on a roadway without a traffic control. The driver of vehicle 1 is dialing on a cellular phone. Vehicle 1 is eastbound on a crossing roadway with a stop sign but did see it or stop or slow down. Driver of Vehicle 2 was attentive but did not see Vehicle 1 approaching. Vehicle 1 crashes into the side of vehicle 2. Vehicle 1 braked (leaving skid marks) just prior to impact, without any steering.

	<i>Vehicle 1</i>	<i>Vehicle 2</i>
Driver's Distraction/Inattention to Driving	(Distracted) while dialing cellular phone	Looked but did not see
Pre-Event Movement	Going straight	Going straight
Critical Pre-Crash Category	This Vehicle Traveling	Other motor vehicle encroaching into lane
Critical Pre-Crash Event	Crossing over (passing through) intersection	From crossing street across path
Attempted Avoidance Maneuver	Braking (lockup)	No avoidance maneuver
Pre-Impact Stability	Skidding longitudinally - rotation less than 30 degrees	Tracking
Pre-Impact Location	Stayed in original travel lane	Stayed in original travel lane

Example 1 (cont'd)

In this example, vehicle 1 has one *critical crash envelope* (V_1CCE) which begins at the point where driver 1 recognizes that vehicle 1 is in an imminent collision path with vehicle 2. Vehicle 1's critical crash envelope ends at the point of impact with vehicle 2.

Vehicle 2 has one *critical crash envelope* (V_2CCE). Although the driver of vehicle 2 did not recognize the danger, vehicle 2's critical crash envelope begins at the point where vehicle 2 is in an imminent path of collision with vehicle 1. Vehicle 2's critical crash envelope ends at the point of impact with vehicle 1.

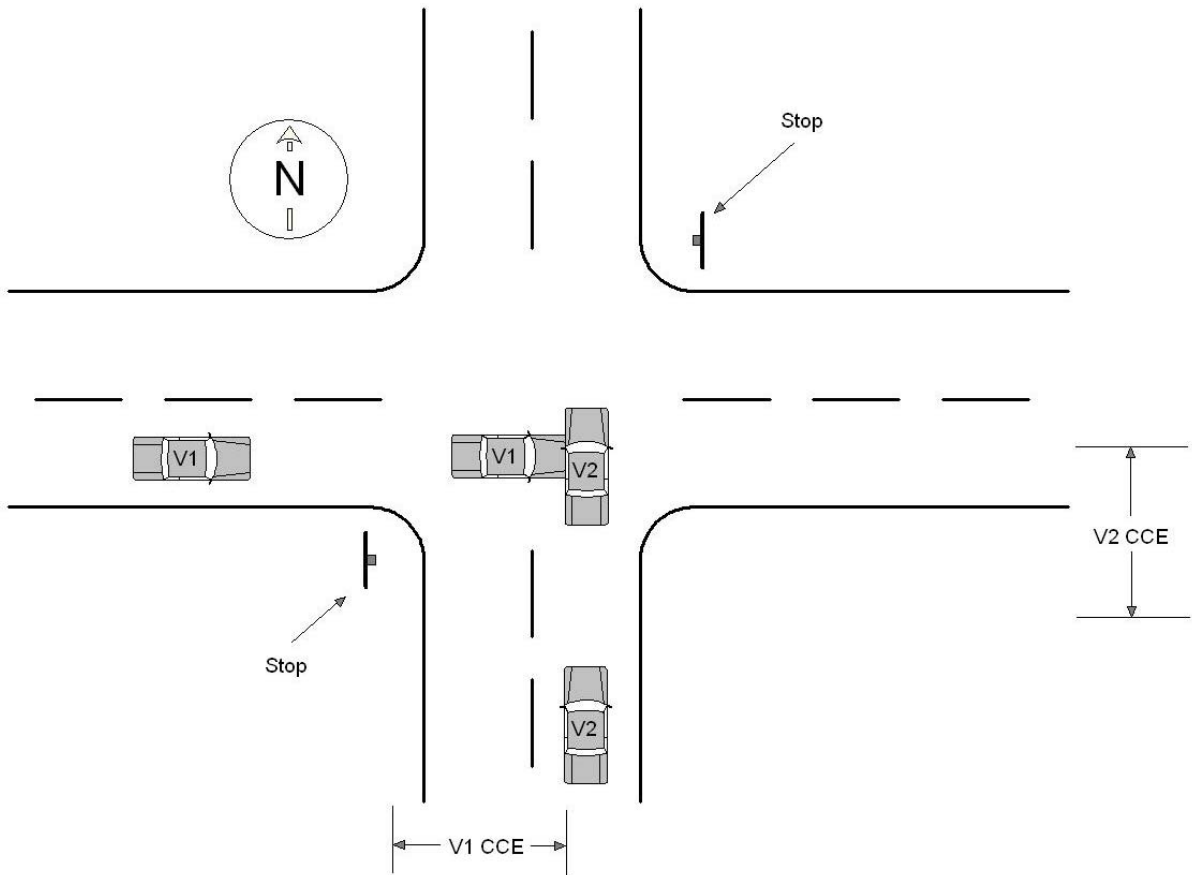

Example 2


Vehicle 1 and vehicle 2 are traveling in opposite directions on the same roadway. The driver of vehicle 1 falls asleep and crosses over the center line into the travel lane of vehicle 2. Vehicle 2 attempted to avoid vehicle 1 by steering right onto the shoulder and accelerating. Vehicle 1 impacted vehicle 2 in the side.

	<i>Vehicle 1</i>	<i>Vehicle 2</i>
Driver's Distraction/Inattention to Driving	Sleepy or fell asleep	Attentive or not distracted
Pre-Event Movement	Going straight	Going straight
Critical Pre-Crash Category	This vehicle traveling	Other motor vehicle encroaching into lane
Critical Pre-Crash Event	Over the lane line on left side of travel lane	From opposite direction over left lane line
Attempted Avoidance Maneuver	No avoidance maneuver	Accelerating and steering right
Pre-Impact Stability	Tracking	Tracking
Pre-Impact Location	Stayed on roadway, but left original travel lane	Departed roadway

Example 2 (cont'd)

In this example, vehicle 1 has one **critical crash envelope** (V_1 CCE) which begins at the point where vehicle 1 crosses over the lane line and ends at the point of impact with vehicle 2.

Vehicle 2 has one **critical crash envelope** (V_2 CCE) which begins at the point where driver 2 recognizes vehicle 1 encroaching into his/her travel lane. Vehicle 2's critical crash envelope ends at the point of impact with vehicle 1.

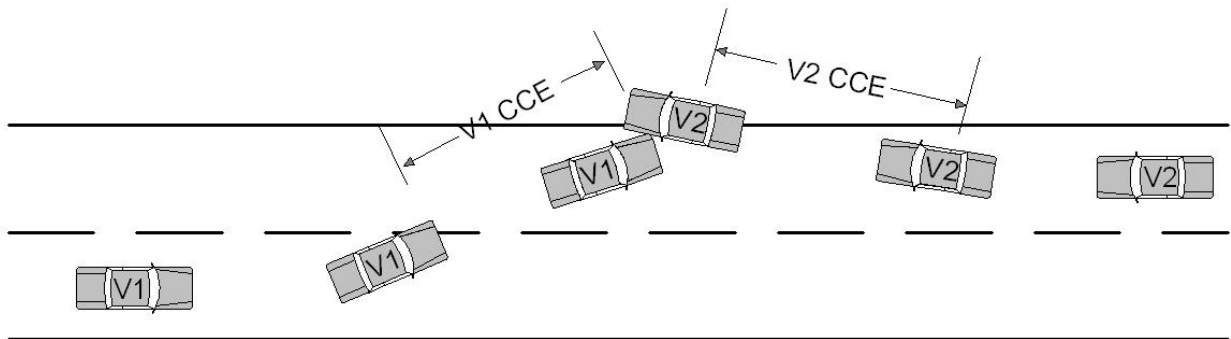

Example 3

Vehicle 1 is traveling eastbound. A noncontact vehicle (NCV) is westbound and attempts to turn left in front of Vehicle 1 into an intersecting private driveway. Vehicle 1 braked (without lockup) and steered left to avoid the noncontact vehicle. The driver of Vehicle 1 successfully avoided the noncontact vehicle and maintained full control, but crossed into the westbound lane. Now traveling the wrong way in the westbound lane, Vehicle 1 attempted to steer right and return to the eastbound lane but struck Vehicle 2 head on. Vehicle 2 attempted to avoid the crash by braking and steering right.

In this example, Vehicle 1 has two critical crash envelopes, (VICCE₁, and VICCE₂). Vehicle 1's first critical crash envelope (VICCE₁) ends at the point where the driver of Vehicle 1 made a successful avoidance maneuver and maintained full control of the vehicle. Vehicle 1's second critical crash envelope (VICCE₂) begins immediately following the successful avoidance maneuver and ends at the point of impact with Vehicle 2. Use the critical crash envelope which resulted in Vehicle 1's first impact (VICCE₂).

Vehicle 2 has one critical crash envelope (V2CCE₁) which begins at the point where the driver of Vehicle 2 recognizes Vehicle 1 in his/her lane and ends at the point of impact with Vehicle 1.


The noncontact vehicle was not involved in an impact with another vehicle, person, animal, or object in the sequence of crash events and is therefore not included in the Crashworthiness Data System. However, the noncontact vehicle must be shown on the Crash Collision Diagram.

	<i>Vehicle 1</i>	<i>Vehicle 2</i>
Driver's Distraction/Inattention to Driving	Attentive or not distracted	Attentive or not distracted
Pre-Event Movement	Successful avoidance maneuver to a previous critical event	Going straight
Critical Pre-Crash Category	Other motor vehicle in lane	Other motor vehicle in lane
Critical Pre-Crash Event	Traveling in opposite direction	Traveling in opposite direction
Attempted Avoidance Maneuver	Steering right	Braking and steering right
Pre-Impact Stability	Tracking	Tracking
Pre-Impact Location	Stayed in original travel lane	Stayed in original travel lane

In this example, vehicle 1 has two critical crash envelopes (V_1CCE_1 and V_1CCE_2). Vehicle 1's first **critical crash envelope** (V_1CCE_1) ends at the point where the driver of vehicle 1 made a successful avoidance maneuver and maintained full control of the vehicle. Vehicle 1's second **critical crash envelope** (V_1CCE_2) begins immediately following the successful avoidance maneuver and ends at the point of impact with vehicle 2. Use the critical crash envelope which resulted in vehicle 1's first impact (V_1CCE_2).

Vehicle 2 has one **critical crash envelope** (V_2CCE) which begins at the point where driver 2 recognizes vehicle 1 in his/her travel lane and ends at the point of impact with vehicle 1.

The noncontact vehicle was not involved in an impact with another vehicle, person, animal, or object in the sequence of crash events and is therefore not included in the Crashworthiness Data System. However, the noncontact vehicle must be shown on the Crash Collision Diagram.

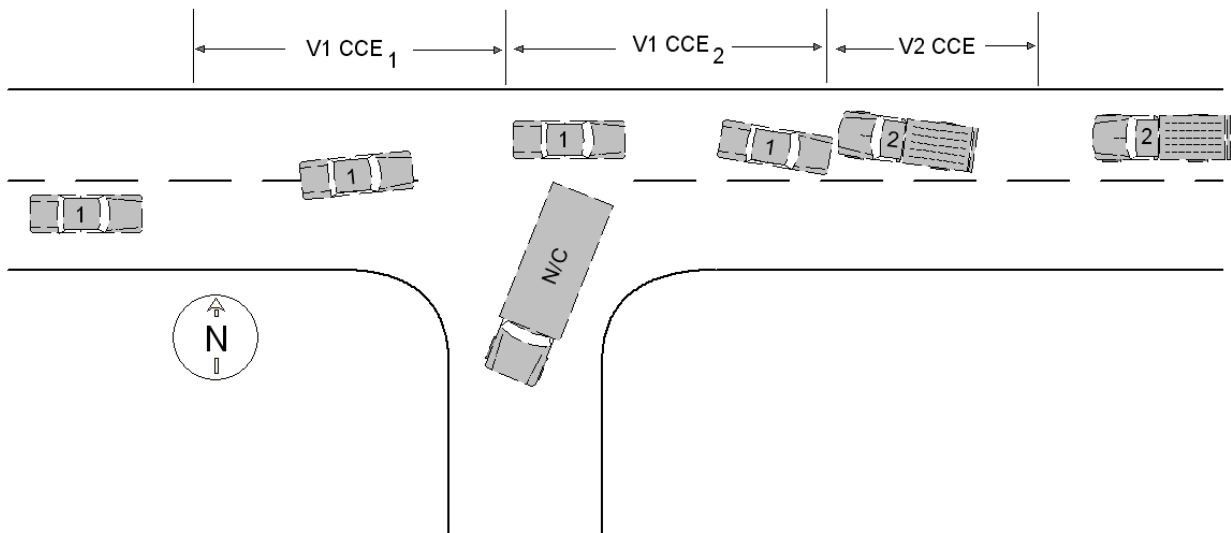


Example 4

Vehicle 1 and vehicle 2 are traveling in opposite directions on the same roadway. The driver of vehicle 1 brakes (without lockup) and steers left to avoid a pedestrian who darted into his/her travel lane. Vehicle 1 crosses over the center line into the travel path of vehicle 2. The driver of vehicle 2 was talking with a passenger and not paying close attention to driving and at the last second attempted to avoid vehicle 1 by braking and steering right onto the shoulder. Vehicle 2 skids and rotates clockwise about 45 degrees before it is impacted in the side by vehicle 1.

	<i>Vehicle 1</i>	<i>Vehicle 2</i>
Driver's Distraction/Inattention to Driving	Attentive or not distracted	(Distracted) by other object, occupant or event
Pre-Event Movement	Going straight	Going straight
Critical Pre-Crash Category	Pedestrian, Pedacyclist, or other nonmotorist	Other Motor Vehicle encroaching into lane
Critical Pre-Crash Event	Pedestrian in roadway	From opposite direction over left lane line
Attempted Avoidance Maneuver	Braking and steering left	Braking and steering right
Pre-Impact Stability	Tracking	Skidding laterally - clockwise rotation
Pre-Impact Location	Stayed on roadway but left original travel lane	Stayed in original travel lane

In this example, vehicle 1 has one critical crash envelope (V_1CCE). Vehicle 1's critical crash envelope involved a successful avoidance of a pedestrian [*i.e.*, Critical Precrash Event equals **Pedestrian in roadway**] which resulted in an *immediate* impact to vehicle 2. Therefore, the pedestrian is coded as the critical precrash event for vehicle 1. Vehicle 1's avoidance maneuver is for this example, the action taken to avoid the pedestrian.

Vehicle 2 has one *critical crash envelope* (V_2CCE) which begins at the point where driver 2 recognized and reacted to vehicle 1 in his/her travel lane and ends at the point of impact with vehicle 1.

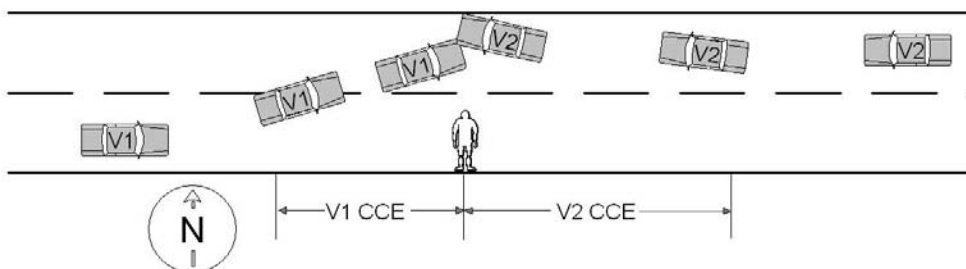

Example 5

Vehicle 1 and vehicle 2 are traveling in the same direction in adjacent lanes on a divided highway (with a painted median). While the driver of vehicle 1 was using an electric razor, the vehicle has a blow out, driver 1 loses control, crosses the left lane line and impacts the right rear of vehicle 2. Vehicle 2 is redirected across the painted median, skidding and rotating clockwise, and subsequently impacts vehicle 3. Vehicle 3 attempted to avoid vehicle 2 by steering right and accelerating.


<i>Vehicle 1</i>		<i>Vehicle 2</i>
Driver's Distraction/Inattention to Driving	[Distracted] while using or reaching for device/object brought into in vehicle	Attentive or not distracted
Pre-Event Movement	Going straight	Going straight
Critical Pre-Crash Category	This vehicle loss control due to	Other motor vehicle encroaching into lane
Critical Pre-Crash Event	Blow out or flat tire	From adjacent lane (same direction) - over right lane line
Attempted Avoidance Maneuver	No avoidance maneuver	No avoidance maneuver
Pre-Impact Stability	Tracking	Tracking
Pre-Impact Location	Stayed on roadway, but left original travel lane	Stayed in original travel lane
<i>Vehicle 3</i>		
Driver's Distraction/Inattention to Driving	Attentive or not distracted	
Pre-Event Movement	Going straight	
Critical Pre-Crash Category	Other motor vehicle encroaching into lane	
Critical Pre-Crash Event	From opposite direction - over left lane line	
Attempted Avoidance Maneuver	Accelerating and steering right	
Pre-Impact Stability	Tracking	
Pre-Impact Location	Stayed in original travel lane	

Example 5 (cont'd)

In this example, vehicle 1 has one **critical crash envelope** (V_1CCE) which begins with control loss due to the blow out and ends at the point of impact with vehicle 2. The blow out is the critical precrash event.

Vehicle 2 has two critical crash envelopes (V_2CCE_1 and V_2CCE_2). Vehicle 2's first **critical crash envelope** (V_2CCE_1) begins when vehicle 1 enters vehicle 2's travel lane and ends at the point of impact with vehicle 1. Vehicle 2's second **critical crash envelope** (V_2CCE_2) begins immediately after the first impact and ends at the point of impact with vehicle 3. Use the critical crash envelope which resulted in vehicle 2's first impact (V_2CCE_1), because the NASS CDS is only interested in coding the critical crash envelope which leads to a vehicle's first harmful event.

For this example, Vehicle 3 has one critical crash envelope (V_3CCE) which begins when driver 3 recognizes and reacts to vehicle 2 which is in an imminent path of collision with vehicle 3 and ends at the point of impact with vehicle 2.

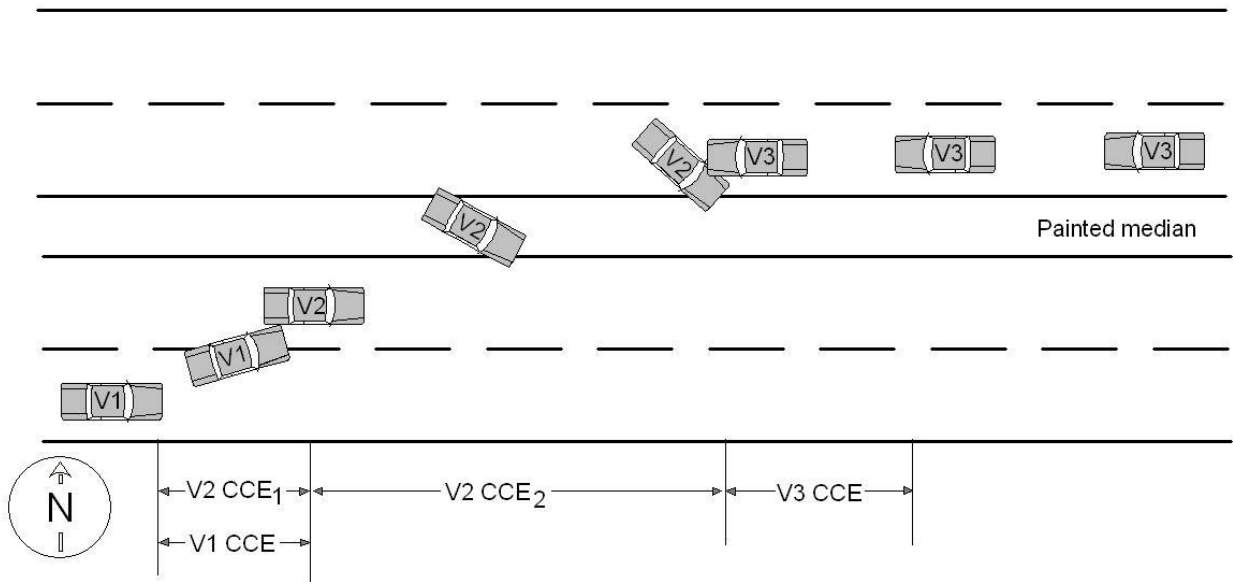

Example 6

Vehicle 1 and vehicle 2 are traveling in opposite directions on the same roadway. A noncontact vehicle is parked in front of a noncontact truck-tractor (with a trailer) on the road shoulder and suddenly enters the roadway into vehicle 1's travel lane. The driver of vehicle 1 instantly brakes (with lockup) and steers left (with counterclockwise rotation) to avoid the noncontact vehicle. Vehicle 1 crosses over the center line and *immediately* impacts vehicle 2. Vehicle 2 had no avoidance maneuvers.


	<i>Vehicle 1</i>	<i>Vehicle 2</i>
Driver's Distraction/Inattention to Driving	Attentive or not distracted	Attentive or not distracted
Pre-Event Movement	Going Straight	Going Straight
Critical Pre-Crash Category	Other motor vehicle encroaching into lane	Other motor vehicle encroaching into lane
Critical Pre-Crash Event	From parking lane	From opposite direction over left lane line
Attempted Avoidance Maneuver	Braking and steering left	No avoidance actions
Pre-Impact Stability	Skidding laterally - counterclockwise rotation	Tracking
Pre-Impact Location	Stayed on roadway but left original travel lane	Stayed in original travel lane

In this example, vehicle 1 has one critical crash envelope (V₁CCE). Vehicle 1's critical crash envelope involved a successful avoidance of a noncontact vehicle and resulted in an *immediate* impact to vehicle 2. Vehicle 1's critical crash envelope was initiated by the noncontact vehicle, afterwards there was no opportunity for subsequent avoidance actions. Therefore, the encroachment of the noncontact vehicle into vehicle 1's travel lane is coded as the critical precrash event for vehicle 1. Vehicle 1's avoidance maneuver is coded as the action taken to avoid the noncontact vehicle.

Example 6 (cont'd)

Vehicle 2 has one *critical crash envelope* (V_2CCE) which begins at the point where vehicle 1 is in an imminent path of collision with vehicle 2 and ends at the point of impact with vehicle 1.


The noncontact vehicle and the noncontact truck were not involved in an impact in the sequence of crash events and are therefore not coded in the Crashworthiness Data System. However, the noncontact vehicle and truck must be shown on the Crash Collision diagram.

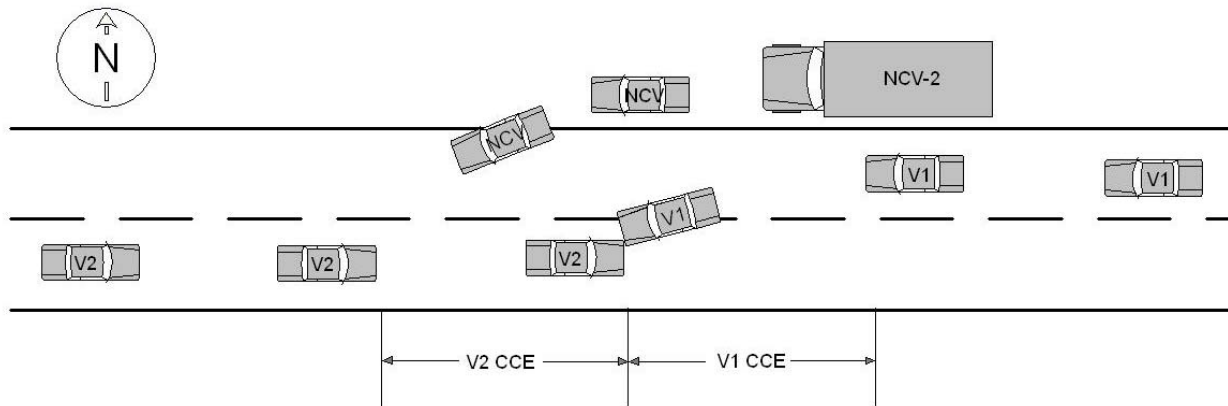

Example 7

Vehicle 1 and Vehicle 2 are traveling in opposite directions on the same roadway. A police car (with lights activated) is making a traffic stop on the side of the road. The driver of Vehicle 1 is looking at the activity on his left. Before he can react, Vehicle 1 crosses the centerline and strikes the front of Vehicle 2. The driver of Vehicle 2 also noticed the police activity, but he was attentive to the slowing traffic ahead. Vehicle 2 attempted to avoid the crash by braking and steering right.

	<i>Vehicle 1</i>	<i>Vehicle 2</i>
Driver's Distraction/Inattention to Driving	Distracted by outside person, object, or event	Attentive or not distracted
Pre-Event Movement	Going straight	Going straight
Critical Pre-Crash Category	This vehicle traveling	Other motor vehicle encroaching into lane
Critical Pre-Crash Event	Over the lane line on left side of travel lane	From opposite direction over left lane line
Attempted Avoidance Maneuver	No avoidance maneuver	Braking and steering right
Pre-Impact Stability	Tracking	Tracking
Pre-Impact Location	Stayed on roadway but left original travel lane	Stayed in original travel lane

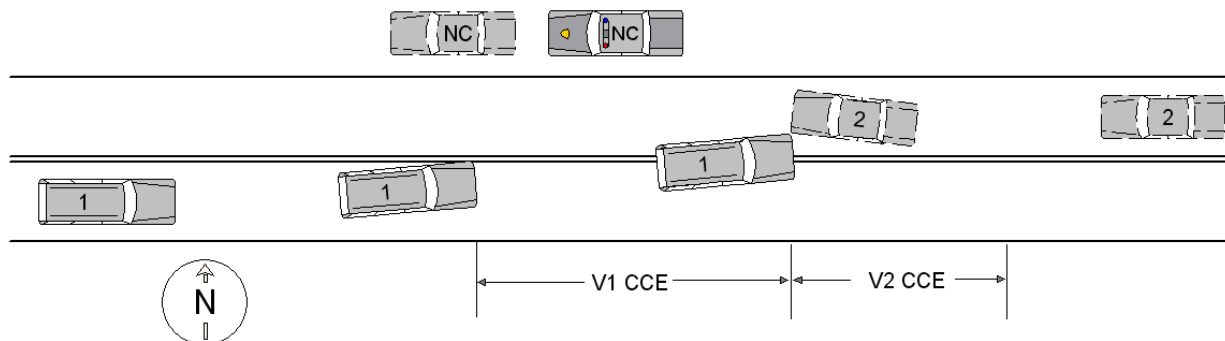

PRE-EVENT MOVEMENT (PRIOR TO RECOGNITION OF CRITICAL EVENT)

Screen Name: Pre-Event Movement (Prior to Recognition of Critical Event)

SAS Data Set: *GV*

SAS Variable: *REMOVE*

Oracle Name: *VEHICLEPRECRASH.PICKPREEVENTMOVEMENT*

Element Attributes:

Oracle	SAS	
0	0	[No Driver Present]
1	1	Going straight
2	2	Decelerating in traffic lane
3	3	Accelerating in traffic lane
4	4	Starting in traffic lane
5	5	Stopped in traffic lane
6	6	Passing or overtaking another vehicle
7	7	Disabled or parked in travel lane
8	8	Leaving a parking position
9	9	Entering a parking position
10	10	Turning right
11	11	Turning left
12	12	Making a U-turn
13	13	Backing up (other than for parking position)
14	14	Negotiating a curve
15	15	Changing lanes
16	16	Merging
17	17	Successful avoidance maneuver to a previous critical event
18	98	Other (specify):
19	99	Unknown

Source: Researcher determined — inputs include scene, interviews and police report.

Remarks:

Record the attribute which best describes this vehicle's activity prior to the driver's realization of an impending critical event or just prior to impact if the driver took no action or had no time to attempt any evasive maneuvers.

Actions taken by the driver, of this vehicle, *after realization* of an impending danger are captured in Attempted Avoidance Maneuver.

[No Driver Present]

is pre-coded if on the Official Records Tab the "Driver Present?" variable is coded as "No driver Present."

Going straight

is selected when this vehicle's path of travel was straight ahead without any attempted or intended changes.

Decelerating in traffic lane

is selected when this vehicle was traveling straight ahead within the traffic lane and was decelerating.

Accelerating in traffic lane

is selected when this vehicle was traveling straight ahead within the traffic lane and was accelerating.

Starting in traffic lane

is selected when this vehicle was in the process of starting forward from a stopped position within the traffic lane (*e.g.*, start up from traffic signal).

Stopped in traffic lane

is selected when this vehicle was stopped momentarily, with the motor running within the traffic lane (*e.g.*, stopped for traffic signal).

Passing or overtaking another vehicle

is selected when this vehicle was traveling straight ahead and was in the process of passing or overtaking another vehicle on the left or right.

Disabled or parked in travel lane

is selected when this vehicle was parked in a travel lane (*e.g.*, double parked, disabled) with a driver present in the vehicle.

Leaving a parking position

is selected when this vehicle was entering the travel lane from a parking area adjacent to the traffic lanes.

Entering a parking position

is selected when this vehicle was leaving the travel lane to a parking area adjacent to the traffic lanes (*i.e.*, in the process of parking).

Turning right

is selected when this vehicle was moving forward and turned right, changing lanes from one roadway to a different roadway (*e.g.*, from or to a driveway, parking lot, or intersection).

Turning left

is selected when this vehicle was moving forward and turned left, changing lanes from one roadway to a different roadway (*e.g.*, from or to a driveway, parking lot, or intersection).

Making a U-turn

is selected when this vehicle was making a U-turn on the trafficway.

Backing up (other than for parking position)

is selected when this vehicle was traveling backwards within the trafficway. Do not use this attribute if the vehicle was backing into a parking space (See **Entering parking position**)

Negotiating a curve

is selected when this vehicle was continuing along a roadway that curved to the right or left.

Changing lanes

is selected when this vehicle was traveling straight ahead and changed travel lanes to the right or left while on the same roadway.

Merging

is selected when this vehicle was moving forward and merging from the left or right into a traffic lane (*e.g.*, roadway narrows, exit/entrance ramps).

Successful avoidance maneuver to a previous critical event

is selected when this vehicle responded to a previous critical event and successfully avoided an impact. However, this maneuver precipitated a subsequent critical crash envelope, which resulted in this vehicle's first impact.

Other (specify)

is selected when this vehicle's pre-event movement is known but none of the specified attributes are applicable. The movement must be specified in the "specify box"

Unknown

is selected when the vehicle's movement prior to the driver's realization of an impending critical event is unknown.

CRITICAL PRE CRASH CATEGORY

Screen Name: Critical Pre Crash Category

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *VEHICLEPRECRASH.PICKCRITICALCLASSEVENT*

Element Attributes:

Oracle	SAS
1	This Vehicle Loss of Control
2	This Vehicle Traveling
3	Other Motor Vehicle In Lane
4	Other Motor Vehicle Encroaching Into Lane
5	Pedestrian or Pedalcyclist, or Other Nonmotorist
6	Object or Animal
7	Other (Specify)
8	Unknown

Source: Researcher determined — inputs include scene inspection, vehicle inspection, driver interview, and police report.

Remarks:

When more than one condition applies and it cannot be determined which one had a greater effect, choose the higher listed element (i.e., **This Vehicle Loss of Control** takes precedence over **This Vehicle Traveling**).

This Vehicle Loss of Control

These identify situations where the critical factor leading to the collision involved control loss of this vehicle. Control loss can be related to either mechanical failure or environmentally induced vehicle instability.

This Vehicle Traveling

These identify situations where the critical factor leading to the collision involves the travel path of this vehicle.

Other Motor Vehicle In Lane

These identify situations where the critical factor leading to the collision involved the travel of the other vehicle in the same lane as this vehicle.

Other Motor Vehicle Encroaching Into Lane

These identify situations where the critical factor leading to the collision involves the other vehicle's movement into or across this vehicle's travel lane from another lane, intersection, driveway, or ramp.

Pedestrian or Pedalcyclist, or Other Nonmotorist

These identify situations where the critical factor leading to the collision for this vehicle involved a pedestrian, pedalcyclist, or other nonmotorist. A pedalcyclist is defined as a person riding a pedal power conveyance (*e.g.*, bicycle, tricycle, etc.). A nonmotorist is defined as a person riding on or in a conveyance which is not motorized or propelled by pedaling (*e.g.*, baby carriage, skate board, roller blades, etc.).

Object or Animal

These identify situations where the critical factor leading to the collision for this vehicle involved an object or animal.

Other (Specify)

is selected when a critical factor not previously listed resulted in the collision for this vehicle. Previous impacts in the crash are not considered as other critical precrash events. For example, use this attribute if the critical event developed from this vehicle's departure from a driveway.

Unknown

is selected when the critical precrash event which resulted in the collision is not known. Missing interviews do not automatically result in the use of the "Unknown" attribute.

CRITICAL PRE-CRASH EVENT

Screen Name: Critical Pre-Crash Event

SAS Data Set: *GV*

SAS Variable: *PREEVENT*

Oracle Name: *VEHICLEPRECRASH.PICKCRITICALEVENT*

Element Attributes:

This Vehicle Loss of Control Due To:

Oracle	SAS
1	1 Blow out/flat tire
2	2 Stalled engine
3	3 Disabling vehicle failure (<i>e.g.</i> , wheel fell off)
(specify):	
4	4 Non-disabling vehicle problem (<i>e.g.</i> , hood flew up) (specify)
5	5 Poor road conditions (puddle, pot hole, ice, etc.) (specify)
6	6 Traveling too fast for conditions
	Cargo Shift
	Jackknife
8	8 Other cause of control loss (specify)
9	9 Unknown cause of control loss

This Vehicle Traveling

Oracle	SAS
10	10 Over the lane line on left side of travel lane
11	11 Over the lane line on right side of travel lane
12	12 Off the edge of the road on the left side
13	13 Off the edge of the road on the right side
14	14 End departure
15	15 Turning left at intersection
16	16 Turning right at intersection
17	17 Crossing over (passing through) intersection
18	18 This vehicle decelerating
19	19 Unknown travel direction

Other Motor Vehicle In Lane

Oracle	SAS
50	50 Other vehicle stopped
51	51 Traveling in same direction with lower or steady speed
52	52 Traveling in same direction while decelerating
53	53 Traveling in same direction with higher speed
54	54 Traveling in opposite direction
55	55 In crossover
56	56 Backing
59	59 Unknown travel direction of other motor vehicle

in lane

Other Motor Vehicle Encroaching Into Lane

60	60 From adjacent lane (same direction)—over left lane line
----	--

Other MV Encroaching Into Lane cont'd

Oracle	SAS
61	61 From adjacent lane (same direction)—over right lane line
62	62 From opposite direction over left lane line
63	63 From opposite direction over right lane line
64	64 From parking lane
65	65 From crossing street, turning into same direction
66	66 From crossing street, across path
67	67 From crossing street turning into opposite direction
68	68 From crossing street, intended path not known
70	70 From driveway, turning into same direction
71	71 From driveway, across path
72	72 From driveway, turning into opposite direction
73	73 From driveway, intended path not known
74	74 From entrance to limited access highway
78	78 Encroachment by other vehicle—details unknown

Pedestrian or Pedalcyclist, or Other Nonmotorist

Oracle	SAS
80	80 Pedestrian in roadway
81	81 Pedestrian approaching roadway
82	82 Pedestrian unknown location
83	83 Pedalcyclist or other nonmotorist in roadway
(specify)	
84	84 Pedalcyclist or other nonmotorist approaching roadway (specify)
85	85 Pedalcyclist or other nonmotorist—unknown location (specify)

Object or Animal

Oracle	SAS
87	87 Animal in roadway
88	88 Animal approaching roadway
89	89 Animal—unknown location
90	90 Object in roadway
91	91 Object approaching roadway
92	92 Object unknown location

Other (specify)

112	98 Other critical pre-crash event (specify):
111	99 Unknown

Source: Researcher determined — inputs include scene inspection, vehicle inspection, driver interview, and police report.

Remarks:

The selection of the **Critical Precrash Category** will determine what **Critical Precrash Events** are available to select.

When more than one condition applies and it cannot be determined which one had a greater effect, choose the higher listed element.

This variable identifies the critical event which made the crash imminent (*i.e.*, something occurred which made the collision possible). Responsive actions to this situation, if any, are coded under **Attempted Avoidance Maneuver**.

A precrash event is coded for each vehicle and identifies the circumstances leading to this vehicle's first impact in the crash.

Do not refer to culpability. Many crash scenarios will suggest fault, but this should be coincidental rather than by design. As an example, vehicle 1 was speeding when vehicle 2 crossed vehicle 1's path from a driveway. The situation which made the precrash event critical for vehicle 1 (since it did not lose control) was vehicle 2's movement across vehicle 1's path **and not** vehicle 1's speed.

This Vehicle Loss Of Control**Blow out or flat tire**

is used when a vehicle in motion loses control as the result of an immediate tire disruption. Examples include blow out, rapid air loss, tread separation, etc..

Stalled engine

refers to a vehicle which is in motion and loses engine power. A stalled engine situation must precipitate a collision to be coded in this variable. A vehicle which is stopped as the result of an engine malfunction does not take this attribute.

Disabling vehicle failure (*e.g.*, wheel fell off)

is selected when a mechanical malfunction, such as a component of the vehicle suspension or steering system, leads to the critical reason for the collision. Specify which component failure was involved in the space provided under this element.

Non-disabling vehicle problem (*e.g.*, hood flew up)

is selected when some mechanical abnormality occurred to this vehicle which leads to the critical reason for the collision. The abnormality must not be disabling damage. A space is provided under this element to specify the non-disabling vehicle problem.

Poor road conditions (puddle, pot hole, ice, etc.)

captures control loss due to environmental conditions of the roadway. These conditions must have initiated the precrash event which resulted in the collision. A space is provided under this element to specify the road condition attributed to initiating the precrash event.

Traveling too fast for conditions

identifies this vehicle's movement relative to its surroundings in which the subsequent loss of control lead to the collision. An example is a roadway departure on a curve where the driver failed to negotiate and departed the roadway resulting in an impact. If the driver merely steered straight while in a curve and departed the roadway, then the category **This Vehicle Traveling** may apply.

Other cause of control loss, specify

is selected when it was determined that this vehicle's loss of control was the primary reason which made the event critical and the above attributes do not adequately identify the control loss condition. The condition cited should be annotated in the space provided.

Unknown cause of control loss

is selected when it is known control loss made the situation critical, but it is not known whether the vehicle or the environment caused the control loss.

This Vehicle Traveling

The attributes identify situations where the critical factor leading to the collision involving the travel path of this vehicle.

Over the lane line on left side of travel lane

is selected when this vehicle departs its lane to the left and is entering or had entered the adjoining lane or shoulder. The change of travel path by this vehicle must precipitate the critical event for the collision. As an example, this vehicle attempts to pass another vehicle on the other vehicle's left and is struck by a vehicle traveling within its travel lane in the opposite direction.

However, by modifying the scenario slightly, the lane change may not always be the factor leading to the precrash event. Consider the same situation where this vehicle is passing to the left of the lead vehicle. If an animal runs into the roadway and is struck by this vehicle, then the correct choice would be **Animal in roadway**.

Over the lane line on right side of travel lane

is selected when this vehicle departs its lane to the right and is entering or had entered the adjoining lane or shoulder. To use this attribute, change of travel path by this vehicle must precipitate the critical event for the collision. As an example, this vehicle attempts to pass another vehicle on the other vehicle's right and is struck in the rear by a vehicle traveling within its travel lane in the same direction. The correct choice for this vehicle would be **Over the lane line on right side of travel lane**.

However, by modifying the scenario slightly the lane change may not always be the factor leading to the precrash event. Consider the same situation where this vehicle is passing to the right of the lead vehicle. If an animal runs into the roadway and is struck by this vehicle, then the correct choice would be **Animal in roadway**.

Off the edge of the road on the left side

identifies a situation where the initial precrash event occurred beyond the left side shoulder area. This also includes departure into a median.

Off the edge of the road on the right side

identifies a situation where the initial precrash event occurred beyond the right side shoulder area.

End departure

is selected when the vehicle departs the end of the roadway (*e.g.*, "T" intersection).

Turning left at intersection

is selected when this vehicle attempts a left turn from its roadway to another roadway or driveway.

Turning right at intersection

is selected when this vehicle attempts a right turn from its roadway to another roadway or driveway.

Crossing over (passing through) intersection

identifies this vehicle's travel as proceeding through the intersection without any planned turning.

This vehicle decelerating

is selected when the vehicle is decelerating, or has just stopped and was immediately struck.

Unknown travel direction

is selected for those occasions where this vehicle's travel made the situation critical, but it is unknown which travel direction this vehicle was moving.

Other Motor Vehicle In Lane

These attributes identify situations where the critical factor leading to the collision involved the travel of the other vehicle in the same lane as this vehicle.

Other vehicle stopped

identifies a situation where the other vehicle is not in motion (*i.e.*, stopped, parked, disabled) and in this vehicle's travel lane. This attribute should not be used if the other vehicle just stopped and was immediately struck.

Traveling in same direction with lower steady speed

is selected when the other vehicle was the lead vehicle in the same travel lane, traveling in the same direction, and was traveling slower than this vehicle

Traveling in same direction while decelerating

is selected when the other vehicle was the lead vehicle in the same travel lane, traveling in the same direction, and was decelerating.

Traveling in same direction with higher speed

is selected when the speed of the other vehicle was higher than this vehicle or accelerating. The other vehicle must be overtaking this vehicle.

Traveling in opposite direction

is selected when the other vehicle was in this vehicle's travel lane and traveling head-on in the opposite direction of this vehicle.

In crossover

is selected when the other vehicle enters a crossover already occupied by this vehicle. A crossover is defined as a designated opening within a median used primarily for "U-turns".

Backing

identifies a situation where the other vehicle was in the process of backing up while in this vehicle's travel lane.

Unknown travel direction of other motor vehicle in lane

is selected for situations where the other vehicle's activity (while in the same lane as this vehicle) precipitated the precrash event, but the travel direction and/or speed could not be determined.

Other Motor Vehicle Encroaching Into Lane

These attributes identify situations where the critical factor leading to the collision involves the other vehicle's movement into or across this vehicle's travel lane from another lane, intersection, driveway, or ramp.

From adjacent lane (same direction)—over left lane line

is selected when the other vehicle was traveling in the same direction as this vehicle and crosses the left lane line with respect to this vehicle's travel lane (*i.e.*, other vehicle crosses its right lane line).

From adjacent lane (same direction) — over right lane line

is selected when the other vehicle was traveling in the same direction as this vehicle and crosses the right lane line with respect to this vehicle's travel lane (*i.e.*, other vehicle crosses its left lane line).

From opposite direction — over left lane line

identifies a situation where the other vehicle crosses the left lane line while traveling in the opposite direction from this vehicle.

From opposite direction — over right lane line

identifies a situation where the other vehicle crosses the right lane line while traveling in the opposite direction from this vehicle.

From parking lane

is selected when the other vehicle was departing a parking lane and entering the travel lane of this vehicle.

From crossing street, turning into same direction

is selected when the other vehicle was turning from another roadway onto this vehicle's roadway and attempted to travel in the same direction as this vehicle. Use this attribute for entrance ramps leading onto limited access highways.

From crossing street, across path

is selected when the other vehicle was continuing straight through the intersection and attempted to cross over this vehicle's roadway.

From crossing street, turning into opposite direction

is selected when the other vehicle was entering an intersection from another roadway and was turning or attempting to turn onto this vehicle's roadway in the opposite travel direction of this vehicle.

From crossing street, intended path not known

is selected when the other vehicle's entrance into the intersection was the critical factor which led to the collision, however, the other vehicle's travel direction could not be determined.

From driveway, turning into same direction

is selected when the other vehicle was turning from a driveway onto this vehicle's roadway and attempted to travel in the same direction as this vehicle.

From driveway, across path

is selected when the other vehicle was entering this vehicle's roadway from a driveway and was continuing straight across to another driveway or roadway.

From driveway, turning into opposite direction

is selected when the other vehicle was entering this vehicle's roadway from a driveway and was attempting to turn into the opposite travel direction of this vehicle.

From driveway, intended path not known

is used to identify driveway-related precrash events where details surrounding the other vehicle's intended path are not known.

From entrance to limited access highway

is selected for entrance ramp situations where the other vehicle was attempting to enter (merge) onto the limited access highway which was being traveled by this vehicle.

Encroachment by other vehicle — details unknown

is selected for situations where the other vehicle initiated the critical precrash event, but circumstances surrounding the other vehicle's encroachment are not known.

Pedestrian or Pedalcyclist, or Other Nonmotorist

These attributes identify situations where the critical factor leading to the collision for this vehicle involved a pedestrian, pedalcyclist, or other nonmotorist. A pedalcyclist is defined as a person riding a pedal power conveyance (*e.g.*, bicycle, tricycle, etc.). A nonmotorist is defined as a person riding on or in a conveyance which is not motorized or propelled by pedaling (*e.g.*, baby carriage, skate board, roller blades, etc.).

Pedestrian in roadway

is selected when a pedestrian was present (*e.g.*, sitting, standing, walking, or running, etc.) in the roadway.

Pedestrian approaching roadway

identifies situations where a pedestrian was within the trafficway and moving toward the roadway or attempting to enter the roadway, but was not on the roadway.

Pedestrian — unknown location

is selected when it was determined the presence or action of a pedestrian was the critical factor which led to this vehicle's collision, but the location or action of the pedestrian was not known.

Pedalcyclist or other nonmotorist in roadway, (specify)

is selected when a pedalcyclist or other nonmotorist was present in the roadway (irrespective of relative motion).

Pedalcyclist or other nonmotorist approaching roadway, (specify)

identifies situations where the pedalcyclist or other nonmotorist was within the trafficway and moving toward the roadway or attempting to enter the roadway, but was not on the roadway.

Pedalcyclist or other nonmotorist — unknown location, (specify)

is selected when it was determined the presence or action of a pedalcyclist or other nonmotorist was the critical factor which led to this vehicle's collision, but the action of the pedalcyclist or other nonmotorist was not known.

Object or Animal

These attributes identify situations where the critical factor leading to the collision for this vehicle involved an object or animal.

Animal in roadway

is selected when an animal was present (*i.e.*, stationary or moving) in the roadway.

Animal approaching roadway

identifies situations where an animal was within the trafficway and moving toward the roadway or attempting to enter the roadway, but not on the roadway.

Animal - unknown location

is selected when it was determined the presence or action of an animal was the critical factor which led to this vehicle's collision, but the action of the animal was not known.

Object in roadway

is used when an object was present in the roadway. An object is defined as being either fixed or nonfixed (**only non-fixed objects are captured in this attribute**).

Object approaching roadway

identifies situations where an object was within the trafficway and moving toward the roadway, but not on the roadway.

Object — unknown location

is selected when it was determined the presence or movement of an object was the critical factor which led to this vehicle's collision, but details surrounding the location of the object were not known.

Other (specify)

These attributes identify situations where the critical factor leading to the collision for this vehicle was not previously listed.

Other Critical Pre-Crash Event(specify)

is selected when a critical factor not previously listed resulted in the collision for this vehicle. Previous impacts in the crash **are not** considered as “other critical precrash events”. For example, use this code if the critical event developed from this vehicle’s departure from a driveway.

Unknown

is selected when the critical precrash event which resulted in the collision is not known. Missing interviews **do not** automatically result in the use of this “Unknown” code.

Precrash Event Scenarios for Different Rear-End Collision Situations

Two Vehicle Collisions

		Trail Vehicle		Lead Vehicle	
1)	Both vehicles in motion. Leading vehicle, traveling at steady speed, is struck from behind by trailing vehicle.	Pre-Event Movement	Going straight	Going straight	Going straight
		Critical Precrash Category	Other Motor Vehicle In Lane	Other Motor Vehicle In Lane	Other Motor Vehicle In Lane
		Critical Precrash Event	Traveling in same direction with lower steady speed	Traveling in same direction with higher speed	Traveling in same direction with higher speed
2)	Both vehicles traveling at same speed. Lead vehicle decelerates and trailing vehicle continues at initial speed. Trailing vehicle eventually applies brakes before striking the lead vehicle.	Pre-Event Movement	Going straight	Going straight	Going straight
		Critical Precrash Category	Other Motor Vehicle In Lane	This Vehicle Traveling	This Vehicle Traveling
		Critical Precrash Event	Traveling in same direction while decelerating	Traveling in same direction while decelerating	This vehicle decelerating
3)	Both vehicles traveling at same speed. Lead vehicle stops and is immediately struck by trailing vehicle.	Pre-Event Movement	Going straight	Going straight	Going straight
		Critical Precrash Category	Other Motor Vehicle In Lane	Other Motor Vehicle In Lane	Other Motor Vehicle In Lane
		Critical Precrash Event	Traveling in same direction while decelerating	Traveling in same direction while decelerating	Traveling in same direction with higher speed
4)	Lead vehicle is stopped on roadway and is struck by a trailing vehicle.	Pre-Event Movement	Going straight	Stopped in traffic	Stopped in traffic
		Critical Precrash Category	Other Motor Vehicle In Lane	Other Motor Vehicle In Lane	Other Motor Vehicle In Lane
		Critical Precrash Event	Other vehicle stopped	Other vehicle stopped	Traveling in same direction with higher speed
5)	Lead and trailing vehicle stopped on roadway. Lead vehicle backs into trailing vehicle.	Pre-Event Movement	Stopped in traffic lane	Stopped in traffic lane	Stopped in traffic lane
		Critical Precrash Category	Other Motor Vehicle In Lane	Other Motor Vehicle In Lane	Other Motor Vehicle In Lane
		Critical Precrash Event	Backing	Backing	Other vehicle stopped

Coding Critical Precrash Event Scenarios for Different Rear-End Collision Situations cont'd

Three Vehicle Collisions

			Trail Vehicle	Middle Vehicle	Lead Vehicle
6)	Two vehicles stopped in traffic, struck by decelerating trailing vehicle	Pre-Event Movement	Decelerating	Stopped in traffic	Stopped in traffic
		Critical Precrash Category	Other Motor Vehicle In Lane	Other Motor Vehicle In Lane	Other Motor Vehicle In Lane
		Critical Precrash Event	Other vehicle stopped	Traveling in same direction while decelerating	Traveling in same direction with higher speed
7)	Lead vehicle stopped in traffic, middle vehicle decelerating, trailing vehicle strikes middle vehicle which strikes lead vehicle.	Pre-Event Movement	Going straight	Decelerating	Stopped in traffic
		Critical Precrash Category	Other Motor Vehicle In Lane	Other Motor Vehicle In Lane	Other Motor Vehicle In Lane
		Critical Precrash Event	Traveling in same direction while decelerating	Traveling in same direction with higher speed	Traveling in same direction with higher speed

ATTEMPTED AVOIDANCE MANEUVER

Page 1 of 2

Screen Name: Attempted Avoidance Maneuver

SAS Data Set: *GV*

SAS Variable: *MANEUVER*

Oracle Name: *VEHICLEPRECRASH.ATTEMPTEDAVIDMANEUVER*

Element Attributes:

Oracle	SAS	
0	0	[No driver present]
1	1	No avoidance maneuver
2	2	Braking (no lockup)
3	3	Braking (lockup)
4	4	Braking (lockup unknown)
5	5	Releasing brakes
6	6	Steering left
7	7	Steering right
8	8	Braking and steering left
9	9	Braking and steering right
10	10	Accelerating
11	11	Accelerating and steering left
12	12	Accelerating and steering right
13	98	Other action (specify)
14	99	Unknown

Source: Researcher determined — inputs include the driver interview, police report, and the scene inspection.

Remarks:

Attempted avoidance maneuvers are movements/actions taken by the driver, within a *critical crash envelope*, in response to a Critical Precrash Event,. See **Precrash Data Overview** for an expanded discussion on precrash definitions. Attempted avoidance maneuvers occur *after* the driver has *realization* of an impending danger. This variable assesses what the driver's action(s) were in response to his/her realization.

Most crashes have only one critical crash envelope and thus only one Critical Precrash Event; however, multiple critical crash envelopes with their respective Critical Precrash Events, can exist.

This variable may be used independently: (1) of any maneuvers associated with this driver's Crash Type, and (2) this vehicle's first associated crash event.

Select the element value which best describes the actions taken by the driver in response to the Critical Precrash Event, within the *critical crash envelope* that occurred just prior to this vehicle's impact. When there was a known action (*e.g.*, braking), but you cannot determine whether there was more than one action (*e.g.*, braking and steering left), default to the known action (*e.g.*, braking).

[No Driver Present]

is pre-coded if on the Official Records Tab the "Driver Present?" variable is coded as "No driver Present".

No avoidance maneuver

is selected whenever the driver did not attempt any evasive (pre-impact) maneuvers.

Braking (no lockup)

is selected when there is no indication that the brakes locked up. This attribute can be used with vehicles equipped with anti-lock braking systems (ABS), that perform as designed.

Braking (lockup)

is selected when there is indication that the brakes locked up. This code is generally not a valid choice for vehicles with anti-lock braking systems (ABS), unless definite evidence of lockup exists.

PRE-IMPACT STABILITY

Page 1 of 2

Screen Name: Pre-Impact Stability

SAS Data Set: GV

SAS Variable: PREISTAB

Oracle Name: VEHILCEPRECRASH.PICKPREIMPACTSTABILITY

Element Attributes:

Oracle	SAS	
0	0	[No driver present]
1	1	Tracking
2	2	Skidding longitudinally rotation less than 30 degrees
3	3	Skidding laterally clockwise rotation
4	4	Skidding laterally counterclockwise rotation
5	8	Other vehicle loss-of-control (specify)
6	9	Pre-crash stability unknown

Source: Researcher determined — inputs include vehicle and scene evidence, interviews and police report.

Remarks:

The purpose of this variable is to assess the stability of the vehicle **after** the critical event, but before the impact. The stability of the vehicle prior to an avoidance action is not considered except in the following situation:

A vehicle that is out of control (*e.g.*, yawing clockwise) prior to an avoidance maneuver is indicated as **Other vehicle loss-of-control** only if an avoidance action was taken in response to an impending danger.

Thus, this variable focuses upon this vehicle's dynamics after the critical event.

[No Driver Present]

is pre-coded if on the Official Records Tab the “Driver Present?” variable is coded as “No driver Present”.

Tracking

is used when there is no brake lockup and the vehicle continued along its intended path without rotation. Stopped, slowing, turning, or accelerating to avoid a rear-end collision are examples.

Skidding longitudinally — rotation less than 30 degrees

is selected when there is brake lockup or whenever tire marks are apparent without brake lockup (braking or non-braking) and rotation is less than 30 degrees clockwise or counterclockwise. If

there is no information to support rotation greater than or equal to 30 degrees, then use this attribute.

Skidding laterally — clockwise rotation

is selected when the vehicle rotates clockwise, relative to the driver's seating position. The vehicle must rotate 30 degrees or more. This attribute also applies when the driver attempts a steering input (*i.e.*, steers right), but the vehicle rotates clockwise.

Skidding laterally — counterclockwise rotation

is selected when the vehicle rotates counterclockwise, relative to the driver's seating position. The vehicle must rotate 30 degrees or more. This attribute also applies when the driver attempts a steering input (*i.e.*, swerves left), but the vehicle rotates counterclockwise.

Other vehicle loss-of-control, (specify)

is selected when a driver loses control of a vehicle prior to the critical event.

Precrash stability unknown

is selected when the stability of the vehicle, after the Critical Event, cannot be determined.

PRE-IMPACT LOCATION

Page 1 of 2

Screen Name: Pre-Impact Location

SAS Data Set: *GV*SAS Variable: *PREILOC*Oracle Name: *VEHICLEPRECRASH.PICKPREIMPACTLOCATION*

Element Attributes:

Oracle	SAS	
0	0	[No driver present]
1	1	Stayed in original travel lane
2	2	Stayed on roadway but left original travel lane
3	3	Stayed on roadway, not known if left original travel lane
4	4	Departed roadway
5	5	Remained off roadway
6	6	Returned to roadway
7	7	Entered roadway
8	9	Unknown

Source: Researcher determined — inputs include vehicle and scene evidence, interviews and police report.

Remarks:

The purpose of this variable is to assess the location of the vehicle **after** the critical event, but before the impact. Select the attribute which best describes the location of the vehicle (i.e., perimeter of the vehicle from the case diagram).

[No Driver Present]

is pre-coded if on the Official Records Tab the "Driver Present?" variable is coded as "No driver Present".

Stayed in original travel lane

is selected when the perimeter of the vehicle remained within the boundaries of its initial travel lane.

Stayed on roadway but left original travel lane

is selected when the "majority" of the perimeter of the vehicle departed its initial travel lane; however, the "majority" of the vehicle remained within the boundaries of the roadway (travel lanes).

Stayed on roadway, not known if left original travel lane

is selected when it cannot be ascertained whether the "majority" of the vehicle remained within its initial travel lane. To use this attribute, the "majority" of the vehicle must have remained within the boundaries of the roadway.

Departed roadway

is selected when the "majority" of the vehicle departed the roadway as a result of a precrash motion. The roadway departure must not be related to the post-impact trajectory of a crash within the roadway.

Remained off roadway

the precrash motion occurred outside the boundaries of the roadway. This includes traveling on the shoulders, within the median, on the roadside, or off the trafficway.

Returned to roadway

is selected when the "majority" of the vehicle was on the roadway, went off the roadway and then returned to the roadway during precrash motion.

Entered roadway

is selected when the vehicle was not previously on the roadway and then the majority of the vehicle enters the roadway during precrash motion.

Unknown

the precrash motion of the vehicle cannot be determined.

CRASH TYPE

Page 1 of 2

Screen Name: Crash Type**SAS Data Set:** *GV***SAS Variable:** *ACCTYPE***Oracle Name:** *VEHICLEPRECRASH.PICKACCIDENTTYPE***Element Attributes:**

Oracle	SAS	
		As assigned by the selection on the next screens
1	00	No Impact 01 - 93
3	98	Other Crash Type
4	99	Unknown
SEE FOLLOWING VARIABLES FOR CODES		


Source: Researcher determined — inputs include police report, scene inspection, vehicle inspection, and interview.**Remarks:**

The Crash Type is a numeric value assigned by selecting the **Crash Category** and the **Crash Configuration** on the next screens/pages. The number can be directly entered or edited here, however, the two-step process of selecting the Crash Category And Crash Configuration is preferred to visualize the crash scenario.





























The first harmful event may include a collision between a vehicle and some object, accompanied by property damage or human injury. The object may be another vehicle, a person, an animal, a fixed object, the road surface, or the ground. If the first collision is a rollover, the impact is with the ground or road surface. The collision may also involve plowing into soft ground, if severe vehicle deceleration results in damage or injury. A road departure without damage or injury is not defined as a harmful event.

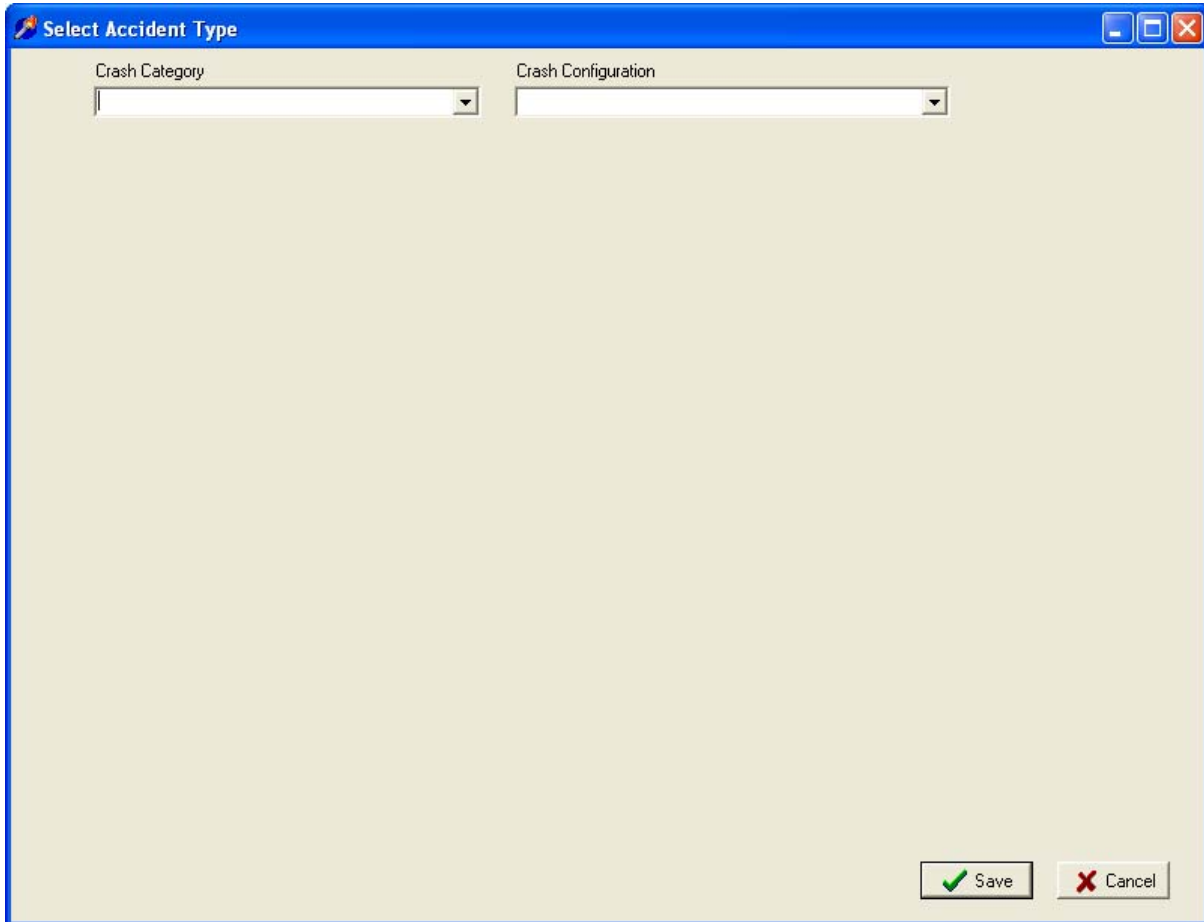Crash Type (cont'd)

To access the category choices double click on the white box next to Crash Type and the following window opens:



CRASH TYPES (includes intent)

I Single Driver	A Right Roadside Departure				04 SPECIFICS OTHER	05 SPECIFICS UNKNOWN	
	B Left Roadside Departure				09 SPECIFICS OTHER	10 SPECIFICS UNKNOWN	
	C Forward Impact					15 SPECIFICS OTHER	16 SPECIFICS UNKNOWN
Same Trafficway Same Direction	D Rear End				(EACH - 32) SPECIFICS OTHER	(EACH - 33) SPECIFICS UNKNOWN	
	E Forward Impact					(EACH - 42) SPECIFICS OTHER	(EACH - 43) SPECIFICS UNKNOWN
	F Angle, Sideswipe				(EACH - 48) SPECIFICS OTHER	(EACH - 49) SPECIFICS UNKNOWN	
Same Trafficway Opposite Direction	G Head-On			(EACH - 52) SPECIFICS OTHER	(EACH - 53) SPECIFICS UNKNOWN		
	H Forward Impact					(EACH - 62) SPECIFICS OTHER	(EACH - 63) SPECIFICS UNKNOWN
	I Angle, Sideswipe			(EACH - 66) SPECIFICS OTHER	(EACH - 67) SPECIFICS UNKNOWN		
	J Turn Across Path				(EACH - 74) SPECIFICS OTHER	(EACH - 75) SPECIFICS UNKNOWN	

GENERAL VEHICLE FORM

PRECRASH

<p>IV Trafficway</p>	<p>K Turn Into Path</p>	<p>Turn Into Same Direction</p>	<p>Turn Into Opposite Direction</p>	<p>(EACH - 84) (EACH - 85) SPECIFICS OTHER SPECIFICS UNKNOWN</p>
<p>V Intersecting Paths</p>	<p>L Straight Paths</p>	<p>86 Striking from the Right</p>	<p>88 Striking from the Left</p>	<p>(EACH - 90) (EACH - 91) SPECIFICS OTHER SPECIFICS UNKNOWN</p>
<p>VI Miscellaneous</p>	<p>M Backing,</p>	<p>92 Backing Veh. 93 Other Veh. or Object</p>	<p>98 Other Accident Type 99 Unknown Accident Type 00 No Impact</p>	

CRASH CATEGORY

Page 1 of 2

Screen Name: Crash Category**SAS Data Set:** N/A**SAS Variable:** N/A**Oracle Name:** N/A**Element Attributes:**

Oracle SAS

Single Driver
Same Trafficway, Same Direction
Same Trafficway, Opposite Direction
Changing Trafficway, Vehicle Turning
Intersecting Paths (Vehicle Damage)
Miscellaneous

Remarks:

Variables Crash Type (Category) and Crash Type (Configuration); are used for categorizing the collisions of drivers involved in crashes. A collision is defined here as the first harmful event in a crash between a vehicle and some object, accompanied by property damage or human injury. The object may be another vehicle, a person, an animal, a fixed object, the road surface, or the ground. The first harmful event may also involve plowing into soft ground, if severe vehicle deceleration results in damage or injury. A road departure without damage or injury is not defined as a collision.

To determine the proper crash type, refer to the three step decision process outlined below:

- Step 1 - Determine the appropriate Crash Category.
- Step 2 - Determine the appropriate Crash Configuration.
- Step 3 - Determine the specific Crash Type from the graphic icons .

The attributes for this variable are the categories. The configuration and specific crash type attributes are further discussed under variables Crash Configuration, and Crash Type.

The definitions of each of the six categories are as follows:

Single Driver

The first harmful event involves a collision between an in-transport vehicle and an object, or an off roadway rollover. A harmful event involving two in-transport vehicles is excluded from this category. Note, the impact location on the vehicle is not a consideration for crash types in this category.

Crash Category (cont'd)

Page 2 of 2

Same Trafficway, Same Direction

The first harmful event occurred while both vehicles were traveling in the same direction on the same trafficway.

Same Trafficway, Opposite Direction

The first harmful event occurred while both vehicles were traveling in opposite directions on the same trafficway.

Change Trafficway, Vehicle Turning

The first harmful event occurred when the vehicle is either turning or merging while attempting to change from one trafficway to another trafficway. Trafficway for this variable is loosely defined to include driveways, alleys and parking lots when a vehicle is either entering or exiting a trafficway.

Intersecting Paths (Vehicle Damage)

The first harmful event involves situations where vehicle trajectories intersect. It is important to note the location of damage to each vehicle for crash typing. The location of damage to each vehicle is important to determine the correct crash type.

Miscellaneous

The first harmful event involves a crash type which cannot be described in the Categories above and thus is included in this category. Select this category, if there is insufficient information to choose between categories. Included are vehicles that are backing, third or subsequent vehicles involved in the crash, U-turns, etc.

Each category is subdivided into crash configuration(s). The configurations are described under **Crash Configuration**.

CRASH CONFIGURATION

Screen Name: Crash Configuration

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: N/A

Element Attributes:

Oracle SAS

Single Driver

Right Roadside Departure

Left Roadside Departure

Forward Impact

Same Trafficway, Same Direction

Rear-End

Forward Impact

Sideswipe/Angle

Same Trafficway, Opposite Direction

Head-On

Forward Impact

Sideswipe/Angle

Change Trafficway Vehicle Turning

Turn Across Path

Turn Into Path

Intersecting Paths (Vehicle Damage)

Straight Paths

Miscellaneous

Backing, Etc.

Source: Researcher determined — inputs include police report, scene inspection, vehicle inspection, and interview.

Remarks:

Each category is further defined by a Crash Configuration. The Configurations are discussed below.

Single Driver

Right Roadside Departure; Left Roadside Departure - The vehicle departed either the right or left side of road with the first harmful event occurring off the road. Right versus left is based on the side of the road departed immediately prior to the first harmful event.

Forward Impact - The vehicle struck an object on the trafficway while moving forward.

Same Trafficway, Same Direction

Rear-End — The front of the overtaking vehicle impacted the rear of the other vehicle. **Note**, even if the rear-impacted vehicle had started to make a turn, code here (not in **Change Trafficway Vehicle Turning**).

Forward Impact — The front of the overtaking vehicle impacted the rear of the other vehicle, following a steering maneuver around a noninvolved vehicle or object.

Sideswipe/Angle — The two vehicles are involved in a shallow, glancing impact involving the side of one or both vehicles. **Note**, CDC guidelines for sideswipes are not considered when assessing this configuration.

Same Trafficway, Opposite Direction

Head-On — The frontal area of one vehicle impacted the frontal area of another.

Forward Impact — The frontal area of one vehicle impacted the frontal area of another following a steering maneuver around a noninvolved vehicle or an object.

Sideswipe/Angle — The two vehicles are involved in a shallow, glancing impact involving the side of one or both vehicles.

Changing Trafficway, Vehicle Turning

Turn Across Path — The two vehicles were initially on the same trafficway when one vehicle tried to turn onto another trafficway and pulled ***in front of*** the other vehicle. Vehicles making a "U" turn are identified in **Miscellaneous**.

Turn Into Path — The two vehicles were initially on different trafficways when one attempted to turn into the same trafficway as the other vehicle. **Note**, the focus of this configuration is on the turning maneuver from one trafficway to another and not on the vehicles' plane of contact.

Intersecting Paths (Vehicle Damage)

Straight Paths — The two vehicles were proceeding (or attempting to proceed) straight ahead.

Miscellaneous

Backing, Etc. — One of the two vehicles involved was a backing vehicle, regardless of its location on the trafficway or the damage location on the vehicles. Any crash configuration which cannot be described in the categories above is included here (e.g., U-turns, third or subsequent vehicles involved in the crash, etc.).

CRASH TYPES

Screen Name: Crash Types

SAS Data Set: *GV*

SAS Variable: *ACCTYPE*

Oracle Name: *VEHICLEPRECRASH.PICKACCIDENTTYPE*

Element Values:

Crash Category: Single Driver

Crash Configuration Right Roadside Departure:

Oracle	SAS	
01	01	Drive Off Road
02	02	Control/Traction Loss
03	03	Avoid Collision with Vehicle, Pedestrian, Animal
04	04	Specifics Other
05	05	Specifics Unknown

Crash Configuration Left Roadside Departure

06	06	Drive Off Road
07	07	Control/Traction Loss
08	08	Avoid Collision With Vehicle, Pedestrian, Animal
09	09	Specifics Other
10	10	Specifics Unknown

Crash Configuration Forward Impact

11	11	Parked Vehicle
12	12	Stationary Object
13	13	Pedestrian/Animal
14	14	End Departure
15	15	Specifics Other
16	16	Specifics Unknown

Crash Category: Same Trafficway, Same Direction

Crash Configuration Rear-End

20	20	Stopped
21	21	Stopped, Straight
22	22	Stopped, Left
23	23	Stopped, Right
24	24	Slower
25	25	Slower, Going Straight
26	26	Slower, Going Left
27	27	Slower, Going Right

Crash Types (cont'd)

Oracle	SAS	
28	28	Decelerating (Slowing)
29	29	Decelerating (Slowing), Going Straight
30	30	Decelerating (Slowing), Going Left
31	31	Decelerating (Slowing), Going Right
32	32	Specifics Other
33	33	Specifics Unknown

Crash Configuration: Forward Impact

34	34	This Vehicle's Frontal Area Impacts Another Vehicle
35	35	This Vehicle Is Impacted by Frontal Area of Another Vehicle
36	36	This Vehicle's Frontal Area Impacts Another Vehicle
37	37	This Vehicle Is Impacted by Frontal Area of Another Vehicle
38	38	This Vehicle's Frontal Area Impacts Another Vehicle
39	39	This Vehicle Is Impacted by Frontal Area of Another Vehicle
40	40	This Vehicle's Frontal Area Impacts Another Vehicle
41	41	This Vehicle Is Impacted by Frontal Area of Another Vehicle
42	42	Specifics Other
43	43	Specifics Unknown

Crash Configuration: Sideswipe/Angle

44	44	Straight Ahead on Left
45	45	Straight Ahead on Left/Right
46	46	Changing Lanes to the Right
47	47	Changing Lanes to the Left
48	48	Specifics Other
49	49	Specifics Unknown

Crash Category: Same Trafficway Opposite Direction

Crash Configuration: Head-On

50	50	Lateral Move (Left/Right)
51	51	Lateral Move (Going Straight)
52	52	Specifics Other
53	53	Specifics Unknown

Crash Configuration: Forward Impact

55	54	This Vehicle's Frontal Area Impacts Another Vehicle
55	55	This Vehicle Is Impacted by Frontal Area of Another Vehicle
56	56	This Vehicle's Frontal Area Impacts Another Vehicle
57	57	This Vehicle Is Impacted by Frontal Area of Another Vehicle
58	58	This Vehicle's Frontal Area Impacts Another Vehicle
59	59	This Vehicle Is Impacted by Frontal Area of Another Vehicle
60	60	This Vehicle's Frontal Area Impacts Another Vehicle

Crash Types (cont'd)

Oracle	SAS	
61	61	This Vehicle Is Impacted by Frontal Area of Another Vehicle
62	62	Specifics Other
63	63	Specifics Unknown

Crash Configuration: Sideswipe/Angle

64	64	Lateral Move (left/Right)
65	65	Lateral Move (Going Straight)
66	66	Specifics Other
67	67	Specifics Unknown

Crash Category: Change Trafficway Vehicle Turning

Crash Configuration: Turn Across Path

68	68	Initial Opposite Directions (Left/Right)
69	69	Initial Opposite Directions (Going Straight)
70	70	Initial Same Directions (Turning Right)
71	71	Initial Same Directions (Going Straight)
72	72	Initial Same Directions (Turning Left)
73	73	Initial Same Directions (Going Straight)
74	74	Specifics Other
75	75	Specifics Unknown

Crash Configuration: Turn Into Path

76	76	Turn Into Same Direction (Turning Left)
77	77	Turn Into Same Direction (Going Straight)
78	78	Turn Into Same Direction (Turning Right)
79	79	Turn Into Same Direction (Going Straight)
80	80	Turn Into Opposite Directions (Turning Right)
81	81	Turn Into Opposite Directions (Going Straight)
82	82	Turn Into Opposite Directions (Turning Left)
83	83	Turn Into Opposite Directions (Going Straight)
84	84	Specifics Other
85	85	Specifics Unknown

Crash Category: Intersecting Paths (Vehicle Damage)

Configuration Straight Paths

86	86	Striking from the Right
87	87	Struck on the Right
88	88	Striking from the Left
89	89	Struck on the Left
90	90	Specifics Other
91	91	Specifics Unknown

Crash Category: Miscellaneous

Oracle	SAS	Crash Configuration: Backing, Etc.
92	92	Backing Vehicle
93	93	Other Vehicle or Object
98	98	Other Crash Type
99	99	Unknown Crash Type
00	00	No Impact

Source: Researcher determined — inputs include police report, scene inspection, vehicle inspection, and interview.

Remarks:**Crash Category: Single Driver**

The crash types in **Single Driver** involve an impact between a vehicle and an object. The other Categories identify specific collision combinations which must be coded in specified pairs (*i.e.*, the pair attribute defines the Crash Type). As an example, the combination Rear-end, stopped and Rear-end, specifics other or Rear-end, stopped and Slower, straight ahead are not valid since Rear-end, stopped only has meaning when linked to Stopped.

A crash involving a vehicle impacting a "driverless in-transport vehicle" is coded "**, specifics other**" in the appropriate configuration-category. For example, a vehicle which impacts the rear of a driverless in-transport vehicle is encoded Rear-end, specifics other.

In crashes involving more than two vehicles or in collision sequences involving a combination of vehicle-to-object-to-vehicle impacts, code the Crash Type for the vehicle(s) involved in the first harmful event. All other vehicles are coded **Other Crash Type**.

Keep in mind that *intended actions* play an important role in the coding scheme. For example, crash type Slower, turning left is selected over type (Slower, straight ahead) if the subject vehicle was traveling slower with the *intention* of turning left. Note, the turning action need not have occurred prior to the collision. The driver's *intent* to turn is the key.

The *configurations* are delineated into specific crash types. These types can be identified by referring to the crash type diagrams.


Crash Category Single Driver cont'd

Crash Configuration: Right Roadside Departure

The vehicle departed the right side of the road with the first harmful event occurring off the road.


01 Right Roadside Departure: Drive Off Road

Enter "01" when the vehicle departed the road under a controlled situation (e.g. was distracted, fell asleep, intentionally departed, etc).




02 Right Roadside Departure: Control/Traction Loss

Enter "02" when there is evidence that the vehicle lost traction or "got away" from in some other way (e.g., the vehicle spun off the road as a result of surface conditions, oversteer phenomena, or mechanical malfunctions). If doubt exists, code "01" (Right Roadside Departure, Drive Off Road).



03 Right Roadside Departure: Avoid Collision With Vehicle, Pedestrian,

Enter "03" when the vehicle departed the road to avoid something on the road. Phantom vehicle situations, pedestrians, bicyclists, and other cyclists and nonmotorists are included here.



04 Right Roadside Departure: Specifics Other

Enter "04" if the vehicle departed the road to avoid something on the road other than a vehicle, pedestrian, or animal. Also use "Specifics Other" for crashes involving a driverless in-transport vehicle.



05 Right Roadside Departure: Specifics Unknown


Enter "05" if the vehicle departed the right side of the road for unknown reasons.



Crash Configuration: Left Roadside Departure


06 Left Roadside Departure: Drive Off Road

Enter "06" when the vehicle departed the road under a controlled situation (e.g., was distracted, fell asleep, intentionally departed, etc.)




07 Left Roadside Departure: Control/Traction Loss

Enter "07" if there is evidence that the vehicle lost traction or "got away" from the driver in some other way (e.g., the vehicle spun off the road as a result of surface conditions, oversteer phenomena, or mechanical malfunctions.) If doubt exists, code "06" (Left Roadside Departure, Drive Off Road).



08 Left Roadside Departure: Avoid Collision With Vehicle, Pedestrian, Animal

Enter "08" when the vehicle departed the road to avoid something on the road. Phantom vehicle situations, pedestrians, bicyclists, and other cyclists and nonmotorists are included here.



09 Left Roadside Departure: Specifics Other

Enter "09" if the vehicle departed the road to avoid something on the road other than a vehicle, pedestrian, or animal. Also, use "specifics Other" for crashes involving a driverless in-transport vehicle.



10 Left Roadside Departure: Specifics Unknown

Enter "10" if the vehicle departed the left side of the road for unknown reasons.



Crash Configuration: Forward Impact

The vehicle struck an object on the road or off the end of a trafficway while moving forward.


11 Forward Impact: Parked Vehicle

Enter "11" if the crash involves impact with a parked vehicle on either side of the road.




12 Forward Impact: Stationary Object

Enter "12" if the crash involves impact with a stationary object on either side of the road.




13 Forward Impact: Pedestrian/Animal

Enter "13" if the first harmful event involves impact with a pedestrian or animal on the road. Pedestrians, bicyclists, and other cyclists and nonmotorists are included here. Vehicle plane of contact is NOT a consideration.




14 Forward Impact: End Departure

Enter "14" when the vehicle ran off the end of the road and crashed into something.



15 Forward Impact: Specifics Other

Enter "15" for impacted (striking or struck) railway vehicles and nonstationary the road. Also use "Specifics Other" for crashes involving a driverless in-transport motor vehicles.



16 Forward Impact: Specifics Unknown

Enter "16" when the PAR indicates a single driver was involved in a forward impact collision, but no further classification is possible.


Crash Category: Same Trafficway, Same Direction

Crash Configuration: Rear-End

The front of the overtaking vehicle impacted the rear of the other vehicle. Note, even if the rear-impacted vehicle had started to make a turn, code here (**not** in Crash Category: Change in Trafficway, Vehicle Turning).


20 Rear-End: Stopped

Enter "20" for a vehicle that impacts another vehicle from the rear when the impacted vehicle was stopped in the trafficway.




21 Rear-End: Stopped, Straight

Enter "21" for a rear-impacted vehicle that was stopped in the trafficway, and was intending to proceed straight ahead.




22 Rear-End: Stopped, Left

Enter "22" for a rear-impacted vehicle that was stopped in the trafficway, intending to make a left turn.



23 Rear-End: Stopped, Right


Enter "23" for a rear-impacted vehicle that was stopped in the trafficway, intending to make a right turn.



Crash Types (cont'd)


24 Rear-End: Slower

Enter "24" for a vehicle that impacts another vehicle from the rear when the impacted vehicle was going slower than the striking vehicle.




25 Rear-End: Slower, Going Straight

Enter "25" for a rear-impacted vehicle that was going slower than the other vehicle while proceeding straight ahead.




26 Rear-End: Slower, Going Left

Enter "26" for a rear-impacted vehicle that was going slower than the other vehicle while intending to turn left.




27 Rear-End: Slower, Going Right

Enter "27" for a rear-impacted vehicle that was going slower than the other vehicle while intending to turn right.




28 Rear-End: Decelerating (Slowing)

Enter "28" for a vehicle impacts another vehicle from the rear when the impacted vehicle was slowing down.




29 Rear-End: Decelerating (Slowing), Going Straight

Enter "29" for a rear-impacted vehicle that was slowing down while proceeding straight ahead.




30 Rear-End: Decelerating (Slowing), Going Left

Enter "30" for a rear-impacted vehicle that was slowing down while intending to turn left.



31 Rear-End: Decelerating (Slowing), Going Right

Enter "31" for a rear-impacted vehicle that was slowing down while intending to turn right.




32 Rear-End: Specifics Other

Enter "32" for rear-end collisions which cannot be described in "20"-"31."
Enter "Specifics Other" for crashess involving a driverless in-transport vehicle.



33 Rear-End: Specifics Unknown

Enter "33" when the PAR indicates a rear-end collision occurred, but no further classification is possible.




Crash Configuration: Forward Impact

The front of the overtaking vehicle impacted the rear of the other vehicle, following a steering maneuver around a noninvolved vehicle or object.


34 Forward Impact: Control/Traction Loss

Enter "34" for a vehicle that's frontal area impacts another vehicle due to loss of traction (during a maneuver to avoid a collision with a non-involved vehicle) both are traveling on the same trafficway in the same direction.




35 Forward Impact: Control/Traction Loss

Enter "35" for a vehicle which is impacted by the frontal area of another vehicle due to loss of control or traction (during a maneuver to avoid a collision with a non-involved vehicle) while both are traveling on the same trafficway in the same direction.




36 Forward Impact: Control/Traction Loss

Enter "36" for a vehicle that's frontal area impacts another vehicle due to loss of traction (during a maneuver to avoid a collision with an object) while both are traveling on the same trafficway in the same direction.




37 Forward Impact: Control/Traction Loss

Enter "37" for a vehicle which is impacted by the frontal area of another vehicle due to loss of control or traction (during a maneuver to avoid a collision with an object) while both are traveling on the same trafficway in the same direction.




38 Forward Impact: Avoid Collision with Vehicle

Enter "38" for a vehicle that struck the rear of another vehicle with its front plane while maneuvering to avoid collision with a non-involved vehicle, when loss of control or traction was not a factor, and both were traveling on the same trafficway, in the same direction.




39 Forward Impact: Avoid Collision with Vehicle



Enter "39" for a vehicle that was impacted by the frontal area of another vehicle which was maneuvering to avoid a collision with a non-involved vehicle, when loss of control or traction was not a factor, and both were traveling on the same trafficway, in the same direction.


40 Forward Impact: Avoid Collision with Object

Enter "40" for a vehicle that struck the rear of another vehicle with its front plane while maneuvering to avoid collision with an object, when loss of control or traction was not a factor, and both were traveling on the same trafficway, in the same direction.



41 Forward Impact: Avoid Collision with Object

Enter "41" for a vehicle which was impacted by the frontal area of another vehicle which was maneuvering to avoid a collision with an object, when loss of control or traction was not a factor, and both were traveling on the same trafficway, in the same direction.



42 Forward Impact: Specifics Other

Enter "42" (for both vehicles) for a forward impact collision which occurred while both vehicles were traveling on the same trafficway, in the same direction, and the striking vehicle was attempting to avoid a vehicle or an object which cannot be described by "34" - "40."



Also, use this code for crashes involving a driverless in-transport vehicle which would otherwise qualify for this configuration.

43 Forward Impact: Specifics Unknown

Enter "43" when the PAR indicates that a forward impact collision occurred while both vehicles were traveling on the same trafficway and in the same direction, but no further classification was possible.



Crash Configuration: Sideswipe/Angle

The two vehicles are involved in an impact involving the side of one or both vehicles.

The following four codes, "44" (Sideswipe/Angle, straight ahead on left), "45" (Sideswipe/Angle, straight ahead on left/right), "46" (Sideswipe/Angle, changing lanes to the right), "47" (Sideswipe/Angle, changing lanes to the left), identify relative vehicle positions (left versus right) and lane of travel intentions (straight ahead versus changing lanes). From these four codes, four combinations are permitted. They are:

1. "44" and "45"
2. "46" and "45"
3. "45" and "47"
4. "46" and "47".

When used in combination, these codes refer to a sideswipe or angle collision which involved a vehicle to the left of a vehicle to the right where:

1. neither vehicle (codes "44" and "45") intended to change its lane;
2. the vehicle on the left (code "46") was changing lanes to the right, and the vehicle on the right (code "45") was not intending to change its lane;
3. the vehicle on the left (code "45") was not intending to change its lane, and the vehicle on the right (code "47") was changing lanes to the left; and
4. the vehicle on the left (code "46") was changing lanes to the right, and the vehicle on the right (code "47") was changing lanes to the left.

In addition, when:


1. the right sides of the two vehicles impact following a 180 degree rotation of the vehicle on the right, or
2. the left sides of the two vehicles impact following a 180 degree rotation of the vehicle on the left.

Select the appropriate combination depending upon:

- their positions (i.e., left versus right) and
- the intended lane of travel (straight ahead versus changing lanes) of their drivers.


44 Sideswipe/Angle: Straight Ahead on Left

See discussion under Configuration: Sideswipe/Angle, above for an explanation of when this attribute applies.




45 Sideswipe/Angle: Straight Ahead on Left/Right

See discussion under Configuration: Sideswipe/Angle, above for an explanation of when this attribute applies.




46 Sideswipe/Angle: Changing Lanes to the Right

See discussion under Configuration: Sideswipe/Angle, above for an explanation of when this attribute applies.

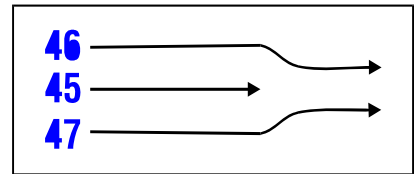

47 Sideswipe/Angle: Changing Lanes to the Left

See discussion under Configuration: Sideswipe/Angle, above for an explanation of when this attribute applies.

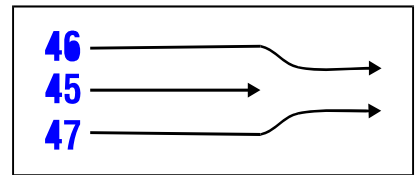

48 Sideswipe/Angle: Specifics Other

Enter "48" if one vehicle was behind the other prior to a sideswipe/angle collision occurring while both vehicles were traveling on the same trafficway and in the same direction.

EACH: **48**
SPECIFICS
OTHER

For example, use this code when two vehicles are on the same trafficway and going the same direction, and one loses control and is struck in the side by the front of the other vehicle. However, if one vehicle rotates such that the impact is front to front, then use code "98" (Other crash type).

Use this code for crashes involving a driverless in-transport vehicle.

49 Sideswipe/Angle: Specifics Unknown

Enter "49" for sideswipe/angle collisions that occur while both vehicles are traveling on the same trafficway and in the same direction, when no further classification is possible.

EACH: **49**
SPECIFICS
UNKNOWN


Crash Category: Same Trafficway, Opposite Direction

Crash Configuration: Head-On

The frontal area of one vehicle impacted the frontal area of another.


50 Head-On: Lateral Move (Left/Right)

Enter "50" for a vehicle that LEAVES ITS LANE [moves laterally (sideways)] immediately before colliding head-on with another vehicle, when the vehicles are traveling on the same trafficway in opposite directions.

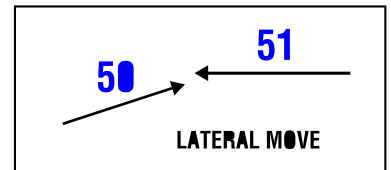


51 Head-On: Lateral Move (Going Straight)

Enter "51" for a vehicle that collides head-on with another vehicle which has IMMEDIATELY LEFT ITS LANE (moved laterally), when the vehicles are traveling on the same trafficway in opposite directions.

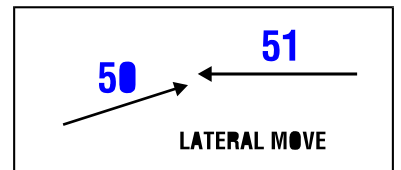

52 Head-On: Specifics Other


Enter "52" for a head-on collision that cannot be described by "50"- "51", when are traveling on the same trafficway in opposite directions. Clarification: Enter "52" for both vehicles involved in a head-on collision when one is traveling the wrong way on a one way roadway.



Enter "Specifics Other" for crashes involving a driverless in-transport vehicle.

53 Head-On: Specifics Unknown

Enter "53" when the PAR indicates a head-on collision occurred between two vehicles traveling on the same trafficway in opposite directions, when no further classification is possible.




Crash Configuration: Forward Impact

The frontal area of one vehicle impacted the frontal area of another following a steering maneuver around a noninvolved vehicle or an object.


54 Forward Impact: Control/Traction Loss

Enter "54" for a vehicle whose frontal area impacts another vehicle due to loss of control or traction (during a maneuver to avoid a collision with a third vehicle) while the vehicles are traveling on the same trafficway in opposite directions.




55 Forward Impact: Control/Traction Loss

Enter "55" for a vehicle which is impacted by the frontal area of another vehicle due to loss of control or traction (during a maneuver to avoid a collision with a third vehicle) while the vehicles are traveling on the same trafficway in opposite directions.




56 Forward Impact: Control/Traction Loss

Enter "56" for a vehicle whose frontal area impacts another vehicle due to loss of control or traction (during a maneuver to avoid a collision with an object) while the vehicles are traveling on the same trafficway in opposite directions.




57 Forward Impact: Control/Traction Loss

Enter "57" for a vehicle which is impacted by the frontal area of another vehicle due to loss of control or traction (during a maneuver to avoid a collision with an object) while the vehicles are traveling on the same trafficway in opposite directions.




58 Forward Impact: Avoid Collision with Vehicle

Enter "58" for a vehicle whose frontal area impacts another vehicle while maneuvering to avoid a collision with a non-involved vehicle, when loss of control or traction was not a factor, and the vehicles were traveling on the same trafficway, in opposite directions.




59 Forward Impact: Avoid Collision with Vehicle

Enter "59" for a vehicle which was impacted by the frontal area of another vehicle which was maneuvering to avoid collision with a non-involved vehicle when loss of control or traction was not a factor, and the vehicles were traveling on the same trafficway, in opposite directions.




60 Forward Impact: Avoid Collision with Object

Enter "60" for a vehicle that struck the front of another vehicle with the frontal plane while maneuvering to avoid collision with an object, when loss of control or traction was not a factor, and the vehicles were traveling on the same trafficway, in opposite directions.



61 Forward Impact: Avoid Collision with Object

Enter "61" for a vehicle which was impacted by the frontal area of another vehicle which was maneuvering to avoid collision with an object, when loss of control or traction was not a factor, and the vehicles were traveling on the same trafficway, in opposite directions.



62 Forward Impact: Specifics Other

Enter "62" for forward impact collisions occurring while the vehicles were traveling on the same trafficway in opposite directions which cannot be described by "54"- "61". Enter "Specifics Other" for crashes involving a "driverless in-transport vehicle."



63 Forward Impact: Specifics Unknown

Enter "63" when the PAR indicates a forward impact collision occurred while the vehicles were traveling on the same trafficway in opposite directions, but no further classification is possible.




Crash Configuration: Sideswipe/Angle

The two vehicles are involved in an impact involving the side of one or both vehicles.


64 Sideswipe/Angle: Lateral Move (Left/Right)

Code "64" identifies the vehicle which infringed upon the other vehicle (code "65") in a Crash Category: Change Trafficway Opposite Direction, Crash Configuration: Sideswipe/Angle collision. Enter "64" for the vehicle which left its lane (moved laterally) leading to the collision.

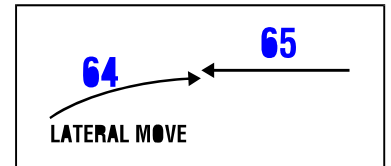

65 Sideswipe/Angle: Lateral Move (Going Straight)

Enter "65" for the vehicle which was infringed upon by the other vehicle (code "64") in a Crash Category: Change Trafficway Opposite Direction, Crash Configuration: Sideswipe/Angle collision.

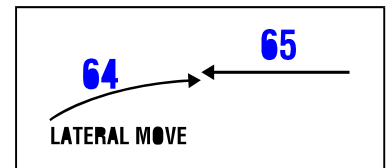

66 Sideswipe/Angle: Specifics Other

Enter "66" for sideswipe/angle collisions occurring while both vehicles were traveling on the same trafficway in opposite directions which cannot be described by "64"- "65". Enter "Specifics Other" for crashes involving a "driverless in-transport vehicle."



67 Sideswipe/Angle: Specifics Unknown

Enter "67" when the PAR indicates a sideswipe/angle collision occurred while both vehicles were traveling on the same trafficway in opposite directions, but no further classification is possible.




Crash Category: Changing Trafficway, Vehicle Turning

Configuration J. Turn Across Path

The two vehicles were initially on the same trafficway when one vehicle tried to turn onto another trafficway and pulled in front of the other vehicle. Vehicles making a "U" turn are identified in Category VI. Miscellaneous.


68 Turn Across Path: Initial Opposite Directions (Left/Right)

Code "68" identifies the vehicle which turned across the path of another vehicle (code "69") in a Category IV, Configuration J collision, in which the vehicles were initially traveling in opposite directions.

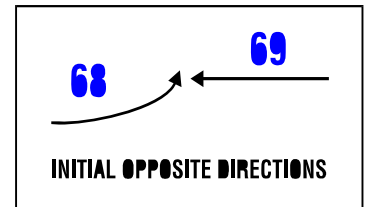


69 Turn Across Path: Initial Opposite Directions (Going Straight)

Enter "69" for a vehicle involved in a collision in which another vehicle (code "68") turned across its Path, and in which the vehicles were initially traveling in opposite directions.

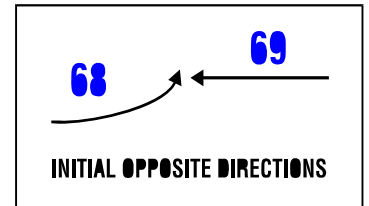


70 Turn Across Path: Initial Same Directions (Turning Right)

Enter "70" for a vehicle which turned right, across the path of another vehicle (code "71"), when both vehicles were initially traveling in the same direction.




71 Turn Across Path: Initial Same Directions (Going Straight)

Enter "71" for a vehicle whose path was crossed by a vehicle turning right (code "70"), when both vehicles were initially traveling in the same direction.




72 Turn Across Path: Initial Same Directions (Turning Left)

Enter "72" for a vehicle which turned left, across the path of another vehicle (code "73"), when both vehicles were initially traveling in the same direction.



73 Turn Across Path: Initial Same Directions (Going Straight)

Enter "73" for a vehicle whose path was crossed by a vehicle turning left (code "72"), when both vehicles were initially traveling in the same direction.




74 Turn Across Path: Specifics Other

Enter "74" for collisions in which one vehicle turned across another's path, which cannot be described by "68"-"72". Enter "Specifics Other" for crashes involving a driverless in-transport vehicle.



75 Turn Across Path: Specifics Unknown

Enter "75" when the PAR indicates one vehicle turned across another's path, causing a collision, but no further classification is possible.




Crash Configuration: Turn Into Path

The two vehicles were initially on different trafficways when one attempted to turn into the same trafficway as the other vehicle.

Note, the focus of this configuration is on the turning maneuver from one trafficway to another and not on the vehicles' plane of contact.


76 Turn Into Same Direction (Turning Left)

Enter "76" for a vehicle which turned left, into the path of another vehicle (code "77"), so that both vehicles were traveling in the same direction at the time of the collision.

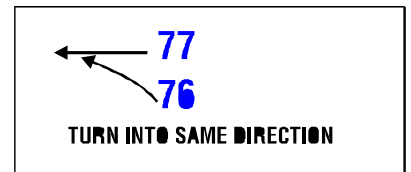


77 Turn Into Same Direction (Going Straight)

Enter "77" for a vehicle involved in a collision in which another vehicle (code "76") turned left, into its path, so that both vehicles were traveling in the same direction at the time of the collision.

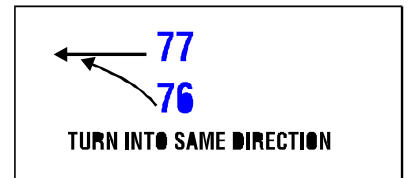


78 Turn Into Same Direction (Turning Right)

Enter "78" for a vehicle which turned right, into the path of another vehicle (code "79"), so that both vehicles were traveling in the same direction at the time of the collision.

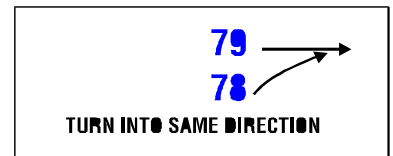


79 Turn Into Same Direction (Going Straight)

Enter "79" for a vehicle involved in a collision in which another vehicle (code "78") turned right, into its path, so that both vehicles were traveling in the same direction at the time of the collision.

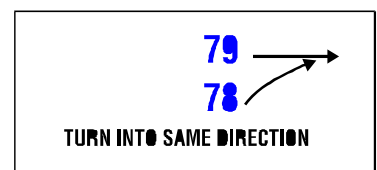

80 Turn Into Opposite Directions (Turning Right)


Enter "80" for a vehicle which turned right, into the path of another vehicle (code "81"), so that the vehicles were traveling in opposite directions at the time of the collision.



Crash Types (cont'd)


81 Turn Into Opposite Directions (Going Straight)

Enter "81" for a vehicle involved in a collision in which another vehicle (code "80") turned right, into its path, so that the vehicles were traveling in opposite directions at the time of the collision.



82 Turn Into Opposite Directions (Turning Left)


Enter "82" for a vehicle which turned left, into the path of another vehicle (code "83"), so that the vehicles were traveling in opposite directions at the time of the collision.



Code "82" is used when the driver's vehicle was in the act of making a left turn (e.g., from a driveway, parking lot or intersection). Do not confuse this situation with "**Crash Configuration: Straight Paths.**" The driver's intended path is the prime concern.

83 Turn Into Opposite Directions (Going Straight)

Enter "83" for a vehicle involved in a collision in which another vehicle (code "82") turned left, into its path, so that the vehicles were traveling in opposite directions at the time of the collision.

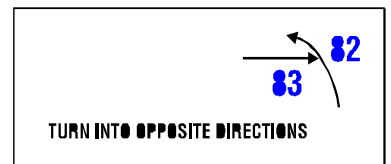


84 Turn Into Path: Specifics Other

Enter "84" for collisions in which one vehicle turned across another's path, which cannot be described by "76"-"83". Enter "Specifics Other" for crashes involving a driverless in-transport vehicle.



85 Turn Into Path: Specifics Unknown

Enter "85" when the PAR indicates one vehicle turned into another's path, causing a collision, but no further classification is possible.




Crash Category: Intersecting Paths (Vehicle Damage)

Crash Configuration: Straight Paths

The two vehicles were proceeding (or attempting to proceed) straight ahead.


86 Straight Paths: Striking from the Right

Enter "86" for a vehicle which strikes the right side of another vehicle (code "87") from the right when both vehicles were going straight at the time of the collision, i.e., right side damage to 87, front damage to 86.




87 Straight Paths: Struck on the Right

Enter "87" for a vehicle which is struck on the right side by another vehicle (code "86") from the right when both vehicles were going straight at the time of the collision, i.e., right side damage to 87, front damage to 86.




88 Straight Paths: Striking from the Left

Enter "88" for a vehicle which strikes another vehicle (code "89") from the left when both vehicles were going straight at the time of the collision, i.e., left side damage to 89, front damage to 88.




89 Straight Paths: Struck on the Left

Enter "89" for a vehicle which is struck on the left side by another vehicle (code "88") from the left when both vehicles were going straight at the time of the collision, i.e., left side damage to 89, front damage to 88.



90 Straight Paths: Specifics Other

Enter "90" for collisions in which two vehicles, both going straight, collide when their paths intersect, which cannot be described by "86"- "89". Enter "Specifics Other" for crashes involving a driverless in-transport vehicle.



91 Straight Paths: Specifics Unknown

Enter "91 " when the PAR indicates two vehicles, both going straight, collided when their paths intersected, but no further classification is possible.

<p>EACH: 91</p> <p>SPECIFICS UNKNOWN</p>
--

Crash Category: Miscellaneous


Crash Configuration: Backing, Etc.

One of the two vehicles involved was a backing vehicle, regardless of its location on the trafficway or the damage location on the vehicles.

Any crash configuration which cannot be described in the above Crash Categories is included here.

92 Backing, Etc.: Backing Vehicle

Enter "92" for a backing vehicle which was involved with another vehicle (code 93) or object.

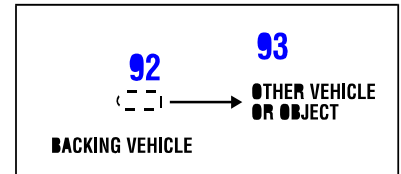

93 Backing, Etc.: Other Vehicle or Object

Enter "93" for the vehicle which was involved with the backing vehicle (code 92).

98 Backing, Etc.: Other Crash Type

Code "98" is used for those events and collisions which do not reasonably fit any of the specified types. This code includes (but is not limited to):

- Rollovers on the road
- U-turns
- Third or subsequent vehicles involved in a crash or
- The second involved vehicle, when the first harmful event involved a vehicle-to-object collision or a non-collision.

98	OTHER ACCIDENT TYPE
99	UNKNOWN ACCIDENT TYPE
00	NO IMPACT

99 Backing, Etc.: Unknown Crash Type

Code "99" when the crash category or configuration is unknown.

98	OTHER ACCIDENT TYPE
99	UNKNOWN ACCIDENT TYPE
00	NO IMPACT

00 Backing, Etc.: No Impact

Code "00" identifies non-collision events (fire, immersion, etc.)
Rollovers on the road should be coded as Crash Type "98" **Other
Accident Type**.

98	OTHER ACCIDENT TYPE
99	UNKNOWN ACCIDENT TYPE
00	NO IMPACT

DISTRACTIONS

General Vehicle Form, Case 2008-43-093B/ Vehicle #1

VEHICLE | SPECIFICATIONS | OFFICIAL RECORDS | PRECRASH | ROLLOVER | RECONSTRUCTION | DELTA V | LOG | REVIEW

ENVIRONMENT | MOVEMENT | DISTRACTIONS

Driver's Distraction/Inattention To Driving: Inattentive or distracted

- By other occupant(s), (specify):
- By moving object in vehicle (specify):
- While talking/listening cell phone (specify loc/type phone):
- While dialing cell phone (specify location/type phone):
- While adjusting climate controls
- While adjusting radio, cassette, CD (specify):
- While using other device/controls integral to vehicle (specify)
- While using/reaching device/object brought into vehicle (specify)
- Inattentive or lost in thought
- Sleepy or fell asleep
- Distracted by outside person, object, or event (specify):
- Eating or drinking (specify):
- Smoking Related (specify):
- Other, distraction/inattention (specify):
- Unknown

Save Close

DRIVER'S DISTRACTION/INATTENTION TO DRIVING

Screen Name: Driver's Distraction/Inattention to Driving

SAS Data Set: *GV*

SAS Variable: *DRATENTN*

Oracle Name: *VEHICLEPRECRASH.PICKDISTRACTION*

Element Attributes:

Oracle	SAS	
0	0	[No driver present]
2	1	Attentive or not distracted
3	2	Looked but did not see
4	3	Inattentive or distracted
18	9	Unknown

Source: Researcher determined — inputs include interviews and police report.

Remarks:

[No Driver Present]

is pre-coded if on the Official Records Tab the “Driver Present?” variable is coded as “No driver Present”.

Attentive or not distracted

is selected when the driver is known to have been completely attentive to driving prior to realization of impending danger.

Looked but did not see

is selected when the driver is paying attention to driving, but does not see the relevant vehicle, object, etc. This attribute should be used when a driver has an opportunity to take some action prior to impact, but the driver takes no action and no other distractions apply. This situation frequently occurs when an overtaking vehicle is in the driver's "blind spot" or at intersections when you look both ways and a crossing vehicle is not noticed. If the driver sees the vehicle, object, etc., but does not consider it a danger then, and no other distractions apply then select Attentive or not distracted

Inattentive or distracted:

is selected when the driver was inattentive or distracted prior to the realization of an impending critical event. Once this attribute is selected, options come into view where the Researcher can select all distractions that apply.

Unknown

is selected when it is unknown if this driver was fully attentive to driving prior to realization of impending danger. Use this attribute if no interview is obtained and there is no other source of information regarding this driver's attention to driving prior to realization of impending danger.

DRIVER'S DISTRACTIONS

Screen Name: Driver's Distraction/Inattention to Driving

SAS Data Set: *DISTRACT*

SAS Variable: *DRIVDIS*

Oracle Name: *DRIVERDISTRACTION.DISTRACTIONID*

Element Attributes:

Inattentive or distracted:

Oracle	SAS	
1	1	By other occupant(s), (specify):
2	2	By moving object in vehicle (specify):
3	3	While talking/listening cell phone (specify loc and type phone):
4	4	While dialing cell phone (specify location/type of phone):
5	5	While adjusting climate controls
6	6	While adjusting radio, cassette, CD (specify):
7	7	While using other device/controls integral to vehicle (specify):
8	8	While using/reaching for device/object brought into vehicle (specify):
10	9	Sleepy or fell asleep
11	10	Distracted by outside person, object, or event (specify):
12	11	Eating or drinking (specify):
13	12	Smoking related (specify):
9	97	Inattentive or lost in thought
14	98	Other, distraction/inattention (specify):
-9999	99	Unknown

Source: Researcher determined — inputs include interviews and police report.

Remarks:

Select all the attributes which describe this driver's **inattention** to driving prior to the driver's realization of an impending critical event or just prior to impact if realization of an impending critical event does not occur. If this driver's vehicle has two critical crash envelopes, record the attribute(s) which best describe the driver's attention ***prior to the first Critical Precrash Event*** (*i.e.*, prior to realization of the impending danger which the driver successfully avoided). Intoxication is not considered a distraction.

All attributes which indicate “(specify)” require specific information to be annotated

By other occupant(s) (specify):

is selected when the driver was distracted by another occupant in this driver's vehicle prior to realization of impending danger. Examples of other occupant distraction include conversing with or looking at another occupant. The specific occupant distraction *must be recorded in the "specify box."*

By moving object in vehicle (specify):

is selected when the driver was distracted by a moving object in this driver's vehicle prior to realization of impending danger. Examples include a dropped object, a moving pet, insect or cargo. The specific object *must be recorded in the "specify box"*.

While talking/listening cellular phone or reaching for a cell phone (specify loc/type of phone)

is used when the driver is talking or listening on a cellular phone. Specify the type of phone (hands off, hand phone, etc.) and the location of the phone (installed in the console, held in the hand, etc.)

While dialing cellular phone (specify location and type of phone)

Specify the type of phone used (hands off, hand phone, etc.) and indicate where it is located (installed in the console, held in the hand, etc.).

While adjusting climate controls

is selected when someone is distracted from the driving task while adjusting the air conditioner heater, etc.

While adjusting radio, cassette, CD, (specify)

is selected when someone is distracted from the driving task while adjusting or using the radio, cassette, CD which are mounted in the vehicle.

While using other device/controls integral to vehicle, (specify)

is selected when the driver is distracted while using a device in the vehicle including adjusting windows (power or manual) adjusting door locks (power or manual), adjusting side view mirrors (power or manual), adjusting rear view mirror, adjusting seat (power or manual), adjusting steering wheel, and adjusting seat belt, using vehicle's cigarette lighter, etc. (Included here is **all** OEM equipment).

While using/reaching for device/object brought into vehicle (specify)

is selected when the driver is distracted while using or reaching for a device brought into the vehicle including: radar detectors, CB radios, razors, portable CD players, headphones, etc. The use of another device to light a cigarette other than the vehicle's cigarette lighter should be coded under "smoking related". Specify the device in the provided space.

Sleepy or fell asleep

is selected when the driver was sleeping or dozing prior to realization of impending danger or just prior to impact if realization did not occur.

Distracted by outside person, object, or event (Specify):

is selected when the driver was distracted by an outside person, object or event prior to realization of impending danger. Examples include animals on the roadside or a previous crash. The specific outside person, object, or event must be recorded in the provided space. Do not use this attribute for a person, object or event which the driver has recognized and for which the driver has taken some action (e.g. avoiding a pedestrian on the roadway).

Eating or drinking

is used when the driver is eating or drinking, or involved in an activity related to these actions (*i.e.*, picking food from carton placed on passenger seat, reaching to throw out used food wrapper, etc.).

Smoking related

is selected when the driver is smoking or involved in an activity related to smoking, such as lighting cigarette, putting ashes in the ash tray, etc. The act of using the cigarette lighter of the vehicle, is selected as **While using other device/object integral vehicle**.

Inattentive or lost in thought

is selected when the driver is thinking about items other than the driving task (daydreaming).

Other distraction (Specify)

is selected when details regarding this driver's inattention are known but none of the specified attributes are applicable. The **Other Distraction** must be recorded in the provided space. This attribute includes incapacitating illness.

Unknown

is selected when it is known that this driver was inattentive prior to realization of impending danger but details of the distraction are unknown.

ROLLOVER

General Vehicle Form, Case 2007-996-900015/ Vehicle #1

VEHICLE | SPECIFICATIONS | OFFICIAL RECORDS | PRECRASH | DRIVER | ROLLOVER | RECONSTRUCTION | DELTA V | LOG | REVIEW

Rollover Data

Type: Longitudinal axis

Quarter Turns: 2

Interrupted Rollover: Yes

Pre Rollover

Maneuver: Departing roadway (to nonpaved surface)

Rollover Initiation

Type: Trip-over

Location: On shoulder -paved

Object Contacted Class: Collision with Fixed Object

Object Contacted: Tree(<= 10 cm in diameter)

Rollover Specifics

Location on Vehicle where Initial Principal Tripping Force Is Applied: Wheels/tires

Direction of Initial Roll: Roll right - primarily about the longitudinal axis

Rollover Measurement

Estimated distance: 10 mts

Save Close

Rollover Data Overview

The following variables provide a coded assessment of the occurrence of a rollover for this vehicle. A rollover is defined as any vehicle rotation of 90 degrees or more about any true longitudinal or lateral axis. A rollover may occur at any time during the crash sequence. When determining rollover presence, consider only the power unit, not any towed or trailing units. The variables also attempt to identify:

- What initiated the rollover
- At what plane of the vehicle exterior the tripping force was applied and
- The direction of the initial roll.

ROLLOVER TYPE

Page 1 of 2

Screen Name: Rollover Data-Type

SAS Data Set: *GV*SAS Variable: *ROLLTYPE*Oracle Name: *VEHICLEROLLOVER.PICKROLLOVERTYPE*

Element Attributes:

Oracle	SAS	
1	0	No rollover (no overturning)
2	1	Rollover — Longitudinal axis
4	2	Rollover — end-over-end (<i>i.e.</i> , primarily about the lateral axis)
	97	[Not a CDS Vehicle]
5	99	Overturn, details unknown

Source: Primary sources are the vehicle and scene inspections; secondary sources include photographs, police report, driver interviews, and other interviewees.

Remarks:

Rollover is defined as any vehicle rotation of 90 degrees or more about any true longitudinal or lateral axis. Rollover can occur at any time during the collision and is coded independently of other configuration questions.

No rollover (no overturning)

Select this code if uncertainty exists concerning whether or not this vehicle rolled over. In addition, use this attribute if a trailer attached to the vehicle rolled over but the vehicle itself did not.

Longitudinal axis

is selected when the vehicle rolls primarily from side-to-side (e.g., from left side, to top, to right side). If it is known that it rolled over the longitudinal axis, but the number of turns is unknown, then indicate **Longitudinal axis** and indicate **Unknown** on the next variable.

Rollover — end-over-end (*i.e.*, primarily about the lateral axis)

is selected when the rollover is mainly end-over-end. This attribute is used when a rollover is a combination of a side-to-side and end-over-end roll and it cannot be determined which type of rollover is most prevalent.

NOTE: Rollover Types indicated as Rollover – end-over-end (*i.e.*, primarily about the lateral axis) will automatically code all of the rollover variables to reflect an end-over-end rollover.

Rollover Type (cont'd)

Page 2 of 2

Rollover (overturn), details unknown

is selected when it is known that the vehicle rolled over, but the rollover details cannot be determined. If it is known that it rolled over the longitudinal axis, but the number of turns is unknown, then indicate **Longitudinal axis** and indicate **Unknown** on then next variable.

NUMBER OF QUARTER TURNS

Screen Name: Rollover Data-Quarter Turns

SAS Data Set: GV

SAS Variable: ROLLTURN

Oracle Name: VEHICLEROLLOVER.ROLLOVERTURNS

Element Attributes:

Oracle SAS

		Enter the number of quarter turns:
-8866	0	No rollover
-8865		[End over end]
	[88	Not a CDS Vehicle]
-9999	99	Unknown

Range 1-20, Unknown
20 includes, 21 or more quarter rolls


Source: Primary sources are the vehicle and scene inspections; secondary sources include photographs, police report, driver interviews, and other interviewees.

Remarks:

Enter the number of quarter turns

based on the researcher's crash reconstruction. A "quarter turn" is defined as a rotation of 90 degrees about the longitudinal axis of the vehicle; this does not include rotation about the vertical axis, commonly called yaw. Therefore, if a vehicle rolled about the longitudinal axis onto its roof (i.e., side- to-side roll), then it rolled 180 degrees and entered as "2" quarter turns.

In the example below, the vehicle rolled from its upright position to left side, to top, then to the right side, and back onto its wheels. This would be indicated as "4" quarter turns.

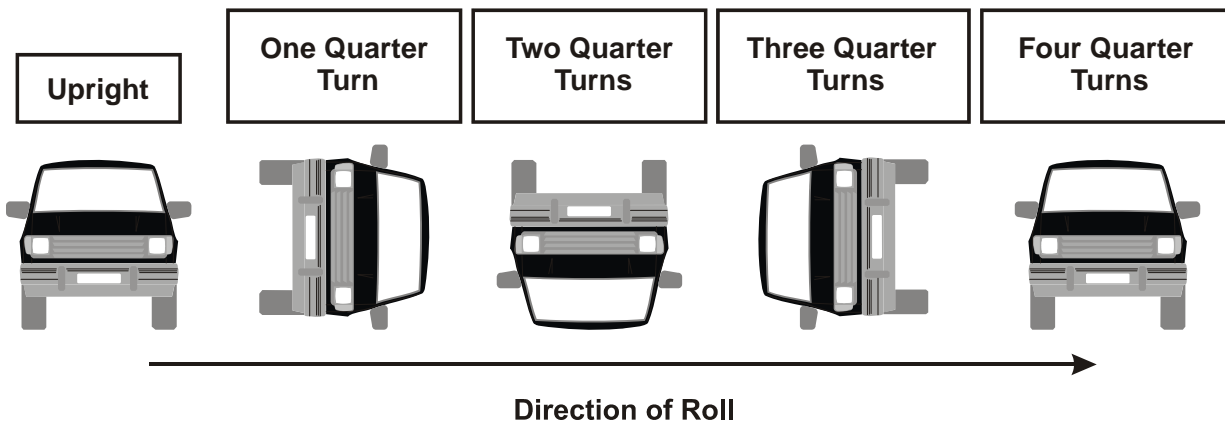

Number of Quarter Turns (cont'd)

Page 2 of 2

Unknown

is selected when it cannot be determined the number of quarter turns the vehicle did during the rollover sequence.

INTERRUPTED ROLL

Screen Name: Interrupted roll

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLEROLLOVER.INTERRUPTED*

Element Attributes:

Oracle	SAS	
1	1	Yes
2	2	No
9	99	Unknown
8	88	[No rollover] [Not a CDS vehicle] [End over End]

Source: Vehicle inspection, scene inspection, interviews, and police report.

Remarks:

The purpose of this variable is to determine if the vehicle's rollover sequence was acted upon by another vehicle or object between the trip point and the final rest position. Examples may include the vehicle striking a tree with its top during the rollover sequence, or contacting an object in the environment. This impact should have an effect on the distance the vehicle would have traveled from trip point to final rest.

Note:

If the researcher determines that the rollover sequence was interrupted, an event and CDC must be assigned to the vehicle damage from the object which interrupted the roll.

Yes

is selected when the rollover sequence was interrupted.

No

is selected when the rollover sequence was not interrupted.

Unknown

is selected when it is unknown if the rollover sequence was interrupted.

PRE ROLLOVER MANUEVER

Screen Name: Maneuver

SAS Data Set:

SAS Variable:

Oracle Name: ***VEHICLEROLLOVER.PREMANEUVER***

Element Attributes:

Oracle	SAS	
1	1	No rollover
2	2	Departing roadway (to paved surface)
3	3	Departed roadway (to non-paved surface)
4	4	Returning to roadway (from paved surface)
5	5	Returning to roadway (from non-paved surface)
6	6	On roadway maneuver
7	7	Off roadway maneuver
-9999	99	Unknown [Not a CDS vehicle]

Source: Researcher determined — primary sources are the scene and vehicle inspections. Secondary sources are photographs, police report, driver interviews, and other interviewees.

Remarks:

Determine the last controlled maneuver, relative to the roadway, prior to the initiation of the rollover.

No rollover

No rollover occurred involving this vehicle.

Departing roadway (to paved surface)

Vehicle departs roadway to a paved shoulder, gore or other area as the last movement prior to the tripping point. This area is usually delineated by painted lines or ceramic dots.

Departing roadway (to non-paved surface)

Vehicle departs roadway to an unpaved shoulder or unimproved area as the last movement prior to the trip point.

Returning to roadway (from paved surface)

Vehicle returns to the roadway from a paved shoulder or other area as the last movement prior to the trip point. Painted lines or ceramic dots usually delineate this area.

Pre-rollover maneuver (cont'd)

Page 2 of 2

Returning to roadway (from non-paved surface

Vehicle returns to the roadway from an unpaved shoulder or other area as the last movement prior to the trip point.

On Roadway maneuver

The vehicle remained predominantly on the roadway and the trip point is on the roadway or immediately next to it.

Off Roadway maneuver

The vehicle departed the roadway completely. While off the roadway the vehicle began or completed a maneuver different than the one that took it off the roadway.

Unknown

The researcher is unable to determine the maneuvers or location of the vehicle just prior to the rollover initiation. This code should be used only in very rare instances.

ROLLOVER INITIATION TYPE

Page 1 of 5

Screen Name: Rollover Initiation-Type

SAS Data Set: *GV*

SAS Variable: *ROLINTYP*

Oracle Name: *VEHICLEROLLOVER.PICKROLLOVERINITTYPE*

Element Attributes:

Oracle	SAS	
-8888	0	[No rollover (no overturning)]
1	1	Trip-over
2	2	Flip-over
3	3	Turn-over (specify)
4	4	Climb-over
5	5	Fall-over
6	6	Bounce-over
7	7	Collision with another vehicle
8	8	Other rollover initiation type (specify)
	88	[Not a CDS Vehicle]
10	98	[End-over-end]
9	99	Unknown

Source: Researcher determined — primary sources are the scene and vehicle inspections. Secondary sources are photographs, police report, driver interviews, and other interviewees.





Remarks:

Various types of rollovers are identified above. A vehicle action that cannot be categorized under any of the above elements should be coded **Other rollover initiation type** and specified in the space provided. The attributes below are used for rollovers initiated about the longitudinal axis. Rollover Types indicated as Rollover – end-over-end (i.e., primarily about the lateral axis) will automatically code all of the rollover variables to reflect an end-over-end rollover.

Trip-over

is selected when the vehicle's lateral motion is suddenly slowed or stopped, inducing a rollover. The opposing force may be produced by a curb, pot-holes, or pavement/soil dug into by a vehicle's wheels.



Trip-Over:
The vehicle's lateral motion is resisted by opposing force, inducing roll moment.

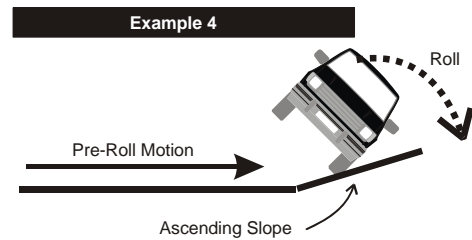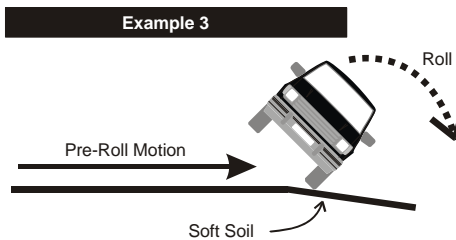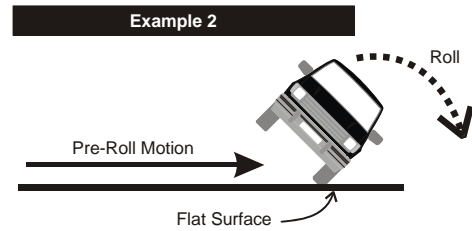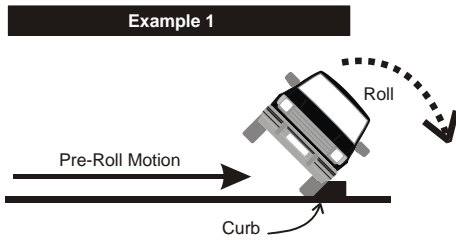

Flip-Over
is selected when the vehicle is rotated about its longitudinal axis by a ramp-like object in a yaw when it comes in contact with the ramp-like object. For example, if the vehicle traveling forward climbs the down turned end of a guardrail and rolls over about its longitudinal axis, use this code.

Flip-Over

Forward moving vehicle is vigorously rotated about its longitudinal axis by a ramp-like object such as a guardrail taper or ditch back slope.

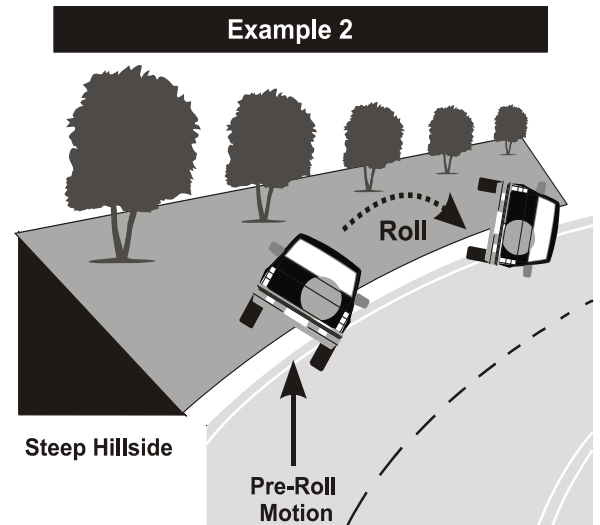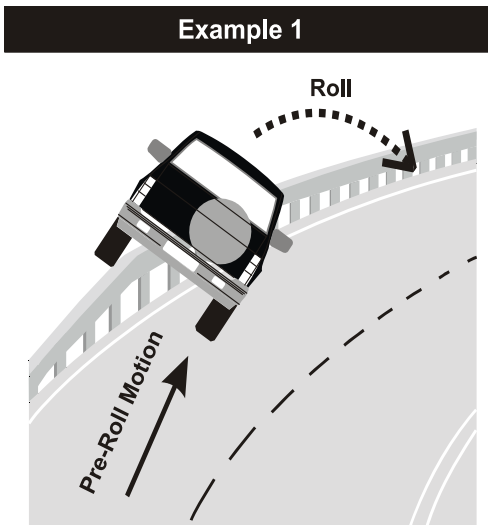


To use this, the vehicle's roll need not begin on the ramp-like structure or object, For example, if the vehicle transverses the turned-down end of a guardrail, continues along the level portion, then rolls back toward the side of the guardrail from which it came, use this code.

Turn-Over


Turn-Over

is selected when centrifugal forces from a sharply turning or rotating vehicle produce a rollover when resisted by normal surface friction. This type of rollover is more likely to occur in vehicles with a higher center of gravity than most passenger vehicles. The surface type includes pavement surfaces plus gravel, grass, dirt, etc. The distinction between **Turn-over** and **Trip-over** is that no furrowing, gouging, etc. occurs to the surface at the point of trip. In addition, see remarks for **Fall-over** below. When turnover is selected, the justification **must be entered**.

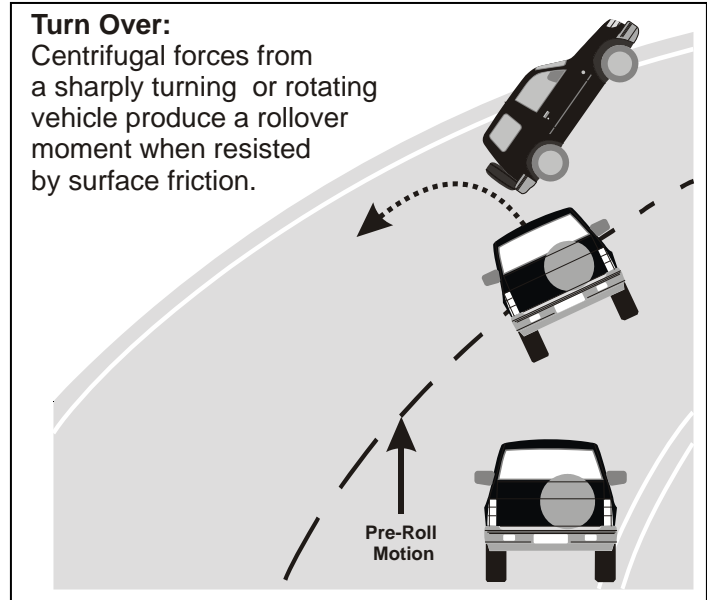


Climb-Over

is selected when a vehicle climbs up and over a fixed object such as a barrier or guardrail. The object should be high enough to lift the vehicle completely off the ground (*i.e.*, the height should exceed the radius of the vehicle's largest diameter wheel). The vehicle must roll to the opposite side from which it approached the object.

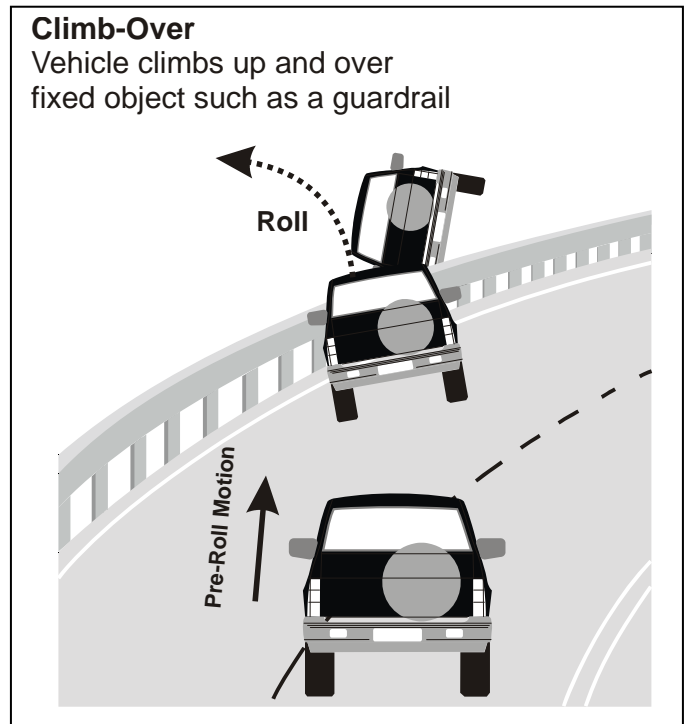

Fall-Over

is selected when the surface the vehicle is traversing slopes downward in the direction of movement of the vehicle's center-of-gravity such that the vehicle's center of gravity becomes outboard of its wheels. The distinction between this and **Turn-over** above involves the negative slope of the traversed surface. If the rotation and/or the surface friction causes the trip, then use **Turn-over**, however, if the slope is so negative that a line straight downward through the vehicle's center-of-gravity (as shown in the illustration) would fall outside the vehicle's track, then use this attribute. For example, if a vehicle goes off the road and encounters a substantial surface drop off because of the elevated nature of the road in relation to its environment (e.g., cliff, ditch, etc.), then use this attribute.

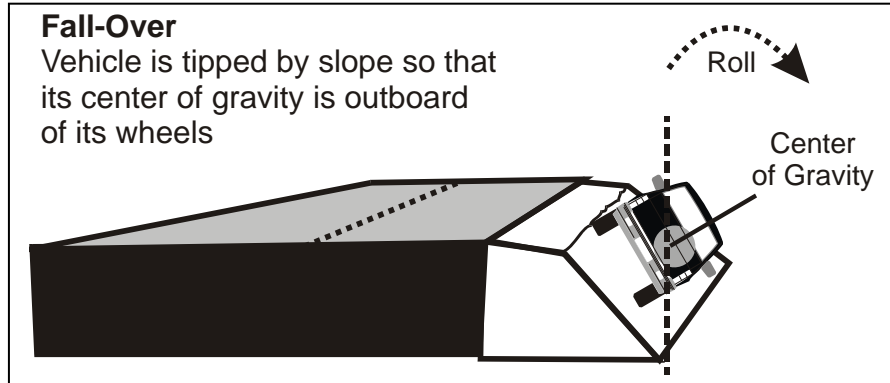


is selected when the surface the vehicle is traversing slopes downward in the direction of movement of the vehicle's center-of-gravity such that the vehicle's center of gravity becomes outboard of its wheels. The distinction between this and **Turn-over** above involves the negative slope of the traversed surface. If the rotation and/or the surface friction causes the trip, then use **Turn-over**, however, if the slope is so negative that a line straight downward through the vehicle's center-of-gravity (as shown in the illustration) would fall outside the vehicle's track, then use this attribute. For example, if a vehicle goes off the road and encounters a substantial surface drop off because of the elevated nature of the road in relation to its environment (e.g., cliff, ditch, etc.), then use this attribute.

Bounce-Over

Bounce-Over

is selected when a vehicle deflects off of a fixed object (such as a guardrail, barrier, tree, or pole) or a not-in-transport vehicle such that the vehicle's rotation causes it to overturn. The deflection momentum contributes to a rollover. To use this attribute, the rollover must occur in close proximity to the object from which it deflected. For example, if a vehicle strikes a center median barrier and rotates across two traffic lanes prior to the vehicle rolling over, then **Trip-over** or **Turn-over** would apply.

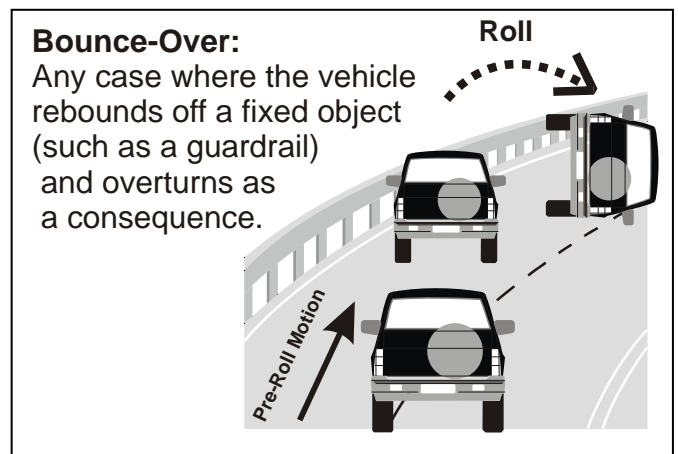

Collision with another vehicle

is selected when an impact with another vehicle causes the rollover. The rollover must be the immediate result of the impact between the vehicles (*e.g.*, intersection crashes where a vehicle is struck in the side and the momentum of the struck vehicle results in the rollover, or offset end-to-end type crashes when one vehicle will vault over the tapered end of another vehicle resulting in a rollover). Otherwise use attributes above. For example, if a vehicle is struck in the side ***and*** the vehicle rotates ***and*** does not produce any wheel/rim gouges or furrows in the surface nor encounters any prominent raised objects (*e.g.*, a high curb) ***and*** overturns in close proximity to the point of impact, then use this attribute.

Rollover Initiation Type (cont'd)

Page 5 of 5

Other rollover initiation type

is selected when this vehicle's rollover initiation type cannot be described above. Whenever this is used, the researcher is required to *specify* the type of rollover which occurred.

Unknown

is selected when the type of rollover initiation is unknown

[End-over-end]

is automatically entered when the type of rollover is end-over-end.

LOCATION OF ROLLOVER INITIATION

Page 1 of 2

Screen Name: Rollover Initiation-Location

SAS Data Set: GV

SAS Variable: ROLINLOC

Oracle Name: VEHICLEROLLOVER.PICKLOCATIONROLLOVERINIT

Element Attributes:

Oracle	SAS	
-8888	0	[No rollover (no overturning)]
1	1	On roadway
2	2	On shoulder — paved
3	3	On shoulder — unpaved
4	4	On roadside or divided trafficway median
	7	[Not a CDS Vehicle]
6	8	[End-over-end]
5	9	Unknown

Source: Researcher determined — primary source is the scene inspection. Secondary sources are vehicle inspection, photographs, police report, driver interviews, and other interviewees.

Remarks:

This variable defines the location of the trip point or start of the vehicle's roll that was identified in, Rollover Initiation Type. Physical evidence on and/or off the roadway should be used to identify the point of initial roll. Scenes with no physical evidence such as gouges in the pavement or ground may be determined by the secondary sources listed above.

On roadway

is selected when the rollover initiates in the travel lanes of the roadway (*i.e.*, between painted edgelines or between roadway edges when painted edgelines are absent). The median between roadways (divided highways such as thruways or expressways) is identified as codes On shoulder—paved, On shoulder—unpaved, or On roadside or divided trafficway median as described below. ANSI defines a **roadway** as that part of a trafficway designed, improved and ordinarily used for motor vehicle travel, and excludes any shoulder alongside the roadway.

On shoulder — paved

is selected when the rollover initiation occurs on a paved surface outside the painted edgeline or the outer edge or pavement seam of the roadway. A shoulder may exist within the median of a divided highway or on the outermost edge of the roadway. A shoulder is defined as that part of a trafficway

contiguous with the roadway for emergency use, for accommodation of stopped road vehicles, and for lateral support of the roadway structure.

On shoulder — unpaved

is selected when the rollover initiation begins within the confines of the *improved* area (*i.e.*, gravel or stone) contiguous with the roadway. Unpaved shoulders, for NASS CDS purposes, are composed of loose gravel or stone. Combination gravel/stone and asphalt surfaces, such as macadam or "chip and seal", are considered as paved. Roadways without an improved, contiguous surface will be considered as not having shoulders.

On roadside or divided trafficway median

is selected when the rollover initiation occurs outside the roadway and the shoulder. There are roads where sod or dirt will support the roadway edge. When the rollover initiation occurs within this area, use this attribute because this roadway does not have shoulders. In addition, shoulders end wherever most curbs or fixed objects begin. If the trip begins on a curb that is adjacent on one side to a sidewalk, turf, or dirt, then use this attribute. If the roll is initiated by a fixed object then use this attribute. Care must be exercised with some mountable curbs. If the mountable curb has paving on both sides and its primary function is to control water runoff, then use **On shoulder—paved**.

ROLLOVER INITIATION OBJECT CONTACTED CLASS

Screen Name: Rollover Initiation--Object Contacted Class

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *VEHICLEROLLOVER.ROLLINITOBJCLASS*

Element Attributes:

Oracle	SAS
1	Vehicle
2	Non-collision
3	Collision with Fixed Object
5	Collision with Nonfixed Object
7	Other event (specify)
6	Unknown Event or Object

Source: Researcher determined — primary source is the scene inspection. Secondary sources are vehicle inspection, photographs, police report, driver interviews, and other interviewees.

Remarks:

The Object Contacted codes in the next variable are grouped into specific classes. The class is first selected, then the object lists are filtered for items in that specific class.

Vehicle

is selected when the object contacted that caused this vehicle to rollover is another vehicle.

Noncollision

is automatically entered by the program when a “Turn Over” or “Fall Over” is selected as the rollover initiation type, or when the rollover was initiated by a jackknife noncollision. Additionally this code is used for end-over-end rollovers.

Collision with a Fixed Object

is selected when an impact with a fixed object (e.g., a tree, breakaway pole or post, embankment, curb, etc.) caused the rollover.

Nonbreakaway Pole or Post

is selected when the object contacted that caused the vehicle to rollover was a nonbreakaway pole or post.

Collision with a Non-Fixed Object

is selected when the collision that initiated the rollover is a non-fixed object (e.g., motor vehicle not in transport, animal, railway vehicle, trailer disconnected in transport, etc.).

ROLLOVER INITIATION OBJECT CONTACTED

Page 1 of 8

Screen Name: Rollover Initiation--Object Contacted

SAS Data Set: GV

SAS Variable: ROLLOBJ

Oracle Name: VEHICLEROLLOVER.ROLLINITOBJTYPE

Element Attributes:

Oracle	SAS	
-8866	[0	No rollover (no overturning)]

Vehicle number (1-30)

Non-collision

31	31	Turn-over — fall-over
32	32	No rollover impact initiation (end-over-end)
34	34	Jackknife

Collision With Fixed Object

41	41	Tree (<=10 centimeters in diameter)
42	42	Tree (> 10 centimeters in diameter)
43	43	Shrubbery or bush
44	44	Embankment
45	45	Breakaway pole or post (any diameter)
100	47	Cable barrier guardrail
101	46	Metal guardrail

Nonbreakaway Pole or Post

50	50	Pole or post (<=10 centimeters in diameter)
51	51	Pole or post (> 10 centimeters but <= 30 centimeters diameter)
52	52	Pole or post (> 30 centimeters in diameter)
53	53	Pole or post (diameter unknown)
54	54	Concrete traffic barrier
55	55	Impact attenuator
56	56	Other traffic barrier (specify)
57	57	Fence

Nonbreakaway Pole or Post cont'd

58	58	Wall
59	59	Building
60	60	Ditch or culvert
61	61	Ground

Rollover Initiation Object Contacted (cont'd)

Oracle	SAS	
62	62	Fire hydrant
63	63	Curb
64	64	Bridge
68	68	Other fixed object (specify):
69	69	Unknown fixed object

Collision with Nonfixed Object

76	76	Animal
77	77	Railway vehicle
78	78	Trailer, disconnected in transport
79	79	Object fell from vehicle in-transport
88	88	Other nonfixed object (specify):
89	89	Unknown nonfixed object

Other Event

98	98	Other event (specify)
----	----	-----------------------

Unknown Event or Object

99	99	Unknown event or object
97	[97	Not a CDS Vehicle]

Source: Researcher determined — primary sources are the scene and vehicle inspections; secondary sources include the police report and interviewees.

Remarks:

This variable is related to Rollover Initiation Type, and identifies the source of the force that acted upon the vehicle which resulted in the rollover. These attributes are obtained from the Exterior Vehicle Form, CDC tab, Object Contacted attributes. If the rollover was initiated by an impact which was assigned a CDC, then the applicable element value will be selected for this variable. If the rollover was not initiated by a CDC applicable impact, then it is unlikely that the same value will be selected. Therefore, the researcher must determine the cause (*i.e.*, initiation force) of the rollover and consequently the object contacted during the rollover. For example, if a vehicle strikes a curb which trips the vehicle, then select **Curb** even though the CDC Object Contacted for the rollover would probably equal **Overturn- rollover**.

Similarly, if a vehicle vaults a longitudinal barrier (Climb-over), then select **Concrete traffic barrier** or **Other traffic barrier**, depending upon the longitudinal barrier design. If a yawing vehicle rolls as a result of centrifugal forces caused by normal surface friction or as a result of burrowing into soft soil, then select **Ground** because the ground applied the force that acted as the tripping mechanism for the rollover.

Vehicle number

select the vehicle number to report the vehicle that impacted this vehicle and caused the rollover to occur [*i.e.*, Rollover initiation type must equal Collision with another vehicle]. Select the vehicle

number of the vehicle that initiated the rollover to this vehicle. This will be most common when one vehicle (generally with a high center of gravity) is involved in an offset head-on crash with a second vehicle (possibly with a lower sloping front end) resulting in a vaulting type rollover. Do not use these attributes if the vehicle rolls over subsequent to its impact with another vehicle but because of centrifugal force or a tripping mechanism. These latter two causes would take priority.

Turn-over — fall-over

excludes end-over-end and is used when the vehicle roll is precipitated by centrifugal or gravitational forces and Rollover Initiation Type, has been selected **Turn-over** or **Fall-over**.

Jackknife

is selected when a vehicle rolls over as result of a jackknife and the sole reason for the rollover is the force applied by the jackknifing trailer. For example, if a vehicle is pulling a trailer and the trailer jackknifes (*i.e.*, 90 degrees rotation and intraunit damage) and overturns, for whatever reason (*e.g.*, trailer tires furrow in soft earth, centrifugal force, trailer trips, loadshifts causing it to tip, etc.), **and** the trailer's overturning causes this vehicle to overturn, then use this. However, if a centrifugal force or tripping mechanism causes the vehicle to overturn with or without the trailer overturning, then use another attribute.

Tree (< 10 centimeters in diameter)

is selected when a vehicle impacts a tree which has a diameter of ten centimeters or less and the tree either (1) acts like a rigid barrier or (2) bends or breaks causing the vehicle to rollover [*i.e.*, Rollover Initiation Type equals Trip-over, Flip-over, or Bounce-over]. Select another attribute when a vehicle impacts a tree and experiences a subsequent rollover due to centrifugal forces or other tripping mechanisms.

Tree (> 10 centimeters in diameter)

is selected when a vehicle impacts a tree with a diameter of greater than 10 centimeters and the tree either (1) acts like a rigid barrier or (2) bends or breaks causing the vehicle to rollover [*i.e.*, Rollover Initiation Type equals Trip-over, Flip-over, or Bounce-over]. Select another attribute when a vehicle impacts a tree and experiences a subsequent rollover due to centrifugal forces or other tripping mechanisms.

Shrubby or bush

is selected when a vehicle impacts shrubbery or bushes and the contacted object causes the vehicle to rollover [*i.e.*, Rollover Initiation Type equals Trip-over or Flip-over]. This will be a very rare occurrence. Subsequent rollovers that result from centrifugal forces or other tripping mechanisms take priority for this variable.

Embankment

is selected when a vehicle rides up or over an embankment and the vehicle rolls over as a result of the angle of the embankment [*i.e.*, Rollover Initiation Type equals Flip-over or Fall-over]. Vehicles

which dig into the surface of an embankment and rollover as a result of this tripping mechanism are captured in **Ground**.

Breakaway pole or post (any diameter)

is selected whenever a vehicle impacts a breakaway pole or post (of any diameter) and that pole/post yields creating a ramping mechanism which causes a vehicle rollover. Select another attribute if a vehicle rolls over subsequent to the impact as a result of centrifugal forces or other tripping mechanisms.

Pole or post (• 10 centimeters in diameter)

is selected whenever a vehicle impacts a nonbreakaway pole with a diameter of 10 centimeters or less and that pole either (1) acts like a rigid barrier or (2) breaks or bends causing the vehicle to rollover [*i.e.*, Rollover Initiation Type equals Flip-over or Bounce-over]. Do not use this attribute if a vehicle rolls over subsequent to the impact as a result of centrifugal forces or other tripping mechanisms.

Pole or post (> 10 centimeters but • 30 centimeters in diameter)

is selected whenever a vehicle impacts a nonbreakaway pole with a diameter greater than ten centimeters but less than or equal to thirty centimeters and that pole either (1) acts like a rigid barrier or (2) breaks or bends causing the vehicle to rollover [*i.e.*, equals Flip-over or Bounce-over]. Select another attribute if a vehicle rolls over subsequent to the impact as a result of centrifugal forces or other tripping mechanisms.

Pole or post (> 30 centimeters in diameter)

is selected whenever a vehicle impacts a nonbreakaway pole with a diameter greater than thirty centimeters and that pole either (1) acts like a rigid barrier or (2) breaks or bends causing the vehicle to rollover [*i.e.*, Rollover Initiation Type equals Flip-over or Bounce-over]. Select another attribute if a vehicle rolls over subsequent to the impact as a result of centrifugal forces or other tripping mechanisms.

Pole or post (diameter unknown)

is selected whenever a vehicle impacts a pole or post of an unknown diameter and that pole either (1) acts like a rigid barrier or (2) breaks or bends causing the vehicle to rollover [*i.e.*, Rollover Initiation Type equals Flip-over or Bounce-over]. Do not use this attribute if a vehicle rolls over subsequent to the impact as a result of centrifugal forces or other tripping mechanisms.

Concrete traffic barrier

is selected whenever a vehicle impacts a concrete traffic barrier and that impact causes a rollover [*i.e.*, Rollover Initiation Type equals Flip-over, Climb-over, or Bounce-over]. Rollovers which occur subsequent to the impact as a result of centrifugal force or other tripping mechanisms are not considered here. Refer to variable Objected Contacted for examples and definitions of concrete traffic barriers.

Impact Attenuator

is selected whenever a vehicle impacts a crash cushion (refer to variable Objected Contacted) and that impact causes a rollover [*i.e.*, Rollover Initiation Type equals Flip-over or Bounce-over]. Rollovers which occur subsequent to the impact as a result of centrifugal force or other tripping mechanisms are not considered here.

Other traffic barrier

is selected whenever a vehicle impacts a non-concrete longitudinal barrier as defined in variable Objected Contacted and that impact causes a rollover [*i.e.*, Rollover Initiation Type equals Flip-over, Climb-over, or Bounce-over]. Rollovers which occur subsequent to the impact as a result of centrifugal force or other tripping mechanisms are not considered here.

Cable barrier guardrail

refers to a guardrail consisting of 2 to 4 wire cables supported by cable mounts that are attached to steel posts.

Metal guardrail

refers to a cold formed standard W Section or thrie-beam of steel rigid beam elements bolted to posts usually with offset blocks.

Fence, Wall, and Building

are selected whenever one of these objects is contacted and that impact causes a rollover [*i.e.*, Rollover Initiation Type equals Trip-over, Flip-over, Climb-over, or Bounce-over]. Definitions of these objects are defined in variable Object Contacted. Rollovers which occur subsequent to the impact as a result of centrifugal impacts and tripping mechanisms are not considered for these attributes.

Ditch or Culvert

is selected whenever a vehicle enters a ditch or culvert and the vehicle rolls over as a result of the slope of the ditch/culvert [*i.e.*, Rollover Initiation Type equals Flip-over or Fall-over]. Refer to variable Objected Contacted for definition of ditch or culvert. Vehicles in a ditch which dig into the surface and rollover as a result of this tripping mechanism are captured in **Ground**.

Ground

is selected when a vehicle rolls over as a result of contact with the ground [*i.e.*, Rollover Initiation Type equals Trip-over]. "Ground" applies whether the rollover resulted from digging into soft soil,

tripping over an accumulation of dirt or gravel, or gouging into the pavement. Vehicles which dig into the ground on embankments or in ditches and rollover, as a result of that digging, take this attribute.

Fire Hydrant

is selected whenever a vehicle impacts a fire hydrant and that impact causes a rollover. A fire hydrant is defined as a roadside device used by fire departments to provide water for fighting fires.

Vehicles which rollover subsequent to a fire hydrant impact but not as a direct result of that impact (*i.e.*, other tripping force) do not take this attribute.

Curb

includes both mountable and barrier curbs as described for variable Objected Contacted. Curbs which act as a tripping mechanism will frequently have an impact (CDC) associated with them although this is not a criterion for using this attribute. When a curb acts as a tripping mechanism, Rollover Initiation Type is coded Trip over.

Bridge

is selected whenever a vehicle impacts a bridge and that impact causes a rollover [*i.e.*, Rollover Initiation Type equals Flip-over, Climb-over, or Bounce-over]. Refer to variable Objected Contacted for the definition of a bridge. Vehicles which rollover subsequent to a bridge impact but not as a direct result of that impact (*i.e.*, other tripping force) do not take this attribute.

Other fixed object

is selected when a fixed object, other than those previously identified impacted and that impact causes a rollover. Do not use this attribute if a vehicle rolls over subsequent to the impact as a result of centrifugal forces or other tripping mechanisms.

Unknown fixed object

is selected when an unknown fixed object is impacted and that impact causes a rollover. Do not use this attribute if a vehicle rolls over subsequent to the impact as a result of centrifugal forces or other tripping mechanisms.

Passenger car, light truck, van, or other vehicle not in-transport

is selected when a vehicle impacts a not-in-transport passenger car, light truck, van, or any other motor vehicle that is not a medium/heavy truck or bus and that impact causes the vehicle to rollover [*i.e.*, Rollover Initiation Type equals Flip-over, Climb-over, or Bounce-over]. Vehicles which rotate and rollover as a result of centrifugal forces or other tripping mechanisms are not captured in this response.

Medium/heavy truck or bus not in-transport

is selected when a vehicle impacts a not-in-transport medium/heavy truck or bus and that impact causes the vehicle to rollover [*i.e.*, Rollover Initiation Type equals Flip-over, Climb-over, or Bounce-over]. Vehicles which rotate and rollover as a result of centrifugal forces or other tripping mechanisms are not captured in this response.

Animal

is selected when a vehicle impacts an animal and that impact causes the vehicle to rollover. This should be a very rare occurrence. Subsequent rollovers due to other tripping mechanisms are not captured in this response.

Railway vehicle

is selected when a vehicle involved in a crash with a railway vehicle and the impact causes the vehicle to rollover. A railway vehicle is described as any moving or non-moving vehicle that travels on rails. This includes vehicles that are dual purpose, *i.e.*, a vehicle designed to use both road and rail, if at the time of the crash the vehicle is on rails. Examples are, trolley's on rails and trains.

Trailer, disconnected in transport

is selected to report a trailer that has been disconnected from its power unit and subsequently impacted this vehicle and caused the rollover to occur. This will likely occur when a small trailer is involved in a head-on crash with a larger vehicle resulting in a vaulting type rollover. Do not use this attribute if the vehicle rolls over subsequent to an initial impact as centrifugal forces or tripping mechanisms take priority.

Object fell from vehicle in-transport

is selected to report an object that was being carried by or was attached to a vehicle in-transport but fell from or became detached from that vehicle and subsequently impacted this vehicle and caused the rollover to occur. Do not use this attribute if the vehicle rolls over subsequent to an initial impact as centrifugal forces or tripping mechanisms take priority.

Other nonfixed object

is selected when a nonfixed object, other than those described in the above attributes is impacted and that impact causes a rollover. Do not use this attribute if a vehicle rolls over subsequent to the impact as a result of centrifugal forces or other tripping mechanisms.

Unknown nonfixed object

is selected when an unknown nonfixed object is impacted and that impact causes a rollover. Do not use this attribute if a vehicle rolls over subsequent to the impact as a result of centrifugal forces or other tripping mechanisms.

Other event

is selected when circumstances exist that cannot be captured in the element values above (*e.g.*, loadshift, high winds).

Rollover Initiation Object Contacted (cont'd)

Page 8 of 8

Unknown object

is selected when variable a vehicle rolled over and the cause of the rollover (tripping mechanism) cannot be determined.

LOCATION ON VEHICLE WHERE INITIATING ROLLOVER FORCE IS APPLIED

Screen Name: Rollover Specifics -- Location on Vehicle Where Initiating Rollover Force is Applied

SAS Data Set: *GV*

SAS Variable: *TRIPLOC*

Oracle Name: *VEHICLEROLLOVER.PICKLOCATIONTRIPPINGFORCE*

Element Attributes:

Oracle	SAS	
-8888	0	[No Rollover]
1	1	Wheels/tires
2	2	Side plane
3	3	End plane
4	4	Undercarriage
5	5	Other location on vehicle (specify):
6	6	Non-contact rollover forces (specify):
	7	[Not a CDS Vehicle]
8	8	[Rollover-End-over-end]
7	9	Unknown

Source: Researcher determined — primary source is vehicle inspection. Secondary sources are scene inspection, photographs, police report, driver interviews, and other interviews.

Remarks:

Generally the forces that initiate a rollover are applied at the wheels/tires. Occasionally the tripping force is applied at the undercarriage (*e.g.*, when a vehicle mounts a guardrail) or at the side or end plane (*e.g.*, when a barrier or another vehicle impacts the front or side plane of the vehicle and flips or initiates the rollover sequence). The purpose of this variable is to identify the specific point on the vehicle where the initiating rollover force was applied.

Wheels/Tires

is selected whenever the initiating force is applied to the wheels or tires. The most common occurrences involve wheel/tire impacts to potholes and curbs, and wheels that gouge the pavement or dig into the earth.

Side plane

is selected whenever the side plane other than the wheels and tires is contacted and that contact initiates the rollover.

End plane

is selected whenever the end plane of the vehicle is contacted and sustained the rollover initiating force. For example, a vehicle was traveling at a high rate of speed when it impacted a concrete

median barrier [*i.e.*, Rollover Initiation Object Contacted, equals Concrete traffic barrier] with its front left corner. The barrier redirects the vehicle upward and back towards the roadway. As a result, the vehicle rolls over; therefore use this attribute.

Undercarriage

is selected when the rollover was caused by a force acting primarily through the undercarriage plane. For example, a vehicle strikes a guardrail [*i.e.*, Rollover Initiation Object Contacted equals Other traffic barrier (includes guardrail)] with its front right. The vehicle climbs up and over the guardrail and rolls over; therefore use this attribute.

Other location on vehicle

is selected when the tripping force is applied at a location that cannot be captured above. This attribute should be rarely used and only after consultation with the zone center.

Non-contact rollover forces

is selected when the vehicle roll is precipitated by centrifugal or gravitational forces [*i.e.*, Rollover Initiation Type equals Turn-over or Fall-over]. Specify the non-contact rollover force on the line provided.

Undercarriage

is selected when the rollover was caused by a force acting primarily through the through the undercarriage plane. For example, a vehicle strikes a guardrail with its front right. The vehicle climbs up and over the guardrail and rolls over; therefore use this code.

DIRECTION OF INITIAL ROLL

Screen Name: Rollover Specifics--Direction of Initial Roll

SAS Data Set: *GV*

SAS Variable: *ROLINDIR*

Oracle Name: *VEHICLEROLLOVER.PICKDIRECTIONOFINITROLL*

Element Attributes:

Oracle	SAS	
-8888	0	[No Rollover]
1	1	Roll right-primarily about the longitudinal axis
2	2	Roll left-primarily about the longitudinal axis
	7	[Not a CDS Vehicle]
4	8	[Rollover-end-over-end]
3	9	Unknown roll direction

Source: Researcher determined — primary sources are the scene and vehicle inspections. Secondary sources are the police report, driver and other interviews.

Remarks:

During a side-over-side rollover, generally the corner or roof rail with the maximum crush is the trailing side. Also, grass, dirt or damage to the wheels of the leading edge should be observed. This will be a good indication of a roll to the right or a roll to the left. Striations or directional gouge marks on the vehicle are a good indication of a vehicle's roll along the longitudinal or lateral axis. Physical evidence at the crash scene, including yaw marks, scuffing, or gouging will also provide insight into the direction of the initial roll. It will not be uncommon to combine both vehicle and scene evidence when determining the direction of the initial roll.

Roll right

is selected when the vehicle rolls over with the right side leading. This is a clockwise rollover from the driver's view.

Roll left

is selected when the vehicle rolls over with the left side leading. This is a counterclockwise rollover from the driver's view.

ESTIMATED DISTANCE FROM TRIP POINT TO FINAL REST POSITION

Page 1 of 2

Screen Name: Estimated distance**SAS Data Set:****SAS Variable:****Oracle Name:** *VEHICLEROLLOVER.ESTIMATEDDISTANCE***Element Attributes:**

Oracle	SAS	
-8866	888	[No Rollover] Enter to the nearest meter
-9999	999	Unknown
-8887	998	[End-over-end]

Source: Vehicle inspection and scene inspection. A PAR can be a secondary source if a scaled reconstruction of the crash is documented.

Remarks:

The purpose of this variable is to determine the estimated distance from tripping point to the final rest position of the vehicle that rolled over. The measurement should be obtained along a linear path. Total distance in meters rounded to the nearest whole number, examples 41.4 m = 41 m or 41.5 m = 42 m

This measurement should be measured in the field along the path of the vehicle and the final rest measurement should be taken to the center of gravity (CG) of the vehicle at final rest.

In cases where an accurate estimate of the distance cannot be obtained, (i.e., vehicle rolled down a ravine or off a cliff) "Unknown" should be coded.

If a vehicle rolls and then slides to final rest, the entire distance from the point of trip to final rest will be measured.

In the situation where the vehicle overturns and climbs a positive embankment and stops, then gravity causes the vehicle to slide or roll down the embankment, code only the distance traveled during the initial roll, (i.e., distance up the embankment.).


See example 1 and 2

Estimated distance of rollover (cont'd)


Unknown

is selected when the researcher could not determine the distance from initial point of roll to final rest.

Example 1

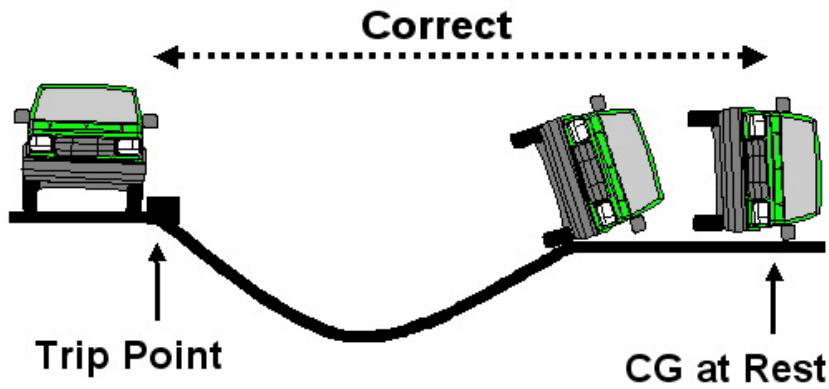

Example 2

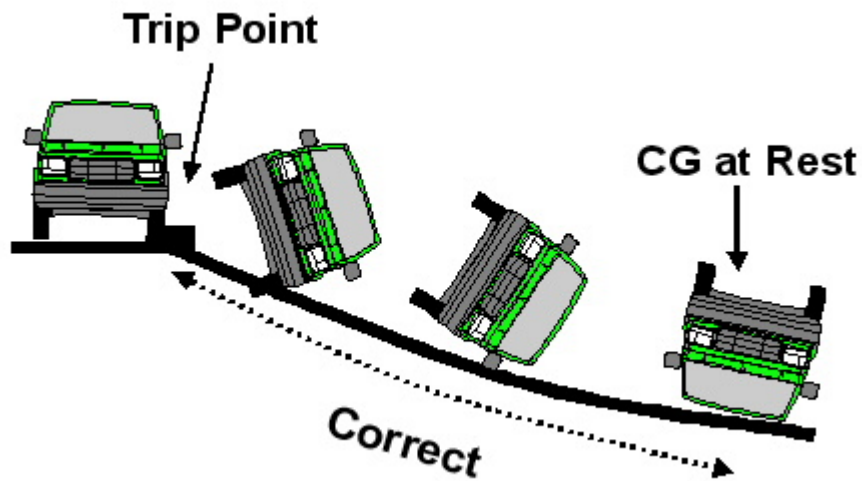

TYPE OF IMPACT FOR HIGHEST DELTA V

Screen Name: Heading Angle at Impact for Highest Delta V--Impact Category

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *VEHICLECRASH.PICKHEADINGANGLECAT*

Element Attributes:

Oracle	SAS	
1	996	Non Horizontal Impact
2	997	Non Collision
3	998	Impact with Object
4	995	Impact with Vehicle
5	999	Unknown

Source: Researcher determined - inputs include vehicle inspection, scene diagram

Remarks:

Select the impact category that describes this vehicle's most severe impact. **Note:** when selecting this attribute, parked vehicles are considered vehicles and not objects.

Non Horizontal impact

is selected when the Highest Delta V for this vehicle involves a non-horizontal impact. Though rollovers involve non-horizontal forces, select non-collision.

Non Collision

is selected when the Highest Delta V for this vehicle involves a Non-collision event.

Impact with Object

is selected when a collision with an object results in this vehicle's highest delta V. If this impact is a non-horizontal impact, then select **Non-horizontal impact**.

Impact with Vehicle

is selected when this vehicle's highest Delta V impact is with another vehicle. If this impact is a non- horizontal impact, then select **Non-horizontal impact**.

Unknown

is selected only when you cannot determine which impact is the highest delta V.

HEADING ANGLE FOR THIS VEHICLE

Screen Name: Heading Angle at Impact for Highest Delta V--Angle - This Vehicle

SAS Data Set: *GV*

SAS Variable: *ANGTHIS*

Oracle Name: *VEHICLECRASH.HEADINGANGLE*

Element Attributes:

Oracle	SAS	
	000-355	Code actual value
	888	[Not a CDS Vehicle]
	996	[Non-horizontal impact]
	997	[Non-collision]
	998	[Impact with object]
-9999	999	[Unknown]


Source: Scene diagram.

Remarks:

Heading Angle for This Vehicle, records the heading angle for this vehicle's highest delta V when this impact was with another vehicle. Heading Angle for Other Vehicle, records the corresponding angle for the other vehicle. Parked vehicles are considered vehicles and not objects.

For vehicle-to-vehicle collisions, use your scene diagram referencing system to determine the heading angles at the point of impact for *this vehicle's* highest delta V. All measurements are referenced to the north arrow on the diagram. The heading angle of each vehicle is determined by projecting the longitudinal axis of the vehicle through the extension of the north arrow. The angle value is obtained by using a 360- protractor and measuring in a clockwise direction from the north arrow, in 5 degree increments. The north arrow always represents 0- (degrees). The angle is a positive value. The following diagrams exemplify the measurement technique.

Heading Angle for This Vehicle (cont'd)

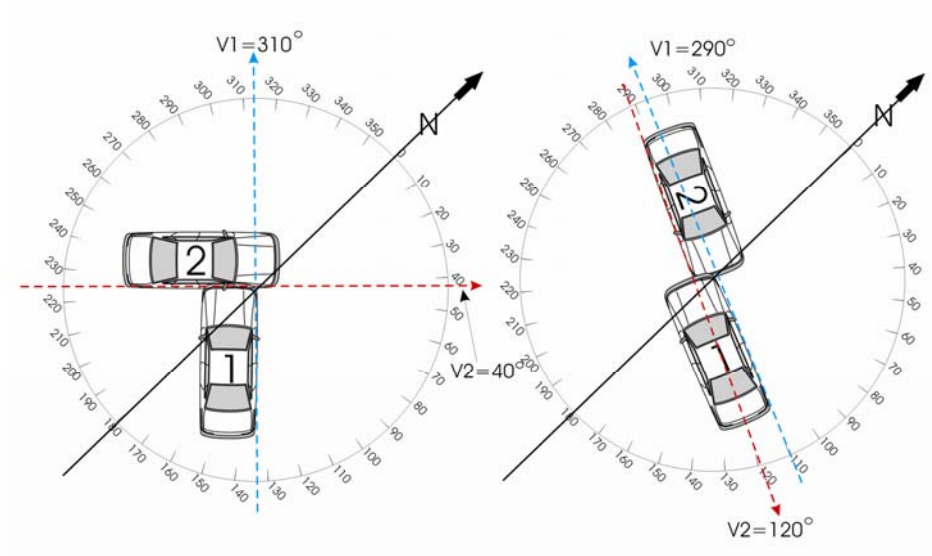

HEADING ANGLE FOR OTHER VEHICLE

Screen Name: Heading Angle at Impact for Highest Delta V--Angle - Other Vehicle

SAS Data Set: *GV*

SAS Variable: *ANGOTHER*

Oracle Name: *VEHICLECRASH.OTHERHEADINGANGLE*


Element Attributes:

Oracle	SAS
	000-355 Code actual value
	888 [Not a CDS Vehicle]
	996 [Non-horizontal impact]
	997 [Non-collision]
	998 [Impact with object]
	-9999 [Unknown]

Source: Scene diagram.

Remarks:

Heading Angle for Other Vehicle, records the heading angle for the other vehicle's highest delta V when this impact was with another vehicle. Heading Angle for This Vehicle, records the corresponding angle for the other vehicle. Parked vehicles are considered vehicles and not objects. For vehicle-to-vehicle collisions, use your scene diagram referencing system to determine the heading angles at the point of impact for *the other vehicle's* highest delta V. All measurements are referenced to the north arrow on the diagram. The heading angle of each vehicle is determined by projecting the longitudinal axis of the vehicle through the extension of the north arrow. The angle value is obtained by using a 360- protractor and measuring in a clockwise direction from the north arrow, in 5 degree increments. The north arrow always represents 0- (degrees). The angle is a positive value.

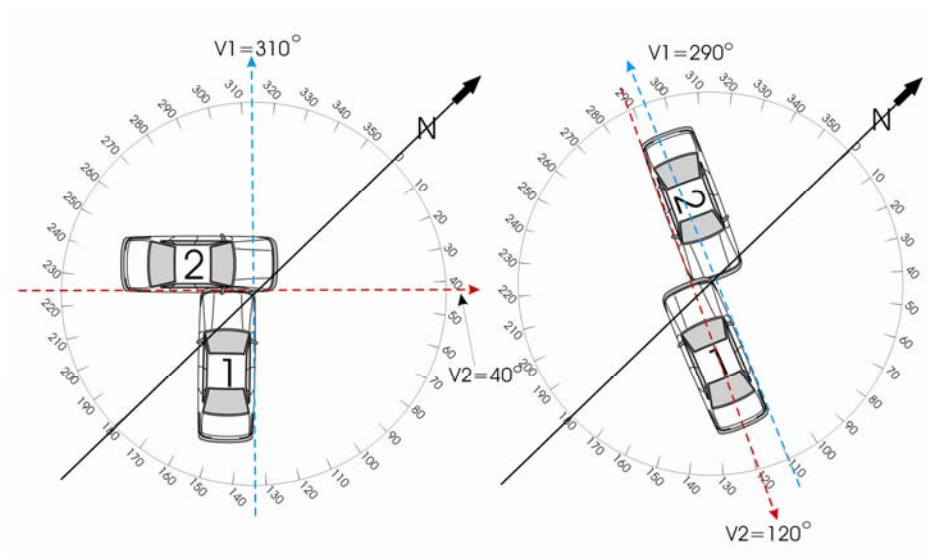

TOWED TRAILING UNIT

Screen Name: Reconstruction Data--Towed Trailing Unit

SAS Data Set: *GV*

SAS Variable: *TOWHITCH*

Oracle Name: *VEHICLECRASH.PICKTOWEDUNIT*

Element Attributes:

Oracle	SAS	
1	0	No Towed Unit
2	1	Yes, Towed Trailing Unit
	8	[Not a CDS Vehicle]
3	9	Unknown

Source: Vehicle inspection, interviews, and police report.

Remarks:

A trailing unit attached by a fixed linkage includes horse trailers, fifth wheel trailers, travel trailers, camper trailers, boat trailers, truck trailers, towed motor vehicles, or any other trailer.

If this variable is **Yes — towed trailing unit**, then enter the weight of the trailer as well as any cargo it may be carrying in variable Vehicle Cargo Weight.

No towed unit

is selected when a trailing unit is not being towed by this CDS applicable vehicle.

Yes — towed trailing unit

is selected when a trailing unit is being towed by this CDS applicable vehicle.

Unknown

is selected when it is uncertain if there was a towed trailing unit.

DOCUMENTATION OF TRAJECTORY DATA

Screen Name: Reconstruction Data--Documentation of Trajectory Data

SAS Data Set: *GV*

SAS Variable: *DOCTRAJ*

Oracle Name: *VEHICLECRASH.PICKTRAJECTORYDOC*

Element Attributes:

Oracle	SAS	
1	0	No
2	1	Yes
	8	[Not a CDS Vehicle]

Source: Researcher determined — inputs include scene inspection, vehicle inspection, police report, and interviews.

The purpose of this variable is to assess the availability of crash induced physical evidence for impact and final rest, including multiple impacts.

No

means there was insufficient crash induced physical evidence to **know or approximate** the point of impact and final rest position for this vehicle's Highest Delta V CDC.

Yes

is selected when sufficient crash induced physical evidence is available to **know or approximate** the point of impact and final rest position for this vehicle's Highest Delta V CDC, independently of whether the WinSMASH program trajectory algorithm could be used (*e.g.*, multiple impacts, missing vehicle, etc.).

For multiple impacts assess this variable with respect to the highest delta V impact. To code "Yes" the point of impact must be known as well its next point of impact or, if the highest delta V impact is the last impact for this vehicle, its final rest position.

When a non-horizontal and/or rollover type collision is the highest delta V impact for this vehicle, use **Yes** if the point of impact (trip point or first contact) and final rest position are known.

The word "approximated" as used above means that the impact and final rest positions do not need to be known precisely, but they are reasonably accurate based on the available physical evidence.

POST COLLISION CONDITION OF TREE OR POLE

Page 1 of 2

Screen Name: Reconstruction Data--Post Collision Condition of Tree or Pole

SAS Data Set: *GV*

SAS Variable: *CONDTREE*

Oracle Name: *VEHICLECRASH.PICKPOSTCONDITIONOBJECT*

Element Attributes:

Oracle	SAS	
1	0	Not Collision (for Highest Delta V) with tree or pole
2	1	Not damaged
3	2	Cracked/Sheared
4	3	Tilted < 45 Degrees
5	4	Tilted >= 45 Degrees
6	5	Uprooted Tree
7	6	Separated pole from base
8	7	Pole replaced
9	8	Other (specify)
	88	[Not a CDS Vehicle]
10	99	Unknown

Source: Researcher determined - input includes vehicle and scene inspection, PAR, interviews, official records.

Remarks:

This variable records the condition of the struck **Tree, Pole** or **Post** for this vehicle's most severe impact.

Not collision (for highest Delta V) with tree or pole

is selected when the Object Contacted, that produced this vehicle's most severe impact was not with a tree or pole (*e.g.*, vehicle-to-vehicle collision).

Not damaged

is selected when the tree or pole has no visible damage or minor surface damage.

Cracked/sheared

is selected when the pole or tree is cracked (10% or more of the fibers), sheared, or bent. Bent and cracked poles may be tilted and the bending/cracking can be at any height. This **Tree, Pole** or **Post** attribute takes precedence over Tilted < 45 degrees, Tilted ≥ 45 degrees, and Uprooted tree. Fallen limbs do not constitute "cracked" for a tree; the assessment is made at the tree's trunk. This *does not* describe metal breakaway poles sheared at their base [see (Separated pole from base)].

Tilted < 45 degrees

is selected when the pole or tree that is inclined at less than a 45 degree angle as a result of this collision. If the tree/pole is also cracked, then use **Cracked/sheared**).

Tilted >= 45 degrees

is selected when the pole or tree that is inclined at a 45 degree angle or greater as a result of this collision. If the tree/pole is also cracked, then use **Cracked/sheared**).

Uprooted tree

is selected when the tree was completely or partially torn out of the ground; the tree trunk remained intact; however, the root system was pulled from the soil.

Breakaway pole separated from base

is selected when the breakaway pole has sheared or separated at the point where it was designed to do so.

Pole replaced

is selected when a replacement pole has been installed and insufficient data exist to categorize the damage to the original pole. This attribute takes precedence over **Unknown**.

Other (specify)

is selected when the **Tree, Pole** or **Post** damage cannot be captured by the preceding attributes.

Unknown

is selected when no data can be obtained regarding the **Tree, Pole** or **Post**.

DELTA V

General Vehicle Form, Case 2007-996-900015/ Vehicle #1

VEHICLE | SPECIFICATIONS | OFFICIAL RECORDS | PRECRASH | DRIVER | ROLLOVER | RECONSTRUCTION | DELTA V | LOG | REVIEW

HIGHEST SEVERITY IMPACT Event Number

Basis for DeltaV

Computer Generated Delta V

Total kmph Energy Absorption joules

Longitudinal kmph Impact Speed kmph

Lateral kmph

Confidence Level

Barrier Equivalent Speed kmph

Estimated Delta V

Researcher Determined

Save Close

The completion of the variables on the Delta V tab depends on whether or not the vehicle was inspected (i.e., General Vehicle Tab “Vehicle Type of Inspection”).

If the vehicle inspection is NOT completed and a missing vehicle WinSMASH run was completed, the Researcher will complete the variables on the Delta V tab of the General Vehicle Form. The data used will be for the highest Delta V calculated for this vehicle.

If the vehicle is at least partially inspected, the delta V information will be entered on the Vehicle Exterior Form/CDC tab/Detail subtab.

EVENT NUMBER FOR HIGHEST SEVERITY IMPACT

Screen Name: Highest Severity Impact--Event Number

SAS Data Set: *GV*

SAS Variable: *ACCSEQDV*

Oracle Name: *VEHICLECRASH.DELTAVEVENTID*

Element Attributes:

Oracle	SAS	
	88	Code sequence number [Not a CDS Vehicle]
-9999	99	Unknown event [Not Inspected]

Range: 1-as selected/roll-up

Source: Roll-up from Vehicle Exterior Form/CDC, Researcher determined

Remarks:

The Event Number that the Researcher selects as the highest severity impact is rolled-up from the Vehicle Exterior Form/CDC. If there is no Vehicle Exterior Form the researcher selects the Event Number for the highest severity impact.

BASIS FOR COMPUTER GENERATED DELTA V FOR HIGHEST SEVERITY IMPACT

Page 1 of 4

Screen Name: Highest Severity Impact--Basis for Delta V**SAS Data Set:** *GV***SAS Variable:** *HDVBASIS***Oracle Name:** *VEHICLECRASH.PICKDELTAVBASIS***Element Attributes:**

Oracle SAS

When no Vehicle Inspection is completed:

0	0	Not Inspected
3	3	SMASH Missing Vehicle

When vehicle is inspected:**Delta V Calculated:**

1	1	[SMASH - Damage and trajectory]
2	2	[SMASH - Damage only]
3	3	SMASH - Missing vehicle
4	4	[SMASH - Damage with CDC only]

Delta V Not Calculated

5	5	At least one vehicle is beyond scope of SMASH
6	6	Rollover
7	7	Other non-horizontal forces
8	8	Sideswipe type damage
9	9	Severe override
10	10	Yielding object
11	11	Overlapping damage
12	12	Insufficient data (specify)
13	98	Other (specify)
	99	[Unknown]

Source: [Roll-up from Vehicle Exterior Form/CDC, or selected if vehicle was not inspected.]
 Researcher determined -- inputs include WinSMASH output (if applicable), vehicle inspection, scene inspection, police report, and photographs.

Remarks:

This variable is used to indicate: (1) which NASSMAIN WinSMASH program or routine was used to compute this vehicle's highest delta V or (2) the reason a NASSMAIN WinSMASH program was not applied to the most severe impact.

The Basis for Delta V for the highest severity impact is rolled-up from the Vehicle Exterior Form/CDC when the vehicle(s) involved in the highest severity impact have been inspected to the extent that integrated WinSMASH is used to calculate Delta V values. If one vehicle is inspected and one is not inspected for the highest severity impact, the researcher selects WinSMASH Missing vehicle to input reconstructed Delta V values. If no vehicle(s) is inspected, thus no Exterior Form, for the vehicle(s) involved in the highest severity impact, select "not inspected" and the remaining variables on this tab will be disabled (pre-coded unknown).

No Vehicle Inspection:**Not Inspected**

This vehicle has no delta V data due to the vehicle not being inspected AND the WinSMASH missing vehicle option is not applicable (i.e., other involved vehicle not inspected, or this is the only vehicle in the crash)

SMASH - missing vehicle

This vehicle was not inspected, and the delta V data was generated by the WinSMASH Missing vehicle option using basic information about this vehicle and the inspected vehicle's known damage data.

Vehicle Inspection Completed:**Delta V Calculated****SMASH - Damage and trajectory**

The WinSMASH output is based on trajectory evidence documented at the scene, in addition to complete vehicle damage.

SMASH - Damage only

The WinSMASH output is based upon complete vehicle damage only.

SMASH - Missing vehicle

In a two vehicle impact only this vehicle was inspected (damage measurements and CDC obtained), and for the other vehicle, the damage measurements (including CDC) are missing; however, enough data are available to use the WinSMASH Missing Vehicle option.

SMASH - Damage with CDC only

The WinSMASH output is based on a two vehicle collision with insufficient vehicle damage documentation. The two vehicle collision must include: one complete vehicle inspection and the other vehicle must have a complete CDC. Additional crush profile information such as the WinSMASH L, "D", etc may be entered to improve the results.

Delta V Not Calculated**At least one vehicle is beyond scope of SMASH**

One of the vehicles (which may be this vehicle) involved in this impact cannot **be adequately represented** by the parameters in an acceptable reconstruction size/stiffness category (e.g., large truck, motorcycle, bus, etc.). As a general rule in CDS NASS, any vehicle that is not applicable for a CDC is not applicable for the NASSMAIN WinSMASH program

For the following codes: All vehicles within scope (CDC applicable) of WinSMASH program but one of the collision conditions is beyond the scope of the WinSMASH program or other acceptable reconstruction techniques, regardless of the adequacy of damage data.

Rollover

The involved vehicle fits the vehicle parameters for an acceptable WinSMASH program; however, the rollover collision is beyond the scope of the program.

Other non-horizontal forces

The involved vehicle fits the vehicle parameter for an acceptable WinSMASH program; however, the other non-horizontal force is beyond the scope of the program e.g., large object falling on vehicle).

Sideswipe type damage

The involved vehicle fits the vehicle parameters for an acceptable WinSMASH program; however, the sideswipe type of collision is beyond the scope of the program.

Severe override

The involved vehicle fits the vehicle parameters for an acceptable WinSMASH program; however, the severe override type of collision is beyond the scope of the program.

Yielding object

The involved vehicle fits the vehicle parameters for an acceptable WinSMASH program; however, the collision with a yielding object (e.g., sheared utility pole) is beyond the scope of the program.

Overlapping damage

The involved vehicle fits the vehicle parameters for an acceptable WinSMASH program; however, collisions involving overlapping damage (i.e., multiple impacts in the same area) are beyond the scope of the program.

Insufficient data (specify)

The involved vehicles and the collision type are applicable for an acceptable WinSMASH program, but due to insufficient data on one or both of the vehicles or object, an acceptable WinSMASH program cannot be used.

Other (specify)

Delta V could not be calculated for a reason not identified in the current pick list. The reason must be specified on the line provided.

TOTAL DELTA V FOR HIGHEST SEVERITY IMPACT

Screen Name: Highest Severity Impact Computer Generated Delta V--Total

SAS Data Set: *GV*

SAS Variable: *HDVTOTAL*

Oracle Name: *VEHICLECRASH.HIGHESTDELTA V*

Element Attributes:

Oracle	SAS	
	888	Nearest kmph [Not a CDS vehicle]
999	999	[Unknown]

Source: Researcher determined -- Entered from WinSMASH program if the vehicle is not inspected. If inspected, data is rolled-up from Vehicle Exterior Form/CDC,

Range: 1-160, 888, 999

Remarks:

The Total Delta V for the highest severity impact, automatically generated by the NASSMAIN WinSMASH, is rolled-up from the Vehicle Exterior Form/CDC. If this vehicle was not inspected, and a missing vehicle algorithm was used to calculate the delta V information, the data is entered here.

999

is rolled-up from the Vehicle Exterior Form/CDC when the results for this impact are unobtainable.

LONGITUDINAL DELTA V FOR HIGHEST SEVERITY IMPACT

Screen Name: Highest Severity Impact Computer Generated Delta V--Longitudinal Component

SAS Data Set: *GV*

SAS Variable: *HDVLONG*

Oracle Name: *VEHICLECRASH.HIGHESTLONGDELTA V*

Element Attributes:

Oracle	SAS	
		Nearest KMPH
	888	[Not a CDS Vehicle]
999	999	[Unknown]

Source: Researcher determined -- Entered from the WinSMASH program if the vehicle is not inspected. If inspected, the data is rolled-up from Vehicle Exterior Form/CDC

Range: -160-160, 888, 999

Remarks:

The Longitudinal Delta V for the highest severity impact, automatically generated by the NASSMAIN WinSMASH, is rolled-up from the Vehicle Exterior Form/CDC. If this vehicle was not inspected, and a missing vehicle algorithm was used to calculate the delta V information, the data is entered here.

999

is rolled-up from the Vehicle Exterior Form/CDC when the results for this impact are unobtainable.

LATERAL DELTA V FOR HIGHEST SEVERITY IMPACT

Screen Name: Highest Severity Impact Computer Generated Delta V--Lateral Component

SAS Data Set: *GV*

SAS Variable: *HDVLAT*

Oracle Name: *VEHICLECRASH.HIGHESTLATDELTA V*

Element Attributes:

Oracle	SAS	
		Nearest kmph
	888	[Not a CDS Vehicle]
999	999	[Unknown]

Source: Researcher determined -- Entered from WinSMASH program if vehicle not inspected; If inspected, Rolled-up from Vehicle Exterior Form/CDC

Range: -160-160, 888, 999

Remarks:

The Lateral Delta V for the highest severity impact, automatically generated by the NASSMAIN WinSMASH, is rolled-up from the Vehicle Exterior Form/CDC. If this vehicle was not inspected, and a missing vehicle algorithm was used to calculate the delta V information, the data is entered here.

999

is rolled-up from the Vehicle Exterior Form/CDC when the results for this impact are unobtainable.

ENERGY ABSORPTION FOR HIGHEST SEVERITY IMPACT

Screen Name: Highest Severity Impact Computer Generated Delta V--Energy Absorption

SAS Data Set: *GV*

SAS Variable: *HENERGY*

Oracle Name: *VEHICLECRASH.HIGHESTENERGY*

Element Attributes:

Oracle	SAS
	Nearest joule
	8888888 [Not a CDS Vehicle]
-9999	9999999 [Unknown]

Source: Researcher determined -- Entered from the WinSMASH program if the vehicle is not inspected. If inspected the data is rolled-up from Vehicle Exterior Form/CDC

Range: 40-1000000, 8888888, 9999999

Remarks:

The Energy Absorption for the highest severity impact, automatically generated by the NASSMAIN WinSMASH, is rolled-up from the Vehicle Exterior Form/CDC. If this vehicle was not inspected, and a missing vehicle algorithm was used to calculate the delta V information, the data is entered here.

9999999

is rolled-up from the Vehicle Exterior Form/CDC when the results for this impact are unobtainable.

IMPACT SPEED FOR HIGHEST SEVERITY IMPACT

Screen Name: Highest Severity Impact Computer Generated Delta V—Impact Speed

SAS Data Set: *GV*

SAS Variable: *HIMPCTSP*

Oracle Name: *VEHICLECRASH.HIGHESTSPPEED*

Element Attributes:

Oracle	SAS	
		Nearest kmph
998	998	Damage and Trajectory run not made
	888	[Not a CDS Vehicle]
999	999	[Unknown]

Source: Researcher determined -- Rolled-up from Vehicle Exterior Form/CDC

Range: 1-160, 888, 998, 999

Remarks:

The Impact speed for the highest severity impact, automatically generated by the NASSMAIN WinSMASH (Damage and Trajectory), is rolled-up from the Vehicle Exterior Form/CDC.

998

is rolled up from the Vehicle Exterior Form / CDC tab when the impact did not include the Trajectory portion of the WinSMASH program.

999

is rolled-up from the Vehicle Exterior Form/CDC when the results for this impact are unobtainable.

CONFIDENCE LEVEL FOR HIGHEST SEVERITY IMPACT

Page 1 of 2

Screen Name: Highest Severity Impact Computer Generated Delta V--Confidence Level

SAS Data Set: *GV*

SAS Variable: *DVCONFID*

Oracle Name: *VEHICLECRASH.PICKDELTACONFIDENCE*

Element Attributes:

Oracle	SAS	
1	0	No reconstruction
2	1	Collision fits model — results appear reasonable
3	2	Collision fits model — results appear high
4	3	Collision fits model — results appear low
5	4	Borderline reconstruction
	8	[Not a CDS Vehicle]

Source: Researcher determined from WinSMASH program results, vehicle inspection, and scene inspection data.

Remarks:

This variable captures the quality of this vehicle's WinSMASH program results for the highest severity impact by evaluating the results, and the data used to create those results, for this impact.

No reconstruction

is selected when WinSMASH is not used for the highest severity impact or it is used only to get a Barrier Equivalent Speed or an Estimated Delta V for the highest severity impact.

Collision fits model - results appear reasonable

is selected if the results of the WinSMASH in comparison to the actual collision are believed to be within an acceptable range for this impact

Collision fits model - results appear high

is selected if the results of the WinSMASH in comparison to the actual collision appear to over represent this impact. For example, vehicle damage is minor (bumper stroke only), and the total delta V is 25 kmph.

Collision fits model - results appear low

is selected if the results of the WinSMASH in comparison to the actual collision appear to under represent this impact. For example, vehicle damage is severe (60 centimeters of distributed frontal crush), injury level is high (AIS-3, 4, 5), and the total delta V is 15 kmph.

Borderline reconstruction

is selected if the results of the WinSMASH in comparison to the actual collision are within an acceptable range for this impact; however, some collision conditions were borderline for the WinSMASH reconstruction. The attribute is also selected:

- 1) for all *uninspected* vehicles whose delta V is determined by the WinSMASH Missing Vehicle and the results appear reasonable;
- 2) when the 6th character of the CDC is coded as an "E" (corner impact);
- 3) for all vehicles which have been coded as an override or override.

BARRIER EQUIVALENT SPEED FOR HIGHEST SEVERITY IMPACT**Screen Name:** Barrier Equivalent Speed**SAS Data Set:** *GV***SAS Variable:** *HBAREQSP***Oracle Name:** *VEHICLECRASH.HIGHESTBARRIERSPEED***Element Attributes:**

Oracle	SAS	
		Nearest kmph
	888	[Not a CDS Vehicle]
999	999	Unknown

Source: WinSMASH program.**Range:** 1-160, 888, 999**Remarks:**

Record the Barrier Equivalent speed from the WinSMASH results for this impact, if this vehicle was **not inspected and** a WinSMASH Missing Vehicle algorithm was run. If the vehicle **was inspected**, and WinSMASH was completed, the results will roll up to this screen from the Vehicle Exterior Form / CDC tab.

To generate Barrier Equivalent speed for car to object impacts the WinSMASH program is utilized. For these runs treat the struck object as an immovable barrier.

For car to object impacts where the object moves or sustains damage (poles, trees, large trucks, etc.) or the object is struck (horizontally) during a rollover use the WinSMASH program and treat the object as a rigid barrier.

ESTIMATED SEVERITY FOR HIGHEST SEVERITY IMPACT

Screen Name: Estimated Highest Delta V--Researcher Determined

SAS Data Set: *GV*

SAS Variable: *HDVEST*

Oracle Name: *VEHICLECRASH.ESTDELTA V*

Element Attributes:

Oracle	SAS	
1	0	Reconstruction Delta V coded

Estimated Delta V

2	1	Less than 10 kmph
3	2	Est. Delta V->= 10 kmph < 25 kmph
4	3	Est. Delta V->= 25 kmph < 40 kmph
5	4	Est. Delta V->= 40 kmph < 55 kmph
6	5	Est. Delta V->= 55 kmph

Other estimates of damage severities

7	6	Damage severity-Minor
8	7	Damage severity-Moderate
9	8	Damage severity-Severe
	88	[Not a CDS Vehicle]
10	99	Unknown

Source: Researcher determined.

Remarks: The value that is in this variable is rolled up from the Vehicle Exterior Form, CDC tab.

If the vehicle was not inspected the variable is automatically pre-coded as either:

- Reconstruction Delta V coded or
- Unknown

based on which selection was made previously on **Basis for Delta V**.

General Vehicle Form, Case 2007-903-900005/ Vehicle #1

VEHICLE | SPECIFICATIONS | OFFICIAL RECORDS | PRECRASH | DRIVER | ROLLOVER | RECONSTRUCTION | DELTA V | LOG | REVIEW

PSU | ZONE

Reason Vehicle Inspection Not Completed

Save Close

REASON VEHICLE INSPECTION NOT COMPLETED

Page 1 of 4

Screen Name: Reason Vehicle Inspection Not Completed

SAS Data Set:

SAS Variable:

Oracle Name: *GENERALVEHICLELOG.PICKREASONNOTINSPECTED*

Element Attributes:

Oracle	SAS	
0	0	Non-CDS applicable vehicle
1	1	Complete inspection
2	2	Partial inspection under repair
3	3	Partial inspection repaired
20	20	Partial inspection Non-Tow
4	4	Partial inspection other (specify)
5	5	Vehicle cannot be located
6	6	Vehicle destroyed
7	7	Vehicle outside study area
8	8	Vehicle impounded
9	9	Vehicle sold
10	10	Hit and Run vehicle
11	11	Owner could not be located
12	12	Owner refusal
13	13	Insurance company refusal
14	14	Attorney refusal or litigation
15	15	Repair or tow facility refusal
16	16	Stolen
17	17	Wrong name/address on PAR
18	18	Caseload/staff turnover
19	19	Other (specify)

Remarks:

This attribute reports the inspection type, or describes the primary reason that the vehicle was not inspected. Select the most appropriate attribute.

Non-CDS applicable vehicle

Is used when the structured vehicle is not CDS applicable.

Complete inspection

Is used when a complete vehicle inspection is obtained. Both the exterior and interior must be completed on an un-repaired vehicle with all measurements and images obtained. Do not use this

attribute for vehicles with missing components, or where applicable measurements cannot be obtained.

Partial inspection – under repair

Is used when an inspection is obtained, but components have been disassembled or repaired, preventing complete inspection.

Partial inspection – repaired

Is used when the inspected vehicle is completely repaired.

Partial inspection – Non-Tow

Is used for inspected non-towed vehicles. If the non-towed vehicle is under repair or completely repaired, do not use this attribute.

Partial inspection – other (specify)

Is used when only partial inspection data are obtained for reasons not described above, e.g., a tow-truck took the vehicle away during the inspection.

Vehicle cannot be located

Is coded when, after numerous attempts, the researcher is unable to discover the location of the vehicle. If the location remains unknown due to refusal of any involved party, do not use this attribute.

Vehicle destroyed

Is coded when the vehicle's last location is known, and the researcher determines that the vehicle has been crushed or otherwise destroyed such that no usable data can be obtained through an inspection.

Vehicle outside study area

Is coded when the vehicle's location (from the PSU office) is of sufficient distance so that the travel time, when added to the inspection time, will exceed eight hours. If the vehicle is less than three hours driving time from the PSU office, do not code this attribute.

Vehicle impounded

Is coded when the police or another official agency has possession of the vehicle for evidentiary purposes, and the researcher is denied access to both the exterior and interior.

Vehicle sold

Is coded when the vehicle has been sold to an unidentified party.

Hit and Run vehicle

Is coded when the vehicle departed the crash scene, and no identifying data about the vehicle or its occupants are available.

Owner could not be located

Is coded when, after numerous attempts, the owner of the vehicle cannot be contacted and the owner's permission is required to inspect the vehicle. Use this attribute when it is established that the vehicle is in the owner's possession or otherwise under the owner's management, and no other source is available to allow the inspection.

Owner refusal

Is coded when it is established that the vehicle is in the owner's possession or otherwise under the owner's management, and the owner has refused to allow the inspection.

Insurance company refusal

Is coded when it is established that the vehicle is in the insurance company's possession or otherwise under the insurance company's management, and the insurance company has refused to allow the inspection. Use this attribute to describe salvage yards that require insurance company permission to inspect, but such permission cannot be obtained.

Attorney refusal or litigation

Is coded when an attorney, generally as a result of litigation, denies the inspection. In cases where the owner refuses based on attorney advice, do not use this attribute.

Repair or tow facility refusal

Is coded when it is established that the vehicle is in the tow or repair facility's possession, and the facility has refused to allow the inspection.

Stolen

Is coded when, after the crash, a vehicle is stolen and its location is unknown.

Wrong name/address on PAR

Is coded when all contact information for the owner/driver is incorrectly reported on the PAR and the correct information cannot be determined. Researchers should exhaust all investigative avenues before coding this response.

Reason Vehicle Inspection Not Completed (cont'd)

Page 4 of 4

Caseload/staff turnover

NOTE: This attribute may only be selected with Zone Center permission. This describes conditions where the majority of the team members depart unexpectedly, or where there are no trained researchers at the team.

Other (specify)

Is coded when no other listed choices are applicable. Specify the reason as briefly as possible. This choice should be used very rarely.

PSU REVIEW

General Vehicle Form, Case 2007-996-900015/ Vehicle #1

VEHICLE | SPECIFICATIONS | OFFICIAL RECORDS | PRECRASH | DRIVER | ROLLOVER | RECONSTRUCTION | DELTA V | LOG | REVIEW

PSU REVIEW | ZONE REVIEW

LIST | DETAIL

Field	Original	Suggested

Save Close

PSU CASE REVIEW

The case review process is a critical part of NASS quality control. Reviews are completed at the PSU, Zone Center, and NHTSA levels. The NASSMAIN program is equipped with an electronic case review that allows suggested changes to be entered and stored in the case. It is imperative that cases be reviewed in a tab-by-tab manner.

When conducting an electronic case review, it is important to enter the case in the “PSU Review” mode. Select “File” from the menu bar and select “PSU Review” from the opened window. All aspects of the case can be reviewed in this mode, but no changes can be made to the case. The method for suggesting changes varies with the type of data being reviewed.

Fixed variables have drop-down boxes that open a window of attributes from which to choose. In the “PSU Review” mode, select the variable for which a suggested change will be made. When the variable box is shaded blue, push the F5 key on the keyboard. A window will pop up displaying the coded attribute, a suggestion box for recommending a new attribute, and a comment box. The suggestion box will contain the same attribute choices available during data entry. Select the proposed attribute change and, if needed, enter justification for the change in the comment box. A list of the suggested changes is compiled under “Review” on the menu bar.

Case components such as summaries, scene diagrams, or sketches can be viewed in the “PSU Review” mode, but suggestion boxes are not available. Select the “Review” option from the menu bar and select the “Notes” option. A text box appears in which any suggestions can be entered. It is recommended to enter each suggested change on a new line of text to allow for easier reading and for additional comments from the case researcher.

When the review is complete, the case researcher should enter the case through the “Researcher Entry” mode so that potential changes can be made. Suggested variable changes that are agreed upon should be changed in the case. For suggestions with which the case researcher disagrees, justification for retaining the variable as coded may be entered in the comment box. Similarly, justification may be entered for suggestions in the “Notes” section that are not acted upon.

It is important to leave all case review notes and suggestions in the case for use in zone center review.

ZONE REVIEW

General Vehicle Form, Case 2007-996-900015/ Vehicle #1

VEHICLE | SPECIFICATIONS | OFFICIAL RECORDS | PRECRASH | DRIVER | ROLLOVER | RECONSTRUCTION | DELTA V | LOG | REVIEW

PSU REVIEW | ZONE REVIEW

LIST | DETAIL

Field	Original	Changed to

Save Close

ZONE CENTER REVIEW

Two types of case review conducted at the zone center are:

1. All variable review OR
2. Key variable/specified review

All aspects of the case are reviewed (all variable review) based upon researcher status as follows:

- Novice (1st 20 cases completed)
- Probationary
- Twenty-five percent of experienced researcher cases are reviewed (excludes researchers on probation).

All variable review

All aspects of a case will be reviewed to assess accuracy, completeness, and quality of case with respect to NASS program standards as indicated by source documents and researcher training.

Areas of exception as well as deficient performance will be assessed based on NHTSA's established guideline for NASS using the following source documents:

- CDS Coding and Editing Manual
- SAE J224 MAR80 .
- Photography Guideline
- Vehicle Measurement Techniques
- WINSMASH Decision Rules
- Researcher training
- Established NASS Edit Checks

Key Variable/Specified review:

Key variable reviews are performed on cases with variables designated to be of special interest and will typically include the following:

- Pre crash
- Rollover
- WINSMASH
- Restraint systems

All cases are checked to ensure they are applicable and selected based on established sampling rules.

In addition to case review, Zone Center personnel are responsible for the coding and sourcing of official and unofficial medical/injury data.

VEHICLE

Exterior Vehicle Form, Case 2007-996-900015/ Vehicle #1

VEHICLE | TIRE | SPECIFICATIONS | FUEL | FIRE | CRUSH | CDC | EDR | SKETCHES | LOG | REVIEW

Identification

Number: 1 Identification Number:

Model Year: 2004 Vehicle Special Use: No Special Use

Make: FORD Transport Status: In transport

Model: TAURUS

Body Category: Automobiles

Body Type: 4-door sedan, hardtop

Class: Intermediate (wheelbase >= 265 but < 278 cm)

Weight

Curb Weight: 1452 kgs Source: Automotive News

Cargo Weight: 91 kgs Source: Vehicle inspection

Inspection

Complete Inspection Date: 01/14/2007

Save Close

VEHICLE NUMBER

Screen Name: Number

SAS Data Set: *ALL (except ACCIDENT, ACCDESC, EVENT, ACCDER, EMS, SPECSTDY)*

SAS Variable: *VEHNO*

Oracle Name: *VEHICLE.VEHICLENUMBER*

Element Attributes:
Generated Number

Range:

Source: Generated when vehicle is selected to open General Vehicle Form.

Remarks:

Note: Vehicles are entered on the Case Form/Structure Tab/Vehicles sub-tab.

Each in-transport motor vehicle (regardless of body type) is assigned a unique number. Vehicle numbers are to be assigned consecutively according to the order listed on the PAR. Any parked CDS applicable vehicles that are struck by an in-transport CDS-applicable vehicle are also assigned a number.

VEHICLE MODEL YEAR

Screen Name: Identification--Model Year

SAS Data Set: *GV*

SAS Variable: *MODELYR*

Oracle Name: *VEHICLE.MODELYEAR*

Element Attributes:

Oracle SAS
1900 - current data collection year plus one
-9999 9999 Unknown

Range: 1900 (current year+1)

Source: Primary source is the VIN during vehicle inspection; secondary sources include the police report and interviews.

Remarks:

Select the model year for which the vehicle was manufactured.

Unknown

if the vehicle model year cannot be determined.

VEHICLE MAKE

Screen Name: Identification--Make

SAS Data Set: *GV*

SAS Variable: *MAKE (for SAS code); OMAKE (for Oracle code)*

Oracle Name: *VEHICLE.MAKEID*

Element Attributes:

Vehicle Make-as Selected

Unknown

Source: Vehicle inspection, police report, and interview

Remarks:

Select the vehicle make for this vehicle.

Unknown

is used for a "hit-and-run" vehicle unless reliable evidence indicates the make of the vehicle.

See appendix for list of makes.

VEHICLE MODEL

Screen Name: Identification—Model

SAS Data Set: *GV*

SAS Variable: *MODEL (for SAS code); OMODEL (for Oracle code)*

Oracle Name: *VEHICLE.MODELID*

Element Attributes:

Vehicle Model-as Selected
Unknown

Source: Vehicle inspection, police report, and interview

Remarks:

Select the vehicle model for this vehicle.

Unknown

is used for a "hit-and-run" vehicle unless reliable evidence indicates the make of the vehicle.

See appendix for list of Models

VEHICLE BODY CATEGORY

Screen Name: Body Category
SAS Data Set: N/A
SAS Variable: N/A
Oracle Name: *VEHICLE.PICKVEHICLETYPE*

Element Attributes:

Oracle	SAS
1	Automobiles
2	Automobile Derivatives
3	Utility Vehicles
4	Van Based Light Trucks
5	Light Conventional Trucks
6	Other Light Trucks
7	Buses (Excludes Van Based)
8	Medium/heavy Trucks
9	Motored Cycles
10	Other Vehicles
-9999	Unknown Body Type

Source: Vehicle inspection, police report, interview, VIN

Remarks:

Automobiles

These light vehicles referred to as automobiles, are designed primarily to transport passengers.

Automobile Derivatives

This describes certain passenger cars that have been modified to perform cargo-related tasks.

Utility Vehicles (< 4,536 kgs GVWR)

Van Based Light Trucks (< 4,536 kgs GVWR)

Light Conventional Trucks (Pickup Style Cab, < 4,536 kgs GVWR)

Other Light Trucks (< 4,536 kgs. GVWR)

Other Light Trucks are used to describe vehicles that are based upon a conventional light pickup frame, but a commercial or recreational body has been affixed to the frame rather than a pickup box.

Buses (Excludes Van Based)

Buses are defined as any medium/heavy motor vehicle designed primarily to transport large groups of passengers.

Medium/Heavy Trucks (> 4,536 kgs GVWR)

Medium/Heavy Trucks describe a single unit truck specifically designed for carrying cargo on the same chassis as the cab. They pertain to a truck-tractor designed for towing trailers or semi-trailers. Although towing is their primary purpose, some truck-tractors are equipped with cargo areas located rearward of the cab.

Motored Cycles (Does Not Include All Terrain Vehicles/Cycles)**Other Vehicles**

Other Vehicles describe all motored vehicles that are designed primarily for off-road use. It is also selected when the body type of the vehicle is unknown.

BODY TYPE

Screen Name: Body Type

SAS Data Set: *GV*

SAS Variable: *BODYTYPE*

Oracle Name: *VEHICLE.BODYTYPEID*

Element Attributes:

CDS APPLICABLE VEHICLES

Oracle SAS

Automobiles

- 01 01 Convertible (excludes sun-roof, t-bar)
- 02 02 2-door sedan, hardtop, coupe
- 03 03 3-door/2-door hatchback
- 17 17 3-door coupe
- 04 04 4-door sedan, hardtop
- 05 05 5-door/4-door hatchback
- 06 06 Station wagon (excluding van and truck based)
- 07 07 Hatchback, number of doors unknown
- 08 08 Other automobile type (specify):
- 09 09 Unknown automobile type

Automobile Derivatives

- 10 10 Auto based pickup (includes El Camino, Caballero, Ranchero, Brat, and Rabbit pickup)
- 11 11 Auto based panel (cargo station wagon, auto based ambulance/hearse)
- 12 12 Large limousine - more than four side doors or stretched chassis
- 13 13 Three-wheel automobile or automobile derivative

Utility Vehicles (<=4,536 kgs GVWR)

- 14 14 Compact utility (examples include: 4-Runner, Amigo, Bravada, Bronco [76 and before], Bronco II, Cherokee [84 and after], Defender, Discovery, Dispatcher, Explorer, Geo Tracker, Golden Eagle, Grand Vitara, Jeep CJ-2 - CJ-7, Laredo, Montero, Mountaineer, Navajo, Passport, Pathfinder, Raider, RAV4, RX-300, Renegade, Rocky, Rodeo, S-10 Blazer, S-15 Jimmy, Samurai, Scrambler, Sidekick, Sportage, Thing, Trooper, Trooper II, Wrangler, Xterra, X-90)
- 15 15 Large utility (examples include: Bronco-full-size [78 and after], full-size Blazer, full-size Jimmy, Hummer, Jeep Cherokee [83 and before], Durango, Escalade, Landcruiser, LX450, Navigator, Ramcharger, RangeRover, Scout, Tahoe, Trailduster, Yukon)

Body Type (cont'd)

Page 2 of 12

Oracle SAS

16	16	Utility station wagon (examples include: Chevrolet Suburban, Expedition, Excursion, GMC Suburban, Grand Wagoneer includes suburban limousine, Travelall)
19 Utility, unknown body type		
Van Based Light Trucks (<=4,536 kgs GVWR)		
20	20	Minivan (examples include: Aerostar, Astro, Caravan, Expo Wagon, Grand Caravan, Grand Voyager, Lumina APV, Mazda MPV, Mini-Ram, Mitsubishi Minivan, Nissan Minivan, Odyssey, Previa, Quest, Safari, Sienna, Silhouette, Town and Country, Toyota Minivan, Toyota Van, Trans Sport, Vanagon/Camper, Venture, Villager, Vista, Voyager, Windstar)
21	21	Large van (examples include: B150-B350, Beauville, Chateau, Chevy Van, Clubwagon, E150- E350, Econoline, G10-G30, G15-G35, Maxiwagon, Rally Van, Ram, Royal, Sport Van, Sportsman, Tradesman, Vandura, Voyager [83 and before].)
22	22	Step van or walk-in van (<=4,536 kgs GVWR)
23	23	Van based motorhome (<=4,536 kgs GVWR)
24	24	Van based school bus (<=4,536 kgs GVWR)
25	25	Van based other bus (<=4,536 kgs GVWR)
28	28	Other van type (Hi-Cube Van, Kary) (specify):
29	29	Unknown van type
Light Conventional Trucks (Pickup style cab, <=4,536 kgs GVWR)		
30	30	Compact pickup (examples include: Arrow Pickup [foreign], Colt P/U, Courier, D50, Dakota, Datsun/Nissan Pickup, Frontier, Hombre, LUV, Mazda Pickup, Mitsubishi Pickup, Pup, Ram 50, Ranger, S-10 , S-15, Sonoma, Sport Trac, T-10, T-15, Tacoma, Toyota Pickup)
31	31	Large Pickup (examples include: C10-C35, Comanche, D100-D350, F100-F350, Jeep Pickup, K10-K35, R100-R500, R10-R35, Ram Pickup, Sierra, Silverado, T100, V10-V35, W100-W350)
32	32	Pickup with slide-in camper
33	33	Convertible pickup
39	39	Unknown pickup style light conventional truck type
Other Light Trucks (<=4,536 kgs GVWR)		
40	40	Cab chassis based (includes rescue vehicles, light stake, dump, and tow truck)
41	41	Truck based panel
42	42	Light truck based motorhome (chassis mounted)
45	45	Other light conventional truck type
48	48	Unknown light truck type
49	49	Unknown light vehicle type (automobile, utility, van, or light truck)

Body Type (cont'd)

OTHER VEHICLES

Oracle SAS

Buses (Excludes Van Based)

- 50 50 School bus (designed to carry students, not cross country or transit)
- 58 58 Other bus type (e.g., transit, intercity, bus based motorhome) (specify)
- 59 59 Unknown bus type

Medium/Heavy Trucks (> 4,536 kgs GVWR)

- 60 60 Step van (> 4,536 kgs GVWR)
- 61 61 Single unit straight truck (4,536 kgs <GVWR<=8,845 kgs)
- 62 62 Single unit straight truck (8,8845 kgs <GVWR<=11,793 kgs)
- 63 63 Single unit straight truck (> 11,793 kgs GVWR)
- 64 64 Single unit straight truck, GVWR unknown
- 65 65 Medium/heavy truck based motorhome
- 67 67 Truck-tractor with no cargo trailer
- 68 68 Truck-tractor pulling one trailer
- 69 69 Truck-tractor pulling two or more trailers
- 70 70 Truck-tractor (unknown if pulling trailer)
- 74 74 Medium/Heavy pickup truck (≥ 4,536 kgs GVWR)
- 78 78 Unknown medium/heavy truck type

Unknown truck type (light / medium / heavy)

- 79 79 Unknown truck type (light / medium / heavy)

Motored Cycles (Does Not Include All-Terrain Vehicles/Cycles)

- 80 80 Motorcycle
- 81 81 Moped (motorized bicycle)
- 82 82 Three-wheel motorcycle or moped
- 88 88 Other motored cycle (minibike, motor scooter) (specify):
- 89 89 Unknown motored cycle type

Other Vehicles

- 90 90 ATV (All-Terrain Vehicle) and ATC (All-Terrain Cycle)
- 91 91 Snowmobile
- 92 92 Farm equipment other than trucks
- 93 93 Construction equipment other than trucks
- 97 97 Other vehicle type

Unknown Vehicle Type

- 99 99 Unknown body type

Body Type (cont'd)

Page 4 of 12

Source: Vehicle inspection, police report, and interview

Remarks:

Automobiles

These light vehicles referred to as automobiles, are designed primarily to transport passengers.

01 Convertible (excludes sun-roof, t-bar)

refers to a passenger car equipped with a removable or retractable roof. To qualify for this attribute, the entire roof must open. Convertible roofs are generally fabric; however, removable hardtops are also included. This attribute takes priority over 2-door or 4-door attributes.

02 2-door sedan, hardtop, coupe

refers to a passenger car equipped with two doors for ingress/egress and a separate trunk area for cargo (*i.e.*, trunk lid hinged below the backlight). Folding rear seats do not necessarily violate the separate "trunk area" concept.

03 3-door/2-door hatchback

refers to a passenger car equipped with two doors for ingress/egress and a rear hatch opening for cargo (*i.e.*, hinged above the backlight). The cargo area is not permanently partitioned from the passenger compartment area.

17 3-door coupe

refers to a passenger car equipped with three doors (two front seat and one rear seat) for ingress/egress and a separate trunk area for cargo (*i.e.*, trunk lid hinged below the backlight). Folding rear seats do not necessarily violate the separate "trunk area" concept.

04 4-door sedan, hardtop

refers to a passenger car equipped with four doors for ingress/egress and a separate trunk area for cargo (*i.e.*, trunk lid hinged below the backlight). Folding rear seats do not necessarily violate the separate "trunk area" concept.

05 5-door/4-door hatchback

refers to a passenger car equipped with four doors for ingress/egress and a rear hatch opening for cargo (*i.e.*, hinged above the backlight). The cargo area is not permanently partitioned from the passenger compartment area.

06 Station wagon (excluding van and truck based)

refers to a passenger car with an enlarged cargo area. The entire roof covering the cargo area is generally equal in height from front to rear and full height side glass is installed between the C and D-pillars. The rearmost area is not permanently partitioned from the forward passenger compartment area (*e.g.*, "horizontal window shades" to hide cargo do not constitute partitions).

Body Type (cont'd)

Page 5 of 12

07 Hatchback, number of doors unknown

refers to a passenger car with an unknown number of doors for ingress/egress and a rear hatch opening for cargo (*i.e.*, hinged above the backlight). The cargo area is not permanently partitioned from the passenger compartment area.

08 Other automobile type

refers to any passenger car that cannot be described by other automobile attributes.

09 Unknown automobile type

is used when it is known that the vehicle is a passenger car, but there is insufficient data to determine the type.

Automobile Derivatives

This describes certain passenger cars that have been modified to perform cargo-related tasks.

10 Auto based pickup

refers to a passenger car based, pickup type vehicle (includes El Camino, Caballero, Ranchero, Brat, and Rabbit pickup). The roof area (and side glass) rearward of the front seats on a station wagon have been removed and converted into a pickup-type cargo box.

11 Auto based panel

refers an automotive station wagon that may have sheet metal rearward of the B-pillar rather than glass (cargo station wagon, auto based ambulance/hearse).

12 Large limousine

refers to an automobile that has sections added within its wheelbase (more than four side doors) or stretched chassis to increase length and passenger/cargo carrying capacity .

13 Three-wheel automobile or automobile derivative

refers to three-wheel vehicles with an enclosed passenger compartment.

Utility Vehicles (<=4,536 kgs GVWR)**also referred to as:**

Multi-purpose vehicles (MPV)

are designed to have off-road capabilities. These vehicles are generally four wheel drive (4 x 4), have increased ground clearance, and are equipped with a strong frame. Four wheel drive automobiles are not considered MPVs.

14 Compact utility

refers to a short wheelbase and narrow tracked multi-purpose vehicle designed to operate in rugged terrain (examples include: 4-Runner, Amigo, Bravada, Bronco [76 and before], Bronco II, Cherokee [84 and after], Defender, Discovery, Dispatcher, Explorer, Geo Tracker, Golden Eagle, Grand Vitara, Jeep CJ-2 - CJ-7, Laredo, Montero, Mountaineer, Navajo, Passport, Pathfinder, Raider,

Body Type (cont'd)

Page 6 of 12

RAV4, RX-300, Renegade, Rocky, Rodeo, S-10 Blazer, S-15 Jimmy, Samurai, Scrambler, Sidekick, Sportage, Thing, Trooper, Trooper II, Wrangler, Xterra, X-90).

15 Large utility

refers to full-size multi-purpose vehicles primarily designed around a shortened pickup truck chassis. While generally a station wagon style body, some models are equipped with a removable top (examples include: Bronco-full-size [78 and after], full-size Blazer, full-size Jimmy, Hummer, Jeep Cherokee [83 and before], Durango, Escalade, Landcruiser, LX450, Navigator, Ramcharger, RangeRover, Scout, Tahoe, Trailduster, Yukon).

16 Utility station wagon

refers primarily to a pickup truck based chassis enlarged to a station wagon (examples include: Chevrolet Suburban, Excursion, GMC Suburban, Travelall, Grand Wagoneer, includes suburban limousine).

Utility, unknown body type

is used when it is known that the vehicle is a utility vehicle, but there is insufficient data to determine the specific type. Class of Vehicle is entered as (**Compact utility vehicle**).

Van Based Light Trucks (<=4,536 kgs GVWR)

Light trucks (<=4,536 kgs GVWR) are designed to maximize cargo/passenger area versus overall length. Basically a "box on wheels" these vehicles are identifiable by their enclosed cargo/passenger area and relatively short (or non-existent) hood.

20 Minivan

refers to down-sized cargo or passenger vans (examples include: Aerostar, Astro, Caravan, Expo Wagon, Grand Caravan, Grand Voyager, Lumina APV, Mazda MPV, Mini-Ram, Mitsubishi Minivan, Nissan Minivan, Odyssey, Previa, Quest, Safari, Sienna, Silhouette, Town and Country, Toyota Minivan, Toyota Van, Trans Sport, Vanagon/Camper, Venture, Villager, Vista, Voyager, Windstar).

21 Large van

refers to a standard cargo or passenger van (examples include: B150-B350, Sportsman, Royal, Maxiwagon, Ram, Tradesman, Voyager [83 and before], E150-E350, Econoline, Clubwagon, Chateau, G10-G30, Chevy Van, Beauville, Sport Van, G15-G35, Rally Van, Vandura). These vans will generally have a larger capacity in both volume and GVWR.

22 Step van or walk-in van (<=4,536 kgs GVWR)

refers to a multi-stop delivery vehicle with a GVWR less than or equal to 4,536 kilograms. Examples are the Grumman LLV used by the US Postal Service or the Aeromate manufactured by Utilimaster Motor Corporation.

Body Type (cont'd)

Page 7 of 12

23 Van based motorhome (<=4,536 kgs GVWR)

refers to a van where the chassis and cab portions from the B-pillar forward of this vehicle are the same as in attributes minivan, large van, step van, however, a frame mounted recreational unit is added behind the driver/cab area. This attribute takes priority over attributes minivan and large van.

24 Van based school bus (<=4,536 kgs GVWR)

is a passenger van designed to carry students (passengers) to and from educational facilities and/or related functions. The vehicles are characteristically painted yellow and clearly identified as school buses. Use this attribute regardless of whether the vehicle is owned by a school system or a private company. Van based school buses converted for other uses (*e.g.*, church bus) also take this attribute.

25 Van based other bus (<=4,536 kgs GVWR)

is a van derivative (*e.g.*, taxi, small local transit) designed to carry passengers for low occupancy functions or purposes. Van based school buses do not use this attribute.

28 Other van type (Hi-Cube Van, Kary)

refers to a cargo or delivery van where that chassis and cab portions from the B-pillar forward of this vehicle are the same as in Minivans and Large Vans with a frame mounted cargo area unit added behind the driver/cab area, or if the van cannot be described as a Minivan, Large Van, Step-van or a Van-based motorhome. Annotate the van type when using this attribute. This attribute takes priority over Minivans and Large Vans.

29 Unknown van type

is used when it is known that this vehicle is a light van, but its specific type cannot be determined.

Light Conventional Trucks (Pickup Style Cab, <=4,536 kgs GVWR)

Light Conventional Trucks are used to describe vehicles commonly referred to as pickup trucks and some of their derivatives. These light trucks are characteristically designed with a small cab containing a single row of seats (extended cabs with additional seats are available for some models), a large hood covering a conventional engine placement, and a separate open box area (approximately 180 to 240 centimeters long) for cargo.

30 Compact pickup

is used to describe a pickup truck having a width of 178 centimeters or less. (examples include: Arrow Pickup [foreign], Colt P/U, Courier, D50, Dakota, Datsun/Nissan Pickup, Frontier, Hombre, LUV, Mazda Pickup, Mitsubishi Pickup, Pup, Ram 50, Ranger, S-10, S-15, Sonoma, T-10, T-15, Tacoma, Toyota Pickup).

31 Large Pickup

is used to describe a pickup truck having a width of greater than 178 centimeters (examples include: C10-C35, Comanche, D100-D350, F100-F350, Jeep Pickup, K10-K35, R100-R500, R10-R35, Ram Pickup, Sierra, Silverado, T100, V10-V35, W100-W350).

32 Pickup with slide-in camper

is used to describe any pickup truck that is equipped with a slide-in camper. A slide-in camper is a unit that mounts within a pickup bed. Pickup bed caps, tonneau covers, or frame mounted campers are not applicable for this attribute.

33 Convertible pickup

refers to a pickup truck equipped with a removable or retractable roof. To qualify for this attribute, the entire roof must open. Convertible roofs are generally fabric; however, removable hardtops are also included. This attribute takes priority over compact and large pickups.

39 Unknown pickup style light conventional truck

is used when this vehicle is a Light Conventional Trucks, but there is insufficient data to determine the specific attribute.

Other Light Trucks (<=4,536 kgs. GVWR)

Other Light Trucks are used to describe vehicles that are based upon a conventional light pickup frame, but a commercial or recreational body has been affixed to the frame rather than a pickup box.

40 Cab chassis based (includes rescue vehicles, light stake, dump, and tow truck)

is used to describe a light vehicle with a pickup style cab and a commercial (non-pickup) body attached to the frame. Included are pickup based ambulances and tow trucks.

41 Truck based panel

is used to describe a truck based station wagon that has sheet metal rather than glass above the beltline rearward of the B-pillars.

42 Light truck based motorhome (chassis mounted)

is used to describe a frame mounted recreational unit attached to a light van or conventional chassis.

45 Other light conventional truck type

is used for light conventional trucks that cannot be described elsewhere.

48 Unknown light truck type

is used when it is known that the vehicle is a light truck chassis based vehicle but insufficient data exist to specify what type of light truck it is.

49 Unknown light vehicle type (automobile, utility, van, or light truck)

is used when it is known that the vehicle is a light vehicle, but insufficient data exists to specify what type of light truck it is.

Body Type (cont'd)

Page 9 of 12

Buses (Excludes Van Based)

Buses are defined as any medium/heavy motor vehicle designed primarily to transport large groups of passengers.

50 School bus

(designed to carry students, not cross country or transit) is a bus designed to carry passengers to and from educational facilities and/or related functions. The vehicles are characteristically painted yellow and clearly identified as school buses. Use this attribute regardless of whether the vehicle is owned by a school system or a private company. School buses converted for other uses (*e.g.*, church bus) also take this attribute.

58 Other bus type

is a transport device designed to carry passengers for longer periods of time, (*e.g.*, transit, intercity, bus based motorhome). These vehicles may be classified as over-the-road, transit, intercity, bus related motorhome (other than school bus based), or other.

59 Unknown bus type

is used when it is known the transport device is a bus but there is insufficient data to choose between attributes School bus and Other bus type.

Medium/Heavy Trucks (> 4,536 kgs GVWR)

Medium/Heavy Trucks describe a single unit truck specifically designed for carrying cargo on the same chassis as the cab.

They pertain to a truck-tractor designed for towing trailers or semi-trailers. Although towing is their primary purpose, some truck-tractors are equipped with cargo areas located rearward of the cab.

60 Step van (> 4,536 kgs GVWR)

defines a single unit enclosed body with a GVWR greater than 4,536 kilograms and an integral driver's compartment and cargo area. Step vans are generally equipped with a folding driver seat mounted on a pedestal and a sliding door for easy ingress/egress.

61 Single unit straight truck (4,536 kgs <=GVWR <= 8,845 kgs)

describes a non-articulated truck designed to carry cargo. The gross vehicle weight rating of the vehicle must exceed 4,536 kilograms and be less than or equal to 8,845 kilograms.

62 Single unit straight truck (8,845 kgs <= GVWR <= 11,793 kgs)

describes a non-articulated truck designed to carry cargo. The gross vehicle weight rating of the vehicle must exceed 8,845 kilograms and be less than or equal to 11,793 kilograms.

63 Single unit straight truck (> 11,793 kgs GVWR)

describes a non-articulated truck designed to transport cargo with a gross vehicle weight rating in excess of 11,793 kilograms. Use this attribute if it is known that the GVWR of a single unit straight

Body Type (cont'd)

Page 10 of 12

truck is greater than 4,536 kilograms but there is insufficient data to specify the type of single unit truck.

64 Single unit straight truck, GVWR unknown

is used when the transport vehicle is a single unit straight truck but the GVWR is unknown.

65 Medium/heavy truck based motorhome

describes a recreational vehicle mounted on a single unit medium/heavy truck chassis.

67 Truck-tractor with no cargo trailer

describes a fifth wheel equipped tractor/trailer power unit with no trailer attached.

68 Truck-tractor pulling one trailer

describes a fifth wheel equipped tractor (*i.e.*, power unit of a tractor/trailer combination) pulling one semi-trailer.

69 Truck-tractor pulling two or more trailers

describes a fifth wheel equipped tractor (*i.e.*, power unit of a tractor/trailer combination) pulling a semi-trailer plus one or more trailers. These additional trailers may be attached with a standard hitch or a converter dolly (for semi-trailers).

70 Truck-tractor (unknown if pulling trailer)

is used when the vehicle is known to be a truck-tractor, but it is unknown if a trailer was being towed or if more than one trailer was being towed.

74 Medium/Heavy pickup truck (≥ 4,536 kgs GVWR)**78 Unknown medium/heavy truck type**

is used when the only available information indicates a truck of medium/heavy size.

79 Unknown truck type (light/medium/heavy)

is used when it is known that this vehicle is a truck, but there is insufficient data to classify the vehicle further.

Motorcycles (Does Not Include All Terrain Vehicles/Cycles)

80 Motorcycle

is used when the vehicle is a two-wheeled open (*i.e.*, no enclosed body) vehicle propelled by an internal combustion engine. Motorcycles equipped with a side car also take this attribute.

Body Type (cont'd)

Page 11 of 12

81 Moped (motorized bicycle)

is used when the vehicle is a motorized bicycle capable of moving either by pedaling or by an internal combustion engine.

82 Three-wheel motorcycle or moped

is used when the vehicle is a three-wheeled open vehicle propelled by an internal combustion engine or a three-wheeled motorized bicycle capable of moving either by pedaling or by an internal combustion engine.

88 Other motored cycle (minibike, motor scooter)

is used when the vehicle in question does not qualify for attributes **Motorcycles, moped, three wheeled motorcycle or moped** (*e.g.*, motor scooter).

89 Unknown motored cycle type

is used when it is known that the vehicle is a motored cycle, but no further data is available.

Other Vehicles

Other Vehicles describe all motored vehicles that are designed primarily for off-road use.

90 ATV (All-Terrain Vehicle) and ATC (All-Terrain Cycle)

is used for off-road recreational vehicles which cannot be licensed for use on public roadways. ATVs have 4 or more wheels and ATCs have 2 or 3 wheels. Generally, the tires have low pressure and wide profile (*i.e.*, flotation/balloon).

91 Snowmobile

refers to a vehicle designed to be operated over snow propelled by an internal combustion engine.

92 Farm equipment other than trucks

refers to farming implements other than trucks propelled by an internal combustion engine (*e.g.*, farm tractors, combines, etc.).

93 Construction equipment other than trucks

refers to construction equipment other than trucks propelled by an internal combustion engine (*e.g.*, bulldozer, road grader, etc.).

97 Other vehicle type

is used when the motorized vehicle in question does not qualify for **Construction equipment other than trucks, Farm equipment other than trucks, Snowmobile, ATV (All-Terrain Vehicle) and ATC (All-Terrain Cycle)** (*e.g.*, go-cart, dune buggy, "kit" car, etc.).

Body Type (cont'd)

Page 12 of 12

Unknown Vehicle Type

Unknown Vehicle Type describes all motored vehicles where the body type cannot be differentiated among a light vehicle type, bus, medium/heavy truck, motored cycle, or any other motored vehicle type.

99 Unknown body type

is used when there is no available information regarding the type of vehicle. This lack of information prohibits the accurate classification of this vehicle within one of the preceding attributes.

[CLASS OF VEHICLE]

Page 1 of 5

Screen Name: Class of Vehicle**SAS Data Set:** N/A**SAS Variable:** N/A**Oracle Name:** *VEHICLE.PICVEHICLECLASS***Element Attributes:**

Oracle	SAS	
1	1	Subcompact/mini (wheelbase < 254 cm)
2	2	Compact (wheelbase ≥ 254 but < 265 cm)
3	3	Intermediate (wheelbase ≥ 265 but < 278 cm)
4	4	Full size (wheelbase ≥ 278 but < 291 cm)
5	5	Largest (wheelbase ≥ 291 cm)
9	9	Unknown passenger car size
14	14	Compact utility vehicle
15	15	Large utility vehicle (≤ 4,536 kgs GVWR)
16	16	Utility station wagon (≤ 4,536 kgs GVWR)
19	19	Unknown utility type
20	20	Minivan (≤ 4,536 kgs GVWR)
21	21	Large van (≤ 4,536 kgs GVWR)
24	24	Van based school bus (≤ 4,536 kgs GVWR)
28	28	Other van type (≤ 4,536 kgs GVWR)
29	29	Unknown van type (≤ 4,536 kgs GVWR)
30	30	Compact pickup truck (≤ 4,536 kgs GVWR)
31	31	Large pickup truck (≤ 4,536 kgs GVWR)
38	38	Other pickup truck (≤ 4,536 kgs GVWR)
39	39	Unknown pickup truck type (≤ 4,536 kgs GVWR)
45	45	Other light truck (≤ 4,536 kgs GVWR)
48	48	Unknown light truck type (≤ 4,536 kgs GVWR)
49	49	Unknown light vehicle type
50	50	School bus (excludes van based) (> 4,536 kgs GVWR)
58	58	Other bus (> 4,536 kgs GVWR)
59	59	Unknown bus type
60	60	Truck (> 4,536 kgs GVWR)
67	67	Tractor without trailer
68	68	Tractor - trailer(s)
78	78	Unknown medium/heavy truck type
79	79	Unknown light/medium/heavy truck type
80	80	Motored cycle

Class of vehicle (cont'd)

Page 2 of 5

Oracle	SAS	
90	90	Other vehicle
99	99	Unknown

Source: Researcher determined — inputs include police report, vehicle inspection, VIN breakdown, and interviews.

Remarks:

The Passenger Car Classification Subcommittee, A3B11(1), of the Transportation Research Board, Traffic Records and Accident Analysis Committee, A3B11, assessed size based on the vehicle wheelbase. The guidelines for this classification can be found in the report entitled Recommended Definitions for Passenger Car Size Classification by Wheelbase and Weight, August 1984 by the previously mentioned subcommittee. This variable is the same variable that appears in the Identification section of the Vehicle Tab on the General Vehicle Form and Vehicle Exterior Form.

Subcompact/mini (wheelbase < 254 cm)

Choose based upon wheelbase.

Compact (wheelbase >= 254 but < 265 cm)

Choose based upon wheelbase.

Intermediate (wheelbase >= 265 but < 278 cm)

Choose based upon wheelbase.

Full size (wheelbase >= 278 but < 291 cm)

Choose based upon wheelbase.

Largest (wheelbase >= 291 cm)

Choose based upon wheelbase.

Unknown passenger car size

is used when it is known that a vehicle is a passenger car but the wheelbase is unknown.

Compact utility vehicle

refers to vehicle models defined as **Compact utility** under Body Type. Use this attribute if the size of the utility vehicle is unknown.

Large utility vehicle (<= 4,536 kgs GVWR)

refers to vehicle models defined as **Large utility** under Body Type. Refers to full-size multipurpose vehicles primarily designed around a shortened pickup truck chassis. While generally a station wagon body style, some models are equipped with a removable top.

Class of vehicle (cont'd)

Page 3 of 5

Utility station wagon (<= 4,536 kgs GVWR)

refers to vehicle models defined as **Utility station wagon** under Body Type. This refers primarily to a pickup truck based chassis enlarged to a station wagon.

Unknown Utility type

is defined as **Utility, unknown body type** under Body Type. This attribute is used when it is known that the vehicle is a utility vehicle, but there is insufficient data to determine the specific type.

Minivan (<= 4536 kgs. GVWR)

refers to vehicle models defined as **Minivan** under Body Type. This refers to down-sized passenger or cargo vans.

Large van (<= 4536 kgs. GVWR)

refers vehicle models defined as **Large van** under Body Type. This refers to a standard size cargo or passenger van.

Van based school bus (<= 4,536 kgs GVWR)

is a passenger van designed to carry students (passengers) to and from educational facilities and/or related functions. The vehicles are characteristically painted yellow and clearly identified as school buses. Use this attribute regardless of whether the vehicle is owned by a school system or a private company. Van based school buses converted for other uses (e.g., church bus) also take this attribute refers to vehicles defined as **Van based school bus** under Body Type.

Other van type (<= 4,536 kgs GVWR)

refers to vehicle models defined as Step van or walk-in van, Van based motorhome, Van based other bus and code Other van type under Body Type.

Unknown van type (<= 4,536 kgs GVWR)

is used when it is known that this vehicle is a light van, but its specific type cannot be determined. Refers to vehicles described as **Unknown van type** under Body Type.

Compact pickup truck

refers to vehicle models defined as attributes of **Compact pickup truck** in Body Type. This is used to describe a pickup truck having a width of 178 centimeters or less.

Large pickup truck

refers to vehicle models defined as **Large pickup truck** under Body Type. This is used to describe a pickup truck having a width greater than 178 centimeters.

Other pickup truck (<= 4536 kgs GVWR)

refers to vehicle models defined as **Pickup with slide-in camper** and **Convertible pickup** under Body Type.

Class of vehicle (cont'd)

Page 4 of 5

Unknown pickup truck (<= 4536 kgs GVWR)

refers to vehicle models defined as **Unknown pickup style light conventional truck type** under Body Type.

Other light truck (<= 4536 kgs GVWR)

refers to vehicle models defined as **Cab, chassis based (includes rescue vehicles, light stake, dump, and tow truck), Truck based panel, Light truck based motorhome (chassis mounted), and Other light conventional truck type** under Body Type.

Unknown light truck type

refers to vehicle models defined as **Unknown light truck type** under Body Type.

Unknown light vehicle type (automobile, utility, van, or light truck)

refers to vehicle models defined as **Unknown light vehicle type (automobile, utility, van, or light truck)** under Body Type.

School bus (excludes van based) (> 4536 kgs GVWR)

refers to those vehicle models defined as **School bus (designed to carry students, not cross country or transit)** under Body Type.

Other bus (>4,536 kgs GVWR)

describes those vehicle models included in **Other bus type (e.g., transit, intercity, bus based motorhome)** under Body Type.

Unknown bus type

refers to those vehicle models described as **Unknown bus type** under Body Type.

Truck (> 4,536 kgs GVWR)

is defined under Body Type, as **Step van (>4,536 kgs GVWR), Single unit straight truck (4,536 kgs < GVWR <= 8,845), Single unit straight truck (8,845 kgs < GVWR <= 11,793), Single unit straight truck (>11,793 kgs GVWR), Single unit straight truck, GVWR unknown and Medium/heavy truck based motorhome.**

Tractor without trailer

refers to **Truck-tractor with no cargo trailer** under Body Type.

Tractor-trailer(s)

is defined in attributes **Truck-tractor pulling one trailer, Truck-tractor pulling two or more trailers** and **Truck-tractor (unknown if pulling trailer)** under Body Type.

Class of vehicle (cont'd)

Page 5 of 5

Unknown medium/heavy truck type)

is used when the only available information indicates a truck of medium/heavy size. Refer to **Unknown medium/heavy truck type** under Body Type.

Unknown truck type (light/medium/heavy)

refers to those vehicles described by **Unknown truck type (light/medium/heavy)** under Body Type.

Motored cycle

refers to Body Type, **Motorcycle, Moped (motorized bicycle), Three-wheel motorcycle or moped, Other motored cycle (minibike, motorscooter)** and **Unknown motored cycle type**.

Other vehicle

refers to all vehicles described by **ATV (All-Terrain Vehicle) and ATC (All-Terrain Cycle), Snowmobile, Farm equipment other than trucks, or Other vehicle type** under Body Type.

Unknown

is used when there is a lack of information regarding the type of vehicle. This lack of information prohibits the accurate classification of this vehicle using one of the preceding codes. This attribute is equivalent to Body Type, **Unknown body type**.

VEHICLE IDENTIFICATION NUMBER (VIN)

Screen Name: Identification--Identification Number

SAS Data Set: *GV*

SAS Variable: *VIN*

Oracle Name: *VEHICLE.VIN*

Element Attributes:

00000000000000000000 VIN not required on vehicle
 Enter the entire or partial VIN, left justify

99999999999999999999 Unknown

Source: Primary source is vehicle inspection; a secondary source is the police report.

Remarks:

If a vehicle is inspected, the VIN must be obtained from the vehicle. The PAR may be used to obtain a VIN when a vehicle inspection is not required (*i.e.*, non-tow CDS applicable *and* WinSMASH is not applicable; or Body Category, equals **Buses, Medium/Heavy Trucks, Motorcycles, or Other Vehicles**).

Enter the entire VIN; leave "**blank**" any column which does not have a VIN character.

If part of the VIN is missing or not decipherable, leave the column any such character would ordinarily occupy "**blank**".

Use VIN Assist to check the VIN. Additionally, in NASSMAIN the VIN can be checked on the GV Form by going to *Process / VIN Check Routine*.

00000000000000000000

enter a "0" in each position for vehicles not required to have a VIN (e.g., go cart).

99999999999999999999

if the entire VIN is unknown, or missing enter a "9" in each position.

If the vehicle is a motor home or school bus, the vehicle chassis VIN is coded and the secondary manufacturer's number should be annotated if indicated on the PAR.

Vehicle identification number (cont'd)

Page 2 of 2

If the vehicle is manufactured by the Ford Motor Company (prior to 1980) and the VIN begins or ends with a script, "F", the "F" is not entered. Proceed to the next character, as in the example below.

VIN: F 3 U 6 2 S 1 0 0 9 3 2 F
CODE: 3 U 6 2 S 1 0 0 9 3 2

In addition, if any hyphens, periods, or blank spaces are contained in the string of alphanumeric characters, ignore them as in the example below.

VIN: S M - E 3 0 7 6 4 2 1
CODE: S M E 3 0 7 6 4 2 1

VEHICLE SPECIAL USE

Page 1 of 3

Screen Name: Vehicle Special Use

SAS Data Set: *GV*SAS Variable: *VEHUSE*Oracle Name: *VEHICLEPRECRASH.PICKSPECIALUSE*

Element Attribute:

Oracle	SAS	
0	0	No special use
1	1	Taxi
2	2	Vehicle used as school bus
3	3	Vehicle used as other bus
4	4	Military
5	5	Police
6	6	Ambulance
		Fire Truck
		Emergency Services Vehicle
9	9	Unknown

Source: Researcher determined; primary source is the police report; secondary sources include vehicle inspection, and interviewees.

Remarks:**No special use**

is used when no source indicates or implies that this vehicle was applicable to any of the special uses listed below.

Taxi, Vehicle used as school bus, and Vehicle used as other bus

are "*this trip*" specific. The vehicle must be "on duty" as either a taxi or as a bus. External identification on the vehicle as a bus or taxi is not sufficient to determine its special use.

Taxi

is used when this vehicle was being used during this trip (at the time of the crash) on a "fee-for-hire" basis to transport persons. Most of these vehicles will be marked and formally registered as taxis; however, vehicles which are used as taxis, even though they are not registered (*e.g.*, "Gypsy Cabs"), are included here. ***Taxis and drivers which are off-duty*** at the time of the crash ***are not included***.

Vehicle used as school bus

is used if this motor vehicle (**Body Type**, need not equal **School Bus**) satisfies all of the following criteria:

- externally identifiable to other traffic units as a school/pupil transport vehicle. The vehicle may be equipped with flashing lights and/or a sway stop arm, and traffic may be required to stop for the vehicle when occupants enter or exit;
- operated, leased, owned, or contracted by a public or private school-type institution;
- whose occupants, if any, are associated with the institution; and,
- the vehicle is in operation at the time of the crash to and from the school or on a school-sponsored activity or trip.

Vehicle used as other bus

is used when this motor vehicle is designed for transporting more than ten persons and does not satisfy all of the above criteria of a school bus.

Military, Police, Ambulance, and Fire truck or car

are considered to be in use at all times. Special use means "**in use**" and not necessarily emergency use. External identification to the normal driving public is the sole criterion.

Military

is used for any vehicle which is owned by any of the Armed Forces regardless of body type. This attribute includes:

- military police vehicles;
- military ambulances;
- military hearses; and
- military fire vehicles

Police

refers to a vehicle equipped with police emergency devices (lights and siren) that is owned or subsidized by any local, county, state or federal government entity. The police vehicle is presumed to be in special use at all times, although not necessarily in "emergency use." Vehicles not owned by a government entity that are used by law enforcement officers (e.g. undercover) are excluded.

Ambulance

is used for any readily identifiable (lights or markings) vehicles designed to transport sick or injured persons. The ambulance is presumed to be in special use at all times, although not necessarily in "emergency use."

Fire truck

is used for any readily identifiable (lights or markings) vehicles specially designed and equipped to respond to fire, hazmat, medical, and extrication incidents. This attribute includes medium and heavy vehicles such as engines, pumpers, ladder, platform aerial apparatus, heavy rescue vehicles, water tenders or tankers, brush or wilderness firefighting vehicles, etc. Privately owned vehicles, which are not in authorized use, even if equipped with lights, do not qualify (the volunteer firefighter's vehicle).

Emergency Services Vehicle

is used for any readily identifiable (lights or markings) vehicles that do not meet the criteria for Ambulance or Fire Truck and are specially designed and equipped to respond to fire, hazmat, medical, and extrication incidents. This attribute includes light vehicles such as sedans, vans, SUVs, pick-ups, trucks, motorcycles, etc. Privately owned vehicles, which are not in authorized use, even if equipped with lights, do not qualify (the volunteer firefighter's vehicle).

Unknown

is used when no information is available to determine special use for this trip (e.g., a hit-and-run vehicle).

TRANSPORT STATUS

Screen Name: Transport Status?

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *VEHICLE.INTRANSPORT*

Element Attributes:

Oracle	SAS	
1	1	In-Transport
0	2	Not in Transport
2	3	Working Vehicle

Range:

Source: Researcher determined

Remarks:

This is researcher determined and may not necessarily agree with the police report.

If the PAR has conflicting information regarding the vehicle’s transport status, assume the vehicle is in-transport. For example: If the coded box indicates the vehicle was legally parked but the narrative states the vehicle was illegally parked, then consider this vehicle as in-transport.

If there is any doubt as to whether the vehicle is in-transport, notify your Zone Center immediately.

If the PAR is unclear whether the motor vehicle is actually in the act of performing work at the time of the crash, the default is to consider the motor vehicle as **not** working. Careful attention must be taken to review the narrative, diagram and coded boxes, for an accurate determination.

In Transport

Is selected when it is determined that the vehicle is in-transport. This means the vehicle is in motion on a Trafficway or any part of the vehicle is within the boundaries of the roadway.

Examples of In Transport vehicles seen in NASS:

1. A police vehicle used to indicate the roadway is closed due to a previous crash or the roadway is impassable because of a pothole or a tree fell across the roadway is

Transport Status (cont'd)

Page 2 of 3

considered to be in transport. The portion of the roadway past the police vehicle is considered to be closed; that is, outside the trafficway.

2. A cement truck depositing its load for a homeowner's driveway or walkway.
3. Friendly neighbor using his pickup truck to plow the roadway in their neighborhood.
4. A passenger vehicle located partially on the roadway and the shoulder.

Not In-Transport

Is selected when it is determined that the vehicle is not in-transport. Not in-transport vehicles are defined as:

1. Stationary vehicles outside the boundaries of the roadway.
2. Vehicles in motion outside the trafficway.

Examples of Not In-Transport Vehicles:

1. Lawn service truck spraying fertilizer, etc across homeowner's lawn.
2. Disabled passenger car pulled onto shoulder of roadway.
3. Minivan parked on the street during the hours parking is allowed.
4. Tractor plowing the corn field loses control and strikes the barn.

Working Vehicle

Is selected when it is determined that the vehicle was in the act of performing highway construction, maintenance or utility work when it became involved in the crash. This "work" may be located within or outside the trafficway boundaries, including portions of the trafficway closed for construction. This code does not include private construction/maintenance vehicles, or vehicles such as garbage trucks, delivery trucks, taxis, emergency vehicles, tow trucks, etc.

Examples of Working Vehicles include:

1. Steam roller working in a highway construction zone.
2. State highway maintenance crew mowing grass on the roadside.
3. Utility truck performing maintenance on the power lines along the roadway.
4. Highway maintenance vehicle removing ice/snow from the roadway.
5. Private contractor plowing ice/snow from the roadway.
6. Street sweeper sweeping the street.
7. Truck with cherry picker maintaining a traffic signal.
8. Maintenance vehicle painting lane lines on the road. Includes vehicle traveling behind with light(s) flashing.
9. Highway maintenance vehicle performing non-routine work. This includes repairing potholes, removing debris from the roadway, mowing grass in the median, etc.
10. Police vehicles re-directing traffic at a work zone. That is, the police vehicle is stopped across the lane(s) of traffic indicating a work zone is ahead.
11. Private contractor paving the roadway.

Transport Status (cont'd)

Page 3 of 3

Working vehicles do not include personal motor vehicles performing a “neighborly” activity (such as plowing the neighborhood streets). Additionally, vehicles not specifically contracted to AND in the act of performing highway construction, maintenance or utility work are excluded.

When the vehicle is not in the act of performing “work” and involved in a crash, these highway construction, maintenance or utility vehicles are not working vehicles and can be:

1. In-transport when in motion or stopped on a roadway; or
2. Not in-transport when stopped off the roadway.

Examples:

Example #1: A vehicle removing ice/snow from the roadway is involved in a crash with a motor vehicle off the roadway. Does this crash qualify for NASS?

Answer: The vehicle is considered to be a working vehicle and therefore, not in-transport. The motor vehicle off the roadway is also considered to be not in-transport. Therefore, this crash does not qualify for the NASS.

Example #2: A highway maintenance vehicle is removing ice/snow from the roadway and strikes and kills a pedestrian. Does this crash qualify for NASS?

Answer: This crash does not qualify because the highway maintenance vehicle is considered a working motor vehicle and by definition is not in-transport as it was doing work at the time of the incident.

Example #3: A highway maintenance vehicle removing ice/snow from the roadway strikes a passenger vehicle also traveling on the roadway. The passenger vehicle sustains disabling damage and was towed from the scene of the crash. Does this crash qualify for NASS?

Answer: This crash qualifies because the passenger vehicle was in-transport and towed due to damage. This is a single vehicle crash.

Example #4: A passenger vehicle traveling along the roadway loses control and strikes a tractor plowing the corn field. Does this qualify for NASS?

Answer: This crash does indeed qualify for NASS. This is a single vehicle crash where the only vehicle involved in the crash is the passenger vehicle.

CURB WEIGHT

Screen Name: Weight--Curb Weight

SAS Data Set: *VEHSPEC*

SAS Variable: *CURBWGT*

Oracle Name: *VEHICLE.CURBWEIGHT*

Element Attributes:

Oracle	SAS	
		Curb weight of vehicle (kgs)
-9999	999999	Unknown

Range: 450 – 100,000

Source: Researcher determined

Remarks:

Enter this vehicle's curb weight.

Do not confuse the rated Gross Vehicle Weight Rating (GVWR) with the curb weight since it is likely to be significantly greater than the curb weight.

"Vehicle" is defined in this variable to mean the same vehicle identified under **Body Type**.

If the **vehicle model** is known, but the engine size is unknown (*e.g.*, 6 or 8 cylinders), code the average between the high and low curb weights for the model and annotate that the "average" was reported.

When the vehicle specifications do not report the vehicle weight with the proper engine size, adjustments must be made. First, try to determine the weight differences from the vehicle specifications. If the weight difference cannot be determined from the specifications, then adjust as follows: 8 cyl. to 6 cyl. - subtract 100 lbs/45 kilograms; 6 cyl. to 4 cyl. - subtract 75 lbs/34 kilograms.

Add 100lb/45 kilograms to the shipping weight to obtain a curb weight on all CDS applicable vehicles.

Towed trailing units are considered cargo weight and not included in the vehicle curb weight.

Curb Weight (cont'd)

Page 2 of 2

Unknown

is selected when the curb weight of this vehicle cannot be determined.

SOURCE OF CURB WEIGHT INFORMATION

Screen Name: Curb Weight Source

SAS Data Set: *VEHSPEC*

SAS Variable: *CURBSRC*

Oracle Name: *VEHICLE.PICKCURBWTSOURCE*

Element Attributes:

Oracle	SAS	
-9999	0	[Curb weight unknown]
1	1	AAMA
2	2	Automotive News
3	3	Branham Automobile Reference Book
4	4	Gasoline Truck, Import, Truck and Diesel Truck Index
6	5	Canadian Specifications
5	8	Other (specify)

Source: See Remarks

Remarks:

The sources for obtaining curb weight information are listed below:

Passenger Vehicle Specifications

**American Automobile Manufacturers Association (AAMA)
of the U.S., Inc.**

300 New Center Building
Detroit, Michigan 48202

Automotive News

Crain Automotive Group, Inc.

965 East Jefferson Avenue
Detroit, Michigan 48207

Branham Automobile Reference Book

Branham Publishing Company

Post Office Box 1948
Santa Monica, California 90406-1948

Source of Curb Weight Information (cont'd)

Page 2 of 2

*Gasoline Truck Index, Import Truck Index, and
Diesel Truck Index*

Truck Index, Inc.

Post Office Box 10291

Santa Anna, California 92711

If the specification is not available in the sources listed above, then the automated Canadian specifications may be used for this variable.

If no other information is available, data from brochures obtained from vehicle dealers may be used. This will be entered under the “**Other**” attribute. This should then be listed in the “**Specify**” field.

CARGO WEIGHT

Screen Name: Weight--Cargo Weight

SAS Data Set: *VEHSPEC*

SAS Variable: *CARGOWGT*

Oracle Name: *VEHICLE.CARGOWEIGHT*

Element Attributes:

Oracle	SAS	
		Cargo weight of vehicle (kgs)
-9999	9999	Unknown

Source: Researcher determined — inputs include Vehicle Inspection, Interview, PAR, Tow Yard Operator

Remarks:

If Towed Trailing Unit, is Yes – towed trailing unit, then the weight of the trailer and its cargo is coded here. Cargo may also be located in the passenger compartment area and/or trunk.

If there is no cargo then enter the value as zero.

Do not include the weight of the occupants in the cargo weight. The weight of the occupants is included (along with cargo and vehicle curb weight) as a component of the single value which represents the vehicle’s combined weight in the integrated WinSMASH Program, if used.

Cargo weight includes optional add on equipment. The cumulative total of cargo weight that exceeds 100 lbs. is coded here. Examples are as follows:

Includes:

- Tools and tool box(es)
- Construction equipment
- Lumber
- Luggage

Excludes:

- Weight of occupants

Unknown

is selected if the cargo weight is unknown or if it is unknown if there is cargo in the vehicle.

SOURCE OF CARGO WEIGHT INFORMATION

Screen Name: Weight--Cargo Weight Source

SAS Data Set: *GV*

SAS Variable: *CARGOWGT*

Oracle Name: *VEHICLE.PICKCARGOWTSOURCE*

Element Attributes:

Oracle	SAS	
-9999	0	[Cargo weight unknown]
1	1	Vehicle Inspection
2	2	Interview
3	3	PAR
4	4	Tow Yard Operator
5	8	Other (specify)

Source: Researcher determined

Remarks:

This reports the source from which the estimate of the cargo weight, in the vehicle at the time of the crash, was obtained.

INSPECTION TYPE

Screen Name: Inspection - Type of Inspection

SAS Data Set: *GV*

SAS Variable: *INSPTYPE*

Oracle Name: *VEHICLECRASH.PICKINSPECTIONTYPE*

Element Attributes:

Oracle	SAS	
1	0	No inspection
2	1	Vehicle fully repaired — no damage evident
7	2	Partial inspection-Non tow
3	3	Partial inspection other (specify)
4	4	Complete inspection
8	8	Non CDS vehicle

Source: Researcher determined.

This variable is designed to allow users to identify cases with complete documentation of required damage data (exterior and interior).

No inspection

is selected when neither a complete nor a partial inspection of this vehicle was obtained, irrespective of the reason (*e.g.*, refusal, not required, etc.).

Vehicle fully repaired — no damage evident

is selected when a vehicle is inspected, but is completely repaired and no exterior or interior damage data is available.

Partial inspection Other (Specify)

is selected when any phase of the inspection is not completed. This includes inspection of partially repaired vehicles and non-towed CDS applicable vehicles. The reason for the partial inspection must be annotated in the “Specify” box.

If the vehicle interior is completely burned out and restraint use cannot be determined then **Partial Inspection** should be selected.

Complete inspection

is selected when both the exterior and the interior of the unrepaired vehicle were inspected and all applicable measurements and photographs were obtained.

DATE OF INSPECTION

Screen Name: Inspection-Date of Inspection

SAS Data Set: *N/A*

SAS Variable: *N/A*

Oracle Name: *VEHICLECRASH.INSPECTIONDATE*

Element Attributes:

Date that vehicle was inspected


Source: Researcher determined.

The inspection date is the date when a majority of the inspection is complete. This does not count unsuccessful attempts to locate the vehicle.

TIRE OVERVIEW

Federal law requires tire manufacturers to place standardized information on the sidewall of all tires. This information identifies and describes the fundamental characteristics of the tire and also provides a tire identification number for safety standard certification and in case of a recall.

Information on Passenger Vehicle Tires

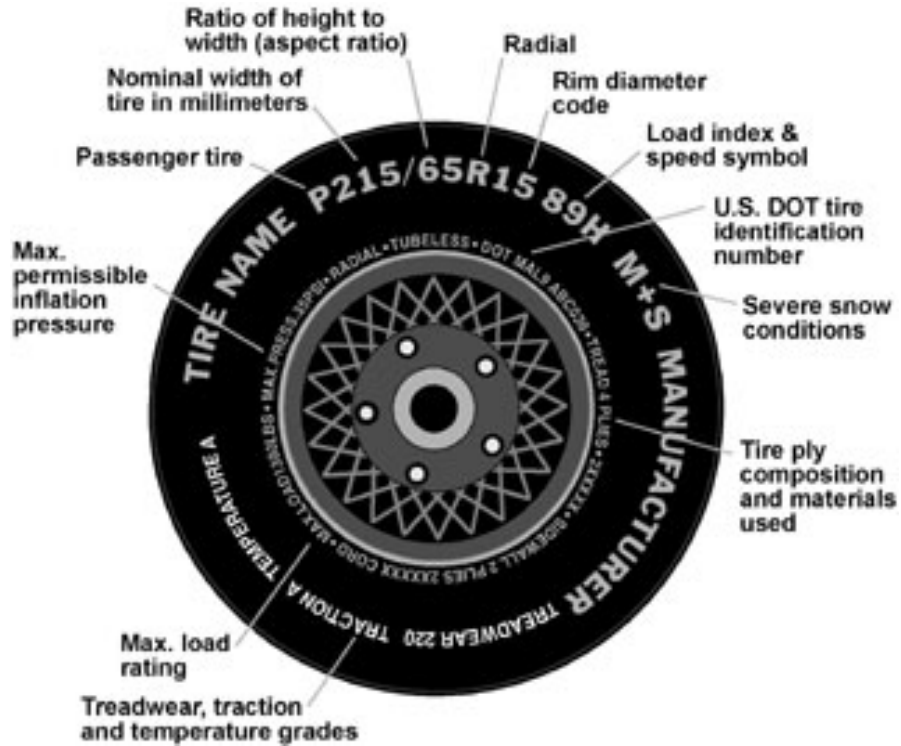

Tire Size: P215/65R15 89H

P

The "P" indicates the tire is for passenger vehicles.

Next number (i.e., 215)

This three-digit number gives the width in millimeters of the tire from sidewall edge to sidewall edge. In general, the larger the number, the wider the tire.

Tire Size: P215/65R15 89H (cont'd)**Next number (i.e., 65)**

This two-digit number, known as the aspect ratio, gives the tire's ratio of height to width. Numbers of 70 or lower indicate a short sidewall for improved steering response and better overall handling on dry pavement.

R

The "R" stands for radial. Radial ply construction of tires has been the industry standard for the past 20 years.

Next number (i.e., 15)

This two-digit number is the wheel or rim diameter in inches. If you change your wheel size, you will have to purchase new tires to match the new wheel diameter.

Next number (i.e., 89)

This two- or three-digit number is the tire's load index. It is a measurement of how much weight each tire can support. You may find this information in your owner's manual. If not, contact a local tire dealer. Note: You may not find this information on all tires because it is not required by law.

Speed Rating (i.e., H)

The speed rating denotes the speed at which a tire is designed to be driven for extended periods of time. The ratings range from 99 miles per hour (mph) to 186 mph. These ratings are listed below. Note: You may not find this information on all tires because it is not required by law.

Letter Rating	Speed Rating
Q	99 mph
R	106 mph
S	112 mph
T	118 mph
U	124 mph
H	130 mph
V	149 mph
W	168* mph
Y	186* mph

* For tires with a maximum speed capability over 149 mph, tire manufacturers sometimes use the letters ZR. For those with a maximum speed capability over 186 mph, tire manufacturers always use the letters ZR.

M+S

The "M+S" or "M/S" indicates that the tire has some mud and snow capability. Most radial tires have these markings; hence, they have some mud and snow capability.

Information on Light Truck Tires



Tires for light trucks have other markings besides those found on the sidewalls of passenger tires.

LT

The "LT" indicates the tire is for light trucks.

Max. Load Dual kg(lbs) at kPa(psi) Cold

This information indicates the maximum load and tire pressure when the tire is used as a dual, that is, when four tires are put on each rear axle (a total of six or more tires on the vehicle).

Max. Load Single kg(lbs) at kPa(psi) Cold

This information indicates the maximum load and tire pressure when the tire is used as a single.


Load Range

This information identifies the tire's load-carrying capabilities and its inflation limits.

Snow Tires

In some heavy snow areas, local governments may require true snow tires, those with very deeply cut tread. These tires should only be used in pairs or placed on all four wheels. Make sure you purchase snow tires that are the same size and construction type as the other tires on your vehicle.

Basic Tire Nomenclature

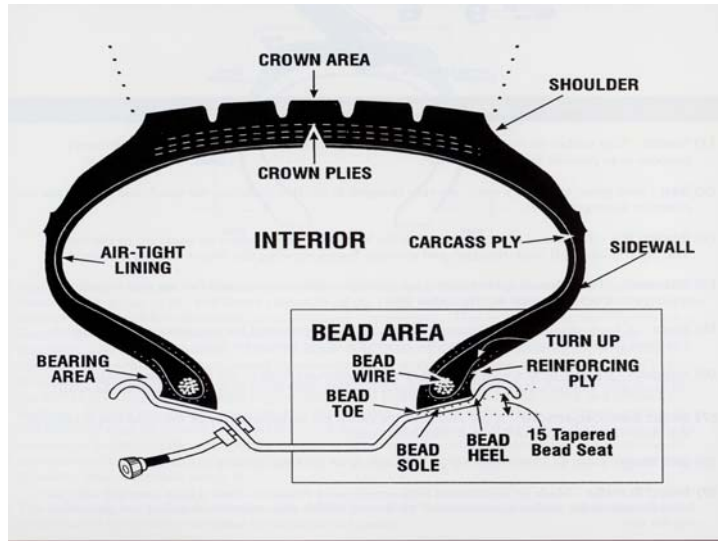

The Sidewall

A special rubber compound is used in the sidewall of the tire, which adds flexibility and weathering resistance. Some tires, such as higher end performance tires, may also incorporate steel and/or nylon inserts to provide quicker steering response.

The Bead

Tire bead bundles secure the tire to the wheel. They are large monofilament steel cords that are wound together to form a cable or ribbon-type configuration. The casing plies are looped around the bead bundles holding them in place. Bead filler, a rubber compound, is incorporated within the bead configuration and extends up into the sidewall area. The rubber compound used on the outside bead area is usually a hard, durable compound that withstands the rigors of mounting and chafing.

Grooves

The grooves are channels for water evacuation between tread and road surface.

Tread

Contact area with road surface using various compound strategies like maximizing grip or mileage.

Shoulder

The shoulder is a transition element between tread and sidewall for traction during cornering and maneuvering.

Bead Wire

A rigid cable serving as an anchor around which body plies are wrapped and which secures tire to rim flange area.

Air Tight Lining

Special rubber compound highly impervious to air migration for maintaining air pressure without leaking.

Crown

The center area of a tire's tread.

Sidewall

The portion of the tire between the bead and the tread. It is flexible to soak up bumps yet stiff to limit tire rollover.

Bead Heel

The bead heel is the outer bead edge that fits against the wheel flange.

Bead Toe

The bead toe is the inner bead edge closest to the tire centerline.

Carcass/Casing

The main body of the tire consisting of wire beads and body plies. The carcass does not include the tread or sidewall rubber.

[TIRE TO INSPECTION INTERVAL]

Screen Name: Inspection Interval

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *VEHICLE_DERIVED.INSPIINTERVAL*

Element Attributes:
Number of days

Source: Calculated field.

This variable is designed to calculate the number of days from crash date to vehicle inspection date.

TIRES GENERAL

Exterior Vehicle Form, Case 2007-996-90001S/ Vehicle #1

VEHICLE | TIRE | SPECIFICATIONS | FUEL | FIRE | CRUSH | CDC | EDR | SKETCHES | LOG | REVIEW

GENERAL | TIRES

Total GVWR kgs

Gross Axle Weight Rating (GAWR) Front kgs Rear kgs

Recommended - (pressure in kiloPascals)

	Size	Cold Pressure
Front	<input type="text"/>	<input type="text"/> kPa
Rear	<input type="text"/>	<input type="text"/> kPa

TOTAL GROSS VEHICLE WEIGHT RATING (KGS)

Screen Name: Total GVWR (kgs)

SAS Data Set: *VEHSPEC*

SAS Variable: *GVWR*

Oracle Name: *VEHICLE.TOTAL_GVWR*

Element Attributes:

Oracle SAS


-9999 9999 Indicate the total GVWR as indicated on the tire or other placard.
Unknown

Source: Vehicle inspection/placard

Remarks:

The Gross Vehicle Weight Rating (GVWR) is the maximum permissible total weight of the unit, including the vehicle itself plus all fluids, optional equipment, accessories, all cargo, driver and passengers. The tire placard may be found in any number of places: B-pillar, door, glove compartment door, center console, truck lid, etc.

See the CDS Digital Photography Guidelines for photos of the placard.

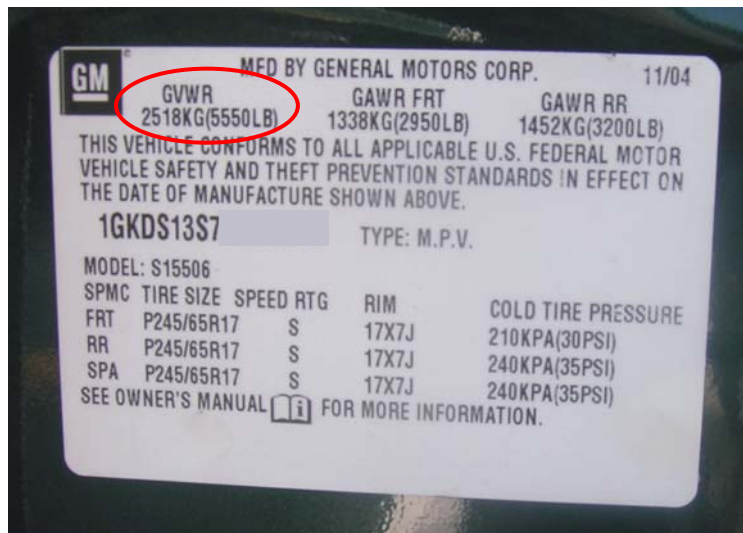

FRONT GROSS AXLE WEIGHT RATING (KGS)

Screen Name: Gross Axle Weight Rating Front (kgs)

SAS Data Set: *VEHSPEC*

SAS Variable: *FGAWR*

Oracle Name: *VEHICLE.FRONT_GAWR*

Element Attributes:

Oracle SAS


-9999 9999 Indicate the front GAWR as indicated on the tire or other placard.
Unknown

Source: Vehicle inspection

Range: 454-2750, 9999

Remarks:

The Front Gross Axle Weight Rating (GAWR) is the maximum weight that the front axle, suspension and tire system is designed to carry.

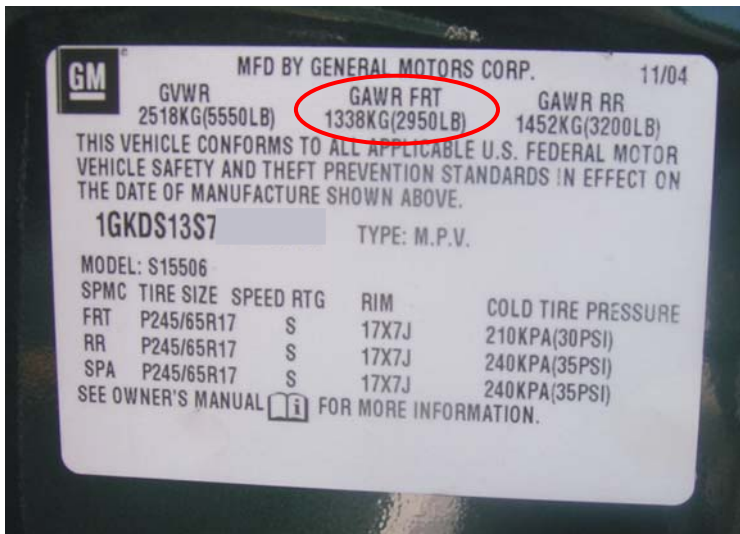

REAR GROSS AXLE WEIGHT RATING (KGS)

Screen Name: Gross Axle Weight Rating Rear (kgs)

SAS Data Set: *VEHSPEC*

SAS Variable: *RGAWR*

Oracle Name: *VEHICLE.REAR_GAWR*

Element Attributes:

Oracle SAS

Indicate the rear GAWR as indicated on the tire placard.


-9999 9999 Unknown

Source: Vehicle inspection

Range: 454-3742, 9999

Remarks:

The Rear Gross Axle Weight Rating (GAWR) is the maximum weight that the rear axle, suspension and tire system is designed to carry.

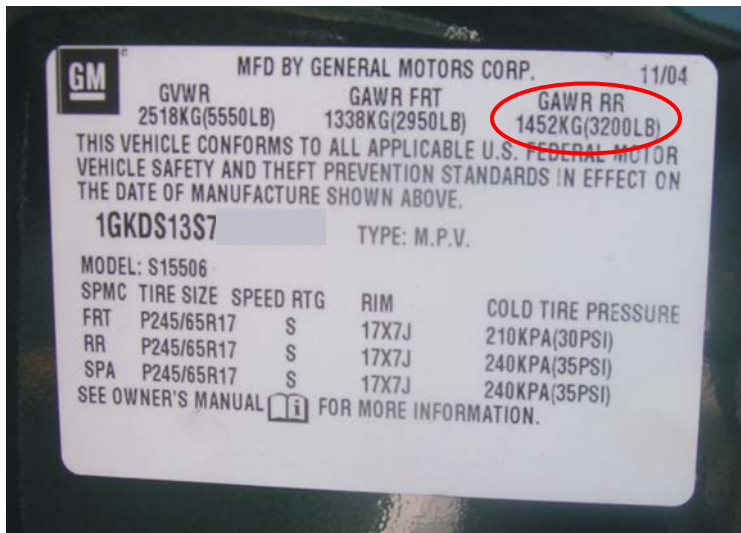

MANUFACTURER’S RECOMMENDED FRONT/REAR TIRE SIZE

Screen Name: Recommended Front/Rear Size

SAS Data Set: *TIRE*

SAS Variable: *RECTIRE1, RECTIRE2, RECTIRE3*

Oracle Name:
TIRESPECIFICATION.FRONTREGTIRESIZE/REARREGTIRESIZE


Element Attributes:

Oracle	SAS	
1	1	P-Metric (specify)
2	2	Light Truck Metric (specify)
3	3	Light Truck High Flotation (specify)
4	4	Light Truck Numeric (specify)
	997	[No Additional Recommendation]
8	8	Other (specify)
-9999	9	Unknown

Source: Vehicle inspection from placard on vehicle

Remarks:

If the tire size is unknown, but it is known to be a P-metric or LT-light truck tire size, code tire as “Unknown.”

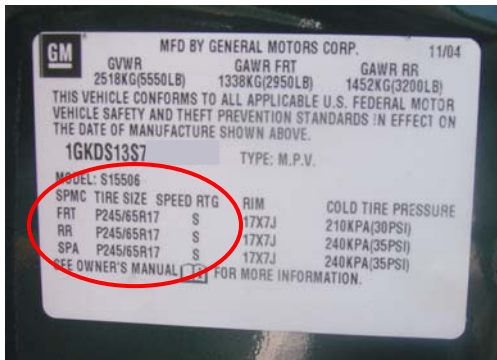

MANUFACTURER'S RECOMMENDED FRONT/REAR TIRE SIZE

Screen Name: Recommended Front/Rear Size

SAS Data Set: *TIRE*

SAS Variable: *RECSIZE1, RECSIZE2, RECSIZE3*

Element Attributes:

- P-Metric P n n n / n n a n n
- P-Metric (specify)
- Light Truck Metric (specify)
- Light Truck High Flotation (specify)
- Light Truck Numeric (specify)
- Other (specify)
- 999 Unknown
- 997 [No Additional Recommendation]


Source: Vehicle inspection from placard on vehicle

Range: 69-552, 997,999

Remarks:

The tire placard may be found in any number of places: B pillar, door, glove compartment door, center console door, trunk lid, etc.

Placards may list more than one tire size for a vehicle, if so, edit/insert the additional tire. If more than three (3) tires are listed code only the first three (3) listed. Photograph the placard using the CDS Digital Photography Guidelines.

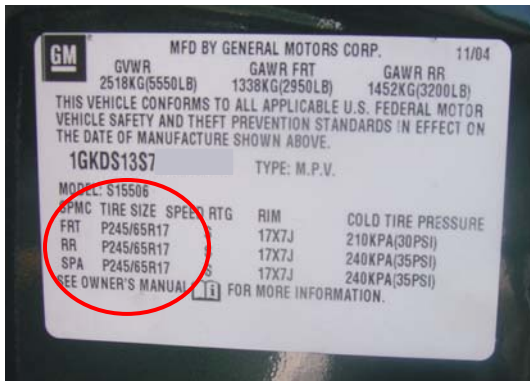

If a character cannot be read then leave a blank space where the character belongs.

a=alpha value to enter n=numeric value to enter
P=P-Metric tire *precoded* LT=Light Truck designation *precoded*
Blanks permitted at any location

P-Metric P n n n / n n a n n

P215/65R15, P215/65R15
P= Passenger Car Tire
215= Section Width in Millimeters
65= Aspect Ratio
R= Radial Construction
15= Rim Diameter in Inches

Light Truck Metric L T n n n / n n a n n

LT235/75R15
LT= Light Truck Tire
235= Section Width in Millimeters
75= Aspect Ratio
R= Radial Construction
15= Rim Diameter in Inches

Light Truck High Flotation n n X n n . n n a n n L T

31X10.50R15LT
31= Tire Diameter in Inches
10.50= Section Width in Millimeters
R= Radial Construction
LT= Light Truck Tire
15= Rim Diameter in Inches

Light Truck Numeric n . n n a n n . n L T

8.75R16.5LT
8.75=Section Width in Inches
R=Radial Construction
16.5=Rim Diameter in Inches
LT=Light Truck Designation

MANUFACTURER RECOMMENDED COLD TIRE PRESSURE FRONT/REAR (KILOPASCALS)

Screen Name: Recommended (pressure in kilopascals) Front/Rear Cold Pressure

SAS Data Set: *TIRE*

SAS Variable: *RECPRES1, RECPRES2, RECPRES3*

Oracle Name: *TIRESPECIFICATION.FRONTPRESSURE/REARPRESSURE*

Element Attributes:

Oracle SAS

Indicate the recommended cold tire pressure for the front/rear tires
Entry defaults to psi, but may also be entered in kPa

997 [No recommendation]
-9999 999 Unknown

Source: Vehicle inspection

Range: 69-552, 997, 999

Remarks:

Enter recommended pressure in psi / kPa (program automatically converts psi to kPa).

If the tire placard or owner's manual doesn't specify whether the recommended tire pressure is a hot or cold pressure, assume that it is a cold pressure.



TIRE/TIRES/LIST

Exterior Vehicle Form, Case 2008-903-90000S/ Vehicle #1

VEHICLE TIRE SPECIFICATIONS FUEL FIRE CRUSH CDC EDR SKETCHES LOG REVIEW

GENERAL TIRES

LIST DETAIL

Location	Manufacturer	Model	Size	Max Pres	Meas Press	Depth (mm)
RF (Right Front)						
LF (Left Front)						
RR (Right Rear)						
LR (Left Rear)						

Save Close

TIRE/TIRES/DETAIL

Exterior Vehicle Form, Case 2008-903-90000S/ Vehicle #1

VEHICLE TIRE SPECIFICATIONS FUEL FIRE CRUSH CDC EDR SKETCHES LOG REVIEW

GENERAL TIRES

LIST DETAIL

Location: LF (Left Front)

Manufacturer: [Dropdown]

Model: [Dropdown]

Size: [Dropdown]

TIN DDT(-R): [Input] [Input] [Input]


Max Pressure: [Input] kPa

Tread Depth: [Input] mm

Meas. Pressure: [Input] kPa

Restricted: [Dropdown]

<< Front >>

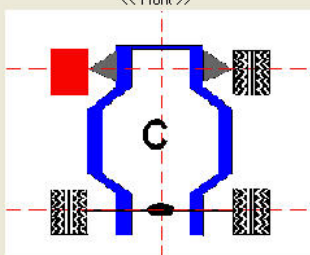

Tire Damage

Right Mouse Click on Check Box to View Specify

None Tire puncture in tread Sidewall Separation Tire de-beaded Other (specify)

Tread Separation Tire puncture in sidewall Tire cut/torn Tire rotted Unknown

Save Close

TIRE LOCATION

Screen Name: Location

SAS Data Set: *TIRE*

SAS Variable: *TLOC*

Oracle Name: *VEHICLEWHEELS.WHEELLOCATIONCODE*

Element Attributes:

Oracle	SAS	
1	1	RF (Right Front)
2	2	LF (Left Front)
3	3	RR (Right Rear)
4	4	LR (Rear)

Source: Vehicle inspection

Remarks:

Enter the location of the tire being examined. If there are double tires on a vehicle, only record information on the outer tires.

TIRE MANUFACTURER

Screen Name: Manufacturer

SAS Data Set: *TIRE*

SAS Variable: *TMAKE*

Oracle Name: *VEHICLEWHEELS.TIREMAKEID*

Element Attributes:

Oracle	SAS	
		1-181 (see list)
-8887	887	Tire missing
-8888	888	Other make (specify)
-9999	999	Unknown

Source: Vehicle inspection

Range: 1-181, 887, 888,999

Remarks:

Choose the manufacturer from drop down list. The name of the manufacturer maybe found on the sidewall of the tire. If it cannot be read then indicate "Unknown".

If the tire is missing and cannot be examined then indicate "Tire missing". If the wheel hub is resting on the tire or the tire can be found elsewhere (i.e., in the bed of a pickup) and it can be ascertained that this is the "missing" tire for the vehicle, then indicate the appropriate information about the tire.

Manufacturers that are presently in the database can be found on the next two pages.

EXTERIOR VEHICLE FORM**TIRE/TIRES/DETAIL**

Tire manufacturer (cont'd)

Page 2 of 3

AKURET	1
AMERICAN	2
AMERICAN RADIAL	3
APACHE	4
ARIZONIAN	5
ARMSTRONG	6
ASTRO	7
ATLAS	8
AURORA	9
AVON	10
ALLEGIANCEIV	177
BARUM	11
BFGOODRICH	12
BIG O	13
BILT-MOR	14
BRADLEY	15
BRIDGESTONE	16
BRIGADIER	17
BRUNSWICK	18
CARQUEST	19
CASCADE	20
CAVALIER	21
CEAT	22
CENTENNIAL	23
CHENG SHIN	24
CO-OP	28
CONCORDE	25
CONTENTAL/TAG	26
CONTINENTAL	27
COOPER	29
COOPER-EXPORT	30
CORDOVAN	31
CORNELL	32
COSMO	33
CRESTWOOD	34
CROWN	35
DANZIG	36
DAYTON	37
DEAN	38
DELTA	39
DENMAN	40
DIAMOND	41
DOMINATOR	42
DORAL	43
DOUBLE COIN	44
DOUGLAS	45
DUNLOP	46

DURALON	47
DYNASTAR	48
ELDORADO	49
ELECTRA	50
EMBASSY	51
ESCORT	52
EUROTECH	53
EXXON	54
FALKEN	55
FEDERAL	56
FIRESTONE	57
FISK	58
FORMULA	59
FRONTIER	60
FULDA	61
FUTURA	62
GENERAL	63
GILLETE	64
GISLAVED	65
GOODRICH	66
GOODYEAR	67
GT TIRE	68
GT TIRE US	69
GUARDIAN	70
GUARDSMAN	71
HALLMARK	72
HANKOOK	73
HERCULES	74
HIGH COUNTRY	75
HOOD	76
HOOSIER	77
JETZON	78
JUPITER	79
K-MART	85
KELLY	80
KELLY- SPRINGFIELD	81
KINGSTAR	82
KIRKLAND	83
KIRKWOOD	84
KUMHO	86
LARAMIE	87
LASSA	88
LEE	89
LEMANS	178
LIBERATOR	179
M&H	90

MABOR	91
MARSHAL	92
MASTERCRAFT	93
MAXXIS	94
MEDALIST	95
MENTOR	96
MERIT	97
MICHELIN	98
MICKEY THOMPSON	99
MILLER	100
MITAS	101
MODI	102
MOHAWK	103
MONARCH	104
MONTGOMERY WARD	105
MRF	106
MULTI-MILE	107
NANKANG/BRADLEY	108
NATIONAL	109
NITTO	110
NOKIAN	111
NTB	112
OHTSU	113
Other (specify)	8888
PACEMARK	114
PANTHER	115
PARKWAY	116
PARNELLI	117
PATRIOT	118
PEERLESS	119
PENSKE	120
PHILLIPS	121
PIRELLI	122
POLARIS	123
POS-A-TRAC	124
POS-A-TRACTION	125
PATHFINDER	181
REGUL	126
RELIANT	127
REMINGTON	128
REPUBLIC	129
REYNOLDS	130
RIKEN	131
ROAD KING	132
ROADMASTER	133
ROADPRO	134

EXTERIOR VEHICLE FORM

RUNWAY	135
SEARS	136
SEMPERIT	137
SHELL	138
SIDEWINDER	139
SIEBERLING	140
SIGMA	141
SOLO-TECH	142
SONIC	143
SPARTAN	144
SPORT IV	145
STAR	146
STARFIRE	147
SUMITOMO	148
SUMMIT	149

TIRE/TIRES/DETAIL

SUPER SPORT	150
TACOMA	151
TBC	152
TELSTAR	153
TEMCO	154
TIGAR	155
TIRE MISSING	8887
TNT	156
TOSCO 76	157
TOURING SUPREME	158
TOYO	159
TREDTECH	160
TRIBUNE	161
TURNPIKE USA	162
ULTRA-TECH	163

UNION 76	164
UNIROYAL	165
UNIVERSAL	166
Unknown	9999
VANDERBILT	167
VIKING	168
VISA	169
VOGUE	170
VREDESTEIN	171
WESTERN AUTO	172
WINSTON	173
WOOSUNG	174
WYNSTAR	180
YKS	175
YOKOHAMA	176

TIRE MODEL

Screen Name: Model

SAS Data Set: *TIRE*

SAS Variable: *TMODEL*

Oracle Name: *VEHICLEWHEELS.TIREMODELID*

Element Attributes:

Oracle	SAS	
-8888	8	Specify model
-9999	9	Unknown

Source: Vehicle inspection

Remarks:

The name of the model may be found on the sidewall of the tire. If it cannot be read then indicate "Unknown."

TIRE TYPE ON VEHICLE

Screen Name: Size

SAS Data Set: *TIRE*

SAS Variable: *TYPE*

Oracle Name: *VEHICLEWHEELS.TIRESIZEID*

Element Attributes:

Oracle	SAS	
1	1	P-Metric (specify)
2	2	Light Truck Metric (specify)
3	3	Light Truck High Flotation (specify)
4	4	Light Truck Numeric (specify)
8	8	Other (specify)
-9999	9	Unknown

Source: Vehicle inspection

Remarks:

TIRE SIZE ON VEHICLE

Screen Name: Size

SAS Data Set: *TIRE*

SAS Variable: *SIZE*

Oracle Name: *VEHICLEWHEELS.TIRESIZEID*

Element Attributes:

Oracle	SAS	
1	1	P-Metric (specify)
2	2	Light Truck Metric (specify)
3	3	Light Truck High Flotation (specify)
4	4	Light Truck Numeric (specify)
8	8	Other (specify)
-9999	9	Unknown

Source: Vehicle inspection

Remarks:

There will be many characters on the tire sidewall that identify various characteristics of the tire. We are only interested in recording the tire size information. This information is embossed in various ways depending on the type of tire.

If a character cannot be read then leave a blank space where the character belongs.

**a=alpha value to enter n=numeric value to enter
P=P-Metric tire *precoded* **LT**=Light Truck designation *precoded*
Blanks permitted at any location**

P-Metric P n n n / n n a n n
P215/65R15, P215/65R15
P= Passenger Car Tire
215= Section Width in Millimeters
65= Aspect Ratio
R= Radial Construction
15= Rim Diameter in Inches

Tire Size On Vehicle (cont'd)

Page 2 of 2

Light Truck Metric L T n n n / n n a n n

LT235/75R15

LT= Light Truck Tire

235= Section Width in Millimeters

75= Aspect Ratio

R= Radial Construction

15= Rim Diameter in Inches

Light Truck High Flotation n n X n n . n n a n n L T

31X10.50R15LT

31= Tire Diameter in Inches

10.50= Section Width in Millimeters

R= Radial Construction

LT= Light Truck Tire

15= Rim Diameter in Inches

Light Truck Numeric n . n n a n n . n L T

8.75R16.5LT

8.75=Section Width in Inches

R=Radial Construction

16.5=Rim Diameter in Inches

LT=Light Truck Designation

TIRE IDENTIFICATION NUMBER

Screen Name: TIN

SAS Data Set: TIRE

SAS Variable: TIN

Oracle Name: VEHICLEWHEELS.TIN

Element Attributes:

99999 9999 9999 Specify tire identification number
Unknown
Enter characters in each section left justified
“#” entered for unreadable characters
3 to 13 characters will be present
Spaces for places without characters

Range: Numbers 0 – 9
Capital letters except , I, Q, Letters G, O, S and Z are seldom used.
Spaces for places without characters
“#” entered for unreadable characters
3 to 13 characters will be present

Source: Vehicle inspection

Remarks:

The tire identification number is used to identify the tire manufacturer, tire size, and week of manufacture. The tire identification number may be present in the form of a shortened version or a complete version. It will be preceded by the letters **DOT** or **DOT-R**. These characters might also appear above or below the tire identification number. They are NOT part of the tire identification number.

Photo documentation of the TIN is required.

Enter all 9s if the tire identification number is unknown:

9 9 9 9 9 9 9 9 9 9 9 9 9

A complete tire identification number will appear as:

DOT X X X X X X X X N N N N
 1 2 3 4

DOT-R X X X X X X X X N N N N
 1 2 3 4

Tire Identification Number (cont'd)

- 1 Manufacturers assigned identification
- 2 Tire size code
- 3 Tire characteristics or brand name code (OPTIONAL 1-4 characters)
- 4 Date of manufacture (3 digits old standard, 4 digits new standard)

The last section represents the week and year of manufacture. The 1st two symbols identify week. The 3rd and 4th symbols identify year (only one digit for the old tire identification number standard).

Example: 0101 means the 1st week of 2001, or the week beginning Sunday, January 7, 2001, and ending Saturday, January 13, 2001

One side of the tire will have the full tire identification number, the other side will have a partial tire identification number which will not include the date field.

Only read the tire identification number present on the outside of the tire.



H Y C 6 _ _ 6 1 1 _ _ _ _ _

Note missing 3rd section at right. There can't be a 61st week of a year.



Y 6 U R _ _ 4 4 2 _ _ _ _ _

Note the 2nd section is listed together with 1st section

Tire Identification Number (cont'd)



2 E 0 6 _ _ _ _ _ 2 4 0 2

Note that there are attachment points for the plate in the tire mold on either side of "2402".



H 4 H 8 _ _ _ J E N _ _ 5 1 0 4



A P H H _ _ W H T _ _ 2 1 3 _ _

MINIMUM TREAD DEPTH (MM)

Screen Name: Tread Depth

SAS Data Set: *TIRE*

SAS Variable: *DEPTH*

Oracle Name: *VEHICLEWHEELS.TREADDEPTH*

Element Attributes:

Oracle SAS

Specify tread depth

Entry defaults to 1/32 inch, but may also be entered in mm

-9999 99 Unknown

Range: 0mm - 25mm

Source: Vehicle inspection

Remarks:

Indicate the tread depth in 1/32 inch (program automatically converts 1/32 inch to mm).

The Minimum Tire Tread Depth is to be measured using the supplied tire tread depth indicator. The measurement should be taken on the shallowest groove of the tread. Be careful not to measure on a wear bar indicator. The measurement is to be documented to the nearest 32nd inch.

If tread depth is measured at 25mm or more, code as 25mm.

TIRE MEASURED PRESSURE (KILOPASCALS)

Screen Name: Meas. Pressure

SAS Data Set: *TIRE*

SAS Variable: *PRES*

Oracle Name: *VEHICLEWHEELS.MEASUREDPRESSURE*

Element Attributes:

Oracle SAS

Specify measured pressure of the tire in psi
Entry defaults to psi, but may also be entered in kPa

-8882	888	Tire flat
-9999	999	Unknown

Source: Vehicle inspection

Range: 34-689, 888, 999

Remarks:

Enter measured pressure in psi/kpa (program automatically converts psi to kpa).
The PAR may be used as a source if it contains this data, but on scene data supersedes all other data.

The *Measured Pressure* is to be documented using the supplied air pressure gauge. Adhere to the following instructions when taking and reading the pressure:

The pressure gauge should be cleared before taking the reading. It should be placed over the tire's valve stem and press firmly so that no escaping air is heard. If the vehicle is equipped with dual rear wheels, document only the outboard tires. NOTE: Testing has revealed that a tire will normally lose 0.1 psi for each reading.

Record the pressure of the tire at the time of inspection, regardless of whether the tire has been replaced or re-inflated since the crash.

TIRE RESTRICTED

Screen Name: Restricted

SAS Data Set: *TIRE*

SAS Variable: *RESTRCT*

Oracle Name: *VEHICLEWHEELS.TIREROTATIONRESTRICTED*

Element Attributes:

Oracle	SAS	
2	2	No
1	1	Yes
3	0	Not applicable
4	9	Unknown

Source: Vehicle inspection

Remarks:

The variable reflects the tire/wheel restriction that occurred as a result of the crash. This variable is being collected for use in modifying input to the WINSMASH computer program.

A restricted tire is a tire that, due to crash forces, is unable to rotate. The tire could be trapped by surrounding vehicle parts or is damaged by the impact. The tire is in a "locked position."

No

The wheel/tire was not restricted

Yes

The wheel/tire was physically restricted

N/A

There is no wheel/tire for this position

Unknown

Use this selection when it cannot be determined if the wheel/tire was restricted as a result of the crash

TIRE DAMAGE

Screen Name: Damage

SAS Data Set: *TIREDMG*

SAS Variable: *DAMTYPE*


Oracle Name: *TIRE DAMAGE.DAMAGED*

Element Attributes:

Oracle	SAS	
-9999	99	Unknown
2	1	Tread separation
5	2	Sidewall separation
3	3	Tire puncture in tread
4	4	Tire puncture in sidewall
6	5	Tire cut/torn
8	6	Tire rotted
7	7	De-beaded
77	88	Other (specify)

Source: Vehicle inspection

Remarks: Observations of the tire by the researcher at the time of the inspection.

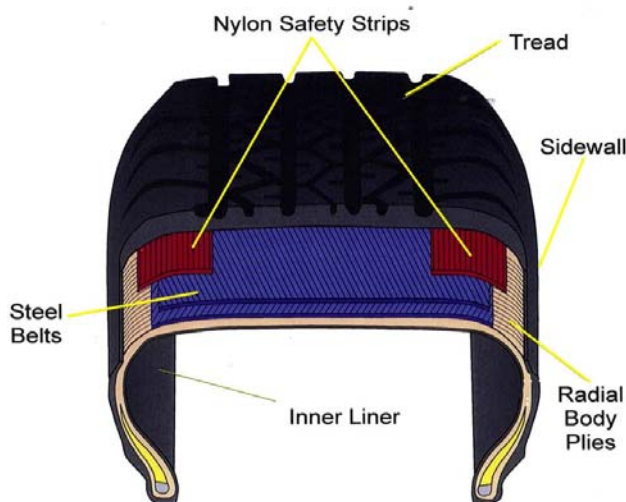

Tread Separation

Tread is the outermost grooved part of the tire that comes in contact with the road. Tread separation occurs when the tread of the tire peels away from the inner liner or the carcass (portion of the tire

that holds air) exposing the inner tire, belts, and cords. This separation makes tire blow out and increases the likelihood an accident will occur.

Sidewall Separation

The sidewalls are the portions of the tire between the beads and the tread compounded of rubber with high flex and weather resistance to control the ride and provide support. Sidewall separation means the parting of the rubber compound from the cord material in the sidewall.

Tire Puncture in Tread

A hole made by a sharp point object on the Tread of the tire.

Tire Puncture in Sidewall

A hole made by a sharp point object on the Sidewall of the tire.

Tire Cut/torn

Following pictures show cut/torn tire on the sidewall.

**Tire Rotted**

Rubber degrades when exposed to heat, oxygen, ozone, and other elements. With age, rotted tires develop cracks on the sidewall and tread.

Tire De-beaded

The Bead is a structure composed of high tensile strength steel wire formed into hoops which function as anchors for the plies and hold the tire assembly onto the rim of the wheel.

Other (specify)

Refers to any damage observed that is not listed. This includes bead separation which is a breakdown of bond between components in the bead area. The bead can be broken or bent.

SPECIFICATIONS

Exterior Vehicle Form, Case 2007-996-900015/ Vehicle #1

VEHICLE | TIRE | SPECIFICATIONS | FUEL | FIRE | CRUSH | CDC | EDR | SKETCHES | LOG | REVIEW

FORD TAURUS 2004

Original Specifications

Wheelbase	<input type="text"/>	cms	Front Overhang	<input type="text"/>	cms
Overall Length	<input type="text"/>	cms	Rear Overhang	<input type="text"/>	cms
Maximum Width	<input type="text"/>	cms	Undeformed End Width	<input type="text"/>	cms
Curb Weight	<input type="text" value="1452"/>	kgs	Engine Cylinders	<input type="text" value="4"/>	
Average Track	<input type="text"/>	cms	Displacement	<input type="text" value="3"/>	L

Transmission

Type Of Transmission: Automatic Drive Wheels: Front Wheel Drive (FWD)

Researcher's Assessment of Vehicle Disposition: Towed due to vehicle damage

Justification:

Is This a Multi-Stage Manufactured Vehicle And/Or A Certified Altered Vehicle: No post-manufacturer modifications

Suspected Modifications:

Save Close

WHEELBASE

Screen Name: Original Specifications—Wheelbase

SAS Data Set: *VEHSPEC*

SAS Variable: *WHEELBAS*

Oracle Name: *VEHICLE.WHEELBASE*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter.
-9999	999	Unknown

Range: 100 – 650 cms

Source: Vehicle specifications, exemplar vehicle

Remarks:

The wheelbase dimension is obtained from source materials and not from vehicle measurements. If written vehicle specifications cannot be found, after consultation of the zone center, the researcher may take the measurements from an exemplar vehicle.

The coding of this variable reflects the length of the vehicle's original or undamaged wheelbase to the nearest centimeter.

Unknown

is used when this vehicle's original wheelbase cannot be determined.

OVERALL LENGTH

Screen Name: Original Specifications—Overall Length

SAS Data Set: *VEHSPEC*

SAS Variable: *OVERALL*

Oracle Name: *VEHICLE.OVERALLLENGTH*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter.
-9999	999	Unknown

Range: 100 – 1000 cms

Source: Vehicle specifications, exemplar vehicle

Remarks:

Enter the overall length of the vehicle, as determined from source materials, to the nearest centimeter.

Any add-on equipment is excluded from the overall length of the vehicle (i.e., a pick-up with an after-market bumper added).

Unknown

is used when this vehicle's original overall length cannot be determined.

MAXIMUM WIDTH

Screen Name: Original Specifications—Maximum Width

SAS Data Set: *VEHSPEC*

SAS Variable: *MAXWIDTH*

Oracle Name: *VEHICLE.MAXWIDTH*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter.
-9999	999	Unknown

Range: 100 – 250 cms

Source: Vehicle specifications, exemplar vehicle

Remarks:

Enter the overall/maximum width of the vehicle, as determined from source materials, to the nearest centimeter.

Unknown

is used when this vehicle's original overall width cannot be determined.

CURB WEIGHT

Screen Name: Original Specifications—Curb Weight

SAS Data Set: *VEHSPEC*

SAS Variable: *CURBWGT*

Oracle Name: *VEHICLE.CURBWEIGHT*

Element Attributes:

Oracle	SAS	
		Curb weight of vehicle (kgs)
-9999	999999	Unknown

Range: 450 – 6,500

Source: Researcher determined

Remarks:

Enter this vehicle's curb weight.

Do not confuse the rated Gross Vehicle Weight Rating (GVWR) with the curb weight since it is likely to be significantly greater than the curb weight.

"Vehicle" is defined in this variable to mean the same vehicle identified under Body Type.

If the vehicle model is known, but the engine size is unknown (*e.g.*, 6 or 8 cylinders), code the average between the high and low curb weights for the model and annotate that the "average" was reported.

When the vehicle specifications do not report the vehicle weight with the proper engine size, adjustments must be made. First, try to determine the weight differences from the vehicle specifications. If the weight difference cannot be determined from the specifications, then adjust as follows: 8 cyl. to 6 cyl. - subtract 100lb/45 kilograms; 6 cyl. to 4 cyl. - subtract 75lb/34 kilograms.

If a source material reports "shipping weight" add 100lb/45 kilograms to obtain a curb weight on all CDS applicable vehicles.

Towed trailing units are considered cargo weight and not included in the vehicle curb weight.

Unknown

is entered when the curb weight of this vehicle cannot be determined.

AVERAGE TRACK WIDTH

Screen Name: Original Specifications—Average Track

SAS Data Set: *VEHSPEC*

SAS Variable: *ORIGAVTW*

Oracle Name: *VEHICLE.AVGTRACK*

Element Attributes:

Oracle	SAS	
		Code to the nearest centimeter
-9999	999	Unknown

Range: 100-200, 999

Source: Vehicle specifications, undamaged measurements

Remarks:

Enter the average track width of the vehicle to the nearest centimeter.

If vehicle specifications cannot be obtained, and there are no post manufacture modifications, and there is no significant damage to the axles, then you can get the value from the case vehicle. Measure both undamaged track widths on the vehicle and record the average.

If an axle is damaged such that an average value cannot be determined, use the measurement of the undamaged axle as the average encoded value.

If both axles are significantly damaged record the value from an exemplar vehicle.

If the vehicle is equipped with dual rear wheels (*i.e.*, some full-size pickup trucks) the track width is measured from the center of the space between the wheels on both sides.

Unknown

is used in the following situations:

- The axles are significantly damaged and there are no specifications available for this vehicle, and an exemplar vehicle was not measured.
- The axle is significantly damaged *and* there were post-manufacture modifications that would alter the track width.
- The measurements were not obtained from this vehicle or and exemplar vehicle and there are no specifications available.

FRONT OVERHANG

Screen Name: Original Specifications—Front Overhang

SAS Data Set: *VEHSPEC*

SAS Variable: *FTOVHANG*

Oracle Name: *VEHICLE.FRONTOVERHANG*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter.
-9999	999	Unknown

Range: 25-150, 999

Source: Vehicle specifications, undamaged measurements or an exemplar vehicle

Remarks:

Enter the front overhang, as determined from source materials, of the vehicle to the nearest centimeter.

NOTE: the researcher should record, on the sketch page, the front and rear stringline measurements. These measurements will closely represent the original overhang measurements provided a reference line was established and the axles were not moved.

This measurement is required for all end impacts. If it is a side impact and the front overhang is not available use **Unknown**.

Unknown

is used in the following situations:

- The axles are significantly damaged and there are no specifications available for this vehicle, and an exemplar vehicle was not measured.
- The axle is significantly damaged *and* there were post-manufacture modifications that would alter the front overhang.
- The measurements were not obtained from this vehicle or an exemplar vehicle and there are no specifications available.

REAR OVERHANG

Screen Name: Original Specifications—Rear Overhang

SAS Data Set: *VEHSPEC*

SAS Variable: *RROVHANG*

Oracle Name: *VEHICLE.REAROVERHANG*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter.
-9999	999	Unknown

Range: 25-200, 999

Source: Vehicle specifications, undamaged measurements or an exemplar vehicle.

Remarks:

Enter the rear overhang, as determined from source materials, of the vehicle to the nearest centimeter.

NOTE: the researcher should record, on the sketch page, the front and rear stringline measurements. These measurements will closely represent the original overhang measurements provided a reference line was established and the axles were not moved.

Unknown

is used in the following situations:

- The axles are significantly damaged and there are no specifications available for this vehicle, and an exemplar vehicle was not measured.
- The axle is significantly damaged *and* there were post-manufacture modifications that would alter the rear overhang.
- The measurements were not obtained from this vehicle or an exemplar vehicle and there are no specifications available.

UNDEFORMED END WIDTH

Screen Name: Original Specifications—Undeformed End Width

SAS Data Set: *VEHSPEC*

SAS Variable: *UNENDW*

Oracle Name: *VEHICLE.ENDWIDTH*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter.
-9999	999	Unknown

Range: 100-250, 999

Source: Vehicle inspection, or an of an exemplar vehicle

Remarks:

The undeformed end width is the undamaged dimension of the contacted end plane measured between the apex of both bumper corners.

Unknown

If the vehicle cannot be directly measured and an exemplar vehicle cannot be found, then enter unknown.

ENGINE CYLINDERS

Screen Name: Original Specifications—Engine Cylinders

SAS Data Set: *VEHSPEC*

SAS Variable: *ENGCYL*

Oracle Name: *VEHICLE.CYLINDERS*

Element Attributes:

Oracle	SAS	
		Code the number of cylinders
-9999	99	Unknown

Range: 1-14, 99

Source: Vehicle inspection, specifications, VIN

Remarks:

The coding of this variable reflects the number of cylinders in the vehicle. The information can be found in vehicle specifications. It may also be found in owner's manuals.

Unknown

If the number of engine cylinders cannot be determined, then enter unknown.

ENGINE DISPLACEMENT

Screen Name: Original Specifications—Engine Displacement

SAS Data Set: *VEHSPEC*

SAS Variable: *ENGDISP*

Oracle Name: *VEHICLE.ENGINEL*

Element Attributes:

Oracle	SAS	
		Code to the nearest tenth of a liter
-9999	99	Unknown

Range: 0.0-10.0, 99

Source: Vehicle inspection, specifications, VIN

Remarks:

The coding of this variable reflects the vehicle's engine displacement. The information can be found in vehicle specifications. It may also be found in owner's manuals, or from the vehicle inspection.

Enter the vehicle's engine displacement. It is recorded to the nearest tenth of a liter.

Unknown

If the displacement cannot be determined, then enter unknown.

TYPE OF TRANSMISSION

Screen Name: Type of Transmission

SAS Data Set: *VEHSPEC*

SAS Variable: *TRANS*

Oracle Name: *VEHICLE.PICKTRANSMISSIONCODE*

Element Attributes:

Oracle	SAS	
1	1	Manual
2	2	Automatic
3	9	Unknown

Source: Vehicle inspection

Remarks:

The coding of this variable reflects the type of transmission that is in the vehicle. This variable is being collected for use in modifying input to the WINSMASH computer program.

Manual

The vehicle has a manual transmission.

Automatic

The vehicle has an automatic transmission.

Unknown

It cannot be determined what type of transmission is in the vehicle.

DRIVE WHEELS

Screen Name: Drive Wheels

SAS Data Set: *VEHSPEC*

SAS Variable: *DRIVE*

Oracle Name: *VEHICLE.PICKDRIVEWHEELSCODE*

Element Attributes:

Oracle	SAS	
1	1	Front Wheel Drive
2	2	Rear Wheel Drive
3	3	Four Wheel Drive
4	4	All Wheel Drive
5	9	Unknown

Source: Vehicle inspection

Remarks:

The coding of this variable reflects the type of drive wheels power the vehicle. This variable is being collected for use in modifying input to the WINSMASH computer program.

Front Wheel Drive

In a front-wheel drive vehicle, power from the engine is transferred to the front tires.

Rear Wheel Drive

In a rear-wheel drive vehicle, power from the engine is transferred to the rear tires.

4 Wheel Drive

In a four-wheel drive vehicle, power is delivered to all four wheels only when the driver requests it.

All Wheel Drive

In an all-wheel drive vehicle, power is distributed to all four of the vehicle's tires, all of the time.

Unknown

Use this when it cannot be determined what type of drive wheels power the vehicle.

RESEARCHER'S ASSESSMENT OF VEHICLE DISPOSITION

Screen Name: Researcher's Assessment of Vehicle Disposition

SAS Data Set: *GV*

SAS Variable: *TOWRES*

Oracle Name: *VEHICLE.RESEARCHVEHDISPOS*

Element Attributes:

Oracle	SAS	
0	0	Not towed due to vehicle damage
1	1	Towed due to vehicle damage
9	9	Unknown
-8		[Not inspected]

Source: Primary source is the vehicle inspection; secondary source is interviewee(s).

Remarks:

Determine this variable based on vehicle inspection (which is supplemented by interview data for a repaired vehicle). **Under no circumstance should the PAR be used as a source for coding this variable.** "Towing" is defined identically to the definition in variable **Police Reported-Vehicle Disposition** (*i.e.*, towing must be a result of event-related disabling damage; towing must occur directly from the scene, etc.). A gray area exists, however, when attempting to define the term "disabling damage".

Determine the severity of the damage during the vehicle's inspection. Not towed due to vehicle damage if the damage is "**minor**" (*i.e.*, minor mechanical repairs *could* have been completed at the scene). "**Minor mechanical repairs**" refers to items such as: replacing headlights or taillights, changing tires, pulling sheet metal away which may be restricting a wheel, etc.

NOTE: These repairs need not have been completed at the scene. They are merely examples of situations which do *not* require the vehicle to be categorized "disabled" for the NASS CDS study.

Not towed due to vehicle damage

when the vehicle was driven from the scene, or when the vehicle was unnecessarily towed from the scene (*i.e.*, could have been driven).

Towed due to vehicle damage

when the vehicle sustained damage from the crash such that towing was required.

Unknown

when the vehicle was towed from the scene but the reason for the towing cannot be determined

JUSTIFICATION FOR RESEARCHER'S ASSESSMENT OF VEHICLE DISPOSITION

Screen Name: Researcher's Assessment of Vehicle Disposition Justification

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *VEHICLE.SOURCEVEHICLEDISPOSITION*

Element Attributes:

Enter justification for tow status
[Not inspected]

Source: Primary source is the vehicle inspection; secondary source is interviewee(s).

Remarks:

Indicate the specific reason for the determination that the vehicle was or was not towed. Proper responses are for a towed vehicle would include: severe damage, restricted tires, radiator involvement, passenger compartment intrusion, broken suspension assembly, etc. A vehicle found to be "not towed due to damage" might have responses such as: broken headlights require tow, tire flat or minor bumper damage.

NOTE: "Vehicle Inspection" is the source of data and should not be entered here.

When there is a conflict between Police reported tow status and the researcher's assessment of tow status, include the reason for the choice. For example, a researcher selects Not towed due to vehicle damage and provides the following annotation: "The vehicle received only broken headlights in the collision; police required that the vehicle be towed".

MULTI-STAGE OR ALTERED VEHICLE

Page 1 of 3

Screen Name: Is This a Multi-Stage Manufactured Vehicle And/Or A Certified Altered Vehicle?

SAS Data Set: *VEHSPEC*

SAS Variable: *ALTVEH*

Oracle Name: *VEHICLE.MANUFACTURERCERTMODS*

Element Attributes:

Oracle	SAS	
1	0	No post manufacturer modifications
2	1	Yes — post manufacturer modifications (specify)
9	9	Unknown if vehicle is modified
-8		[Not inspected]

Source: Vehicle Inspection.

Remarks:

Under the "Code of Federal Regulations, Title 49 - Transportation" Chapter V Part 567, Sections 567.5 and 567.7, a label certifying compliance with all Federal Motor Vehicle Safety Standards must be affixed to a multi-stage manufactured vehicle or altered (post manufactured) vehicle.

A multi-stage manufactured vehicle will generally begin as a chassis-cab (incomplete vehicle) and subsequently end up in final-stage as a pickup based utility truck (dump truck, flat bed, stake body, tow truck, etc.) or a van derivative (*i.e.*, van conversion, Hi-cube, motor home, etc.).

Altered vehicles will generally involve a major modification of basic components such as suspension, frame, power plants, etc., with work generally performed by a recognized auto body shop. The lengthening of a standard automobile chassis to create a limousine would be one example of the type of alteration which would qualify for certification.

To determine if the vehicle qualifies, locate the certification label which should include one of the following statements:

Multi-stage vehicle

Incomplete manufactured vehicle (chassis-cab) certification label should include the statement: **"CHASSIS-CAB MANUFACTURED BY"** or **"CHASSIS-CAB MFD. BY"**.

Intermediate manufactured vehicle certification label should have the following statement: **"INTERMEDIATE MANUFACTURED BY"** or **"INTERMEDIATE MFD. BY"**.

Multi-Stage or Altered Vehicle (cont'd)

Page 2 of 3

Final manufactured vehicle certification label should have the following statements:

"MANUFACTURED BY" or "MFD. BY" and "INCOMPLETE VEHICLE MANUFACTURED BY" or "INC VEH MFD. BY".

Altered vehicle

An altered vehicle certification label should include the statement: **"This vehicle was altered by (individual or corporate name) in (month and year in which alterations were completed) and as altered it conforms to all applicable Federal Motor Vehicle Safety Standards affected by the alteration and in effect in (month, year)."**

These labels are generally affixed in one of the following areas on the driver's side of the vehicle:

- hinge pillar
- door-latch post
- door edge that meets the door-latch post
- left side of the instrument panel
- inward-facing surface of driver's door

No post manufacturer modifications

is used when this vehicle was a full-line manufactured vehicle. Full-line is interpreted as a vehicle that is completely assembled at the end of a plant assembly line of its original manufacturer. This would include vehicles which only require cosmetic additions such as additional paint, mirrors, wheels, etc., to be customer ready.

Yes — post manufacturer modifications

is used for multi-stage vehicles and/or altered certified vehicles. This includes vehicles which were in various stages of completion (*i.e.*, incomplete, intermediate, final).

Vehicles that are altered via "backyard modification (*i.e.*, addition of air shocks, spring spacers, cosmetic alteration including sheet metal and paint, etc.) are not identified as certified altered vehicles. Only those businesses which specialize in vehicle alterations (*i.e.*, limo body shops, etc.) where a label of alteration is required by federal regulations and is present on the vehicle are identified in this element.

An image of the certification label(s) is essential and must be included with the case. Categorize this image in the Miscellaneous Category.

Unknown

is used in the following situations.


- The vehicle fits the description of a multi-stage or altered vehicle, but the researcher was not able to view the label(s) for positive identification.
- The label(s) was removed/destroyed so a clear determination of whether the vehicle was a certified multi-stage or altered vehicle could not be made.

EXTERIOR VEHICLE FORM

SPECIFICATIONS

Multi-Stage or Altered Vehicle (cont'd)

Photograph examples:

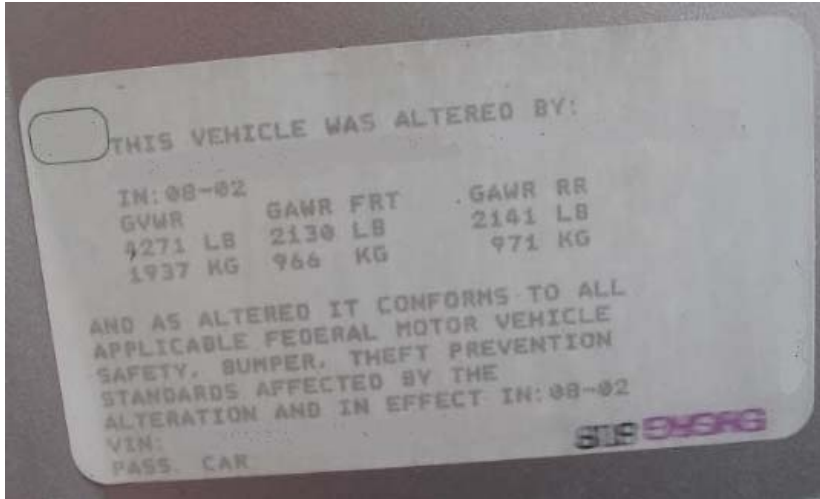

SUSPECTED POST MANUFACTURERER MODIFICATIONS

Screen Name: Suspected post manufacturer modifications

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLE.SUSPECTEDMODS*

Element Attributes:

Check Box

Range:

Source: Vehicle inspection, researcher determined

Remarks:

The purpose of this variable is to determine if the vehicle has been modified so that the handling and crashworthiness characteristics are affected. This is based upon a suspicion by the researcher at the time of the vehicle inspection.

Examples of modifications:

- Smaller or larger tires
- Body lift kit
- Lowered body
- Altered suspension
- Composite front body panels

Examples of modifications that are not considered:

- Changing the side rear view mirrors
- Aftermarket window tinting
- Additional lighting attached to the roof

FUEL SYSTEMS

Be sure to photograph all fuel tanks and surrounding area. Refer to the [NASS CDS Digital Photography Guideline](#) for a detailed description of the required photographs.

Record **all** fuel systems, and code any Damage to Fuel Cell. If Fuel Cell is damaged other variables are required to be coded.

Exterior Vehicle Form, Case 2007-996-900015/ Vehicle #1

VEHICLE | TIRE | SPECIFICATIONS | FUEL | FIRE | CRUSH | CDC | EDR | SKETCHES | LOG | REVIEW

Fuel System Number 1 of 2 Previous Next

Fuel Type Nickel-Cadmium Battery

Damage to Fuel Cell No damage to cell

Leakage Location No fuel leakage

Location of Fuel Cell Over the rear axle

Type of Fuel Cell Electric/solar powered

Location of Filler Cap Electric/solar powered

Precrash Condition No damage

Save Close

Note: Code Fuel Type, Damage to Fuel Cell, and Leakage Location for each Fuel System noted. Code other variables only if a leak, damage or fire occurred

FUEL SYSTEM NUMBER

Screen Name: Fuel System Number

SAS Data Set: *FUELTANK*

SAS Variable: *TANKNO*

Oracle Name: *FUELTANK.FUELTANKNUMBER*

Element Attributes:

Number of fuel cell

Remarks:

Use Edit/Insert to add a fuel system for **each** fuel system in the vehicle.

This variable records those fuel systems that are permanently affixed to the vehicle as an energy reservoir for the vehicle's engine. Some vehicles may be equipped with reserve cells. (i.e., one or more cells connected in series and controlled by the driver).

Extra fuel cells on-board a vehicle which are not designed to supply fuel to the vehicle's engine are not considered for this variable. Some examples include: fuel cans, bottled gas, and ancillary tanks for occupational related work (i.e., construction, etc.).

An electric fuel cell, hydrogen fuel cell or compressed natural gas (CNG) is considered a fuel system.

FUEL TYPE

Page 1 of 3

Screen Name: Fuel Type

SAS Data Set: **FUELTANK**SAS Variable: **FUELTYP**Oracle Name: **FUELTANK.PICKFUELTYPE****Element Attributes:**

Oracle	SAS	
1	1	Gasoline
2	2	Diesel
3	3	CNG (Compressed Natural Gas)
4	4	LPG (Liquid Petroleum Gas) also known as Propane
5	5	LNG (Liquid Natural Gas)
6	6	Methanol (M100 or M85)
7	7	Ethanol (E100 or E85)
12	12	Nickel-Cadmium Battery
16	15	Nickel-Metal Hydride (NiMH)
9	9	Hydrogen Fuel Cell
98	98	Other (specify):
99	99	Unknown Fuel Type

Source: Primary source is the vehicle inspection; secondary source is the interviewee(s).

Remarks:

These variables record the fuel type available in each fuel system during this crash sequence. The type of fuel the engine was operating on will normally be indicated on the vehicle. Typical locations include, but are limited to fuel door, filler cap, fuel gauge and vehicle owner's manual.

Gasoline

is described as a volatile mixture of flammable liquid hydrocarbons derived from crude oil and used principally as a fuel for internal-combustion engines. Use this attribute for gasoline and ethanol mixture. This is commonly called "gasohol" which is a mixture of gasoline and ethanol (10%) or methanol (3%).

Diesel

is described as a volatile mixture of flammable liquid hydrocarbons derived from crude oil and used principally as a fuel for internal-combustion engines. It has the same process as gasoline but not as refined. This attribute includes bio-diesel fuel.

Compressed Natural Gas (CNG)

Compressed natural gas, or CNG, is natural gas under pressure which remains clear, odorless, and non-corrosive. Although vehicles can use natural gas as either a liquid or a gas, most vehicles use the gaseous form compressed to pressures above 3,100 pounds per square inch.

LPG (Liquid Petroleum Gas) also known as Propane

Motor Fuel Propane, otherwise known as Liquefied Petroleum Gas (LPG), is produced as part of natural gas processing and crude oil refining. In natural gas processing, the heavier hydrocarbons that naturally accompany natural gas, such as LPG. Propane is a gas that can be turned into a liquid at a moderate pressure, 160 pounds per square inch (psi), and is stored in pressure tanks at about 200 psi at 100 degrees Fahrenheit.

LNG (Liquid Natural Gas)

Liquefied natural gas, or LNG, is natural gas in a liquid form that is clear, colorless, odorless, non-corrosive, and non-toxic. LNG is produced when natural gas is cooled to minus 259 degrees Fahrenheit, through a process known as liquefaction. During this process, the natural gas, which is primarily methane, is cooled below its boiling point, whereby certain concentrations of hydrocarbons, water, carbon dioxide, oxygen, and some sulfur compounds are either reduced or removed. LNG is also less than half the weight of water, so it will float if spilled on water.

Methanol (M100 or M85)

Methanol (methyl alcohol), often referred to as "wood alcohol" is a clean-burning liquid alternative transportation fuel. Its chemical formula is CH_3OH . M85 (85 percent methanol and 15 percent unleaded gasoline) has an octane rating of 102, compared to 92 for premium unleaded and 87 for regular unleaded gasoline.

Ethanol (E100 or E85)

Ethanol, or ethyl alcohol, has the chemical formula $\text{C}_2\text{H}_5\text{OH}$. While most familiar as the form of alcohol found in alcoholic beverages, ethanol also makes an effective motor fuel, with decades of motor fuel application experience in the United States and other countries. There is a small but growing market for E85 fuel (85 percent ethanol and 15 percent gasoline) for use in flexible fuel vehicles (FFVs).

Nickel-Cadmium Battery

described as a sealed storage battery having a nickel anode, a cadmium cathode and an alkaline electrolyte. Commonly referred to as NiCd.

Nickel-Metal Hydride

described as similar to the nickel-cadmium battery but containing less toxic material and has a higher capacity. Commonly referred to as NiMH.

Fuel Type (cont'd)

Page 3 of 3

Hydrogen Fuel Cell

Hydrogen is the simplest, lightest and most plentiful element in the universe. It is made up of one proton and one electron revolving around the proton. In its normal gaseous state, hydrogen is colorless, odorless, tasteless, non-toxic and burns invisibly. Fuel cells generate electricity from a catalyst-facilitated chemical reaction between hydrogen and oxygen ions in a cell. Several cells combined make up a fuel cell stack. Fuel cell systems have relatively few moving parts, and their only by products are water and heat when pure hydrogen is used as the fuel.

Other (specify)

is used for any type of fuel used that is not described in the above attributes. This includes alternative energy sources, i.e., flywheel technology. Included in this attribute are the following battery types: Lead acid, Nickel Iron, Sodium Metal Chloride, and Sodium Sulfur. Annotate for specific information.

Unknown fuel type

is used when:

- The vehicle was totally destroyed, or
- The fuel type can not be determined

DAMAGE TO FUEL CELL

Page 1 of 2

Screen Name: Damage to Fuel Cell**SAS Data Set:** *FUELTANK***SAS Variable:** *FUELDAM***Oracle Name:** *FUELTANK.PICKDAMAGEDFUELTANK***Element Attributes:**

Oracle	SAS	
1	1	No damage to cell
2	2	Deformed, no seam separation
3	3	Deformed, with a seam separation
4	4	Punctured
5	5	Lacerated (ripped)
6	6	Abraded (scraped)
7	7	Filler neck separation from the fuel cell
8	8	Other damage (specify):
9	9	Unknown

Source: Vehicle Inspection.**Remarks:**

These variables record the damage to the fuel cell(s) that occurred during the sequence of crash events. The objective of these variables is to identify damage to the fuel cell(s) that may or may not result in a loss of fuel system integrity. If the fuel cell(s) has more than one form of damage, enter the damage that resulted in a fuel system integrity loss. If there were multiple types of integrity loss then select the first attribute which applies

Refer to the [NASS CDS Digital Photography Guideline](#) for a detailed description of the required photographs.

In addition, annotate any pre-crash damage to the fuel tank.

No damage to fuel cell

is used when the fuel cell is not damaged during the sequence of crash events.

Deformed, no seam separation

is used when the fuel cell was deformed or crushed during the crash and the seam did not fail. Tanks which do not have a seam(s) (*e.g.*, extruded fuel cells such as high density polyethylene HDPE) should be evaluated for deformation and encoded under this attribute if applicable.

Deformed, with a seam separation

is used when the fuel cell was deformed or crushed during the crash and the seam failed. Single piece extruded cells (*i.e.* no seams, HDPE) which experience integrity loss are **not** entered here.

Punctured

is used when the fuel cell was punctured, perforated or pierced during the collision sequence.

Lacerated (ripped)

is used when the fuel cell was lacerated, cut, sliced, ripped or torn during the collision sequence.

Abraded (scraped)

is used when the fuel cell was abraded or scraped during the collision sequence.

Filler neck separation from the fuel tank

is used when the filler neck was separated from the fuel cell during the collision sequence.

Other damage (specify)

is used when damage to the fuel cell can not be described in other attributes. HDPE cells that are crushed to the point that they crack, causing an integrity loss of the fuel cell, are included here.

Unknown

is used when the fuel cell damage can not be determined.

FUEL SYSTEM LEAKAGE LOCATION

Screen Name: Leakage Location

SAS Data Set: *FUELTANK*

SAS Variable: *FUELLEAK*

Oracle Name: *FUELTANK.PICKLEAKAGEAREA*

Element Attributes:

Oracle	SAS	
1	1	No fuel leakage

Primary Area Of Leakage

2	2	Cell
3	3	Filler neck
4	4	Cap
5	5	Lines/pump/filter
6	6	Vent/emission recovery
7	8	Other (specify):
8	9	Unknown
		[Not Applicable]

Source: Vehicle Inspection.

Remarks:

These variables provide information on fuel retention by the fuel system during the crash sequence. The objective of these variables is to report fuel system leakage. If the fuel system has leakage from more than one source, enter the leakage that resulted in a fire. If there are multiple areas of leakage and no fire, then enter the most severe area of leakage. If the severity can not be determined, then use attributes in the priority listed.

Refer to the [NASS CDS Digital Photography Guideline](#) for a detailed description of the required photographs.

If no fuel leakage was caused by the crash, record no fuel leakage. If the fuel system was leaking prior to the collision, (*i.e.*, corrosion to tank, loose fuel line, etc.) annotate the information. In this variable leakage can only occur from impact damage.

No fuel leakage

is used when there has been no loss in fuel retention.

Cell

is used when the fuel cell was leaking as a result of an impact during the crash sequence. Also use this attribute when leakage occurs as a result of all the filler neck separating from the fuel cell.

Filler Neck

is used when the filler neck is the source of fuel leakage as a result of an impact during the crash sequence.

Cap

is used when the mouth of the filler neck or the filler cap is the source of fuel leakage that occurred as a result of damage from an impact during this vehicle's crash sequence.

Lines/pump/filter

is used when fuel was leaking from the fuel system lines, pump and/or fuel filter as a result of an impact during the crash sequence.

Vent/emission recovery

is used when fuel was leaking from the vent or emission recovery system as a result of an impact during the crash sequence.

Other (specify)

is used when fuel was leaking, as a result of the crash, from other than the sources specified above.

Unknown

is used when:

- It cannot be determined if the fuel system experienced any leakage, or
- The source of the fuel system leakage could not be determined.

LOCATION OF FUEL CELL

Page 1 of 2

Screen Name: Location of Fuel Tank

SAS Data Set: **FUELTANK**SAS Variable: **FUELLOC**Oracle Name: **FUELTANK.PICKLOCATIONOFTANK****Element Attributes:**

Oracle	SAS	
1	1	Aft of rear axle centered
2	2	Aft of rear axle left side
3	3	Aft of rear axle right side
4	4	Forward of rear axle centered
5	5	Forward of rear axle left side
6	6	Forward of rear axle right side
7	7	Over the rear axle
8	8	Other (specify):
9	9	Unknown
-8887		[Not Applicable]

Source: Vehicle Inspection.

Remarks:

This variable identifies the location(s) of this vehicle's fuel cell(s). Refer to the [NASS CDS Digital Photography Guideline](#) for a detailed description of the required photographs.

Aft of rear axle centered

is used to identify fuel cells located in back of the center of the rear wheels (rear axle) and in the center of the vehicle (*e.g.*, between the frame rails if present).

Aft of rear axle left side

is used to identify fuel cells located in back of the center of the rear wheels (rear axle) and on the left side of the vehicle (*e.g.*, between the frame rails and the outer body surface).

Aft of rear axle right side

is used to identify fuel cells located in back of the center of the rear wheels (rear axle) and on the right side of the vehicle (*e.g.*, between the frame rails and the outer body surface).

Forward of center of the rear wheels (rear axle) centered

is used to identify fuel cells located in front of the center of the rear wheels (rear axle) and in the center of the vehicle (*e.g.*, between the frame rails if present).

Forward of center of the rear wheels (rear axle) left side

is used to identify fuel cells located in front of the center of the rear wheels (rear axle) and in the left side of the vehicle (*e.g.*, between the frame rails and the outer body surface).

Forward of center of the rear wheels (rear axle) right side

is used to identify fuel cells located in front of the center of the rear wheels (rear axle) and in the right side of the vehicle (*e.g.*, between the frame rails and the outer body surface).

Over the rear axle

is used when any part of the fuel cell is located over the center of the rear wheels (rear axle)

Other (specify)

is used when the fuel cell is in a location other than as specified in the previous attributes. Included in this attribute are fuel cells located inside the passenger compartment, trunk, cargo area, pickup bed, etc. The location is specified in the space provided.

Unknown

is used when the fuel cell location can not be determined and an exemplar vehicle can not be located.

TYPE OF FUEL CELL

Screen Name: Type of Fuel Tank

SAS Data Set: *FUELTANK*

SAS Variable: *FUELTNK*

Oracle Name: *FUELTANK.PICKTYPEOFTANK*

Element Attributes:

Oracle	SAS	
1	1	Metallic
2	2	Non-Metallic
3	9	Unknown
0		[Electric/solar powered]
-8887		[Not Applicable]

Source: Vehicle Inspection.

Remarks:

This variable records the composition of the fuel cell that is permanently affixed to the vehicle as an energy reservoir for the vehicle's engine.

Metallic

is used for fuel cells made from metal. This would include steel, aluminum (alloys), stainless steel, etc.

Non-metallic

is used for fuel tanks which are made from plastic. Plastic tanks are composed of high density polyethylene (HDPE).

Unknown

is used when the type of tank material could not be determined:

- researcher could not make a determination due to inaccessibility, or
- vehicle was dismantled during inspection and the fuel tank(s) was not available.

The following information has been compiled from discussions with automobile manufacturers, service and parts representatives and the National Automotive History Collection. This information cannot be used to code this variable and must be confirmed by visual and/or mechanical means.

Vehicle Fuel Tank Material**HDPE (High Density Polyethylene)**

(1) Ford Motor Co.	
Ford Aerostar Mini Van	HDPE
Ranger PU (89-on)	HDPE
Explorer	HDPE
Cougar/T-Bird (90-on)	Some have HDPE with steel reinforcement
F Series PU	Some of the earlier models may have HDPE
Escort (91-on)	Some have HDPE
Tracer (91-on)	Some have HDPE
Mustang (93-on)	Some have HDPE
(2) General Motors Corp.	
Chevrolet	
Lumina Mini Van	HDPE
"B" Body (91-on)	HDPE
- Caprice	
- Impala	
- Station Wagons	
"L" Body (91-on)	HDPE
- Corsica	
- Beretta	
Pontiac	
Tran Sport Mini Van	HDPE
Parisienne	HDPE
Oldsmobile	
Silhouette Mini Van	HDPE
Custom Cruiser	HDPE
Buick	
LeSabre Estate (90-on)	HDPE
Roadmaster	HDPE
Saturn	HDPE - all models

Type of Fuel Tank (cont'd)

Page 3 of 4

- (3) **Chrysler Corp.**
 Plymouth
 Voyager Wagon HDPE in optional 20 gallon tank
 Trailduster (80-on) HDPE
- Dodge
 Caravan Wagon HDPE in optional 20 gallon tank
- Sportsman(1980) Optional tank was HDPE
 (88-on) HDPE
 Ram Wagon(1980) Optional tank was HDPE
 (88-on) HDPE
 Tradesman(1980) Optional tank was HDPE
 (88-on) HDPE
 Ram Van(1980) Optional tank was HDPE
- (88-on) HDPE
 Ram PU(80-on) HDPE
 Power Ram PU(80-on) HDPE
 Ramcharger(80-on) HDPE
 Dakota(86-on) HDPE
 Monaco HDPE
- Eagle
 Premier(88-on) HDPE
- Jeep
 CJ5 (83-91) Optional tank was HDPE
 CJ7 (81-86) Optional tank was HDPE
 CJ8 (81-86)/Scrambler Optional tank was HDPE
 Wrangler (87-on) Optional tank (22 gal) was HDPE
 Cherokee (80-on) HDPE-some have steel tanks
 Wagoneer (80-on) HDPE
 J10, J20 PU (80-on) HDPE
 Grand Wagoneer (84-on) HDPE
- (4) **Peugeot**
 505 HDPE
 Station Wagon HDPE
 Sedan HDPE

Type of Fuel Tank (cont'd)

- (5) **Volkswagen**
 - Golf (85-86, 89-on) HDPE
 - Jetta (90-on) HDPE
 - Passat (92-on) HDPE
 - Corrado (89-on) HDPE

- (6) **Volvo**
 - 700 Series (85-on) HDPE

- (7) **Saab**
 - All Models (80-on) HDPE

- (8) **Merkur**
 - Scorpio HDPE

 - XR4Ti Some are HDPE

- (9) **Mitsubishi** Trucks only are HDPE

All Vehicles from the Following Manufacturers Have Steel Gas Tanks

Acura	Infiniti	Porsche
Alfa Romeo	Isuzu	Renault
Bentley	Lexus	Sterling
BMW	Lincoln	Subaru
Cadillac	Lotus	Suzuki
Geo	Mazda	Toyota
Honda	Mercedes Benz	Yugo
Hyundai	Nissan	

LOCATION OF FILLER CAP

Page 1 of 2

Screen Name: Location of Filler Cap

SAS Data Set: **FUELTANK**SAS Variable: **FUELCAP**Oracle Name: **FUELTANK.PICKLOCATIONOFFILLERCAP****Element Attributes:**

Oracle	SAS	
1	1	On back plane
6	2	Over the rear axle on left side plane
7	3	Over the rear axle on right side plane
2	4	Aft of rear axle on left side plane
3	5	Aft of rear axle on right side plane
4	6	Forward of rear axle on left side plane
5	7	Forward of rear axle on right side plane
8	8	Other (specify):
9	9	Unknown
0		[Electric/solar powered]
-8887		[Not Applicable]

Source: Vehicle Inspection, secondary source exemplar vehicle

Remarks:

These variables identify the location(s) of the fuel tank filler cap in its original undamaged position on the vehicle.

Be sure to photograph the tank and surrounding area. Refer to the [NASS CDS Digital Photography Guideline](#) for a detailed description of the required photographs.

On back plane

is used when the fuel tank filler cap is located on the back plane of the vehicle.

Over the rear axle on left side plane

is used when any part of the fuel tank filler cap is located over the center of the rear wheels (rear axle) on the left side plane. This attribute takes precedence over the following attributes.

Over the rear axle on right side plane

is used when any part of the fuel tank filler cap is located over the center of the rear wheels (rear axle) on the right side plane. This attribute takes precedence over the following attributes.

Aft of rear axle on left side plane

is used when the fuel tank filler cap is located behind the center of the rear wheels (rear axle) and on the left side plane of the vehicle.

Aft of rear axle on right side plane

is used when the fuel tank filler cap is located behind the center of the rear wheels (rear axle) and on the right side plane of the vehicle.

Forward of rear axle on left side plane

is used when the fuel tank filler cap is located in front of the center of the rear wheels (rear axle) on the left side plane of the vehicle.

Forward of rear axle on right side plane

is used when the fuel tank filler cap is located in front of the center of the rear wheel(s) (rear axle) on the right side plane of the vehicle.

Other (specify)

is used when the fuel tank filler cap is in a location other than as specified above. The location is specified in the space provided.

Unknown

is used when the fuel tank filler cap location can not be determined and an exemplar vehicle can not be located (e.g., the vehicle was totally destroyed).

PRECRASH CONDITION OF FUEL CELL

Page 1 of 2

Screen Name: Precrash Condition

SAS Data Set: **FUELTANK**SAS Variable: **FUELPRE**Oracle Name: **FUELTANK.PICKPRECRASHCONDITION****Element Attributes:**

Oracle	SAS	
0	0	Electric/solar powered
1	1	No damage
2	2	Corroded
3	3	Leaking
4	4	Abraded
5	8	Other (specify):
6	9	Unknown
-8887		[Not Applicable]

Source: Vehicle Inspection, secondary source is the interview

Remarks:

These variables record the damage to the fuel tank(s) that was present prior to the crash. The objective of these variables is to identify damage to the fuel tank(s) that was not a result of the crash. When more than one damage is present select the choice that is higher on the list.

No damage

is used when the fuel tank was not damaged prior to the crash

Corroded

is used when corrosion damage is evident on the fuel tank.

Leaking

is used when there is evidence of leakage present and it can be determined that it is not a result of the collision sequence of events.

Abraded

is used when there is evidence of abrasion or scraping on the fuel tank not a result of the crash.

Other (specify)

is used to indicate other damage not listed above.

Precrash Condition of Fuel Cell (cont'd)

Page 2 of 2

Unknown

is used when the precrash condition of the fuel tank cannot be determined



FIRE

Exterior Vehicle Form, Case 2007-996-900015/ Vehicle #1

VEHICLE | TIRE | SPECIFICATIONS | FUEL | FIRE | CRUSH | CDC | EDR | SKETCHES | LOG | REVIEW

Fire Occurrence

Origin of Fire

 Save  Close

FIRE OCCURRENCE

Screen Name: Fire Occurrence

SAS Data Set: *GV*

SAS Variable: *FIRE*

Oracle Name: *FIRE.PICKSEVERITYCODE*

Element Attributes:

Oracle	SAS	
1	0	No fire
2	1	Minor fire
3	2	Major fire
	7	Vehicle not inspected
	8	[Not a CDS vehicle]
9	9	Unknown

Source: Primary source is the vehicle inspection; secondary sources include the interviewee(s), police report, and occupant medical records.

Remarks:

Fire events are added on the Case Form/Events Tab.

In order to classify fire damage, a fire must have occurred to this vehicle. (1) The fire could have resulted from an impact with another vehicle or object which consequently caused a fuel system integrity failure or electrical short circuit. (2) If the fire resulted from a noncollision event (*e.g.*, electrical short circuit, fuel leakage, etc.) that occurred prior to this vehicle impacting with another vehicle or object, and if the crash qualifies for the NASS CDS, then both the noncollision event and all subsequent events are entered on the Case Form Events Tab.

As it pertains to the occurrence of fire, the crash circumstances are not considered stabilized until the threat of damage to this vehicle, or injury consequences to this vehicle's occupants, has ceased. Therefore, the crash sequence is not considered stabilized until all occupants have exited the vehicle and the scene has been declared safe by police or other authority. Fires that occur at a later time to vehicles abandoned at the scene (*e.g.*, in open fields, on hillsides, etc) or to vehicles removed from the scene to another location (towyard, curbside, etc.) are not considered part of the crash sequence.

Minor

is a general term used to describe the degree of fire involvement and is used in the following situations:

- Engine compartment only fire

- Trunk compartment only fire
- Partial passenger compartment only fire
- Undercarriage only fire
- Tire(s) only fire

Major

identifies those situations where the vehicle experienced a greater fire involvement than defined under “minor” above and is used in the following situations:

- Combined engine and passenger compartment fire (either partial or total passenger compartment involvement).
- Total passenger compartment fire.
- Combined trunk and passenger compartment fire (either partial or total passenger compartment involvement).
- Combined undercarriage and passenger compartment (either partial or total passenger compartment involvement).
- Combined tire(s) and passenger compartment (either partial or total passenger compartment involvement).

Unknown

is used when it cannot be determined if this vehicle sustained a fire related to the crash, e.g., a fire was reported, but this vehicle was repaired prior to inspection.

ORIGIN OF FIRE

Screen Name: Origin of Fire

SAS Data Set: *GV*

SAS Variable: *FIREORIG*

Oracle Name: *FIRE.PICKFIREORIGIN*

Element Attributes:

Oracle	SAS	
	0	No fire
1	1	Vehicle exterior (front, side, back, top)
2	2	Exhaust system
3	3	Fuel tank (and other fuel retention system parts)
4	4	Engine compartment
5	5	Cargo/trunk compartment
6	6	Instrument panel
7	7	Passenger compartment area
8	8	Other location (specify):
	77	[Vehicle not inspected]
	88	[Not a CDS vehicle]
9	99	Unknown

Source: Primary source is the vehicle inspection; secondary sources include the interviewee(s), and police report.

Remarks:

This variable identifies the location of fire initiation and should not be confused with the magnitude of the fire. As an example, if the vehicle appeared totally "burned", Passenger compartment area would not necessarily be used unless the fire began in the vehicle's interior.

For many fires it will be difficult to determine fire origin especially when the entire vehicle was involved. The researcher should look for "hot" spots which generally appear lighter in coloration and are often accompanied by warped or melted metal. If multiple fires occur to the same vehicle, choose the fire that started within this vehicle (*i.e.*, choose an interior fire over an exterior fire), then choose the fire with the greater severity.

Vehicle exterior (front, side, back, top)

identifies fire source as occurring external to the vehicle. This generally occurs in a multiple vehicle collision where another vehicle initiates the fire and the fire is then introduced to this vehicle.

Exhaust system

is used when components of the exhaust system initiated the fire. Components of the exhaust system include: exhaust pipes, muffler/resonator, and catalytic converter.

Fuel tank (and other fuel retention system parts)

includes: the fuel tank(s), fuel supply and vent lines, tank filler neck, and fuel filler cap. Use this attribute when the fuel tank area (defined above) sustains damage such that fuel leaks and is ignited by sparks from contact with the surface of crushing metal components, or is ignited by hot surfaces of the vehicle or object that is involved in producing the damage (*e.g.*, lamp filaments, hot engine components of an impacting vehicle).

Do not use this if fuel leakage occurs and is ignited in this vehicle's engine compartment [*i.e.*, use Engine compartment]. If fuel leakage occurs in the fuel tank area and spills onto and is ignited by hot exhaust system components, then use Exhaust system.

Engine compartment

is used when the fire initiates in the area (open or enclosed) which houses the engine. Generally, most engine compartments are located at the front end of the vehicle under the hood. However, some engines are mounted midway (referred to as mid- engine) on the chassis, and some are located at the rear of the vehicle.

The reason for fire initiation in these areas is inconsequential (whether fuel or electrical), but the fire's relative location to the engine is the important consideration.

Cargo/trunk compartment

identifies areas which are separated from the passenger compartment by a solid partition. In passenger automobiles, the partition will generally be formed by the seat back(s), package shelf, and trunk lid. However, areas designed to accommodate cargo (*e.g.*, the area behind the second seat of a station wagon) are not considered a cargo compartment unless these areas were walled off by a solid partition. Please note, a grate fencing is not considered a solid partition. A solid partition is generally composed of a material which limits air flow between areas.

Cargo boxes on pickup trucks are generally separated from the occupant compartment by the back wall of the cab and are classified as a cargo compartment. Please note, operable windows in backlights of pickup cabs are considered part of the solid partition, regardless of opening status.

Light vans will generally not have a separate cargo compartment unless a solid wall was installed.

Instrument panel

is used when the fire originated under the instrument panel. The instrument panel is defined as the panel extending horizontally from A-pillar to A-pillar and vertically from the lower part of the windshield to the lowest vertical edge of the panel.

Passenger Compartment area

is used when the fire initiated within the designated passenger area. This includes cargo areas adjacent to seating areas which were not separated by a solid partition.

Other location

is used when none of the other attributes apply. Included in this attribute are fires occurring with wheels or brakes.

Unknown

is used when the location of where the fire initiated cannot be determined, e.g.:

- The vehicle was totally destroyed by fire and the origin could not be determined.
- A combination of areas were involved but an estimate of point of origin could not be made.
- A fire was reported, but the vehicle was repaired prior to inspection.

CRUSH LOCATION

Profile #	Event#	Direct Damage Location	Field L Location	Max Crush

The established protocol for obtaining crush data is defined in the *NASS Vehicle Measurement Techniques*.

PROFILE NUMBER

Screen Name: Profile #

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *DAMAGELOCATOR.IMPACTNUMBER*

Element Attributes:

Range: 1-as assigned

Source: Vehicle inspection.

Remarks:

This field cannot be edited by the researcher. When the researcher selects an Event # (next variable) the system automatically assigns a Profile # for each profile documented for that event.

NOTE:

For each crush profile to be documented on the profile tab a specific location line must first be completed including:

- Profile #
- Event #
- Direct Damage Location
- Field L Location
- Max Crush

There can be more than one crush profile for each event. It is imperative that the proper plane is measured. Follow the Vehicle Measurement Techniques guideline.

For rollover crashes the researcher completes one location line for the most crushed component (laterally or vertical).

EVENT NUMBER

Screen Name: Event #

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *EVENTS.EVENTSEQUENCENUMBER*

Element Attributes:

Range: 1-as selected

Source: Vehicle inspection.

Remarks:

The researcher chooses from the events that they have previously specified in the case structure for this vehicle.

NOTE:

For each crush profile to be documented on the profile tab a specific location line must first be completed including:

- Profile #
- Event #
- Direct Damage Location
- Field L Location
- Max Crush

NOTE: There can be more than one crush profile for each event. There can be more than one crush profile for each event. It is imperative that the proper plane is measured. Follow the Vehicle Measurement Techniques guideline.

DIRECT DAMAGE LOCATION

Screen Name: Direct Damage Location

SAS Data Set: *CDCCRSH*

SAS Variable: *DMGLOC*

Oracle Name: *DAMAGELOCATOR.LOCATIONDIRECTDAMAGE*

Element Attributes:

Source: Vehicle inspection.

Remarks:

This variable is used to reference a retrievable point on the vehicle for CDC, WinSMASH inputs and Direct D on the damaged plane. Locate an end of damage with respect to the post crash centerpoint or bumper corner of the end plane or, for side impacts, to an undamaged axle. This field is used to assist with CDC assignments. The following examples include the data that are required:

- The left end begins 4 centimeters right of post crash center of the end plane, or
- The rearmost end begins 48 centimeters rearward of the rear axle (side plane)

Rollover damage should be described as area of primary contact, (i.e., Right roof rail or Left side roof rail to center of roof.)

LOCATION OF FIELD L

Screen Name: Field L

SAS Data Set: *CDCCRSH*

SAS Variable: *FIELDLOC*

Oracle Name: *DAMAGELOCATOR.LOCATIONFIELDL*

Element Attributes:**Range:****Remarks:**

This variable is used to reference a retrievable point on the vehicle for CDC, WinSMASH inputs and Direct D on the damaged plane. Locate an end of damage with respect to the post crash centerpoint or bumper corner of the end plane or, for side impacts, to an undamaged axle. This field is used to assist with CDC assignments. The following examples include the data that are required:

- Entire end plane or
- C₁ is 102 centimeters forward of the rear axle

A Field L is not measured for rollovers, in the text field "**rollover**" should be entered.

LOCATION OF MAX CRUSH

Screen Name: Max Crush

SAS Data Set: *CDCCRSH*

SAS Variable: *CMAXLOC*

Oracle Name: *DAMAGELOCATOR.LOCATIONMAXCRUSH*

Element Attributes:

Source: Vehicle Inspection

Remarks:

This variable is used to reference a retrievable point on the vehicle for CDC, WinSMASH inputs and Direct D on the damaged plane. Locate an end of damage with respect to the post crash centerpoint or bumper corner of the end plane or, for side impacts, to an undamaged axle. This field is used to assist with CDC assignments. The following examples include the data that are required:

- located at C₃
- between C₃ and C₄
- located 5 centimeters forward of the rear axle

Rollover max crush location should be described as above.

EXTERIOR VEHICLE FORM
CRUSH PROFILE

CRUSH/PROFILE

Exterior Vehicle Form, Case 2007-996-900015/ Vehicle #2

VEHICLE | TIRE | SPECIFICATIONS | FUEL | FIRE | CRUSH | CDC | EDR | SKETCHES | LOG | REVIEW

LOCATION | PROFILE

Profile #: 1 CDC#:

ALL MEASUREMENTS ARE IN CENTIMETERS

Category:

Field L: SMASH L:

Field L +/-D: Direct +/- D:

Width (CDC):

Lateral measurement

+/-	Plane of Impact	Max	C1	C2	C3	C4	C5	C6
▶								

Unknown Crush **Average**

PROFILE NUMBER

Screen Name: Profile #

SAS Data Set: N/A

SAS Variable: N/A

Element Attributes:

Range: 1-as assigned

Source: Vehicle inspection.

Remarks:

This field cannot be edited. The Profile Number that is displayed on the Profile subtab is determined by selecting a specific crush profile on the Crush Profile tab/Location subtab.

CDC NUMBER

Screen Name: CDC #

SAS Data Set: *CDCCRS*

SAS Variable: *DEFORMNO*

Element Attributes: Generated (# and plane of contact) from documented CDCs

Range: 1-5

Source: Vehicle inspection.

Remarks:

The element attributes are generated from the CDCs entered on the CDC/Detail Tab (e.g. 1-F Front, 2-L Left Side). Select the CDC number that matches the event/damage for which you are going to document the crush profile. There may be multiple CDCs that describe a single impact to a vehicle.

FIELD L**Screen Name:** Field L**SAS Data Set:** *CDCCRSH***SAS Variable:** *FIELDL***Oracle Name:** *DAMAGELOCATOR.FIELDL***Element Attributes:**

Oracle	SAS	
-9999	999	Entered number Unknown

Range: 1-1,000**Source:** Vehicle Inspection**Remarks:**

Enter the Field L used during the vehicle inspection to measure the crush profile. The Field L represents both direct and induced damage as measured along the reference line (shock cord). This measurement is used to locate the position of the C-measurements.

Unknown should be used for rollover cases.

WINSMASH L

Screen Name: SMASH L

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *DAMAGELOCATOR.SMASHL*

Element Attributes:

Oracle	SAS	
-9999	999	Entered number Unknown

Range: 1-1,000

Source: Vehicle Inspection

Remarks:

The WinSMASH L is the “L” that will be used for the WinSMASH program. This equals the **Field L** for all side impacts and for minor end impacts where the direct and induced damage does **not** extend all the way across the endplane. Use the **Undeformed End Width** for all end impacts where the direct and induced damage **extends all** the way across the endplane.

Unknown should be used for rollover cases.

FIELD L +/- D**Screen Name:** Field L +/- D**SAS Data Set:** *CDCCRSH***SAS Variable:** *FIELDD***Oracle Name:** *DAMAGELOCATOR.D***Element Attributes:**

Oracle	SAS	
		Entered number
-9999	999	Unknown

Range: -500 500, 997, 999**Source:** Vehicle Inspection**Remarks:**

This is the Field L +/- D that will be used for the WinSMASH program. It is the measurement from the center of the damaged endplane or wheelbase to the center of the Field L, measured in the field on the damaged vehicle. Indicate whether "D" is a positive or negative value.

Unknown should be used for rollover cases.

DIRECT +/- D**Screen Name:** Direct +/- D**SAS Data Set:** *CDCCRS***SAS Variable:** *D***Oracle Name:** *DAMAGELOCATOR.SMASHD***Element Attributes:**

Entered number

Range: -390 299, 997, 999, -9999**Source:** Vehicle Inspection**Remarks:**

This is the Direct +/- D that will be used for the WinSMASH program. It is the measurement from the damaged center of the endplane or damaged wheelbase to the center of the direct damage, measured in the field on the damaged vehicle. Indicate whether "D" is a positive or negative value.

Unknown should be used for rollover cases.

CATEGORY

Screen Name: Category

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *DAMAGELOCATOR.PLANECATEGORY*

Element Attributes:

Oracle	SAS
1	Side
2	End
3	Top (specify)
7	Rollover
4	Under (specify)
-99	Unknown
	Not Applicable

Range:

Source: Vehicle inspection

Remarks:

This is the impact plane on which measurements are being taken. This field must be selected in order to enter a crush profile.

A fully repaired vehicle should be coded as Not Applicable.

WIDTH (CDC)**Screen Name:** Width (CDC)**SAS Data Set:** *CDCCRSH***SAS Variable:** *DIRDAMW***Oracle Name:** *DAMAGELOCATOR.WIDTHCDC***Element Attributes:**

Oracle	SAS	
-9999	999	Entered number Unknown

Range: 1-659,999**Source:** Vehicle inspection.**Remarks:**

The direct damage width, measured on the vehicle, that is used in determining the CDC for this impact/event.

A CDC width should be obtained for rollover cases. If the CDC begins with 00T, then measure the CDC width laterally with preference given to the greenhouse. If the CDC begins with 00L/R, then measure the CDC width longitudinally.

VERTICAL LEVEL AT WHICH CRUSH MEASUREMENTS ARE TAKEN FOR A PARTICULAR CRUSH PROFILE.

Screen Name: Plane of Impact

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: ***CRUSHPROFILE.PLANEOFIMPACT***

Element Attributes:

Oracle	SAS	
	END PLANE	
21	(+)	Bumper
22	(+)	Above Bumper
23	(-)	Free Space
24	(+)	Stand Adjustment
25	(-)	Stand Adjustment
	SIDE	
1	(+)	Sill
2	(+)	Mid Door
3	(+)	Upper Door
4	(+)	Lower Door
5	(-)	Free Space
6	(+)	Stand Adjustment
7	(-)	Stand Adjustment
	TOP	
30	(+)	Top
	UNDER	
32	(+)	Under
	ROLLOVER (Vertical)	
87		Unknown
70		Right A-pillar
71		Left A-pillar
72		Right B-pillar
73		Left B-pillar
74		Right C-pillar
75		Left C-pillar
76		Right D-pillar
77		Left D-pillar
78		Left windshield header
79		Right windshield header
80		Left back light header
81		Right back light header

Vertical level at which crush measurements are taken for a particular crush profile (cont'd)

Oracle	SAS	
82		Right Roof
83		Left Roof
85		Right Side
84		Left Side
86		Other (specify)

ROLLOVER (Lateral)

60		Unknown
40		Right A-pillar
41		Left A-pillar
42		Right B-pillar
43		Left B-pillar
44		Right C-pillar
45		Left C-pillar
46		Right D-pillar
47		Left D-pillar
48		Left windshield header
49		Right windshield header
50		Left back light header
51		Right back light header
56		Right Roof
54		Left Roof
58		Right Side
57		Left Side
59		Other (specify)

Source: Vehicle inspection.

Remarks:

On the first line select the vertical level at which the crush profile is measured (*i.e.*, bumper, above bumper, sill, mid-door, etc.). Use Edit/Insert at the top of the screen to insert another line. On the next line(s) select an operator (Free-space and/or Stand Adjustment) to adjust the measurements. The values are entered at the Max and C1 through C6 positions. Then insert another line and select Result for the computer to generate the actual crush. After the results are generated, if changes are made to Cs or freespace, you have to select result again to re-generate the new results. If more than one vertical level is measured for averaging (*i.e.*, bumper and above bumper), then insert another line and select the second vertical level and follow the same procedures as above. After you get your second result, the computer will generate the average at the bottom of the screen.


Vertical level at which crush measurements are taken for a particular crush profile (cont'd)

Note: the operator column +/- is automatically assigned when the attribute is selected. All freespace is (-) subtracted from the C measurements measured to the stringline, while stand adjustments can be either (+) added or (-) subtracted from the C measurements measured to the stringline. If the stands had to be set out further than the overall length of the vehicle, a minus Stand Adjustment

must be used. If the stands had to be set shorter than the overall length of the vehicle, a + Stand Adjustment must be used.

Selection criteria for Rollover (Top) or (Side)

Side Plane measurement protocol:

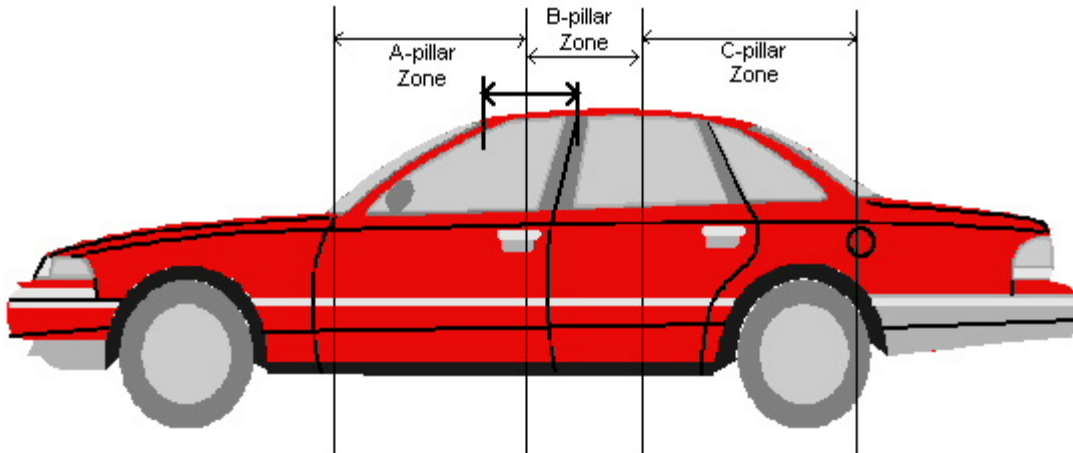

A-pillar Zone starts at the base of the A-pillar and extends to half of the width between the windshield top frame point and the mid point of the B-pillar.


B-pillar Zone starts where the A-pillar zone ends and extends to the half of the width between the mid point of the B pillar and the mid point of the C-pillar or where the B-pillar ends.

C-pillar Zone starts where B-pillar zone ends and extends to the half of the width between the mid point of the C-pillar and the mid point of the D-pillar or where the C-pillar ends.

D-pillar Zone starts where C-pillar zone ends and extends to the half of the width between the mid point of the D-pillar and the mid point of the E-pillar or where the D-pillar ends.

Vertical level at which crush measurements are taken for a particular crush profile (cont'd)

Top Plane measurement protocol:

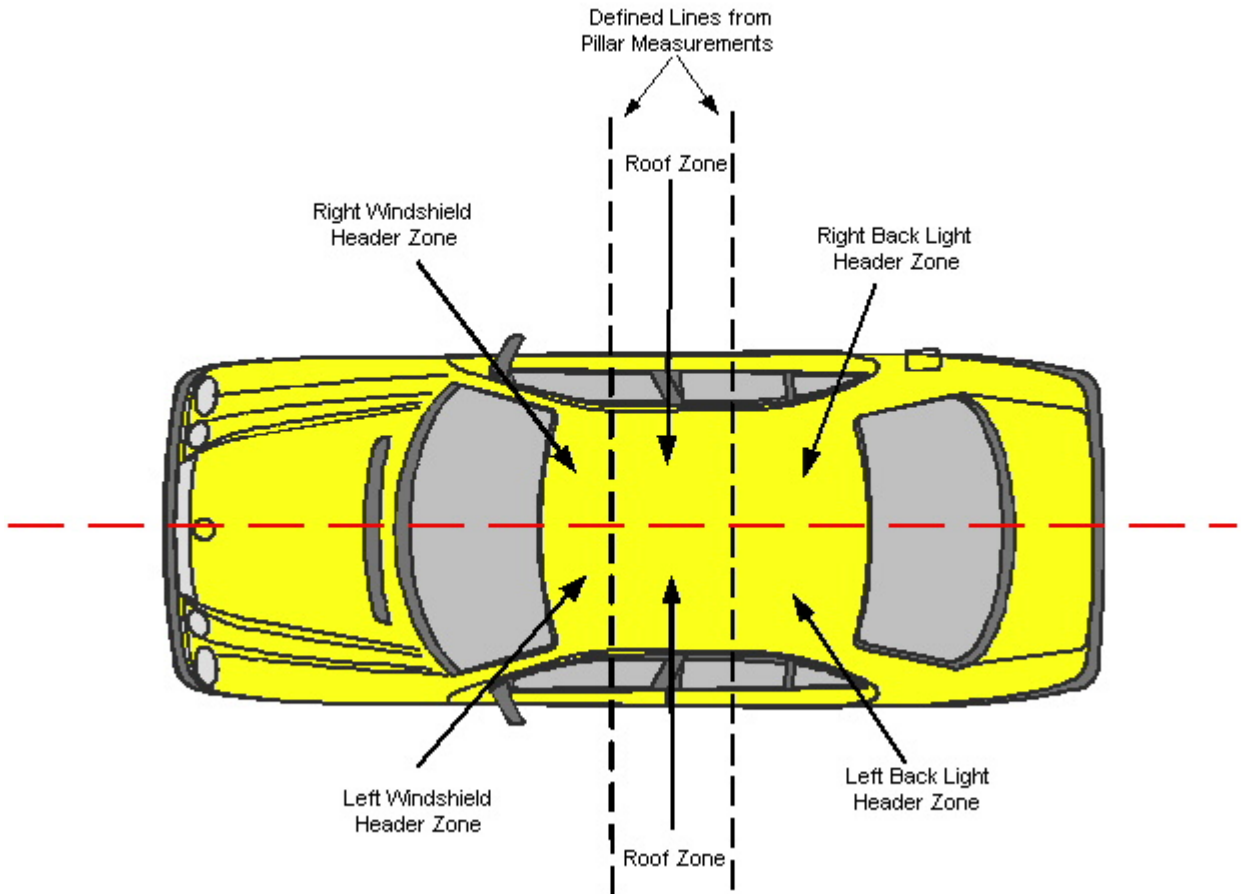

The defined zones created in the Side Plane measurement protocol should be extended onto the Top Plane. This allows for the Top Plane to be zoned as the above illustration depicts. The Roof Zone is the entire area from Windshield Header Zone to the Back Light Header Zone.

Crush caused by contact with an object during the rollover is measured at the component with the maximum amount of crush. This is considered for obtaining the maximum crush for the greenhouse area of the vehicle.

MAXIMUM CRUSH FOR THIS VERTICAL LEVEL OF CRUSH MEASUREMENTS FOR THIS CRUSH PROFILE

Screen Name: Max

SAS Data Set: CDCCRSH

SAS Variable: CMAX

Oracle Name: CRUSHPROFILE.MAXCRUSH

Element Attributes:

Oracle	SAS	
	997	Entered number
	999	Not applicable
-9999	999	Unknown

Range: blank, 0-250, 997, 999

Source: Vehicle inspection.

Remarks:

This is the maximum crush measured at the vehicle for the profile being documented. Maximum crush is determined after free space is subtracted and/or stand adjustment is added (+) or subtracted (minus) if appropriate.

If the Max crush falls at a C location, the values at that C location must also be entered here, along with any freespace or stand adjustments.

When averaging techniques are used, Max crush is NOT averaged

Rollover crashes

This is the maximum crush measured at the component selected in Plane of Impact. A different measurement area can be selected for the Vertical and Lateral measurements.

C1, C2, C3, C4, C5, C6

Screen Name: C1, C2, C3, C4, C5, C6

SAS Data Set: *CDCCRSH*

SAS Variable: *C1, C2, C3, C4, C5, C6*

Oracle Name: *CRUSHPROFILE.CRUSH1/CRUSH2/CRUSH3/...CRUSH6*

Element Attributes:

Oracle	SAS	
		Entered number
	997	Not applicable
-9999	999	Unknown

Range: blank, 0-250, 997, 999

Source: Vehicle inspection.

Remarks:

The damage measurements associated with a specific impact/CDC are entered regardless of the use of a reconstruction program. Record the C-values for each impact to the nearest centimeter.

Record two, four, or six C-measurements (as appropriate) on the line for the crush profile being documented. On the line beneath, annotate the free space to be subtracted and/or stand adjustment. If only 2 or 4 C-values are obtained select N/A for the remaining C-values.

ROLLOVER DOCUMENTATION

The screenshot shows a software window titled "Exterior Vehicle Form, Case 2007-8701-009K / Vehicle #1". The interface includes a menu bar with options: VEHICLE, TIRE, SPECIFICATIONS, FUEL, FIRE, CRUSH, CDC, EDR, SKETCHES, LOG, and REVIEW. Below the menu, there are tabs for "LOCATION" and "PROFILE". The "PROFILE" tab is active, showing "Profile # 1" and "CDC# 01FLHN4". A note states "ALL MEASUREMENTS ARE IN CENTIMETERS". There are two dropdown menus: "Category" set to "Rollover" and "Width (CDC)" set to "2".

Below these fields are two tables: "Lateral measurement" and "Vertical measurement".

	+/ -	Plane of Impact	Max
	-	Left B-pillar	200
	+	Comparison	198
	=	Result	2

	+/ -	Plane of Impact	Max
	-	Left windshield header	180
	+	Comparison	175
	=	Result	5

Rollover documentation records the maximum crush laterally and vertically. The maximum crush zones are identified differently for the lateral and vertical measurement. The lateral max crush and the vertical max crush can be located at different areas of the vehicle greenhouse. The maximum crush zone will be in the greenhouse area of the vehicle.

CDC/SUMMARY

Exterior Vehicle Form, Case 2007-996-900015/ Vehicle #2

VEHICLE | TIRE | SPECIFICATIONS | FUEL | FIRE | CRUSH | CDC | EDR | SKETCHES | LOG | REVIEW

SUMMARY | DETAIL

Event	Object Contacted	Force Dir	Location	Total	Long	Lateral	Energy	Impact	Barrier	Est	Rank

Save Close

CDC/DETAIL

Exterior Vehicle Form, Case 2008-43-0938/ Vehicle #1

VEHICLE | TIRE | SPECIFICATIONS | FUEL | FIRE | CRUSH | CDC | EDR | SKETCHES | LOG | REVIEW

SUMMARY | DETAIL

Event No. 1 GAD Front Previous Next

Object Contacted
Category: Vehicle
Object: Vehicle#2
Force Direction: 90 degrees
Increment: 00 No Shift
Clock: 3
Over/Underride: None
Heading Angle: 0

Deformation Location: R Right Side
Long/Lateral: Y Side (F + P) OR End (L + C)
Vertical/Lateral: A All
Distribution: S Sideswipe
Extent: Two
Summary: 03RYAS2

SIDE IMPACT
Direct Damage to Pillar(s): Check all that apply

A-pillar C-pillar Unknown
 B-pillar Other (specify) None

Sill Height: 20 Door Sill Diff: 20 Cmax Height: 20

DELTA V

Total	Longtdl	Lateral	Energy	Impact	Barrier	Estimated	Rank
17	-17	-3	46221	998	23	Reconstruction Delta V coded	1

Basis: SMASH - Damage only

Save Close

EVENT NUMBER

Screen Name: Event No.

SAS Data Set: *CDCCRS*

SAS Variable: *ACCSEQ*

Oracle Name: *EVENTS.EVENTSEQUENCENUMBER*

Element Attributes:

Entered number

Range: 1-20

Source: Vehicle inspection.

Remarks:

Once the CDC/Detail tab is selected the researcher must select Edit/Insert from the Main Menu at the top of the screen to activate the tab. This will automatically insert 1 of 1 for the CDC #.

The researcher chooses from the events that they have previously specified in the case structure for this vehicle.

[DEFORMATION NUMBER]**Screen Name:** N/A**SAS Data Set:** *CDCCRS***SAS Variable:** *DEFORMNO***Oracle Name:** *DAMAGELOCATOR.IMPACTNUMBER***Element Attributes:**

1 - 5

Range: 1-5**Source:** Vehicle inspection.**Remarks:**

Certain impacts to a vehicle require more than one CDC to describe the damage.

One example are impacts with an object such as a fence where there is continuous contact with the object as it contacts multiple planes of the vehicle. The fence initially contacts the front of the vehicle, then as the vehicle proceeds into the fence, it contacts the vehicle sides and the top of the vehicle. There will be a separate CDC entered for each of these planes.

The other situation involves an impact where the vehicle initially contacts another vehicle with its front then rotates and causes a slap to the side of the vehicle. This would require a different CDC to two different planes.

GENERAL AREA OF DAMAGE

Screen Name: GAD

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *EVENTS.PICKAREAOFDAMAGE*

Element Attributes:**Range:**

Source: Roll-up from Case Form/Events

Remarks:

The researcher CANNOT enter information in this field. It is entered on the Case Form/Events tab, and rolls-up to this screen.

OBJECT CONTACTED CATEGORY AND OBJECT

Screen Name: Object Contacted Category and Object

SAS Data Set: *CDCCRS*

SAS Variable: *OBJCONT*

Oracle Name: *EVENTS.PICKOBJECTCONTACT*

Source: Vehicle inspection.

Element Attributes:

Oracle SAS

01-30 01-30 Vehicle Number

Noncollision

31 31 Overturn — rollover (excludes end-over-end)

32 32 Rollover - end-over-end

33 33 Fire or explosion

34 34 Jackknife

35 35 Other intraunit damage

(specify):

36 36 Noncollision injury

38 38 Other noncollision

(specify):

39 39 Noncollision — details

unknown

Collision With Fixed Object

41 41 Tree (≤ 10 cm in diameter)

42 42 Tree (> 10 cm in diameter)

43 43 Shrubbery or bush

44 44 Embankment

45 45 Breakaway pole or post (any diameter)

50 50 Nonbreakaway Pole or post (≤ 10 cm in diameter)

51 51 Nonbreakaway Pole or post (> 10 cm but ≤ 30 cm in diameter)

52 52 Nonbreakaway Pole or post (> 30 cm in diameter)

53 53 Nonbreakaway Pole or post (diameter unknown)

54 54 Concrete traffic barrier

55 55 Impact attenuator

56 56 Other traffic barrier (specify):

57 57 Fence

Oracle SAS

58 58 Wall

59 59 Building

60 60 Ditch or culvert

61 61 Ground

62 62 Fire hydrant

63 63 Curb

64 64 Bridge

68 68 Other fixed object

(specify):

69 69 Unknown fixed object

Cable barrier guardrail

Metal guardrail

Collision with Nonfixed Object

72 72 Pedestrian

73 73 Cyclist or cycle

74 74 Other nonmotorist or

conveyance (specify)

75 75 Vehicle occupant

76 76 Animal

102 77 Railway vehicle

78 78 Trailer, disconnected in transport

79 79 Object fell from vehicle in-transport

88 88 Other nonfixed object

(specify):

89 89 Unknown nonfixed object

Other event (specify)

98 98 Other event (specify):

Unknown event or object

99 99 Unknown event or object

Object Contacted Category and Object (cont'd)

Page 2 of 2

Source: Researcher determined: primary sources are the scene and vehicle inspections; secondary sources include the police report and interviewees.

Remarks:

Once the Event Number is selected the Object Contacted Category and Object will roll-up to these fields from the Case Form/Events Tab. If the event is not listed or incorrect, it must be entered on the Case Form/Events Tab.

SEE CASE FORM/EVENTS TAB FOR DETAILS ON CODING ATTRIBUTES.

DIRECTION OF FORCE

Screen Name: Force Direction

SAS Data Set: *CDCCRS*

SAS Variable: *PDOF*

Oracle Name: *VEHICLEDEFORMATION.DIRECTIONOFFORCE*

Element Attributes:

Oracle	SAS	
		Entered number (to nearest 10 deg)
-8888	998	Non horizontal force
-9999	999	Unknown

Range: 0 – 350, 998, 999

Source: Restricted to vehicle inspection or photographs.

Remarks:

0-350

An estimated CDC is indicated for each impact. In this estimate, write the principal direction of force in positive increments of ten degrees. Thus, if the direction appeared to be approximately ten degrees to the right of straight-ahead, indicate "10". If the direction of force appeared to be ten degrees left of straight-ahead, indicate "350". The final coding of the CDC reflects the direction of force in clock positions.

Non-horizontal Force

Select this any time a vehicle becomes inverted and impacts any object or vehicle while inverted. In addition, use this selection in any other circumstance which is consistent with the directions contained in SAE J224 MAR80.

Unknown

Select this when the force direction cannot be determined via vehicle inspection or images/photographs.

[CLOCK]

Screen Name: Clock

SAS Data Set: *CDCCRS*

SAS Variable: *CLOCK*

Oracle Name: *VEHICLEDEFORMATION.CLOCKFORCE*

Element Attributes:

[00 Non horizontal force]

[1 – 12 Direction of clock force]

[99 Unknown]

Source: Restricted to vehicle inspection or photographs.

Remarks:

The clock direction is a calculation from the **Direction of Force** previously entered.

INCREMENT OF CLOCK DIRECTION

Screen Name: Increment

SAS Data Set: *CDCCRSH*

SAS Variable: *SHIFT*

Oracle Name: *VEHICLEDEFORMATION.SHIFTINCREMENT*

Element Attributes:

Oracle	SAS	
0	00	No shift
20	2 0	End shift vertical up; top shift up
40	4 0	End shift vertical down; top shift rearward
60	60	End, top, or bowing shift lateral right
80	80	End, top, or bowing shift lateral left
-9999	99	Unknown Shift

Source: Vehicle inspection

Remarks:

The coding of this variable reflects whether the end of the vehicle has been shifted >10 cm. This variable is being collected for use in modifying the CDC for the vehicle.

00 - No shift

Less than 10cm of shift or for roof shift, no visible shift

20 - Up

Upward shift of >10cm of at least 1 frame rail.

40 - Down

Downward shift of >10cm of at least 1 frame rail.

60 - Right

End or top shift lateral right. This includes bowing to the right

80 - Left

End or top shift lateral left. This includes bowing to the left

Unknown

Use this when it cannot be determined whether the vehicle has end shift or bowing >10 cm.

To select lateral end shift, both frame rails or the entire end (of a uni-body) must shift >10cm.

Increment of Clock Direction (cont'd)

Page 2 of 2

To select vertical end shift, only one frame rail (nearest the direct damage) needs to shift >10cm.

To select lateral shift for bowing (side impact, measured on the opposite side of the impact) only one bumper corner has to bow (shift) laterally >10cm.

OVERRIDE/UNDERRIDE (THIS VEHICLE)

Screen Name: Over/Underride

SAS Data Set: *CDCCRS*

SAS Variable: *RIDEUP*

Oracle Name: *VEHICLEDEFORMATION.PICKOVERRIDE*

Element Attributes:

Oracle	SAS	
	1	None
	2	Override
	3	Underride
	4	Medium/heavy truck or bus override
	9	Unknown

Source: Vehicle inspection (with exceptions as noted).

Remarks:

None

Is selected when both vehicles are inspected and there is no override/underride, or not an end-to-end impact between two CDS vehicles; or no medium/heavy truck or bus override.

Override

Is selected when 2 CDS applicable vehicles are involved in an end-to-end impact, and this vehicle overrides the other vehicle

Underride

Is selected when 2 CDS applicable vehicles impact (end-to-end), and this vehicle underrides the other vehicle .

Medium/heavy truck or bus override

Is selected when a CDS applicable vehicle's end impacts with the end or side a medium/heavy truck or bus and this CDS vehicle's end (front or back) underrides the medium/heavy truck or bus.

Unknown

It cannot be determined if an override/underride occurred, or the impact configuration for two CDS applicable vehicles cannot be determined.

Override/Underride is coded from the perspective of vehicle impact configuration and is *not* based on: coding in columns 5 and/or 6 of the CDC, or vehicle measurement techniques (*i.e.*, the "13-centimeters" rule for WinSMASH purposes). It is only relevant for end-to-end impacts


between two CDS applicable vehicles, or any configuration impact between a CDS applicable vehicle and a Medium/heavy truck or bus.

This variable is intended to capture those instances where there is an uneven damage pattern caused by uneven amounts of crush at different vertical levels of the front and/or rear planes of the vehicle. Because of the different crush stiffness' involved in these locations, these variables are included to alert the vehicle safety analysts to uneven crush patterns in front and rear impacts, which are not identified in the CDC (*i.e.*, columns 5 and/or 6).

For this variable an impact with a not-in-transport vehicle (either CDS applicable or a medium/heavy truck) is considered a vehicle-to-vehicle impact and not a vehicle-to-object impact.


The term "override" means a vehicle overrode (*i.e.*, goes on top of) the bumper (front or rear) of the other vehicle (except for trucks/buses where the impact configuration does not matter.) The term "underride" means a vehicle underrode (*i.e.*, goes below) the bumper (front or rear) of the other vehicle (except for trucks/buses where the impact configuration does not matter.)

If a vehicle is not equipped with a bumper (*e.g.*, rear of some pickup trucks), then consider the equivalent end structure for coding these variables.

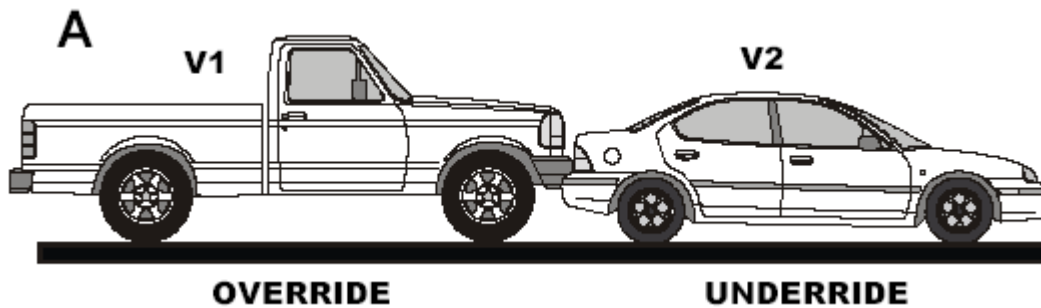

As indicated in **Situation A**, the trunk area of V2 is damaged (*i.e.*, "crushed") while the rear bumper is relatively undisturbed. Hence, the uneven damage pattern. Conversely, the front of V1 is "crushed" at bumper height only, or is crushed *uniformly* at the bumper and grille levels (*i.e.*, an "even" damage pattern). Even though V1 may not exhibit the uneven damage pattern, it would still receive an applicable override code due to the resultant underride damage to V2.

Override/Underride (this vehicle) (cont'd)

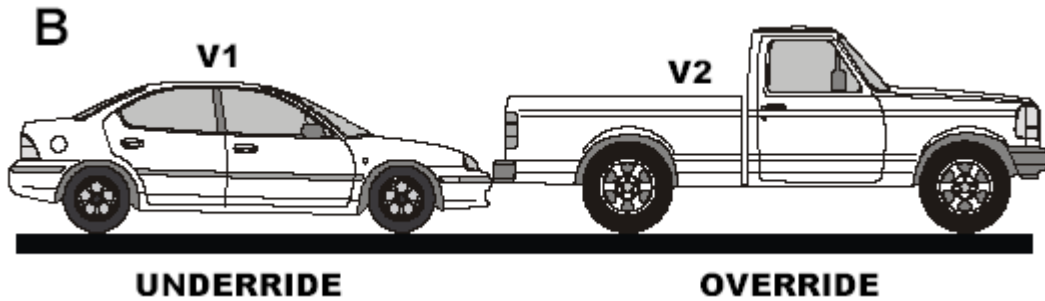

When the bumper receives measurable crush and the area above the bumper also receives measurable crush, the override/underride codes are applicable if the impact configuration applies.

For example, (**Situation B**) the front bumper (V1) may be crushed 2" rearward and the grille area may be crushed 6" rearward. While the averaging technique rule for WINSMASH does not apply for the different levels of crush, the impact may in fact meet the configuration rule for the override/underride variables.

HEADING ANGLE

Page 1 of 2

Screen Name: Heading Angle**SAS Data Set:****SAS Variable:****Oracle Name:** *VEHICLEDEFORMATION.HEADINGANGLE***Element Attributes:**

Oracle	SAS	
	000-355	Code actual value in 5 degree increments
-9999	999	Unknown
		Not Applicable

Source: Scene diagram.**Remarks:**

Heading Angle records the heading angle for this vehicle for the below described circumstances:

- Vehicle to vehicle impacts only.
- Vehicle must have a Winsmash run.
- The heading angle is to be coded for the highest calculated delta V for this vehicle.

Use the scene diagram referencing system to determine the heading angles at the point of impact for *this vehicle and for this CDC only*. All measurements are referenced to the north arrow on the diagram. The heading angle of each vehicle is determined by projecting the longitudinal axis of the vehicle through the extension of the north arrow. The angle value is obtained by using a 360-degree protractor and measuring in a clockwise direction from the north arrow, in 5 degree increments. The north arrow always represents 0- (degrees). The angle is a positive value. The following diagrams exemplify the measurement technique.


Unknown

is used when the heading angle can not be determined.

Not Applicable

is used when the crash configuration doesn't meet the above criteria,(i.e., non-horizontal impact).

Heading angles example:

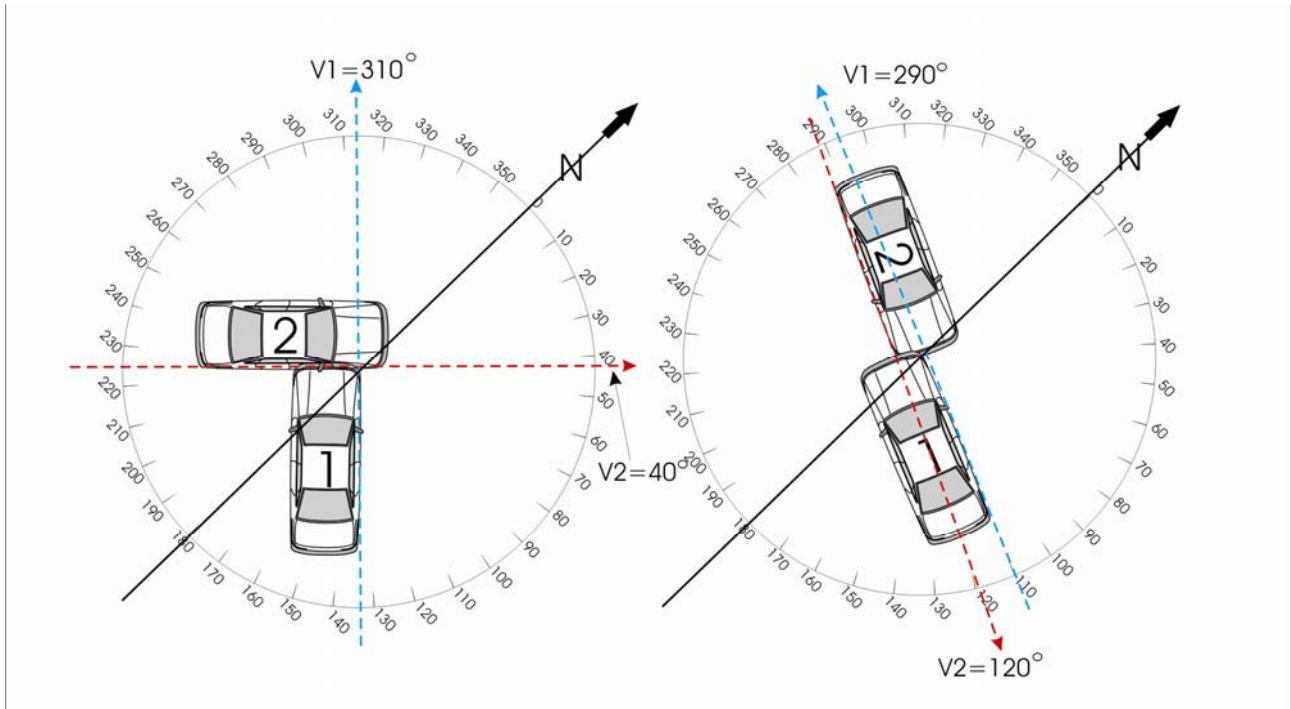

DEFORMATION LOCATION

Screen Name: Deformation Location

SAS Data Set: *CDCCRS*

SAS Variable: *GAD*

Oracle Name: *VEHICLEDEFORMATION.DEFORMATIONLOCATION*

Element Attributes:

Oracle	SAS	
F	F	Front
R	R	Right side
L	L	Left side
B	B	Back (rear)
T	T	Top
U	U	Undercarriage
9	9	Unknown

Source: Restricted to vehicle inspection or photographs.

Remarks:

Refer to the documents entitled: SAE J224MAR80 and "Collision Deformation Classification Training Program: Intermediate Level — Training/Reference Module", for detailed definitions of the Element Attributes as well as instruction on proper usage.

SPECIFIC LONGITUDINAL OR LATERAL LOCATION

Screen Name: Long/Lateral

SAS Data Set: *CDCCRS*

SAS Variable: *SHL*

Oracle Name: *VEHICLEDEFORMATION.LONGLATLOCATION*

Element Attributes:

Oracle	SAS		Oracle	SAS
		Front, Rear		Top or Undercarriage/Side Impact
9	D	Distributed-side or end	18	D Distributed (F+P+B)/Side or end
10	L	Left-front or rear	19	F Front Section
11	C	Center-front or rear	20	P Center Section
12	R	Right-front or rear	21	B Rear Section
13	F	Side front-left or right	22	Y F+P
14	P	Side center section - L or R	23	Z P+B
15	B	Side rear - left or right		F Side front — left or right
16	Y	Side (F + P) or end (L + C)		P Side center section — L or R
17	Z	Side (P + B) or end (C + R)		B Side rear — left or right
59	9	Unknown	24	9 Unknown
				L Left — front or rear
				C Center — front or rear
				R Right- — front or rear

Source: Restricted to vehicle inspection or photographs.

Remarks:

Refer to the documents entitled: SAE J224 MAR80 and "Collision Deformation Classification Training Program: Intermediate Level — Training/Reference Module", for detailed definitions of the Element Attributes as well as instruction on proper usage.

SPECIFIC VERTICAL OR LATERAL LOCATION

Screen Name: Vertical/Lateral

SAS Data Set: *CDCCRS*

SAS Variable: *SVL*

Oracle Name: *VEHICLEDEFORMATION.VERTLATLOCATION*

Element Attributes:

Oracle SAS

CDC (Vertical - Front, Rear, or Side Impacts)

25	A	All
26	H	Top of frame to top
27	E	Everything below belt line
28	G	Belt line and above
29	M	Middle — top of frame to belt line or hood
30	L	Frame — top of frame, frame, bottom of frame (including undercarriage)
31	W	Below undercarriage level (wheels and tires only)
32	9	Unknown

CDC (Lateral - Top and Undercarriage Impacts)

33	D	Distributed
34	L	Left
35	C	Center
36	R	Right
37	Y	Left and Center (L + C)
38	Z	Right and Center (R + C)
39	9	Unknown

Source: Restricted to vehicle inspection or photographs.

Remarks:

Refer to the document entitled: SAE J224 MAR80 and "Collision Deformation Classification Training Program: Intermediate Level — Training/Reference Module", for detailed definitions of the Element Attributes as well as instruction on proper usage.

TYPE OF DAMAGE DISTRIBUTION

Screen Name: Distribution

SAS Data Set: *CDCCRS*

SAS Variable: *TDD*

Oracle Name: *VEHICLEDEFORMATION.DAMAGEDISTRIBUTION*

Element Attributes:

Oracle	SAS	
40	W	Wide impact area
41	N	Narrow impact area
42	S	Sideswipe
43	O	Rollover (includes side)
44	A	Overhanging structure
45	E	Corner
46	K	Conversion impact type
47	U	No residual deformation
48	9	Unknown

Source: Restricted to vehicle inspection or photographs.

Remarks:

Refer to the documents entitled: SAE J224 MAR80 and "Collision Deformation Classification Training Program: Intermediate Level — Training/Reference Module", for detailed definitions of the Element Attributes as well as instruction on proper usage.

Note: When recording a "K" conversion impact type enter the first half of the "K" conversion in one CDC and enter the second half of the "K" conversion in the next CDC.

DEFORMATION EXTENT GUIDE

Screen Name: Extent

SAS Data Set: *CDCCRS*

SAS Variable: *EXTENT*

Oracle Name: *VEHICLEDEFORMATION.DAMAGEEXTENT*

Element Attributes:

Oracle	SAS	
49	1	One
50	2	Two
51	3	Three
52	4	Four
53	5	Five
54	6	Six
55	7	Seven
56	8	Eight
57	9	Nine
58	99	Unknown

Source: Restricted to vehicle inspection or photographs.

Remarks:

Extent zone is based on direct damage only. When two crush profiles are averaged, use the largest maximum **resultant** crush for your extent zone (*i.e.*, do not average the maximum crush).

Refer to the documents entitled: SAE J224 MAR80 and "Collision Deformation Classification Training Program: Intermediate Level — Training/Reference Module", for detailed definitions of the Element Attributes as well as instruction on proper usage.

SIDE IMPACT

Exterior Vehicle Form, Case 2008-43-093B / Vehicle #1

VEHICLE | TIRE | SPECIFICATIONS | FUEL | FIRE | CRUSH | CDC | EDR | SKETCHES | LOG | REVIEW

SUMMARY | **DETAIL**

Event No. 1 GAD Front Previous Next

Object Contacted
Category Vehicle Deformation Location R Right Side
Object Vehicle#2 Long/Lateral Y Side (F + P) OR End (L + C)
Force Direction 90 degrees Vertical/Lateral A All
Increment 00 No Shift Distribution S Sideswipe
Clock 3 Extent Two
Over/Underride None Summary 03RYAS2
Heading Angle 0

SIDE IMPACT
Direct Damage to Pillar(s): Check all that apply

A-pillar C-pillar Unknown
 B-pillar Other (specify) None

Sill Height 20 Door Sill Diff 20 Cmax Height 20

DELTA V

Total	Longtdl	Lateral	Energy	Impact	Barrier	Estimated	Rank
17	-17	-3	46221	998	23	Reconstruction Delta V coded	1

Basis SMASH - Damage only

Save Close

DIRECT DAMAGE TO PILLAR(S)

Screen Name: Direct Damage to Pillar(s)

SAS Data Set:

SAS Variable:

Oracle Name: CDCPILLAR.PILLARID

Element Attributes:

Oracle	SAS
1	A-pillar
2	B-pillar
3	C-pillar
4	Other (specify)
-9999	Unknown
-9998	None
-8887	Not Applicable

Source: Vehicle inspection.

Remarks:

Select all that apply.

This variable applies to the following crash configurations:

- Vehicle to vehicle
- Frontal plane to side plane
- Only for vehicle with side plane impact damage
- CDC 4th character of D, P, Y or Z

This variable only captures those *vehicle-to-vehicle* impacts where the other contacting vehicle sustained an associated frontal impact. The other contacting vehicle must be a CDS applicable vehicle.

This indicates that the vehicle sustained direct damage to a pillar from the striking vehicle. This variable applies observations of the researcher at the time of inspection.

Other (specify)

is used to describe a pillar that sustains direct damage from the striking vehicle that is not listed in the given attribute list.

Direct Damage to Pillar(s)

Page 2 of 2

Unknown

is used when the researcher can not determine if any pillar sustained direct damage from the striking vehicle.

None

is used when the researcher does not observe direct pillar damage at the time of inspection.

Not Applicable

is used when the max crush falls outside of the "P" zone.

VERTICAL HEIGHT OF SILL

Screen Name: Sill Height

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLEDEFORMATION.SILLHEIGHT*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-8887	887	Not Applicable
-9999	999	Unknown

Range: 005-100, 887, 999

Source: Vehicle inspection, exemplar vehicle, manufacturer specifications

Remarks:

Enter to the nearest centimeter

Measure the vertical distance between the ground and the sill where it meets the door seam at or as near as possible to the b-pillar. The preferred measurement is taken at the vehicle inspection. This measurement is the precrash condition of the vehicle.

This variable only captures those *vehicle-to-vehicle* impacts where the other contacting vehicle sustained an associated frontal impact. The other contacting vehicle must be a CDS applicable vehicle. In addition, the measurement is only captured for those impacts where CDC columns 3 and 4 for this vehicle equal LY, LP, LZ, LD, RY, RP, RZ, or RD.

For vehicles with post-manufacturer modifications (certified or not) exemplar vehicles or manufacturer specifications should not be used. In addition, if the vehicle has sustained post-crash damage such that the measurement would not reasonably approximate the pre-crash height use the Unknown code. The presence of flat tires alone would not disqualify the capture of a known measurement.



Sill Height (cont'd)

Page 2 of 2

Not Applicable

Use this code for impacts where CDC column 3 and 4 do not equal LY, LP, LZ, LD, RY, RP, RZ, or RD. This code is also used when the other vehicle does not sustain an associated frontal impact, or is not a CDS applicable vehicle. Used this code when the max crush falls outside of the "P" zone.

Unknown

When the measurement cannot be determined or reasonably approximated.

The presence of flat tires alone would not disqualify the capture of a known measurement.

HEIGHT OF MAX DOOR CRUSH

Page 1 of 2

Screen Name: Cmax Height**SAS Data Set:****SAS Variable:****Oracle Name:** *VEHICLEDEFORMATION.CMAXHEIGHT***Element Attributes:**

Oracle SAS

	Enter to the nearest centimeter
-9999	Unknown
-8887	Not Applicable

Source: Vehicle inspection.**Remarks:**

This measurement is obtained at the time of the vehicle inspection. Do not use an exemplar vehicle or manufacturer specifications for this variable.

This variable applies to the following crash configurations:

- Vehicle to vehicle
- Frontal plane to side plane
- Only for vehicle with side plane impact damage
- CDC column 4 character of D, P, Y or Z

Enter to the nearest centimeter

Measure the vertical distance between the ground and area of the max crush sustained in the “P-zone.”

This variable only captures those *vehicle-to-vehicle* impacts where the other contacting vehicle sustained an associated frontal impact. The other contacting vehicle must be a CDS applicable vehicle.

Care should be taken when determining this post-crash measurement. If the vehicle has had post-manufacturer modifications (certified or not) the use of exemplar vehicles or manufacturer specifications should not be used. In addition, if the vehicle has sustained other post-crash damage such that the measurement would not correctly capture the height (e.g. missing wheel, vehicle split in half) use the Unknown code. The presence of flat tires alone would not disqualify the capture of a known measurement.


Unknown

is used when the researcher can not obtain or determine the height of the max crush.

Not Applicable

is used when the max crush falls outside of the “P” zone.

Example:

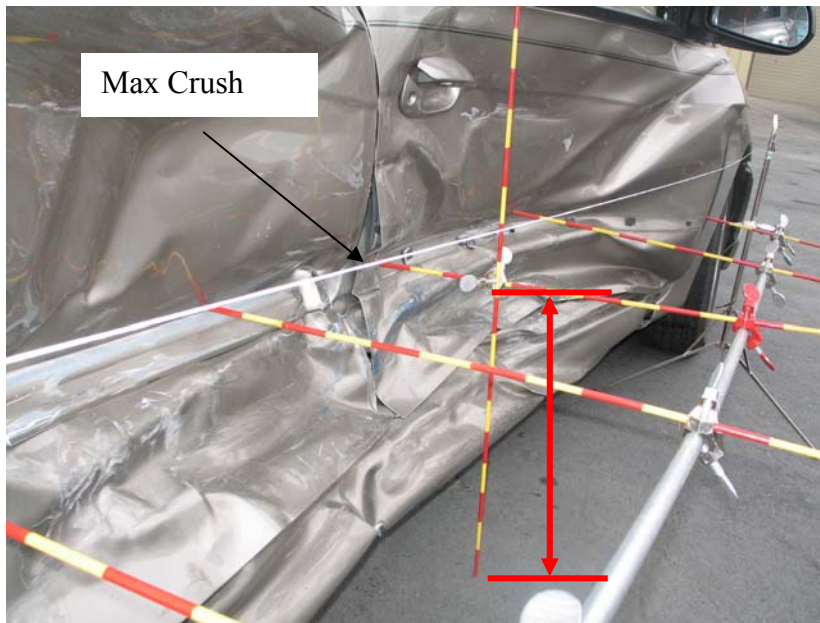

DOOR SILL DIFFERENTIAL (DSD)

Page 1 of 2

Screen Name: Door Sill Diff**SAS Data Set:****SAS Variable:****Oracle Name:** *VEHICLEDEFORMATION.DOORSILLDIFF***Element Attributes:**

Oracle	SAS	
		Enter to the nearest centimeter
-9999		Unknown
-8887		Not Applicable

Source: Vehicle inspection.**Remarks:**

This variable captures the post-crash lateral distance between the sill level versus the maximum crush in the “P-zone.” Measure this when ever the max crush is in the P zone.

This variable applies to the following crash configurations:

- Vehicle to vehicle
- Frontal plane to side plane
- Only for vehicle with side plane impact damage
- CDC column 4 character of D, P, Y or Z

This variable only captures those *vehicle-to-vehicle* impacts where the other contacting vehicle sustained an associated frontal impact. The other contacting vehicle must be a CDS applicable vehicle.

Enter to the nearest centimeter

Measure the lateral distance between the sill versus the maximum crush in the “P-zone.”. The measurement between two positions should be on the same vertical plane.

The measurement must be taken at a right angle to the vehicle's longitudinal axis.

Measurement at the sill level would be taken at the outermost portion of the sill.

Code "0" for those situations when the maximum “P-zone” crush falls outside the perimeter of the sill (e.g. negligible crush).

Zero would also be used in those situations where all qualifying criteria are met, but no contact is made to the door panel.

Unknown

is used when the researcher can not determine or obtain the DSD.

Not Applicable

is used when the max crush is outside of the “P” zone.



WINSMASH OVERVIEW

The WinSMASH software is a simplified two dimensional mathematical analysis of a vehicle's crash events. The software is designed to reconstruct vehicle-to-vehicle collisions and vehicle-to-large object collisions and make a standardized assessment of the severity of an impact. The software uses detailed measurements from the crash scene, vehicle damage and vehicle stiffness characteristics to compute energy absorbed by the vehicle to estimate the change in velocity, Delta-V and Barrier Equivalent Speed (BES).

Delta-V is the change in velocity of the vehicles during approach period, i.e. the time between initial contact and when the maximum crush occurs (and common velocity attained) at the interface. The delta-V is considered a good indicator of the crash severity because it approximates the speed of the collision between the vehicle's occupants and the interior that causes injuries. The BES is defined as the speed with which a vehicle would have to collide with a fixed barrier in order to absorb the same amount of energy or produce the same amount of crush. No information from the collision partner is required to estimate the BES.

The WinSMASH program can also compute the impact speed if detailed measurements of impact and final rest positions are entered into the program. The program assumes the impact was instantaneous and at some point during the impact both vehicles reached a common velocity. The vehicle properties are averaged properties for the vehicle class. Uniform crush stiffness is assumed across the front, rear and side of the vehicle. Due to these assumptions, WinSMASH can't be used for the following collisions:

- Rollovers
- Sideswipes
- Non-horizontal forces
- Severe override/underride
- Undercarriage impacts
- Multiple impacts to the same area

For collisions where not enough information is available to calculate the energy dissipated by the collision partner, WinSMASH can only be used to compute the BES using the Vehicle-to-Barrier option. The following collisions should be set-up with the Vehicle-to-Barrier option and only the **BES** should be entered into NASSMAIN:

- Yielding Fixed Objects
- Animals/Pedestrians/Cyclists
- Moving Railway vehicles/Large Trucks
- Towed Trailer or Vehicles

Two separate and independent methods, namely **Damage Analysis** and **Trajectory Analysis**, can be used to estimate the change in vehicle speeds experienced by the vehicles.

Damage Analysis

The Damage Analysis algorithm is the most often used option in WinSMASH. The Damage Analysis makes use of detailed measurements of the structural deformation of each vehicle to arrive at an estimate of the energy required to produce the observed vehicle damage. The program assumes a linear relationship between the crush energy and the depth of residual crush. This algorithm can be used to generate Delta-V when the scene data is not available. The input data needed for Damage Analysis are: Crush Profile, Vehicle Specifications, Vehicle Size and Stiffness Categories. Based on the length of the wheelbase, the vehicles are grouped into seven size categories and eight stiffness categories. Each stiffness category is assigned a single set of stiffness coefficients: d0 and d1. Users select the size and stiffness coefficients based upon the length of the wheelbase of the automobile. The program assumes that similar size vehicles have similar stiffness characteristics. Because the Delta-V is based entirely on vehicle deformation, care must be taken to provide accurate information.

Note: Refer to Appendix A for changes in the Stiffness value of certain vehicle types.

Example A: Summary of WinSMASH results using Damage Analysis

Vehicle 1		Speed Change (Damage)	
Total:		19.0	km/h
Longitudinal:		17.9	km/h
Latitudinal:		6.5	km/h
PDOF:		200.0	deg
Energy Dissipated	11484 Joules	Moment Arm of Principal Force	-40.7 cm CCW
Barrier Equivalent Speed	10.1 km/h	Change in Angular Velocity	-50.0 degrees/second
Used the d0 and d1 values estimated from vehicle size			

Vehicle 2		Speed Change (Damage)	
Total:		34.0	km/h
Longitudinal:		-33.5	km/h
Latitudinal:		-5.9	km/h
PDOF:		10.0	deg
Energy Dissipated	93556 Joules	Moment Arm of Principal Force	-12.6 cm CCW
Barrier Equivalent Speed	40.2 km/h	Change in Angular Velocity	-34.8 degrees/second
Used the d0 and d1 values estimated from vehicle size			


Damage & Trajectory Analysis

The Trajectory Analysis makes use of trajectory data (e.g. skid marks, impact positions and final rest positions). It is based on work-energy relationships for the spinout and the conservation of linear momentum for the collision. The program estimates the vehicle separation speed from the information about the rest position, skid marks, local friction, point of collision, etc. The momentum equations are used to compute the impact speed.

This subroutine calculates either a damage or a trajectory estimate in axial (velocity vectors are within ten degrees of parallel) collisions or a Conservation of Linear Momentum solution in angular collisions greater than ten degrees. Because the scene data are calculated separately in the Conservation of Linear Momentum solution, a separate Delta-V is generated and a comparison with the Damage Delta-V can be made for accuracy.

Reconciliation Of Different Results Between Damage And Trajectory (WinSMASH)

1. The axial collision solution is used when the initial velocity vectors are within ten degrees of parallel, i.e. collinear impacts. Examples of use in WinSMASH are: head-on collisions, rear-end collisions, vehicles sliding sideways traveling straight into an oncoming vehicle or a stationary barrier, barrier impacts, etc.

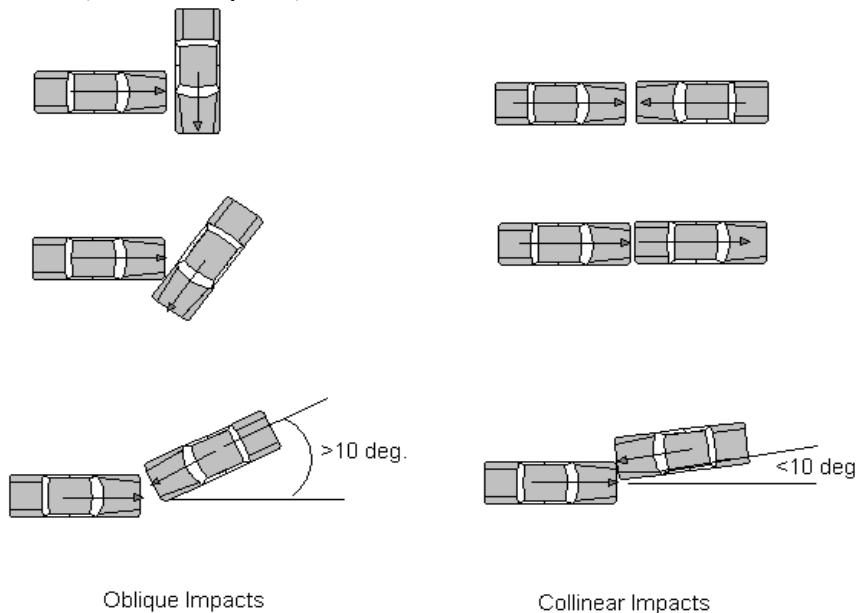

The transition between the axial and angular solutions (*i.e.*, a velocity vector change from within ten degrees of parallel to just outside ten degrees of parallel) may sometimes produce abrupt changes in Delta-V results. Therefore, the researcher should remember to examine the results carefully.

The axial collision printout will calculate impact speed (spinout and damage) and the SPEED CHANGE (DAMAGE), which should be used if the results are reasonable.

Example B: SUMMARY OF WinSMASH RESULTS USING DAMAGE & TRAJECTORY FOR AN AXIAL COLLISION (<10°)


	Speed Change (Damage)		Impact Speed (Damage and Spinout)	
Total:	77.0	km/h	93.6	km/h
Longitudinal:	-77.0	km/h	93.6	km/h
Latitudinal:	0.0	km/h	0.0	km/h
PDOF:	0.0	deg		
Energy Dissipated	489401	joules	Moment Arm of Principal Force	-54.0 cm CCW
Barrier Equivalent Speed	77.3	km/h	Change in Angular Velocity	-286.4 degrees/second

Used the d0 and d1 values estimated from vehicle size

2. The conservation of linear momentum solution is used for angled or oblique collisions (greater than ten degrees from parallel). The reconstruction program produces two independent estimates of Delta-V. The Total, Longitudinal, and Lateral Delta-Vs associated with “**Damage Analysis**” should be compared respectively to the total, longitudinal and lateral Delta-Vs associated with “**linear momentum and trajectory analysis.**” The results will seldom be precisely equal. Experience indicates that a satisfactory agreement exists between two estimates when their Delta-V components differ by no more than 4 kmph or ten (10) percent, whichever is greater, and the angles are within the same o'clock direction. Be sure, when comparing Delta-Vs, to compare the respective components calculated from two methods. When the agreement is not satisfactory, the data associated with each option should be reviewed for accuracy.

Once the speed changes agree satisfactorily, the results for Total, Longitudinal, and Lateral speed changes are each averaged and the averaged values must be entered on the Exterior Vehicle Form. If agreement cannot be reached between the two methods, contact your zone center.

Example C: Vehicle Trajectory simulation (<math><10^\circ</math>)

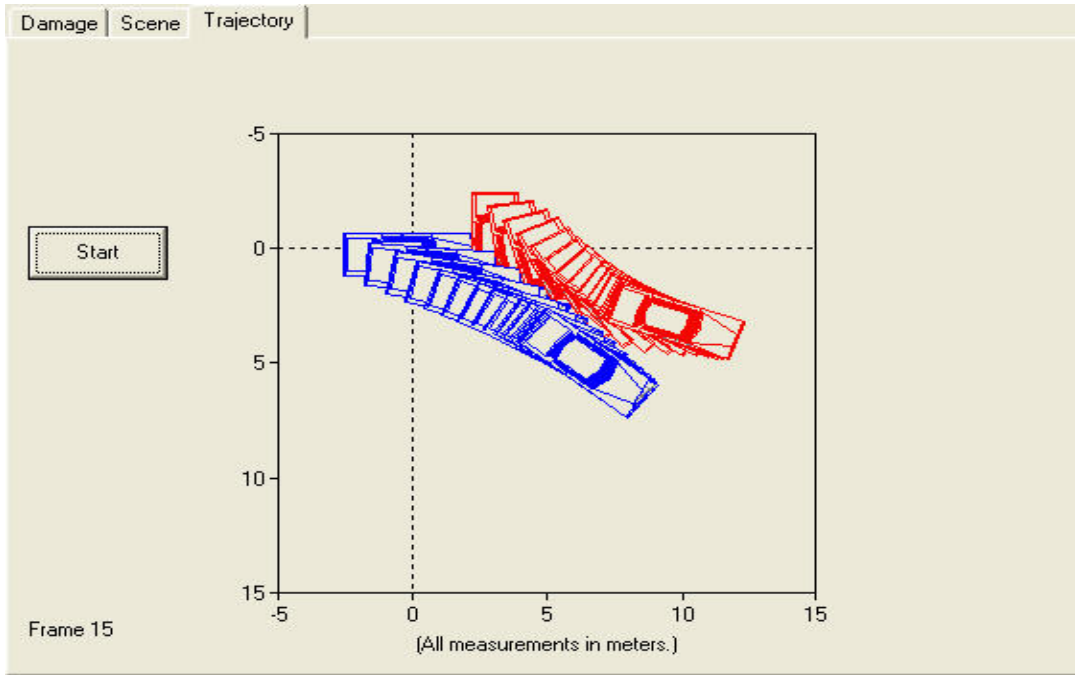

Calculation Types

The following sections describe the various calculation type options available in the program. **Note:** the integrated version of the WinSMASH program pre-fills most of the fields in the program using data entered in NASSMAIN. The user can only change: stiffness category, weight, heading angle and PDOF. The integrated WinSMASH should only be rerun if any of the data used in the program is updated in NASSMAIN.

1) Standard

The standard option is used to reconstruct vehicle-to-vehicle collisions when input data for both vehicles are available. Both Damage Analysis and Trajectory Analysis can be used in this option. The program will only use the damage analysis algorithm if scene data is not entered in the program. For a standard reconstruction the following data are required:

a) Damage analysis

V1	V2
Vehicle Specifications, Curb Weight	Vehicle Specifications, Curb Weight
Crush Profile (C ₁ - C _n), Damage Length	Crush Profile (C ₁ - C _n) Damage Length
CDC	CDC
Heading Angle and PDOF	Heading Angle and PDOF
Size and Stiffness Category	Size and Stiffness Category

b) Damage and Trajectory Analysis (the following additional data are required)

Impact location and final rest position	Impact location and final rest position
Slip Angle and Friction	Slip Angle Friction

2) Barrier

The Barrier option is used to reconstruct a vehicle impact with a fixed object. This option works the same way as the standard option, except that input data for only one vehicle are entered. This option is also used to compute the BES of the vehicle in collisions that violate the assumptions of the WinSMASH model e.g., impact with yielding objects, animals/pedestrian/cyclists, moving railway vehicles/large trucks, towed trailers or vehicles, or multiple impacts to the same area

a) Damage Analysis

V1
Vehicles Specifications, Curb Weight
Crush Profile (C ₁ - C _n), Damage Length
CDC
Heading Angle and PDOF
Size and Stiffness Category

b) Damage and Trajectory Analysis (the following additional data are required)

Impact Location and Final Rest Position
Slip Angle and Friction

3) Missing Vehicle

The Damage Analysis algorithm also has the option (Missing Vehicle) to estimate the Delta-V when the data for one of the vehicles in a vehicle-to-vehicle collision is missing. The same assumption outlined above applies to the Missing Vehicle algorithm. Collisions that violate those assumptions can't be modeled with Missing Vehicle option. In the Missing Vehicle algorithm the energy absorbed by the missing vehicle is directly computed from the known vehicle energy. The following data are required for a Missing Vehicle option:

Damage analysis

V1	V2
Vehicles Specifications, Curb Weight	Vehicles Specifications, Curb Weight
Crush Profile (C ₁ - C _n), Damage Length	--
CDC	General Area of Damage
Heading Angle and PDOF	Heading Angle
Size and Stiffness Category	Size and Stiffness Category

4) CDC Only

The CDC Only option is used for vehicle-to-vehicle collisions when insufficient damage data are documented for one of the vehicles. Both vehicles must have a complete CDC and damage data for one vehicle must be available. The algorithm computes the crush profile of the second vehicle by using damage length (if entered) and the damage extent coded in the CDC. Additional information (e.g. SMASH L, and offset distance) can be entered to improve the results.

V1	V2
Vehicles Specifications, Curb Weight	Vehicles Specifications, Curb Weight
Crush Profile (C ₁ - C _n), Damage Length	Damage Length
CDC	CDC
Heading Angle and PDOF	Heading Angle
Size and Stiffness Category	Size and Stiffness Category

Table of Weights To Be Used For Known Occupants With Unknown Weight

For known occupants with unknown weights, use the occupant's age or age group in the table below to determine the appropriate weight to add.

(All Weights Are In Kilograms based on 50th percentile for each age group)

Age (months)	0-2	3-5	6-8	9-11
Weight (Male)	5.4	7.1	8.5	9.8
Weight (Female)	4.9	6.9	8.0	9.1

Age (years)	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Weight (Male)	11.1	13.7	16	18.2	20.7	22.7	25.7	30.4	34.1	36.1	42.1	46.3	53	61
Weight (Female)	10.6	12.9	15	17.2	19.2	21.5	24.7	29.1	34.1	38.3	44.9	49.7	55.5	56.3

Age (years)	15	16	17	18	19	20-29	30-39	40-49	50-59	60-69	70-79	>=80
Weight (Male)	64	69.4	72.9	70.6	73.8	80.2	83.1	85.7	86.4	86.4	81.2	74.7
Weight (Female)	57.6	59.1	59.3	60.9	64.1	67.7	68.8	72.5	73.4	73.5	69.6	62.4

Source of Information:

Advanced Data from Vital and Health Statistics, Number 361, July 7, 2005. "Anthropometric Reference Data for Children and Adults: U.S. Population, 1999-2002", by Margaret A. McDowell, M.P.H., PhD; Cheryl D. Fryar, M.S.P.H.; Rosemarie Hirsch, M.D.; Cynthia L. Ogden, Ph.D., Division of Health and Nutrition Examination Surveys; U.S. Department of Health and Human Services, Centers for Disease Control and Prevention, National Center for Health Statistics.

The NASSMAIN WinSMASH program will automatically use the resultant C values for each event on which you select to run WinSMASH. Run the WinSMASH while on the CDC tab after the available damage data for the vehicle or vehicles involved in this event have been recorded. Highlight the CDC of the impact you want to run, then click on “Process” from the main menu at the top of the screen. Then click on “Run WinSMASH”. Next select the WinSMASH Calculation Type (Standard, Barrier, Missing Damage, or Pole) run using the following Delta V Decision Rules which are listed in order of precedence:

DELTA V, BARRIER EQUIVALENT AND SPEED ESTIMATE DECISION RULES

1. If all information on the vehicle(s) is known, use the WinSMASH program Standard (for vehicle to vehicle) or Barrier (vehicle to object) calculation type. If the results look reasonable, complete the Delta-V variables of the CDC tab of the Exterior Vehicle (EV) Form including the Barrier Equivalent Speed (BES) using the results from WinSMASH. If the exact point of impact and final rest positions are known and entered in the WinSMASH, in addition to all vehicle damage information, the program uses the Damage and Trajectory algorithm and computes the Impact Speed. Use the results from WinSMASH to complete the Delta-V variables of the CDC tab of the Exterior EV Form including the Impact Speed and the Barrier Equivalent Speed (BES). Select the basis for Delta-V as “Damage and Trajectory Routine.”
2. If you have one inspected vehicle (complete CDC and crush profile) and one partially inspected vehicle, use the WinSMASH Standard calculation type entering all of the available information (e.g., CDC, WinSMASH L, Ds, estimated crush) on the partially inspected vehicle. If the results are reasonable, complete the Delta-V variables of the CDC tab of the EV Form including the Barrier Equivalent Speed using the results from WinSMASH. Since the Impact Speed was not calculated, leave it blank and the computer will put in **998**. Select the basis for Delta-V for both vehicles as “SMASH – Damage w/CDC only.” If results are **NOT** reasonable use rule #3 and treat the partially inspected vehicle as an unknown or missing vehicle.
3. If you have one complete inspected vehicle and one non-inspected vehicle, then use the WinSMASH Missing Vehicle calculation type. If the results are reasonable, complete the Delta-V variables of the CDC tab of the EV Form including the BES using the results from WinSMASH. Select the basis for Delta-V for both vehicles as “Missing Vehicle”. If the results look reasonable for the completely inspected vehicle, code the “Confidence level” on the General Vehicle (GV) Form, Delta-V tab as “Collision fits model – results appear reasonable.” If these results are high or low, code this and annotate the reason. The “Confidence Level” for the non-inspected vehicle will be precoded as “Borderline reconstruction ~ results look reasonable”.

4. For car-to-object impacts where the object moves or sustains damage (poles, trees, large trucks, or large animals etc.) or the object is struck (horizontally) during a rollover, use the WinSMASH damage routine and treat the object as a rigid barrier. If the results look reasonable code **only** the BES. Select the Basis for Total Delta-V as “Yielding Object”. To code BES only, type “999” in the total Delta V block; EDS will then prefill all Delta V variables except BES. You must then code the BES. For smaller non-fixed objects select Estimated Highest Delta-V as minor. Select the Basis for Total Delta-V as appropriate (e.g. “Yielding object”).
5. For vehicle-to-vehicle or vehicle-to-object impacts where a crush profile is roughly estimated or you only have a CDC for the vehicles involved (e.g., partially repaired vehicle, only have photos of damage, etc.), use the WinSMASH damage routine to get an estimated Delta-V. If the results look reasonable select the calculated Delta-V as a range in Estimated Highest Delta-V. Select the Basis for Total Delta-V as appropriate (e.g. “insufficient data”). **Side note** - the vehicle-to-object currently must be done in the stand-alone program.
6. For vehicle-to-object impact with a CDS applicable vehicle that cannot be adequately represented by the parameters in an acceptable reconstruction size/stiffness category (e.g., winch, non-standard bumper, etc.), referred to here as **altered vehicle**, use the WinSMASH damage routine to get an estimated Delta-V. If the results look reasonable, select the calculated Delta-V as a range in Estimated Highest Delta-V. If a crush profile cannot be obtained then select Estimated Highest Delta-V as Minor, Moderate, or Severe. Select the Basis for Total Delta-V as appropriate (e.g. “Vehicle is beyond scope”).
7. For vehicle-to-vehicle impacts where one of the vehicles is **altered** (see #6) use the WinSMASH damage routine to get an estimated Delta-V. Code BES only for unaltered vehicle and select the calculated Delta-V as a range in Estimated Highest Delta-V for **both** vehicles. If both vehicles are altered, then select the calculated Delta-V as a range in Estimated Highest Delta-V for both vehicles and do not code BES.
8. For cases where there are two or more significant impacts with overlapping or masking of damage such that individual crush profiles cannot be obtained then select the Basis for Total Delta-V as “Overlapping Damage” and select Estimated Highest Delta-V as Minor, Moderate, or Severe. **NOTE:** For vehicle-to-vehicle impacts where one vehicle is known and the other has masked damage as described above, treat the masked vehicle as a missing vehicle and follow rule number 3 instructions.
9. For sideswipe, severe override/underide, undercarriage, non-horizontal and rollover type impacts, select the Basis for Total Delta-V as appropriate (e.g. “Sideswipe”, “Non-horizontal”, etc.) and select Estimated Highest Delta-V as Minor, Moderate, or Severe

10. For cases where one vehicle has complete inspection and nothing is known about the other vehicle (PAR indicates a "sedan") run Barrier option of WinSMASH. Code the BES and select the calculated Delta-V as a range in Estimated Highest Delta-V.

Definitions for Minor, Moderate, or Severe:

Rollover - damage assessment priority shall be given to passenger compartment.

Top Plane

Minor is used when there is surface scratching or dents; includes CDC extent zones 1 & 2.

Moderate is used when the passenger compartment maximum crush extends into CDC extent zone 3.

Severe is used when the passenger compartment maximum crush is greater than CDC extent zone 3.

Side Plane

Minor is used when there is surface scratching or dents with no passenger compartment intrusion.

Moderate is used when there is 25 cm (10 inches) or less passenger compartment intrusion.

Severe is used when there is greater than 25 cm (10 inches) passenger compartment intrusion.

Swiping Type Impacts

Minor is used when there is minor crush that does not result in passenger compartment intrusion.

Moderate is used when the maximum crush extends beyond the side door impact protection (*i.e.*, door beam) that can result in up to 25cm (10 inches) passenger compartment intrusion.

Severe is used when the maximum crush results in greater than 25 cm (10 inches) passenger compartment intrusion.

Severe Override/underride Impacts

Minor is used when only the hood/trunk and top of fenders are involved and there is no passenger compartment intrusion.

Moderate is used when only the hood/trunk and top of fenders are involved and there is minimal passenger compartment intrusion.

Severe is used when only the hood/trunk and top of fenders are involved and there is major passenger compartment intrusion.

Undercarriage Impacts

Minor is used when it is a swiping type impact with surface scratching or dents.

Moderate is used when modest crush or bending occurs.

Severe is used when significant crush or bending occurs.

Overlapping (Masked) Impacts

Minor is used when the maximum crush attributed to the most severe impact (estimate) is less than 10 cm.

Moderate is used when the maximum crush attributed to the most severe impact (estimate) is 10cm-35cm.

Severe is used when the maximum crush attributed to the most severe impact (estimate) is greater than 35cm.

Other Non-Horizontal Impacts

Minor is used when the maximum crush is less than 10 cm.

Moderate is used when the maximum crush is 10cm-35cm.

Severe is used when the maximum crush is greater than 35cm.

The NASSMAIN WinSMASH program will automatically use the resultant C values for each event on which to run WinSMASH. The WinSMASH while on the CDC tab after the available damage data for the vehicle or vehicles involved in this event has been recorded. Highlight the CDC of the impact, then click on "Process" from the main menu at the top of the screen. Then click on "Run WinSMASH".

TOTAL DELTA V

Screen Name: DELTA V–Total

SAS Data Set: *CDCCRS*

SAS Variable: *DVTOTAL*

Oracle Name: *VEHICLEDEFORMATION.TOTALDELTA V*

Element Attributes:

Generated kmph
999 Unknown

Range: 1-160, 999

Source: WinSMASH program.

Remarks:

The Total Delta V is automatically generated by the NASSMAIN WinSMASH program for this impact.

The integrated WinSMASH program will automatically use the resultant C values for each event on which you select to run WinSMASH. Run the WinSMASH while on the CDC tab after the available damage data for the vehicle or vehicles involved in this event has been recorded. Highlight the CDC of the impact, then click on “Process” from the main menu at the top of the screen. Then click on “Run WinSMASH”. Next select the type of WinSMASH to run using the Delta V Decision Rules listed in the previous section.

Unknown

is used when the results for this impact are unobtainable or unreasonable.

LONGITUDINAL DELTA V

Screen Name: DELTA V -- Longtdl

SAS Data Set: *CDCCRSH*

SAS Variable: *DVLONG*

Oracle Name: *VEHICLEDEFORMATION.LONGDELTA V*

Element Attributes:

Generated kmph
999 Unknown

Range: -160-160, 999

Source: WinSMASH program.

Remarks:

The Longitudinal Component of Delta V is automatically generated by the NASSMAIN WinSMASH program for this impact.

LATERAL DELTA V

Screen Name: DELTA V -- Lateral

SAS Data Set: *CDCCRS*

SAS Variable: *DVLAT*

Oracle Name: *VEHICLEDEFORMATION.LATDELTA V*

Element Attributes:

Generated kmph
999 Unknown

Range: -160-160, 999

Source: WinSMASH program.

Remarks:

The Lateral Component of Delta V is automatically generated by the NASSMAIN WinSMASH program for this impact.

ENERGY ABSORPTION**Screen Name:** Energy**SAS Data Set:** *CDCCRS***SAS Variable:** *ENERGY***Oracle Name:** *VEHICLEDEFORMATION.ENERGYDELTA***Element Attributes:**

	Generated joules
9,999,999	Unknown

Range: 150 – 1,100,000, 9,999,999**Source:** WinSMASH program.**Remarks:**

Enter The Energy Absorption is automatically generated by the NASSMAIN WinSMASH program for this impact.

IMPACT SPEED OR CHANGE TO IMPACT

Screen Name: Impact

SAS Data Set: *CDCCRS*

SAS Variable: *IMPACTSP*

Oracle Name: *VEHICLEDEFORMATION.IMPACTDELTA*

Element Attributes:

Generated kmph
998 Damage and Trajectory run not made
999 Unknown

Range: 1 – 160, 998, 999

Source: WinSMASH program — damage and trajectory routine

Remarks:

The Impact Speed is automatically generated by the NASSMAIN WinSMASH damage and trajectory program for this impact.

BARRIER EQUIVALENT SPEED

Screen Name: Barrier

SAS Data Set: *CDCCRS*

SAS Variable: *BAREQSP*

Oracle Name: *VEHICLEDEFORMATION.BARRIERDELTA*

Element Attributes:

Generated kmph
999 Unknown

Range: 1-160, 999

Source: WinSMASH program.

Remarks:

The Barrier Equivalent speed is automatically generated by the NASSMAIN WinSMASH for this impact.

The BES is defined as the speed with which a vehicle would have to collide with a fixed barrier in order to absorb the same amount of energy or produce the same amount of crush as in this crash. The same energy absorption could come out of collisions with different delta-V's, leading to different potential injuries. BES, therefore, is a more appropriate way of comparing collisions with similar struck objects. The BES calculated using mass and energy absorbed by each vehicle. No information is required of the collision partner for BRS calculations. Whereas, the total amount of energy (both Vehicle 1 and Vehicle 2) is required to calculate the approach delta-V. For impacts between two similar vehicles, if the mass of one vehicle is significantly greater than its collision partner, then the delta-V equals the BES. Also, if the stiffness of one vehicle is significantly greater than the collision partner then the delta-V is proportional to their mass ratio and the BES.

ESTIMATED SEVERITY

Screen Name: Estimated

SAS Data Set: *CDCCRS*

SAS Variable: *DVEST*

Oracle Name: *VEHICLEDEFORMATION.ESTIMATEDDELTA V*

Element Attributes:

Oracle	SAS	
1	0	[Reconstruction delta V]
Estimated Delta V		
2	1	Less than 10 kmph
3	2	Delta V \geq 10 kmph < 25 kmph
4	3	Delta V \geq 25 kmph < 40 kmph
5	4	Delta V \geq 40 kmph < 55 kmph
6	5	Delta V \geq 55 kmph

Other estimates of damage severities

7	6	Minor
8	7	Moderate
9	8	Severe
10	9	Unknown

Source: Researcher determined.

Remarks:

Reconstruction delta V can not be selected, it is always generated by NASSMAIN when the Delta V variables are generated by the NASSMAIN WinSMASH.

The purpose of this variable is to record an estimate of the Delta V for those situations where the NASSMAIN WinSMASH program (including the Barrier Equivalent Speed) cannot be properly utilized (*e.g.*, overlapping damage, crush profile not measured, severe underride/override, swiping, or rollover type impacts).

For car-to-car or car-to-object impacts where a crush profile is roughly estimated or you only have a CDC for all vehicles involved (*e.g.*, partially repaired vehicle, only have photos of damage, etc.), use the WinSMASH damage routine to get an estimated Delta V. If the results look reasonable, then record the calculated Delta V as a range in the Estimated Highest Delta V. Record the Basis for Total Delta V as appropriate (*e.g.* insufficient data, etc).

For cases where there are two or more significant impacts with overlapping or masking of damage such that individual crush profiles cannot be obtained then record the Basis for Total Delta V as overlapping damage and record the Estimated Highest Delta V as minor, moderate or severe.

Minor, Moderate and Severe are defined below for different damage types:

Rollover — damage assessment priority shall be given to passenger compartment.

Top Plane

- | | |
|----------|---|
| Minor | is used when there is surface scratching or dents; includes CDC extent zones 1 & 2. |
| Moderate | is used when the passenger compartment maximum crush extends into CDC extent zone 3. |
| Severe | is used when the passenger compartment maximum crush is greater than CDC extent zone 3. |

Side Plane

- | | |
|----------|--|
| Minor | is used when there is surface scratching or dents with no passenger compartment intrusion. |
| Moderate | is used when there is 25 cm or less passenger compartment intrusion. |
| Severe | is used when there is greater than 25 cm passenger compartment intrusion. |

Swiping Type Impacts

- | | |
|----------|---|
| Minor | is used when there is minor crush that does not result in passenger compartment intrusion. |
| Moderate | is used when the maximum crush extends beyond the side door impact protection (<i>i.e.</i> , door beam) that can result in up to 25cm passenger compartment intrusion. |
| Severe | is used when the maximum crush results in greater than 25cm passenger compartment intrusion. |

Severe Override/underride Impacts

- | | |
|----------|--|
| Minor | is used when only the hood/trunk and top of fenders are involved and there is no passenger compartment intrusion. |
| Moderate | is used when only the hood/trunk and top of fenders are involved and there is minimal passenger compartment intrusion. |
| Severe | is used when only the hood/trunk and top of fenders are involved and there is major passenger compartment intrusion. |

Undercarriage Impacts

Minor	is used when it is a swiping type impact with surface scratching or dents.
Moderate	is used when modest crush or bending occurs.
Severe	is used when significant crush or bending occurs.

Overlapping (Masked) Impacts

Minor	is used when the maximum crush attributed to the most severe impact (via estimate) is less than 10cm.
Moderate	is used when the maximum crush attributed to the most severe impact (via estimate) is 10cm -35cm.
Severe	is used when the maximum crush attributed to the most severe impact (via estimate) is greater than 35cm.

Other Non-Horizontal Impacts

Minor	is used when the maximum crush is less than 10 cm.
Moderate	is used when the maximum crush is 10cm -35cm.
Severe	is used when the maximum crush is greater than 35cm.

Other Non-Horizontal Impacts

Minor	is coded when the maximum crush is less than 10 cm .
Moderate	is coded when the maximum crush is 10cm -35cm.
Severe	is coded when the maximum crush is greater than 35cm.

SEVERITY RANK

Screen Name: Rank

SAS Data Set: *CDCCRS*

SAS Variable: *RANK*

Range: 1-29

Element Attributes:
As selected

Source: Researcher determined

Remarks:

Indicate the **Rank** for the event that resulted in the severity that has been coded. If a Delta V, Barrier Equivalent Speed, or estimate is known, than the **Rank** of the event must be entered.

If the vehicle is involved in multiple impacts/events, corresponding Events are ranked in order of highest crash severity, based on energy management and the amount of reduction of occupant space for non-collision events.

Use the NASSMAIN WinSMASH results, barrier equivalent speeds, and severity estimates to help rank Events.

Multiple impacts the highest delta-V is only ranked. Rank 1 equals the highest delta-V.

Unknown is not used.

BASIS FOR DELTA V ENTRY

Screen Name: Basis

SAS Data Set: *CDCCRSH*

SAS Variable: *DVBASIS*

Element Attributes:

Delta V Calculated

- 1 WinSMASH - Damage only
- 2 WinSMASH - Damage and trajectory
- 3 WinSMASH - Missing vehicle
- 4 WinSMASH - Damage with CDC only

Delta V Not Calculated

- 5 At least one vehicle is beyond the scope of SMASH
- 6 Rollover
- 7 Other non-horizontal forces
- 8 Sideswipe type damage
- 9 Severe override
- 10 Yielding object
- 11 Overlapping damage
- 12 Insufficient data (specify):
- 98 Other (specify):

Source: Researcher determined — inputs include WinSMASH output (if applicable), vehicle inspection, scene inspection, police report, and photographs.

Remarks:

This variable is used to indicate: (1) which NASSMAIN WinSMASH program or routine was used to compute this vehicle's highest delta V or (2) the reason a NASSMAIN WinSMASH program was not applied to the most severe impact.

Delta V Calculated

NASSMAIN WinSMASH - Damage and trajectory

The NASSMAIN WinSMASH output is based on trajectory evidence documented at the scene, in addition to complete vehicle damage data.

NASSMAIN WinSMASH - Damage only

The WinSMASH output is based upon complete vehicle damage only.

NASSMAIN WinSMASH - Missing vehicle

In a two vehicle impact only one vehicle is inspected (damage measurements and CDC obtained), and for the other vehicle, the damage measurements (including CDC) are missing; however, enough data are available to use the WinSMASH Missing Vehicle option.

WinSMASH - Damage with CDC only

The WinSMASH output is based on a two vehicle collision with insufficient vehicle damage documentation. The two vehicle collision must include: one complete vehicle inspection and the other vehicle must have a complete CDC. Additional crush profile information such as the WinSMASH L, "D", etc may be entered to improve the results.

Delta V Not Calculated**At least one vehicle is beyond the scope of SMASH**

One of the vehicles (which may be this vehicle) involved in this impact cannot be **adequately represented** by the parameters in an acceptable reconstruction size/stiffness category (e.g., large truck, motorcycle, bus, etc.). As a general rule in CDS NASS, any vehicle that is not applicable for a CDC is not applicable for the NASSMAIN WinSMASH program.

For the following codes: All vehicles within scope (CDC applicable) of WinSMASH program but one of the collision conditions is beyond the scope of the WinSMASH program or other acceptable reconstruction techniques, regardless of the adequacy of damage data.

Rollover

The involved vehicle fits the vehicle parameters for an acceptable WinSMASH program; however, the rollover collision is beyond the scope of the program.

Other non-horizontal force

The involved vehicle fits the vehicle parameter for an acceptable WinSMASH program; however, the other non-horizontal force is beyond the scope of the program (e.g., large object falling on vehicle).

Sideswipe type damage

The involved vehicle fits the vehicle parameters for an acceptable WinSMASH program; however, the sideswipe type of collision is beyond the scope of the program.

Severe override

The involved vehicle fits the vehicle parameters for an acceptable WinSMASH program; however, the severe override type of collision is beyond the scope of the program.

Yielding object

The involved vehicle fits the vehicle parameters for an acceptable WinSMASH program; however, the collision with a yielding object (e.g., sheared utility pole) is beyond the scope of the program.

Overlapping damage

The involved vehicle fits the vehicle parameters for an acceptable WinSMASH program; however, collisions involving overlapping damage (i.e., multiple impacts in the same area) are beyond the scope of the program.

Insufficient data (specify)

The involved vehicles and the collision type are applicable for an acceptable WinSMASH program, but due to insufficient data on one or both of the vehicles or object, an acceptable WinSMASH program cannot be used.

Other (specify):

The Delta V could not be calculated for a reason not identified in the current pick list. The reason must be specified on the line provided.

LIST

The screenshot shows a software window titled "Exterior Vehicle Form, Case 2007-996-900015/ Vehicle #2". The window has a menu bar with options: VEHICLE, TIRE, SPECIFICATIONS, FUEL, FIRE, CRUSH, CDC, EDR, SKETCHES, LOG, and REVIEW. Below the menu bar, there is a dropdown menu for "EDR Information obtained?" with the value "Yes - Data entered". Below this, there are tabs for LIST, EDR, AIR BAG DEPLOY, PRECRASH, and CRASH. The main area contains a table with two columns: "Deploy Status" and "CDC". The first row has an asterisk (*) in the "Deploy Status" column and is empty in the "CDC" column. At the bottom right, there are "Save" and "Close" buttons.

Deploy Status	CDC
*	

EDR information will be entered whenever an EDR is read by the field researcher or by other personnel who provide information from the EDR to the researcher.

Information will be entered for as many events as the EDR has recorded. The event may be a deployment event, a near deployment event, or neither (just information from the latest ignition cycle).

ONE VALUE WILL BE TAKEN FOR EACH EDR/EVENT
THERE MAY BE MORE THAN ONE EDR/EVENT PER EDR READING
THERE MAY BE MORE THAN EDR/EVENT PER CDC/EVENT

**SEE THE
EVENT DATA RECORDER DATA COLLECTION GUIDELINE
FOR ADDITIONAL INSTRUCTIONS.**

**FOR DIRECT IMPORT OF EDR DATA SEE THE CDR-to-XML
LIBRARY INSTALLATION & BASIC FUNCTIONS GUIDELINE**

EDR

Exterior Vehicle Form, Case 2007-996-900015/ Vehicle #2

VEHICLE | TIRE | SPECIFICATIONS | FUEL | FIRE | CRUSH | CDC | EDR | SKETCHES | LOG | REVIEW

EDR Information obtained? Yes - Data entered

LIST | EDR | AIR BAG DEPLOY | PRECRASH | CRASH

Identifiers

EDR Version	<input type="text"/>	Ignition Cycle	
Lamp Status	<input type="text"/>	Event	<input type="text"/>
CDC	<input type="text"/>	Investigation	<input type="text"/>
Deploy Status	<input type="text"/>		

Driver		Passenger	
Belt	<input type="text"/>	Belt	<input type="text"/>
		Seat	<input type="text"/>
Pretensioner	<input type="text"/> ms	Pretensioner	<input type="text"/> ms
Seat Track Forward	<input type="text"/>	Suppression Switch	<input type="text"/>

Save Close

EDR

Screen Name: EDR information obtained?

SAS Data Set: *GV*

SAS Variable: *EDRINFO*

Oracle Name: *VEHICLE.EDREXIST*

Element Attributes:

Oracle	SAS	
2	1	Yes - Data entered
10	10	EDR information not obtained - Vehicle make/model not supported by software or hardware.
7	4	EDR information not obtained - Vehicle damage prevents accessing EDR data.
8	5	EDR information not obtained - Permission not received (specify)
5	7	EDR information not obtained - EDR submitted to manufacturer
11	11	EDR information not obtained - Other reasons (specify)
12	12	EDR information not obtained - Software issue (specify)
13	13	EDR information not obtained - Hardware issue (specify)
	77	[Vehicle not inspected]
	88	[Not a CDS vehicle]
-9999	99	Unknown

Source: Researcher determined, vehicle inspection

Remarks:

Yes - Data entered

is used when the researcher obtains data from the EDR.

EDR information not obtained - Vehicle make/model not supported by software

is used when the researcher determines that this vehicle is not supported by the commercially available software/hardware.

EDR information not obtained - Vehicle damage prevents accessing EDR data

is used when the researcher determines the vehicle is equipped with and EDR supported by the commercially available software/hardware and the vehicle has been damaged so that:

- The electrical system is compromised so that the researcher cannot access necessary connections, i.e., the on-board diagnostic (OBD) plug is damaged or induced damage prevents access to the OBD
and

EDR information obtained? (cont'd)

Page 2 of 3

- Vehicle damage prevents access to the control module

Photo documentation of the damage must be provided.**EDR information not obtained - Permission not received (specify)**

is to be used only if the EDR equipped vehicle is supported by the commercially available software/hardware and the researcher was refused permission to access or download the data from the EDR. Examples of a refusal are:

- owner of vehicle refused access,
- attorney refused access,
- the insurance company refused access,
- owner refuses access at anytime during the download.

EDR information not obtained - EDR submitted to manufacturer

use this when any module of any make/model of vehicle is submitted to the manufacturer for download. This attribute should be updated when module data is received.

EDR information not obtained - Other reasons (specify)

This is to be used only if the vehicle is equipped with an EDR supported by the commercially available software/hardware AND the other attributes do not apply. Please specify the reason.

EDR information not obtained - Software issue (specify)

This is to be used only if the vehicle is equipped with an EDR supported by the commercially available software AND all necessary connections to the vehicle were made and the software indicates an error. Examples:

- translation error or
- no communication to the air bag module.

EDR information not obtained - Hardware issue (specify)

This is to be used only if the vehicle is equipped with an EDR supported by the commercially available software AND a problem arises in making the necessary connections to the vehicle. Examples:

- cable to the on-board diagnostic plug (OBD) will not fit
- no power to the EDR or
- the cable to the module does not fit.

EDR information obtained? (cont'd)

Page 3 of 3

Unknown

This is to be used only if the vehicle is equipped with an EDR supported by the commercially available software/hardware and the EDR couldn't be downloaded. Unknown is defined as the researcher couldn't obtain the EDR data due to the status of the control module being unknown. Examples:

- module not in vehicle
- module replaced, i.e., current module in vehicle is not the same one as involved in the crash.

CDR/EDR VERSION NUMBER

Screen Name: EDR Version

SAS Data Set: *EDRDATA*

SAS Variable: *EDRVER*

Oracle Name: *ERDATA.EDRVERSION*

Element Attributes:

Specify version of software being used
Copy of EDR information provided by third party (specify)

Source: Commercially available software program/researcher

Remarks:

The minimum known information if an EDR is read by the researcher will be the EDR software version being used.

Specify version of software being used

Various versions of software for various makes/models of vehicles may be in use. Enter the version that was used to read the EDR in this car.

Copy of EDR information provided by third party

If the EDR was read by a third party (vehicle manufacturer, etc.) and only a hard copy is supplied indicate the source of the information.

WARNING LAMP STATUS

Screen Name: Lamp Status

SAS Data Set: *EDRDATA*

SAS Variable: *LAMPSTAT*

Oracle Name: *EDRDATA.SIRLAMPSTATUSID*

Element Attributes:

Oracle	SAS	
1	1	On
2	2	Off
-8886	8	Not reported
-9999	9	Unknown
-7778		[Invalid]

Source: As recorded by the commercially available software program.

Remarks:

On

The EDR indicates that the supplemental restraint system, warning lamp is on.

Off

The EDR indicates that the supplemental restraint system warning lamp is off

Not reported

The information is not reported by the EDR

Unknown

The information is not known

ACCIDENT EVENT SEQUENCE NUMBER

Screen Name: CDC

SAS Data Set: *EDRDATA*

SAS Variable: *EACCSEQ*

Oracle Name: *EDRDATA.CDCID*

Element Attributes:

Oracle	SAS	
		Choose event number from drop down list
-8887	97	Event not related to this crash
-8879	98	Not reported
-9999	99	Unknown

Source: Researcher determined

Remarks:

If an exact determination can not be when attempting made as to assign an event to a non deployment or deployment event then **Unknown** should be selected. Choose the event if it has been established beyond any doubt that the non-deployment or deployment is related.

Choose event number from drop down list

Choose from the list of events previously listed for this vehicle.

Event not related to this crash

If there is a recorded event not related to this crash.

Unknown

If a positive determination cannot be made as to which event the EDR data is associated, select this attribute.

TYPE OF EVENT

Screen Name: Deploy Status

SAS Data Set: *EDRDATA*

SAS Variable: *DPLYSTAT*

Oracle Name: *EDRDATA.DEPLOYSTATUSID*

Element Attributes:

Oracle	SAS	
1	1	Non-Deployment
2	2	Deployment
3	8	Not reported

Source: Researcher determined

Remarks:

Choose attribute based upon EDR output.

NUMBER OF IGNITION CYCLES AT EVENT OCCURRENCE

Screen Name: Ignition Cycle Event

SAS Data Set: *EDRDATA*

SAS Variable: *EVCYCLES*

Oracle Name: *EDRDATA.EVENTIGNITIONCYCLES*

Element Attributes:

Oracle SAS

Enter the number of cycles

-8879 999998 Not reported

-9999 999999 Unknown

Source: As recorded by the EDR from the commercially available software program.

Remarks:

Identifies how many times the ignition has been cycled on and off.

NUMBER OF IGNITION CYCLES AT INVESTIGATION

Screen Name: Ignition Cycle Investigation

SAS Data Set: *EDRDATA*

SAS Variable: *INVCYCLE*

Oracle Name: *EDRDATA.INVESTIGNITIONCYCLE*

Element Attributes:

Oracle	SAS	
		Enter the number of cycles
-8879	999998	Not reported
-9999	999999	Unknown

Source: As recorded by the EDR from the commercially available software program.

Remarks:

The number of ignition cycles when the module was downloaded for this report.

DRIVER'S BELT STATUS

Screen Name: Driver Belt

SAS Data Set: *EDRDATA*

SAS Variable: *DRVBELT*

Oracle Name: *EDRDATA.DRIVERBELTID*

Element Attributes:

Oracle	SAS	
1	1	Buckled
2	2	Unbuckled
-8886	8	Not reported
-9999	9	Unknown

Source: As recorded by the EDR from the commercially available software program.

Remarks:

Records if the driver's restraint buckle was engaged in the latch.

TIME FOR DRIVER PRETENSIONER ACTUATION

Screen Name: Pretensioner

SAS Data Set: *EDRDATA*

SAS Variable: *DRPRTEN*

Oracle Name: *EDRDATA.PRETENSEDEPLOYTIME*

Element Attributes:

Oracle	SAS	
		Enter the time in milliseconds
-8885	85	Not deployed
-8879	86	Not reported
-9999	99	Unknown

Source: As recorded by the EDR from the commercially available software program.

Range: 1-84, 85, 86, 99

Remarks:

Records the time in milliseconds after algorithm enabled that the Pretensioner actuated.

DRIVER SEAT TRACK IN FORWARD POSITION

Screen Name: Seat Track Forward

SAS Data Set: ***EDRDATA***

SAS Variable: ***DRIVSEAT***

Oracle Name: ***EDRDATA.DRIVERSEATID***

Element Attributes:

Oracle	SAS	
1	1	Yes
2	2	No
3	8	Not reported
-9999	9	Unknown

Source: As recorded by the EDR from the commercially available software program.

Remarks:

Records if the seat track adjustment was forward of a predetermined point in its travel.

PASSENGER'S BELT STATUS

Screen Name: Passenger Belt

SAS Data Set: *EDRDATA*

SAS Variable: *PASBELT*

Oracle Name: *EDRDATA.PASSBELTID*

Element Attributes:

Oracle	SAS	
1	1	Buckled
2	2	Unbuckled
-8886	8	Not reported
-9999	9	Unknown

Source: As recorded by the EDR from the commercially available software program.

Remarks:

Records if the passenger's restraint buckle was engaged in the latch.

PASSENGER'S SEAT WEIGHT SENSOR POSITION

Screen Name: Passenger Seat

SAS Data Set: *EDRDATA*

SAS Variable: *PASSSEAT*

Oracle Name: *EDRDATA.PASSSEATID*

Element Attributes:

Oracle	SAS	
1	1	On
2	2	Off
3	8	Not reported
-9999	9	Unknown

Source: As recorded by the EDR from the commercially available software program in Occupant Classification Status

Remarks:

IF THE VEHICLE WAS EQUIPPED WITH OCCUPANT WEIGHT SENSING TECHNOLOGIES, THE SYSTEM MAY RECORD THE DATA RELATIVE TO THIS VARIABLE.

TIME FOR PASSENGER PRETENSIONER ACTUATION

Screen Name: Passenger Pretensioner

SAS Data Set: *EDRDATA*

SAS Variable: *PASPRTEN*

Oracle Name: *EDRDATA.PASPRETENSEDEPLOYTIME*

Element Attributes:

Oracle	SAS	
		Enter the time in milliseconds
-8885	85	Not deployed
-8879	86	Not reported
-9999	99	Unknown

Source: As recorded by the EDR from the commercially available software program.

Range: 1-84, 85, 86, 99

Remarks:

Records the time in milliseconds after algorithm enabled that the Pretensioner actuated.

PASSENGER AIR BAG SUPPRESSION SWITCH POSITION

Screen Name: Passenger Suppression Switch

SAS Data Set: *EDRDATA*

SAS Variable: *PSWSTAT*

Oracle Name: *EDRDATA.PSWITCHSTATUSID*

Element Attributes:

Oracle	SAS	
1	1	Not suppressed
2	2	Suppressed
-8886	8	Not reported
-9999	9	Unknown

Source: As recorded by the EDR from the commercially available software program.

Remarks:

Documents the presence of a passenger's air bag cut off switch and its position.

AIR BAG DEPLOYMENT TIMES

Exterior Vehicle Form, Case 2007-996-900015/ Vehicle #2

VEHICLE | TIRE | SPECIFICATIONS | FUEL | FIRE | CRUSH | CDC | EDR | SKETCHES | LOG | REVIEW

EDR Information obtained? Yes - Data entered

LIST | EDR | AIR BAG DEPLOY | PRECRASH | CRASH

Air Bag Deployment Times

Type	Position	Stage 1 (ms)	Stage 2 (ms)

Save Close

AIR BAG DEPLOYMENT TIMES

Air Bag Location

Screen Name: Type

SAS Data Set: *EDRABAG*

SAS Variable: *EBAGLOC*

Oracle Name: *AIRBAGDEPLOYTIME.AIRBAGID*

Element Attributes:

Oracle	SAS	
1	1	Steering Wheel Hub
2	2	Top Instrument Panel
3	3	Mid Instrument Panel
4	4	Bottom Instrument Panel
5	5	Seat Back
8	6	Door/Panel
9	7	Roof Side Rail
10	98	Other (specify)
11	99	Unknown

Source: EDR

Remarks:

Enter the location of the air bag. If air bags are available for the occupant, indicate the information on all air bags. Do so by inserting another air bag. To insert another air bag go to the menu bar and select **Edit/Insert**, then indicate its location, and complete the information about the air bag.

Steering Wheel

is used for an air bag that is designed to deploy from a module integrated with the steering wheel. It is designed to protect the vehicle's driver primarily from frontal impacts.

Top Instrument Panel

is used for those air bags that deploy rearward from a location on the top of the instrument panel. They are designed to protect front seat passengers primarily from frontal impacts.

Mid Instrument Panel

is used for those air bags that deploy rearward from a location in the middle of the instrument panel. They are designed to protect front seat passengers primarily from frontal impacts.

Bottom Instrument Panel

is used for those air bags that deploy rearward from a location in the bottom of the instrument panel. They are designed to protect front seat passengers primarily from frontal impacts. This includes “knee bags”.

Seat Back

is located on the outside portion of the seat back and is designed to protect the torso of occupants primarily from side impacts.

Seat Cushion

is located on the outside portion *of* the seat cushion and is designed to protect the torso of occupants primarily from side impacts.

Pillar (A or B)

is primarily a tubular shaped bag that is tethered at the A pillar and is stored in the roof side rail and is designed to protect the head of occupants primarily from side impacts

Door/Panel

is located in the door/panel and is designed to protect the torso of occupants primarily from side impacts.

Roof Side Rail

is primarily a curtain type bag that is stored in the roof side rail and is designed to protect the head of occupants primarily from side impacts

Other (specify)

is used when the location of the air bag cannot be captured in the above attributes. This should be a rare occurrence. The location of the air bag must be specified.

AIR BAG DEPLOYMENT TIMES

Position

Screen Name: Position

SAS Data Set: *EDRABAG*

SAS Variable: *POSITION*

Oracle Name: *AIRGABDEPLOYTIME.POSITIONID*

Element Attributes:

Oracle	SAS	
1	1	Driver
2	2	Passenger

Source: EDR

Remarks:

AIR BAG DEPLOYMENT TIMES

Time For First Stage Air Bag Deployment

Screen Name: First Stage

SAS Data Set: *EDRABAG*

SAS Variable: *STAGE1*

Oracle Name: *AIRBAGDEPLOYTIME.STAGE1*

Element Attributes:

Oracle	SAS	
		Enter the time in milliseconds
-8885		Not Deployed
		Disposal
-9999	999	Unknown
-8880		Stage Not Reported

Source: As recorded by the EDR from the commercially available software program.

Range: 0-120, 999

Remarks:

This is the time in milliseconds after the algorithm enabled documenting when the air bag deployed. Vehicles that are equipped with multi-stage inflators will record the time after algorithm enabled when each stage fires or is disposed.

AIR BAG DEPLOYMENT TIMES

Time For Second Stage Air Bag Deployment

Screen Name: Second Stage

SAS Data Set: *EDRABAG*

SAS Variable: *STAGE2*

Oracle Name: *AIRBAGDEPLOYTIME.STAGE2*

Element Attributes:

Oracle	SAS	
	995	Enter the time in milliseconds [S]
	996	Disposal
-8885	997	Not Deployed
-9999	999	Unknown
-8880		Stage Not Reported

Source: As recorded by the EDR from the commercially available software program.

Range: 0-120, 996,997,999

Remarks:

This is the time in milliseconds after the algorithm enabled documenting when the air bag deployed. Vehicles that are equipped with multi-stage inflators will record the time after algorithm enabled when each stage fires or is disposed.

DATA

Exterior Vehicle Form, Case 2007-996-90001S/ Vehicle #2

VEHICLE | TIRE | SPECIFICATIONS | FUEL | FIRE | CRUSH | CDC | EDR | SKETCHES | LOG | REVIEW

EDR Information obtained ? Yes - Data entered

LIST | EDR | AIR BAG DEPLOY | PRECRASH | CRASH

DATA

Pre-Seconds	Speed (MPH)	Engine Speed (RPM)	Throttle %	Brake Switch Circuit Status
	-5			
	-4			
	-3			
	-2			
*	-1			

Deploy Status Deployment

Save Close

NUMBER OF SECONDS PRIOR TO CRASH

Screen Name: Pre-Seconds

SAS Data Set: *EDRPRECR*

SAS Variable: *PRESEC*

Oracle Name: *EDR_PRECRASH.PRESECONDS*

Element Attributes:

Enter insert a new entry

Source: As recorded by the EDR from the commercially available software program.

Range: -5,-4,-3,-2,-1

Remarks:

If recorded, there are five pre-crash speed readings at one second and in some instances 2 second intervals.

PRE CRASH VEHICLE SPEED READING (-5, -4, -3, -2, -1)

Screen Name: Speed

SAS Data Set: *EDRPRECR*

SAS Variable: *SPEED*

Oracle Name: *EDR_PRECRASH.SPEED*

Element Attributes:

Oracle	SAS	
		Enter the pre-crash speed reading (mph)
-8879	998	Not reported
-9999	999	Unknown

Source: As recorded by the EDR from the commercially available software program.

Range: 0-120

Remarks:

If recorded, there are five pre-crash speed readings at one second and in some instances 2 second intervals.

PRE-CRASH ENGINE SPEED READING (-5, -4, -3, -2, -1)

Screen Name: Engine Speed

SAS Data Set: *EDRPRECR*

SAS Variable: *RPM*

Oracle Name: *EDR_PRECRASH.RPM*

Element Attributes:

Oracle	SAS	
		Enter the pre-crash engine speed reading (rpm)
-8879	9998	Not reported
-9999	9999	Unknown

Source: As recorded by the EDR from the commercially available software program.

Range: 0-10,000 rpm

Remarks:

If recorded, there are five pre-crash engine speed readings at one second and in some instances 2 second intervals.

PRE-CRASH THROTTLE PERCENTAGE READING (-5, -4, -3, -2, -1)

Screen Name: Throttle %

SAS Data Set:

SAS Variable:

Oracle Name: *EDR_PRECRASH.THROTTLE*

Element Attributes:

Oracle	SAS	
		Enter the pre-crash throttle percentage reading
-8879	9998	Not reported
-9999	9999	Unknown

Source: As recorded by the EDR from the commercially available software program.

Range: 0-100%

Remarks:

If recorded, there are five pre-crash throttle percentage readings at one second and in some instances 2 second intervals.

PRE-CRASH BRAKE STATUS (-5, -4, -3, -2, -1)

Screen Name: Brake Switch Circuit Status

SAS Data Set: *EDRPRECR*

SAS Variable: *BRKSWTCH*

Element Attributes:

Oracle	SAS	
1	1	On
2	2	Off
-8886	8	Not reported
-9999	9	Unknown

Source: As recorded by the EDR from the commercially available software program.

Remarks:

If recorded, there are five pre-crash engine speed readings at one second and in some instances 2 second intervals.

DATA/LONGITUDINAL DELTA V

Exterior Vehicle Form, Case 2007-996-900015/ Vehicle #2

VEHICLE | TIRE | SPECIFICATIONS | FUEL | FIRE | CRUSH | CDC | EDR | SKETCHES | LOG | REVIEW

EDR Information obtained ? Yes - Data entered

LIST | EDR | AIR BAG DEPLOY | PRECRASH | CRASH

DATA

LONGITUDINAL DELTA V | LATERAL DELTA V

Time (ms)	Delta-V (MPH)
10	

Save Close

DATA/LONGITUDINAL DELTA V

[Number of Milliseconds After Crash]

Screen Name: N/A

SAS Data Set: *EDRCRASH*

SAS Variable: *MSECONDS*

Oracle Name: *EDR_CRASH.SECONDS*

Element Attributes:

The unit of time for the delta V readings in milliseconds.

Source: As recorded by the EDR from the commercially available software program.

Range: 10-300, by 10's

Remarks:

Edit/Insert a new reading at 10 millisecond intervals.

[Delta V Reading]

Screen Name: N/A

SAS Data Set: *EDRCRASH*

SAS Variable: *DELTA V*

Oracle Name: *EDR_CRASH.DELTAV*

Element Attributes:

Oracle	SAS	
		The value of the delta V
-9999	999	Unknown

Source: As recorded by the EDR from the commercially available software program.

Range: -120 to -.1, 999. Add units in MPH

Remarks:

Enter only as many lines as times reported.

Time for LATERAL Delta V reading

Screen Name: Time

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *EDR_CRASH.SECONDS*

Element Attributes:

Edit/Insert a new reading at 10 millisecond intervals

Source: As recorded by the EDR from the commercially available software program.

Remarks:

DATA/LATERAL DELTA V

Lateral Delta V reading

Screen Name: Delta-V

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *EDR_CRASH.DELTAV*

Element Attributes:

Enter Lateral Delta V reading
Unknown

Source: As recorded by the EDR from the commercially available software program.

Remarks:

Insert the Delta V reading at 10 millisecond intervals.

INSTRUCTIONS FOR COMPLETION OF VEHICLE DAMAGE SKETCH

The Vehicle Sketch enables researchers to report data that are not encoded and might otherwise be omitted from the case. Pertinent data such as scrapes, scratches, buckling, paint transfers, and other indications of engagement or relative motion are reported on this page. In addition, sketch the vehicle damage profile on the outlines provided, using the established protocol as below.

- Outline the damage profile produced by the impact.
- Use cross hatches to indicate direct damage.
- Highlight induced damage and/or remote buckling with diagonal lines.

Although researchers are reporting a vehicle's crash related damage, other damage may be observed which existed prior to the crash or is towing damage. This type of damage must also be indicated and annotated accordingly.

Relevant measurements are required on the Vehicle Sketch page in order to support other data elements.

CDC extent zone measurements are required; although, only the measurements which pertain to the damaged plane are needed (*i.e.*, hood length for frontal, side extents for side impacts, etc.). Obtain all measurements which may be needed when questions arise regarding the damaged plane. If doubt exists concerning whether an impact is to a front or a side plane, obtain both front and side extent zone measurements.


In addition, front and back pre-crash bumper height measurements must be obtained for vehicles sustaining any end plane impact with another vehicle (in-transport or not in-transport) [*i.e.*, column (3) of CDC (including nonselected CDCs) must equal "F" or "B"].

- Measure from the bottom of the bumper face (reinforcement bar) to the ground.
- Include a calibrated instrument (contour gauge rod or 1 meter scale) in the photographs of the vehicle's bumper height.

Measure the length of beds of pickup trucks. If the bed is damaged, measure the length where the damage is the least.


The following screens exemplify the procedures to complete the vehicle sketches.

VEHICLE TYPES

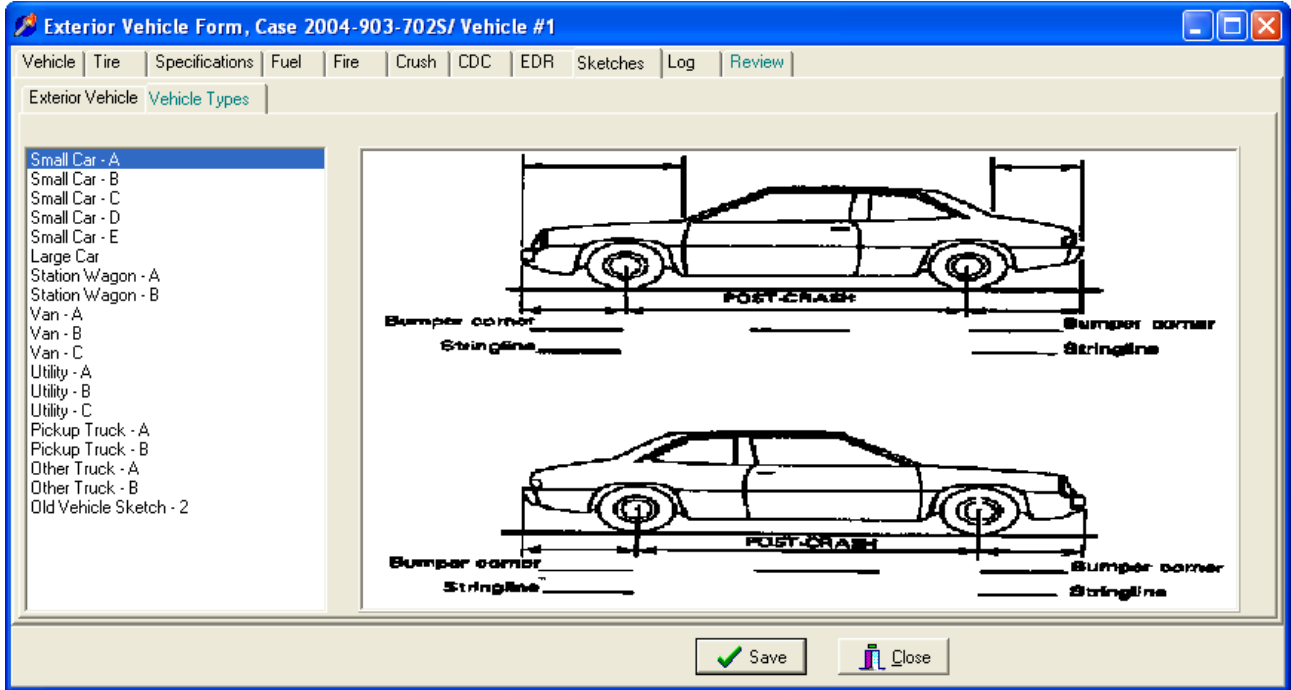


Select vehicle type from left side of screen and double click on type.

TOP VIEW

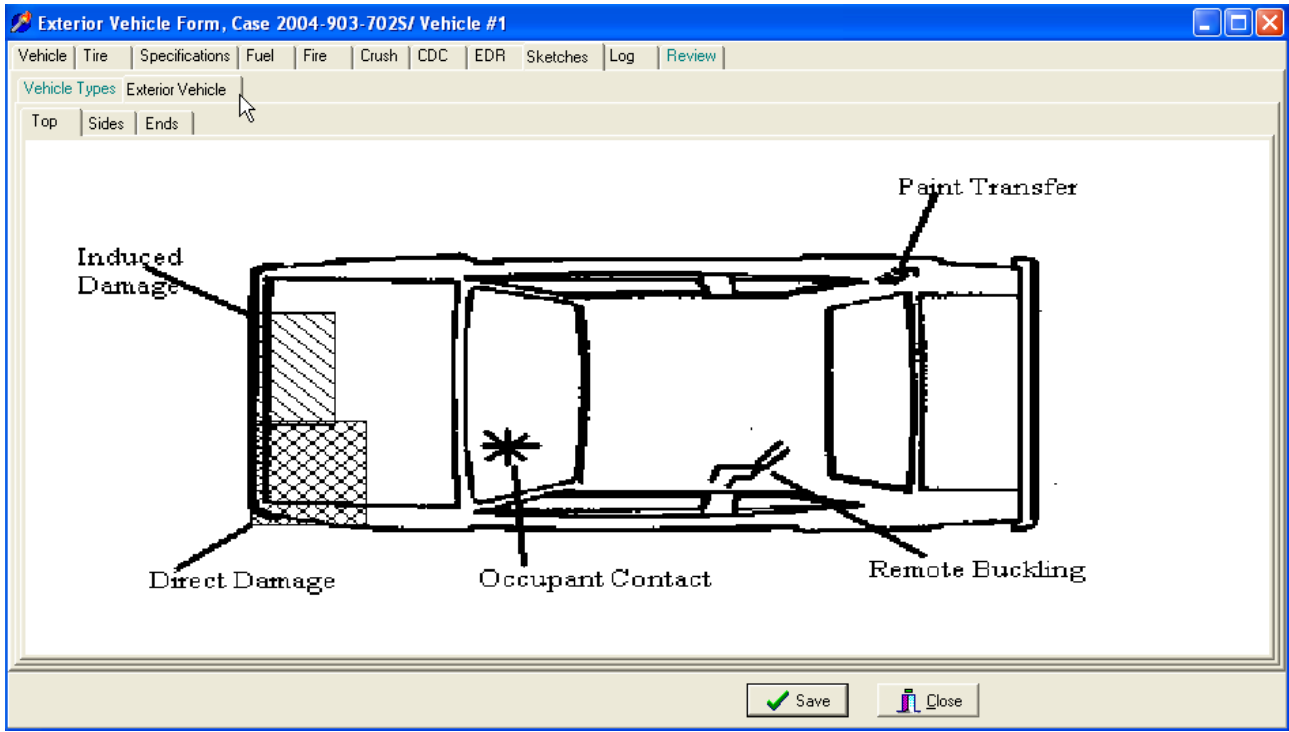


Next, select the End, Side or Top tab for completing the sketches. Then double click on the image to begin sketching the damage and documenting the required measurements.

SIDE VIEW

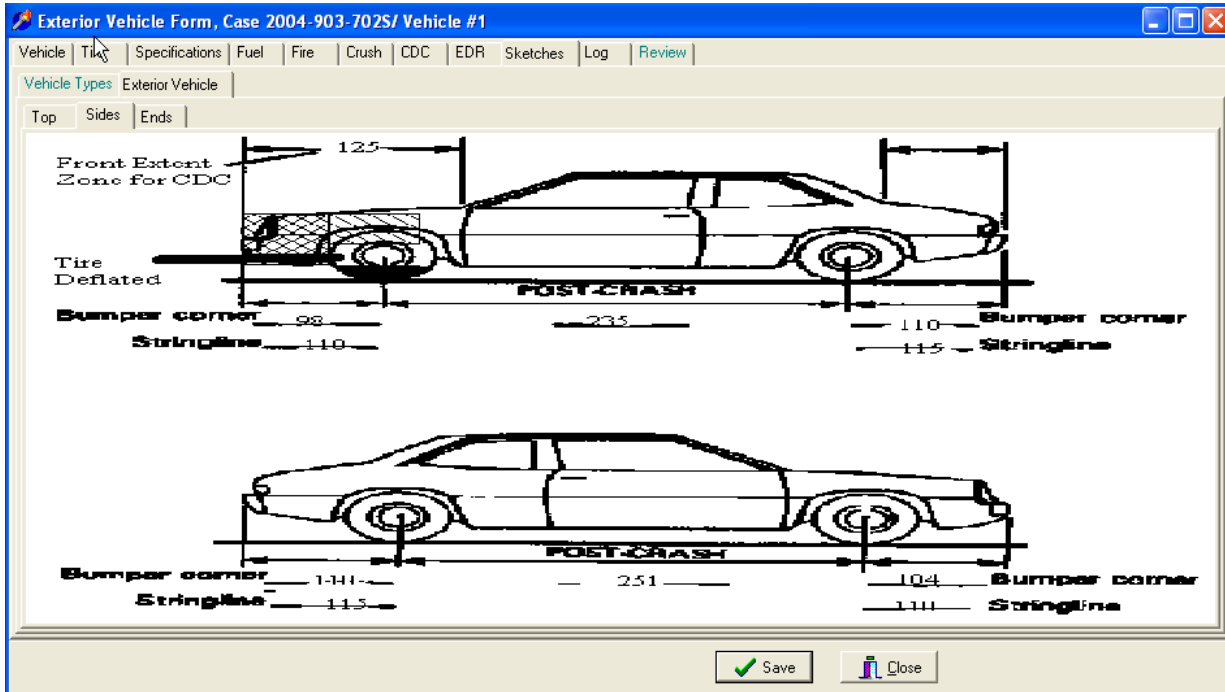

END VIEW

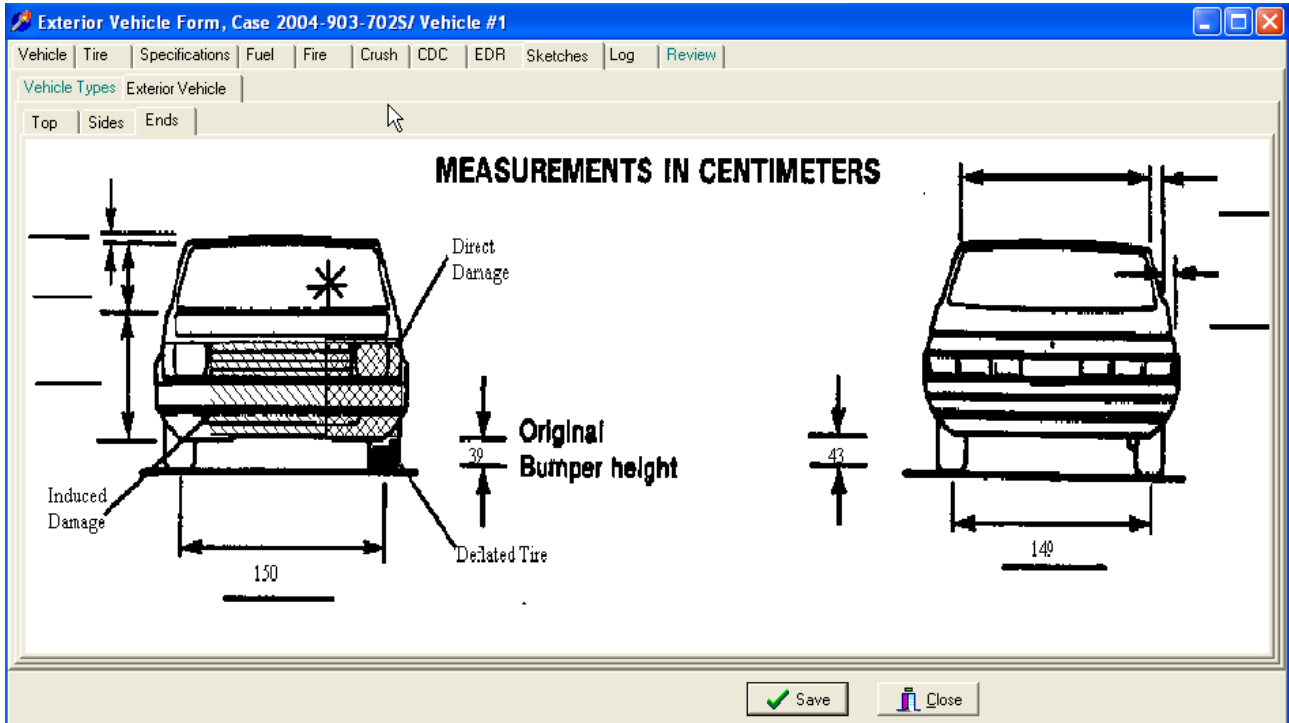

EXTERIOR VEHICLE FORM

SKETCHES/MEASUREMENTS

Exterior Vehicle Form, Case 2008-43-093B/ Vehicle #1 - Vehicle Measurements

Extent Zone Measurements (cms)			
Front	Back	Side	Vertical
(EF1) Hood: 20	(EB1) Trunk: Unknown	(ES1) Door: Unknown	(EV1) Roof: Unknown
(EF2) Windshield: Unknown	(EB2) BackLight: Unknown	(ES2) Glazing: Unknown	(EV2) Glazing: Unknown
(EF3) Pillar: Unknown	(EB3) Pillar: Unknown	(ES3) Roof: Unknown	(EV3) Door: Unknown

Baseline Measurements (cms)		Other Measurements (cms)	
Left	Right	Front	Rear
(BL1) Front OH: Unknown	(BR1): Unknown	(TKWF) Track Width: Unknown	(TKWR): Unknown
(BL2) Front BC: Unknown	(BR2): Unknown	(OBHF) Front Bumper: Unknown	(OBHR): Unknown
(BL3) Wheelbase: Unknown	(BR3): Unknown	Pick-Ups Only (cms)	
(BL4) Rear BC: Unknown	(BR4): Unknown	(PDAL) B Pillar: 50	
(BL5) Rear OH: Unknown	(BR5): Unknown	(PBL) B Pillar: Unknown	

Save Close

EXTERIOR VEHICLE FORM
SIDE DOOR LATERAL WIDTH

SKETCHES/MEASUREMENTS

Screen Name: Lateral - Door

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLEMEASUREMENTS.SIDE_DOOR*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-8887	887	Not Applicable
-9999	999	Unknown

Range: 002-025, 887, 999

Source: Vehicle inspection, exemplar vehicle, manufacturer specification

Remarks:

Used for determining CDC extent zone one for side impacts.

Enter to the nearest centimeter

Measure the undamaged (i.e. original) lateral distance between the bottom of the side glass to the outermost extent of the door.


Do not include any door hardware (e.g. door handles or mirrors).

Not Applicable

Used when the vehicle did not sustain a side impact.

Unknown

When the measurement cannot be determined or obtained from the original vehicle, exemplar, or any source.

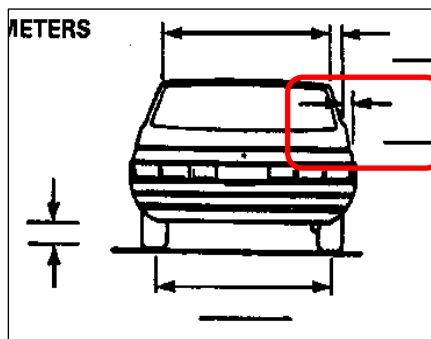

Screen Name: Lateral - Glazing

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLEMEASUREMENTS.SIDE_GLAZING*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-8887	887	Not Applicable
-9999	999	Unknown

Range: 001-035, 887, 999

Source: Vehicle inspection, exemplar vehicle, manufacturer specification

Remarks:

Used for determining CDC extent zone two for side impacts.

Enter to the nearest centimeter


Measure the undamaged (i.e. original) lateral distance between the bottom of the side glass to the top of the side glass of the same window. Do not consider the window frame when determining the top and bottom of the side glass.

Not Applicable

Used when the vehicle did not sustain a side impact.

Unknown

When the measurement cannot be determined or obtained from the original vehicle, exemplar, or any source.

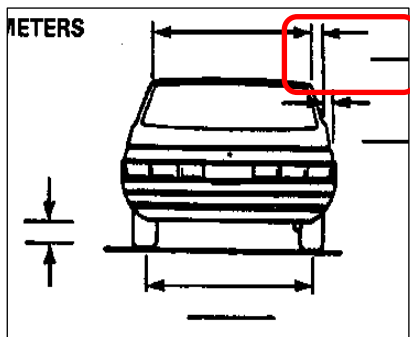

Screen Name: Lateral - Roof

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLEMEASUREMENTS.SIDE_ROOF*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-8887	887	Not Applicable
-9999	999	Unknown

Range: 100-200, 887, 999

Source: Vehicle inspection, exemplar vehicle, manufacturer specification

Remarks:

Used for determining CDC extent zone three thru eight for side impacts.

Enter to the nearest centimeter


Measure the undamaged (i.e. original) lateral distance between the top of the side glass to the top of the side glass on the opposing side of the vehicle. Do not consider the window frame when determining the top of the side glass.

Not Applicable

Used when the vehicle did not sustain a side impact.

Unknown

When the measurement cannot be determined or obtained from the original vehicle, exemplar, or any source.

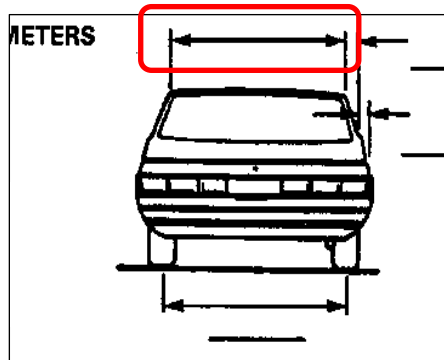

EXTERIOR VEHICLE FORM
SIDE DOOR VERTICAL HEIGHT

SKETCHES/MEASUREMENTS

Screen Name: Vertical - Door

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLEMEASUREMENTS.VERTICLE_DOOR*

Element Attributes:

Oracle	SAS	Enter to the nearest centimeter
-8887	887	Not Applicable
-9999	999	Unknown

Range: 040-120, 887, 999

Source: Vehicle inspection, exemplar vehicle, manufacturer specifications

Remarks:

Used for determining CDC extent zone six thru eight for Top impacts, and two thru four for Undercarriage impacts.

Enter to the nearest centimeter


Measure the undamaged (i.e. original) vertical distance between the bottom of the side glass and the bottom of the sill.

Not Applicable

Used when the vehicle does not sustain a Top or Undercarriage plane impact.

Unknown

When the measurement cannot be determined or obtained from the original vehicle, exemplar, or any source.

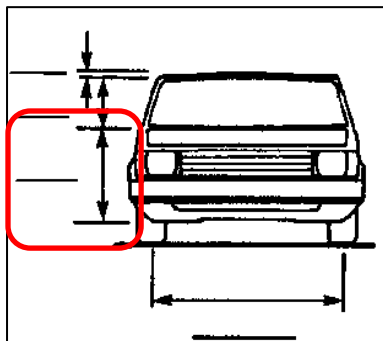

Screen Name: Vertical - Glazing

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLEMEASUREMENTS.VERTICLE_GLAZING*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-8887	887	Not Applicable
-9999	999	Unknown

Range: 020-080, 887, 999

Source: Vehicle inspection, exemplar vehicle, manufacturer specifications

Remarks:

Used for determining CDC extent zone three thru five for Top impacts, and six thru eight for Undercarriage impacts.

Enter to the nearest centimeter


Measure the undamaged (i.e. original) maximum vertical distance between the bottom and top extent of the side glass (not including the window frame).

Not Applicable

Used when the vehicle does not sustain a Top or Undercarriage plane impact.

Unknown

When the measurement cannot be determined or obtained from the original vehicle, exemplar, or any source.

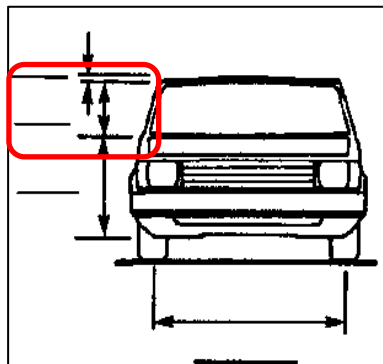

Screen Name: Vertical - Roof

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLEMEASUREMENTS.VERTICLE_ROOF*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-8887	887	Not Applicable
-9999	999	Unknown

Range: 001-020, 887, 999

Source: Vehicle inspection, exemplar vehicle, manufacturer specifications

Remarks:

Used for determining CDC extent zone two for Top impacts.

Enter to the nearest centimeter


Measure the undamaged (i.e. original) vertical distance between the uppermost extent of the side glass (not including the window frame) and the top of the roof.

Not Applicable

Used when the vehicle does not sustain a Top or Undercarriage plane impact.

Unknown

When the measurement cannot be determined or obtained from the original vehicle, exemplar, or any source.

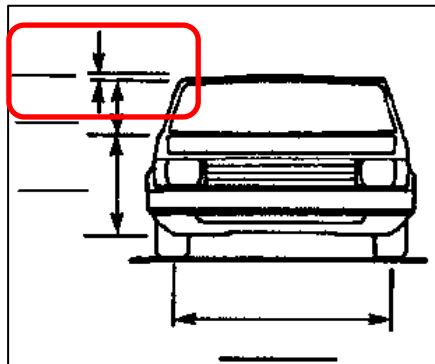

ORIGINAL FRONT BUMPER HEIGHT

Screen Name: Bumper Height - Front

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLEMEASUREMENTS.BUMPER_HEIGHT_FRONT*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-8887	887	Not Applicable
-9999	999	Unknown

Range: 010-150, 887, 999

Source: Vehicle inspection, exemplar vehicle, manufacturer specifications

Remarks:

Enter to the nearest centimeter

Front pre-crash bumper height measurements must be obtained for vehicles sustaining any end plane impact with another vehicle (in- transport or not in-transport) [i.e., column (3) of CDC (including non-selected CDCs) must equal "F"].


- Measure from the bottom of the bumper face (reinforcement bar) to the ground.
- Include a calibrated instrument (contour gauge rod or 1 meter scale) in the photographs of the vehicle's bumper height.

Not Applicable

Used when the vehicle does not sustain a Front plane impact, or in the rare situation where a vehicle is not equipped with a front bumper or reinforcement bar at the time of the crash.

Unknown

When the measurement cannot be determined or obtained from the original vehicle, exemplar, or any source.

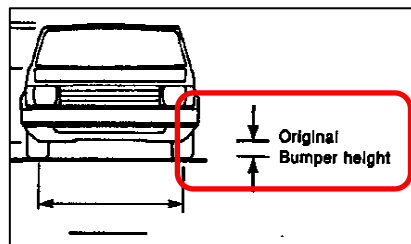

ORIGINAL REAR BUMPER HEIGHT

Screen Name: Rear Bumper Ht

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLEMEASUREMENTS.BUMPER_HEIGHT_REAR*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-8887	887	Not Applicable
-9999	999	Unknown

Range: 010-150, 887, 999

Source: Vehicle inspection, exemplar vehicle, manufacturer specification

Remarks:

Enter to the nearest centimeter

Rear pre-crash bumper height measurements must be obtained for vehicles sustaining any end plane impact with another vehicle (in- transport or not in-transport) [i.e., column (3) of CDC (including non-selected CDCs) must equal "B"].


- Measure from the bottom of the bumper face (reinforcement bar) to the ground.
- Include a calibrated instrument (contour gauge rod or 1 meter scale) in the photographs of the vehicle's bumper height.

Not Applicable

Used when the vehicle does not sustain a Rear plane impact, or in the rare situation where a vehicle is not equipped with a rear bumper or reinforcement bar at the time of the crash.

Unknown

When the measurement cannot be determined or obtained from the original vehicle, exemplar, or any source.

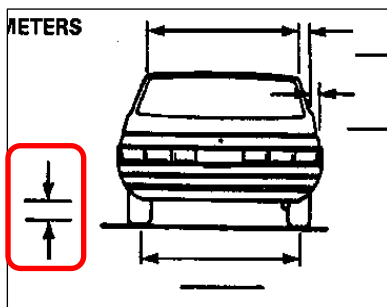

EXTERIOR VEHICLE FORM
FRONT TRACK WIDTH (POST CRASH)

SKETCHES/MEASUREMENTS

Screen Name: Front Track

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLEMEASUREMENTS.TRACKWIDTH_FRONT*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-8887	887	Not Applicable
-9999	999	Unknown

Range: 100-200, 887, 999

Source: Vehicle inspection

Remarks:

Enter to the nearest centimeter


Measure the damaged (i.e., post-crash) distance between the center point of the right front wheel and the center point of the left front wheel. The measurement may also be taken from the inside edge of one wheel to the outside edge of the other.

Not Applicable

Used in the rare situation when the vehicle was not manufactured with 2 wheels on the front axle.

Unknown

When the measurement cannot be determined or obtained, e.g. wheel(s) missing, completely repaired, etc.

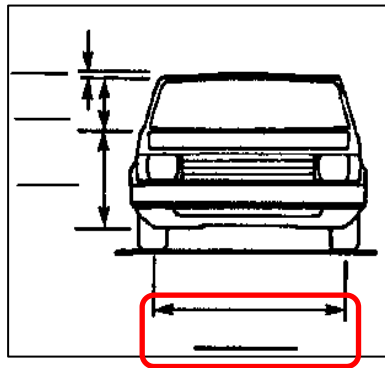

REAR TRACK WIDTH (POST CRASH)

Screen Name: Rear Track

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLEMEASUREMENTS.TRACKWIDTH_REAR*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-8887	887	Not Applicable
-9999	999	Unknown

Range: 100-200, 887, 999

Source: Vehicle inspection

Remarks:

Enter to the nearest centimeter

Measure the damaged (i.e. post-crash) distance between the center point of the right rear wheel and the center point of the left rear wheel. The measurement may also be taken from the inside edge of one wheel to the outside edge of the other.


For vehicles manufactured with dual rear wheels, the measurement should be taken to the center point between the dual wheels to the center point of the opposing dual wheels.

Not Applicable

Used when the vehicle was not manufactured with two rear wheels.

Unknown

When the measurement cannot be determined or obtained, e.g. wheel missing, completely repaired, etc.

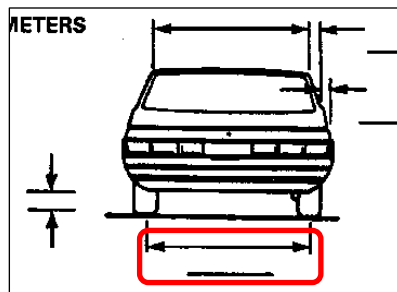

Screen Name: End - Hood

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLEMEASUREMENTS.FRONT_HOOD*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-8887	887	Not Applicable
-9999	999	Unknown

Range: 015-225, 887, 999

Source: Vehicle inspection, exemplar vehicle, manufacturer specification

Remarks:

This measurement is obtained to determine CDC extent zone one thru five for frontal impacts.

Enter to the nearest centimeter

Measure the original (i.e. pre-crash) longitudinal distance along the centerline of the vehicle between the original maximum front extent of the vehicle (e.g. front stringline) and the most forward extent of the base of the windshield (i.e. where the visible portion of the glass ends).


At the windshield, this measurement is normally taken at the center point where the windshield meets the instrument panel.

Not Applicable

Used when the vehicle doesn't sustain a frontal impact.

Unknown

When the measurement cannot be determined or obtained.

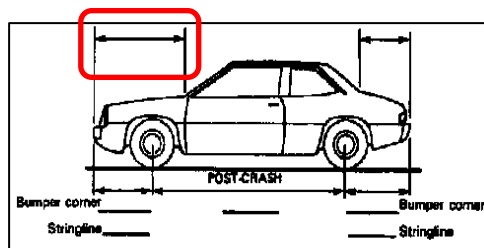

Screen Name: End - Windshield

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLEMEASUREMENTS.FRONT_WINDSHIELD*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-8887	887	Not Applicable
-9999	999	Unknown

Range: 001-150, 887, 999

Source: Vehicle inspection, exemplar vehicle, manufacturer specification

Remarks:

This measurement is obtained to determine the CDC Extent Zone for frontal impacts to all vehicle types.

Enter to the nearest centimeter

Measure the original (i.e. pre-crash) longitudinal measurement along the centerline of the vehicle between the original forward extent of the vehicle's windshield to the rear extent of the windshield.

Not Applicable

Used when the vehicle does not sustain a frontal impact.

Unknown

When the measurement cannot be determined or obtained.

ORIGINAL WINDSHIELD TO B PILLAR

Screen Name: Front – Pillar

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLEMEASUREMENTS.FRONT_PILLAR*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-8887	887	Not Applicable
-9999	999	Unknown

Range: 010-150, 887, 999

Source: Vehicle inspection, exemplar vehicle, manufacturer specification

Remarks:

This measurement is obtained to determine CDC Extent Zone seven and eight for frontal impacts.

Enter to the nearest centimeter

Measure the original (i.e. pre-crash) longitudinal distance between the B Pillar and the top edge of the windshield along the vehicle’s centerline. The measurement should be taken to the longitudinal center of the B Pillar.

Not Applicable

Used when the vehicle doesn’t sustain a frontal impact.

Unknown

When the measurement cannot be determined or obtained.

ORIGINAL BACKLIGHT TO B PILLAR LENGTH

Screen Name: BL – B PILLAR

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLEMEASUREMENTS.BACK_PILLAR*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-8887	887	Not Applicable
-9999	999	Unknown

Range: 000-300, 887, 999

Source: Vehicle inspection, exemplar vehicle, manufacturer specification

Remarks:

This measurement is obtained to determine the CDC Extent Zone for rear impacts to automobiles, station wagons, utility vehicles, and vans.

Enter to the nearest centimeter


Measure the original (i.e. pre-crash) longitudinal measurement between the original forward extent of the vehicle's backlight to the center of the top of the B pillar. The measurement should be taken along the centerline of the vehicle.

Not Applicable

Used when the vehicle does not sustain a rear impact or if the vehicle is not an automobile, utility vehicle, or van.

Unknown

When the measurement cannot be determined or obtained.

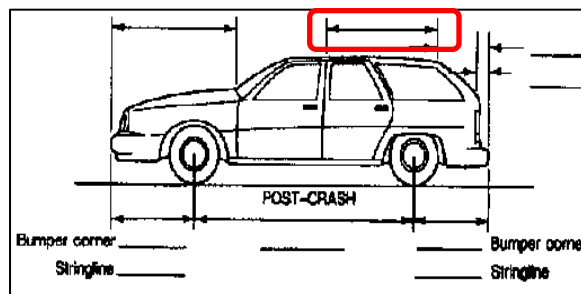

Screen Name: End - Backlight

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLEMEASUREMENTS.BACK_BACKLIGHT*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-8887	887	Not Applicable
-9999	999	Unknown

Range: 001-150, 887, 999

Source: Vehicle inspection, exemplar vehicle, manufacturer specification

Remarks:

This measurement is obtained to determine the CDC Extent Zone for rear impacts to automobiles, station wagons, utility vehicles, and vans. Please refer to SAE J224MAR80 for further explanation and description.

Enter to the nearest centimeter

Measure the original (i.e. pre-crash) longitudinal measurement between the original forward extent of the vehicle's backlight to the rear extent of the backlight along the vehicle's centerline.

Not Applicable

Used when the vehicle does not sustain a rear impact or if the vehicle is not an automobile, utility vehicle, or van.

Unknown

When the measurement cannot be determined or obtained.

ORIGINAL TRUNK LENGTH

Screen Name: End - Trunk

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLEMEASUREMENTS.BACK_TRUNK*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-8887	887	Not Applicable
-9999	999	Unknown

Range: 010-125, 887, 999

Source: Vehicle inspection, exemplar vehicle, manufacturer specification

Remarks:

This measurement is obtained to determine the CDC Extent Zone for rear impacts to automobiles, station wagons, utility vehicles and vans. Please refer to SAE J224MAR80 for further explanation and description.

Enter to the nearest centimeter

Measure the original (i.e. pre-crash) longitudinal measurement between the original maximum rear extent of the vehicle's rear bumper and the most rearward extent of the backlight.


Normally this measurement is taken to the base of the backlight, however there are rare situations when the upper edge of the glazing projects further rearward than the bottom edge. In this circumstance, the measurement is taken to the upper edge of the glazing.

Not Applicable

Used when the vehicle does not sustain a rear impact or if the vehicle is a pick-up truck.

Unknown

When the measurement cannot be determined or obtained.

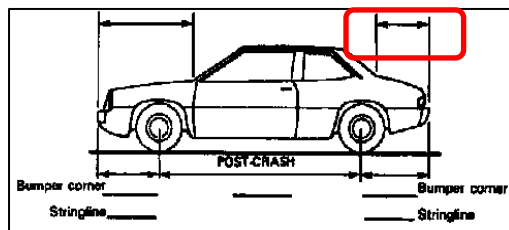

ORIGINAL PICK-UP REAR EXTENT

Screen Name: P/U Rear

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLEMEASUREMENTS.OAL_B.PILLAR*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-8887	887	Not Applicable
-9999	999	Unknown

Range: 100-400, 887, 999

Source: Vehicle inspection, exemplar vehicle, manufacturer specification

Remarks:

This measurement is obtained to determine CDC extent zones for rear impacts to pick-up trucks.

Enter to the nearest centimeter


Measure the original (i.e. pre-crash) longitudinal measurement between the original maximum rear extent of the vehicle (e.g. rear Stringline) and the center of the B Pillar.

Not Applicable

Used when the vehicle does not sustain a rear impact or the vehicle is not a pick-up truck.

Unknown

When the measurement cannot be determined or obtained.

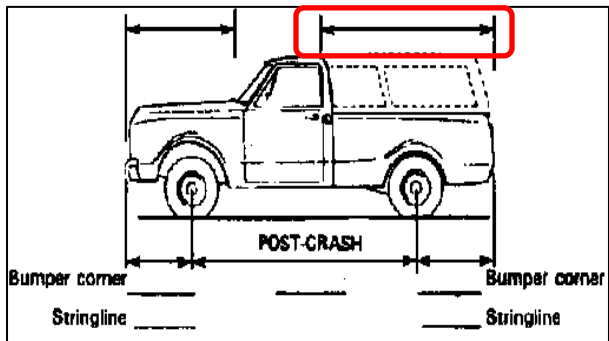

Screen Name: Bed Length

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLEMEASUREMENTS.BED_LENGTH*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-8887	887	Not Applicable
-9999	999	Unknown

Range: 100-250, 887, 999

Source: Vehicle inspection

Remarks:

This measurement is obtained to verify specifications of pick-up trucks.

Enter to the nearest centimeter

Measure the original (i.e. pre-crash) longitudinal distance of the inside of the pick-up truck's bed.

Not Applicable

Used when the vehicle is not a pick-up truck, or if the pick-up truck does not have a bed.

Unknown

When the measurement cannot be determined or obtained.

BASELINE MEASUREMENT – LEFT/RIGHT SIDE FRONT STRINGLINE

Screen Name: Left – FSL/Right - FSL

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLEMEASUREMENTS.FRONT_LT_STRINGLINE/
FRONT_RT_STRINGLINE*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-8887	887	Not Applicable
-9999	999	Unknown

Range: 025-250, 887, 999

Source: Vehicle inspection

Remarks:

Enter to the nearest centimeter

Measure the distance between the post-crash position of the left/right side front axle and the front stringline.

Normally the axle position is measured from the center of the outer hub of the wheel, however if the front wheel exhibits a steer angle or is missing, approximate or use the position of the ball joint or axle.

Include any stingline adjustments.

Obtain this measurement for all vehicles where an end plane stringline is set up regardless of its repair state.

Not Applicable

Use this code when the vehicle does not sustain an end plane impact or when an end plane stingline is not set up.

Unknown

When the measurement cannot be determined or obtained. This includes completely repaired vehicles.

BASELINE MEASUREMENT – LEFT/RIGHT SIDE FRONT CORNER

Screen Name: Left – FBC/Right - FBC

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLEMEASUREMENTS.FRONT_LT BUMPERCORNER/
FRONT_RT BUMPERCORNER*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-8887	887	Not Applicable
-9999	999	Unknown

Range: 000-250, 887, 999

Source: Vehicle inspection

Remarks:

Enter to the nearest centimeter

Measure the distance between the post-crash position of the left/right side front axle and the associated front bumper corner.

Normally the axle position is measured from the center of the outer hub of the wheel, however if the front wheel exhibits an angle or is missing, approximate or use the position of the ball joint or axle.

This measurement is obtained for any end plane or side impacts.

If the bumper structure (including the bumper re-bar) is missing, take the measurement to the next rigid structure.

Not applicable

Used when a vehicle is fully repaired, or does not sustain a front or side impact.

Unknown

When the measurement cannot be determined or obtained.

BASELINE MEASUREMENT – LEFT/RIGHT SIDE WHEELBASE

Screen Name: Left – WB/Right - WB

SAS Data Set:

SAS Variable:

Oracle Name: **VEHICLEMEASUREMENTS.WHEELBASE_LT/
WHEELBASE_RT**

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-8887	887	Not Applicable
-9999	999	Unknown

Range: 050-650, 887, 999

Source: Vehicle inspection

Remarks:

Enter to the nearest centimeter

Measure the distance between the post-crash position of the left/right side front axle and rear axle.

Normally the axle position is measured from the center of the outer hub of the wheel, however if the front wheel exhibits an angle or is missing, approximate or use the position of the ball joint or axle.

Not applicable

Used when a vehicle is fully repaired.

Unknown

When the measurement cannot be determined or obtained.

BASELINE MEASUREMENT – LEFT/RIGHT SIDE REAR CORNER

Screen Name: Left – RBC/Right - RBC

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLEMEASUREMENTS.REAR_LT BUMPERCORNER/
REAR_RT BUMPERCORNER*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-8887	887	Not Applicable
-9999	999	Unknown

Range: 000-250, 887, 999

Source: Vehicle inspection

Remarks:

Enter to the nearest centimeter

Measure the distance between the post-crash position of the left/right side rear axle and the associated rear bumper corner.

Normally the axle position is measured from the center of the outer hub of the wheel, however if the rear wheel is missing, approximate or use the position of the axle.

This measurement is obtained for any end plane or side impacts.

If the bumper structure (including the bumper re-bar) is missing, take the measurement to the next rigid structure.

Not applicable

Used when a vehicle is fully repaired, or does not sustain a front or side impact.

Unknown

When the measurement cannot be determined or obtained.

BASELINE MEASUREMENT – LEFT/RIGHT SIDE REAR STRINGLINE

Screen Name: Left – ROH/Right - ROH

SAS Data Set:

SAS Variable:

Oracle Name: *VEHICLEMEASUREMENTS.REAR_LT_STRINGLINE/
REAR_RT_STRINGLINE*

Element Attributes:

Oracle	SAS	
		Enter to the nearest centimeter
-8887	887	Not Applicable
-9999	999	Unknown

Range: 050-450, 887, 999

Source: Vehicle inspection

Remarks:

Enter to the nearest centimeter

Measure the distance between the post-crash position of the left/right side rear axle and the rear stringline.

Normally the axle position is measured from the center of the outer hub of the wheel, however if the rear wheel is missing, approximate or use the position of the axle.

Include any stingline adjustments.

Obtain this measurement for all vehicles where an end plane stringline is set up regardless of its repair state.

Not Applicable

Use this code when the vehicle does not sustain an end plane impact or when a end plane stingline is not set up.

Unknown

When the measurement cannot be determined or obtained. This includes completely repaired vehicles.

EXTERIOR VEHICLE FORM

LOG

Exterior Vehicle Form, Case 2007-996-900015/ Vehicle #2

VEHICLE | TIRE | SPECIFICATIONS | FUEL | FIRE | CRUSH | CDC | EDR | SKETCHES | LOG | REVIEW

Applicable Precrash Measurements

Reference Line Placement



Impact Damage Documentation

Vehicle Damage Sketch

Exterior Slides Subject

Exterior Slides

Primary Error Source

 Save  Close

Remarks:

- The seven variables listed in the Exterior Vehicle Log tab are completed at the Zone Center level during the Data Quality Control process. Quality ratings for NASS CDS data are divided into the following categories:
- Not Applicable
- Substandard-Beyond Researcher Control
- Substandard
- Standard

These ratings are designed to assess the quality of data collected with respect to NASS program standards. These requirements were derived from field data collection guidelines and researcher training materials. Each variable is rated independently. Overall case quality should not be considered when determining appropriate ratings for each variable.

Not Applicable

Defined for each variable.

Substandard – Beyond Researcher Control

This rating is used when data requirements set forth under each variable cannot be achieved due to uncontrollable circumstances, which prohibited the researcher from obtaining and properly documenting the data.

Substandard

This rating is used when the information set forth under data requirements for each variable is available but is not obtained or is unsatisfactorily documented by the researcher.

When it is unclear which classification to use, Zone Center reviewers default to Substandard (not beyond Researcher control).

Standard

This rating is used when data requirements set forth under each variable have been satisfactorily obtained.

APPLICABLE PRE-CRASH MEASUREMENTS**Element Values:**

Not Applicable
Substandard-Beyond Researcher Control
Substandard
Standard

Remarks:

This variable assesses the acquisition and coding of all pre-crash measurements including the following:

- Recording all original specifications available for this vehicle
- Recording applicable free space for contacted planes
- Recording all CDC extent zone measurements for each plane contacted, including all measurements required for top plane damage i.e. rollover)
- Recording the undeformed end width and (estimated bumper heights for end plane impacts

Not Applicable is coded if specifications are not available at the PSU or from the Zone Center. All sources are to be considered before using this code.

REFERENCE LINE PLACEMENT

Element Values:

Not Applicable
Substandard-Beyond Researcher Control
Substandard
Standard

Remarks:

This variable assesses the documentation of reference line placement, including damage locator measurements.

Not Applicable is coded when a reference line is not required (i.e. horizontal impacts).

IMPACT DAMAGE DOCUMENTATION**Element Values:**

Not Applicable (Not a valid code for this variable)
Substandard-Beyond Researcher Control
Substandard
Standard

Remarks:

This variable assesses the documentation of the impact damage including all applicable crush profile measurements (L's, C's, D, DDW, Field L, Field L/D). Researchers are required to follow the NASS standards as set forth in the NASS Vehicle Measurements Techniques Document. In assessing this variable the Zone Center reviewer should consult this document to confirm that all measurement protocols were followed.

To meet the Standard assessment, a researcher must document the impact damage for each applicable impact to the vehicle. Each of the impacts is assessed individually in order to evaluate the researcher's adherence to the NASS standard.

Beyond the above requirements, several additional measurements or data elements (included in the NASS standard) are to be obtained. These include:

- The correct Vehicle Identification Number (VIN)
- Post crash wheelbases
- Post crash bumper corner measurements
- Post crash Front/Rear axle to string line measurements for end plane impacts
- Post crash track widths

For impacts where no crush profiles are required the focus of this variable is the researcher's documentation of direct damage, max crush, and any other data required to accurately code a CDC.

Vehicles that are under repair should be documented through the use of damaged parts if they are available. In such instances, the NASS Standard may be attainable, provided the data required in the standard are obtained. It is not possible, however, to attain a Standard rating if the damaged parts have been discarded or if the parts have been altered such that the required measurements cannot be obtained. Similarly, fully repaired vehicles cannot receive a Standard assessment.

QUALITY OF VEHICLE DAMAGE SKETCH**Element Values:**

Not Applicable (Not a valid code for this variable)
Substandard-Beyond Researcher Control
Substandard
Standard

Remarks:

This variable assesses the post impact information reported on the Vehicle Sketch page. To receive a Standard rating, the damage sketch should be a legible representation of all damage drawn on the appropriate vehicle sketch page.

The sketch should include the following:

- Crosshatched lines along the direct damage width, which locate as accurately as possible the width and height of the direct damage.
- Diagonal lines which represent the induced damage as accurately as possible the length and height of the Field L.
- Indications of direct damage that may not be supported by a crush profile (e.g. rollover damage, wheel impacts, contact to glazing).
- Diagonal lines to identify remote buckling or induced damage that is not directly adjacent to the impact.
- Annotation of previous or unrelated damage and/or any damage resulting from towing, extrication or salvage activities.
- Observations, which may be useful in reconstructing the crash sequence (e.g. grass in tire beads, scuffs on sidewalls, direction of striations on tires or body surfaces).
- Annotate “Completely repaired” or “Vehicle under repair” on sketch as applicable.

Substandard-Beyond Researcher Control will be coded for all completely repaired vehicles or vehicles that are under repair.

EXTERIOR IMAGES SUBJECT QUALITY**Element Values:**

Not Applicable (Not a valid code for this variable)
Substandard-Beyond Researcher Control
Substandard
Standard

Remarks:

This variable assesses whether or not all of the proper photographs were obtained during the vehicle inspection. The Standard for NASS Exterior Vehicle Photography is established in the CDS Digital Photography Guideline. The guideline establishes a *minimum* criteria for the NASS researcher. Consequently, all of the photographs dictated by the applicable sections of the document are required to meet the NASS standard. However, in order to properly document unusual or special circumstances additional images may be required. Instructions for photographing frontal and rear impacts, as well as rollovers and completely repaired vehicles are included in the Guideline. For vehicles that have sustained multiple impacts, more than one section will apply. Images must be as complete and concise as possible.

Calibrated measurement rods and a vertical calibrated rod must be present in the images for crush profiles. If measurements are required at two damage levels, images of both sets of profiles must be provided.

Proper rollover documentation includes images of contour rods used to measure the lateral and vertical max crush. (These rods may be attached to the vehicle with tape or clamps.)

An unsanitized image of the VIN plate and uncovered state license plate must be included.

EXTERIOR IMAGE QUALITY**Element Values:**

Not Applicable (Not a valid code for this variable)
Substandard-Beyond Researcher Control
Substandard
Standard

Remarks:

This variable assesses the quality of the images with respect to clarity and crispness. Items evaluated for this variable include:

- Proper framing of the subject
- Light exposure
- Proper focus of the overall subject
- Proper focus of relevant areas with respect to close-up images

PRIMARY ERROR SOURCE (VEHICLE PLANE)

Element Values:

- No error
- Front
- Side (left or right)
- Top
- Undercarriage
- Other (specify) _____

Remarks:

This variable is used to identify CDC or crush measurement errors by specific vehicle plane and provides the Zone center with opportunities for technical feedback and/or training. Errors are based on column 3 of the CDC and the associated crush profiles. The primary CDC (highest Delta V) and the associated crush profile receive primary consideration.

Error assessments are based upon the corrected CDC rather than the initial submission. (Example, if a CDC is incorrectly assigned to a side plane and the damage is reassigned to the frontal plane, Front is coded.)

No error is coded when no errors exist in coding the correct plane of impact for the primary CDC (highest Delta V).

LIST

Exterior Vehicle Form, Case 2007-996-900015/ Vehicle #2

VEHICLE | TIRE | SPECIFICATIONS | FUEL | FIRE | CRUSH | CDC | EDR | SKETCHES | LOG | REVIEW

PSU REVIEW | ZONE REVIEW

LIST | DETAIL

Field	Original	Suggested
-------	----------	-----------

Save Close

DETAIL

Exterior Vehicle Form, Case 2007-996-900015/ Vehicle #2

VEHICLE | TIRE | SPECIFICATIONS | FUEL | FIRE | CRUSH | CDC | EDR | SKETCHES | LOG | REVIEW

PSU REVIEW | ZONE REVIEW

LIST | DETAIL

Form Tab Veh# Occ#

Original Suggested

Comment

Save Close

INTEGRITY

Interior Vehicle Form, Case 2007-996-900015/ Vehicle #1

INTEGRITY | GLAZING | INTRUSION | INSTRUMENT | STEERING | CONTACT | EJECTION | ENTRAPMENT | LOG | REVIEW

Passenger Compartment Integrity

No Integrity loss Door (side) Roof Side window Unknown

Windshield Door/hatch (back door) Roof glass Rear window (backlight)

Post crash integrity loss

Location	Opening	Damage/Failure
LF		
RF		
LR		
RR		
TG/H		

Save Close

[IS THERE PASSENGER COMPARTMENT INTEGRITY LOSS?]

Screen Name: N/A

SAS Data Set: VI

SAS Variable: INTGLOSS

Oracle Name: DERIVED FROM VEHICLE_X.COMPARTINTEGRITY

Element Attributes:

0	No integrity loss
1	Yes integrity loss
9	Unknown integrity loss

Source: Vehicle inspection.

Remarks:**No integrity loss**

is selected when the doors, roof, and glazing (as listed below) remained intact during the impact sequence.

Unknown

is used in the following situations:

- extrication damage masked integrity loss, and
- integrity loss could not be determined due to circumstances beyond the researcher's control.

PASSENGER COMPARTMENT INTEGRITY

Screen Name: Passenger Compartment Integrity

SAS Data Set: *INTGRTY*

SAS Variable: *PASINTEG*

Oracle Name: *VEHICLE_X_OMPARTINTEGRITY.INTEGRITYID*

Element Attributes:

Oracle	SAS	
2	1	Windshield
3	2	Door (side)
4	3	Door/hatch (back door)
5	4	Roof
6	5	Roof glass
7	6	Side window
8	7	Rear window (backlight)
-9999		Unknown
-9998	0	No Integrity Loss

Source: Vehicle inspection.

Remarks:

Select all that apply.

The question of integrity loss is assessed with respect to impact related damage. The damage can be either direct or induced. Damage which is not impact related (*e.g.*, fire, extrication) is not considered.

Consider the passenger compartment as a "package" which is designed to contain the occupant. If an opening occurs of sufficient magnitude through which an occupant could have been ejected totally or partially (although it is not necessary for an occupant to have been ejected), the integrity of the compartment should be considered to have been lost. While it is difficult to define the magnitude of the opening in a universal manner, the minimum size of the opening would be equivalent to the head of most adults (approximately 15- 20 centimeters). Components which may lose their integrity are restricted to the windshield glazing, window glazing (side, rear, or roof), door or roof.

Doors which open upon impact or glazing that is broken during the impact sequence are considered integrity loss. However, doors which were left open prior to an impact do not constitute damage related loss of integrity and should be reported under **Door, Tailgate Or Hatch Opening**, select **Other**.

Windshield

is selected when the glazing is either holed/slit or displaced sufficiently to allow an adult size head to pass through.

Door (side)

refers to the door structure and excludes glazing areas. All side doors, whether hinged or sliding are considered here. A door is defined as a structure that allows ingress/egress to the occupant compartment of the vehicle and has hinges and locking mechanism.

Door/hatch (back door)

identifies integrity loss of the back door structure and not the glazing. Back doors include hatchback, tailgate, and liftback. In situations where the rear hatch or upper portion of the tailgate is made entirely of glazing material and secured with a latching mechanism, only the latching mechanism should be considered for this attribute. Integrity loss through shattered or displaced rear window glazing is identified in **Rear window**

Roof

refers only to the roof structure and not glazing areas. Roof structures containing metal panels (*e.g.*, "T" top roofs) are reported here as well as closed convertible tops.

Roof glass

reports glazing material in the roof structure which is broken or displaced.

Side window

refers to glazing which was broken or displaced during the crash sequence. Glazing which was totally open prior to the crash and broken (*i.e.*, sidelight rolled down into the door area) is not entered as integrity loss.

Rear window (backlight)

includes backlights, hatchbacks / tailgates / liftbacks, and rear door glazing which were broken or displaced.

Unknown

is used when an integrity loss could not be determined.

POST CRASH INTEGRITY LOSS**Screen Name:*****SAS Data Set:******SAS Variable:*****Element Attributes:**

Check box

Source: Vehicle inspection.**Remarks:****Post crash integrity loss**

is selected when the researcher determines that what appears to be integrity loss is caused by post crash actions. Examples:

- The windshield collapses due to extreme outside temperature
- Fire/EMS cut windshield out for extrication
- Fire/EMS cut the pillars or doors for extrication

Door, Tailgate, or Hatch Opening Overview

It is the intent of these variables to capture whether a passenger compartment door, tailgate, or hatch opened or remained closed during the crash sequence. The reason the doors came open during the crash is also reported.

The areas of interest include the left front, right front, left rear, right rear, and tailgate/hatch doors (*i.e.*, LF, RF, LR, LR2, LR3, RR, RR2, RR3, TG/H, respectively). The LF and RF doors are the forward most side doors on the left and right sides of a vehicle and the LR and RR doors are the next door (or set of doors) rearward of the LF and RF doors. There are situations where two adjacent doors are used to cover a single opening (*i.e.*, side or rear of a cargo van). These should be treated as a single door. Side doors are applicable whether hinged or on tracks.

A door is defined as a structure that allows ingress/egress to the occupant compartment of the vehicle and has hinges and locking mechanism.

Generally, hatch doors meet the following criteria:

- provide access to the rear cargo area of a passenger car type vehicle, through a large opening backlight,
- are composed primarily of glass and may or may not be framed,
- are hinged at the top and latched at the bottom, and
- are not used in conjunction with a lower door or tailgate.

Some vehicles are equipped with frameless glass hatches which may shatter as a result of an impact. This situation is considered a glazing loss (refer to **Glazing**) rather than a hatch opening unless the hatch did, in fact, open prior to the glass breaking (*i.e.*, release of the latching/hinging mechanism). Some glass hatches may be bordered by a narrow band of metal. The condition of this metal band is the focus of this variable group. These remarks also apply when the upper window of a tailgate assembly is being considered.

Generally, tailgates exist on the rear end plane of a utility/station wagon type vehicles. They may be one or two piece assemblies. In the instance of a two piece unit, they will be hinged at the top and bottom with a horizontal seam. One piece units may be hinged at the top for some vehicles or at the bottom with retracting rear windows for others. Pickup truck tailgates are not included in these variables.

Rear doors may be single or double units covering a single opening. The rear doors are hinged on one or both sides with a vertical seam present in dual door applications. Rear doors are most commonly found on van type vehicles and are indicated under descriptor - "TG/H".

[DOOR, TAILGATE, OR HATCH LOCATION]

Screen Name: Location

SAS Data Set: *DOORS*

SAS Variable: *DLOCAT*

Oracle Name: *VEHICLEINTEGRITY.INTEGRITYLOCATIONID*

Element Attributes:

Oracle	SAS		
1	1	LF	Left Front=1
2	2	RF	Right Front=2
3	3	LR	Left Rear=3
4	4	RR	Right Rear=4
5	5	TG/H	Tail Gate / Hatch=5

Source: Vehicle inspection.

Remarks:

Information is precoded and a choice is made for filling in subsequent variables

DOOR, TAILGATE, OR HATCH OPENING

Screen Name: Opening

SAS Data Set: *DOORS*

SAS Variable: *DOPEN*

Oracle Name: *VEHICLEINTEGRITY.PICKOPENING*

Element Attributes:

Oracle	SAS	
16	N/A	[No door/gate/hatch]
17	1	Door/gate/hatch remained closed and operational
18	2	Door/gate/hatch came open during collision
19	3	Door/gate/hatch jammed shut
20	8	Other (specify):
21	9	Unknown

Source: Vehicle inspection.

Remarks:

This variable identifies the operational status of a door, tailgate or hatch during a crash sequence. Priority is given to doors which “open” during the collision. Doors which are pushed inwards and jammed, such that a gap or space occurs, are captured under this variable as **door/gate/hatch jammed shut**. The gap or space that occurs is coded under the variable **Integrity Loss**. Where multiple doors cover a single opening, and the disposition of each door was different, select the response for the door which is first identified in the following priority list:

- Door/gate/hatch came open during collision
- Door/gate/hatch jammed shut,
- Other (specify):
- Door/gate/hatch remained closed and operational
- Unknown

As an example, if one door came open and the other was jammed shut, the proper response would be Door/gate/hatch came open during collision. Gaps caused by body deformation are not selected as door opening events. These gaps will be selected in Passenger Compartment Integrity.

No door/gate/hatch

is selected when no OEM door, tailgate, or hatch exists in the appropriate area (*i.e.*, LF, RF, LR, RR, TG/H).

Door/gate/hatch remained closed and operational

for any door, tailgate, or hatch which did not open during the crash sequence and remained operational.

Door/gate/hatch came open during collision

is selected when the door assembly opened during the crash sequence, irrespective of the cause. Further, the magnitude of the opening created is inconsequential when selecting this response. Note, if this response is selected then the **Damage/Separation** responses for the next variable, must be indicated, based on what caused the door / hatch to come open. The researcher must consider the potential that a sprung-mass situation may exist. In this condition, the door may have been opened after the crash, but due to vehicle body stresses the door cannot be shut. This is an important consideration when assessing whether the door came open during the collision.

Door/gate/hatch jammed shut

is selected when a door is rendered inoperable due to being jammed shut. Inoperable is defined as the inability of the researcher to open the door wide enough (through the use of reasonable force) to allow passage of an adult head. It is irrelevant whether the jamming is a result of latch or hinge failure, the displacement of adjacent body panels, or direct damage. Undamaged locked doors should not be considered as jammed or inoperable. Doors which were pried open following the crash are an indication of jamming and should be closely examined. In this situation, the researcher should thoroughly annotate and photograph the door area to support this conclusion.

Other

is selected for those situations which cannot be identified with other elements. Doors which are open prior to the crash are reported here (*e.g.*, hatchbacks open for cargo reasons, ventilation, etc.).

Unknown

is used when the researcher could not make a performance assessment of the door, tailgate or hatch.

DAMAGE/SEPARATION ASSOCIATED WITH DOOR, TAILGATE, OR HATCH OPENING IN COLLISION

Screen Name: Damage/Separation

SAS Data Set: *DOORS*

SAS Variable: *DFAILURE*

Oracle Name: *VEHICLEINTEGRITY.PICKOPENINGFAILURE*

Element Attributes:

Oracle	SAS	
		[No door/gate/hatch]
22	1	[Door not opened/separation not assessed]
23	2	Door operational (no damage)
24	3	Latch/striker separation due to damage
25	4	Hinge separation due to damage
26	5	Door structure separation due to damage
27	6	Door support (<i>i.e.</i> , pillar, sill, roof side rail, etc.) separation due to damage
28	7	Latch/striker and hinge separation due to damage
29	8	Other separation (specify):
30	9	Unknown

Source: Vehicle inspection.

Remarks:

This variable is designed to capture the reason a door opened during the collision sequence.

[No door/gate/hatch]

is automatically selected when:

- no door, tailgate, or hatch exists.
- the door/tailgate/hatch did not open during the crash sequence or
- the door/tailgate/hatch is jammed shut.

Doors which were open prior to the crash (hatchbacks open for cargo reasons, ventilation, etc.) also are reported here.

[Door not opened]

is automatically selected when:

- the door/tailgate/hatch did not open during the crash sequence or
- the door/tailgate/hatch is jammed shut.

Door operational (no damage)

is selected when the door, tailgate, or hatch opened during the crash sequence, but the unit was undamaged and remained operational.

Latch/striker separation due to damage

is selected when the door, tailgate, or hatch opened as a result of a separation of the latch/striker assembly. The separation must be due to damage, either direct or induced, and must result in the forced unlatching of the latch/striker assembly or shearing of the striker post.

Hinge separation due to damage

is selected to indicate that a hinge separation exists as a result of either direct or induced damage. A hinge separation includes the complete separation of the hinge assembly from the door structure, pillar or of the two or more components which comprise the hinge assembly.

Door structure separation due to damage

is selected anytime the door structure sustained damage which allowed the latch, striker, or hinge to separate from the mounting surface (*i.e.*, torn metal). The door structure is defined as all components of the door assembly exclusive of the door skin.

Door support (*i.e.*, pillar, sill, roof side rail, etc.)

is selected to define situations where the latch/striker assembly did not separate, but the door support areas are damaged sufficiently to allow for the door to open. This includes, but is not limited to, the damage of pillars, sills and/or roof side rails at its most severe level.

Latch/striker and hinge separation due to damage

Latch/striker and hinge separation due to damage is used to describe situations where the entire door and adjacent components (*i.e.*, pillars) are torn away by an impact. Separation must be present to the latch/striker and at least one hinge, resulting in the door opening (*i.e.*, door partially or completely torn off).

Other separation (specify)

is used to indicate that an opening exists which cannot be described with the attributes above. This includes vehicles with a canvas roof and door structure (*i.e.*, Jeeps, etc.).

Unknown

is used when it cannot be determined which attribute applies.

GLAZING

Interior Vehicle Form, Case 2008-43-093B/ Vehicle #2

INTEGRITY | GLAZING | INTRUSION | INSTRUMENT | STEERING | CONTACT | EJECTION | ENTRAPMENT | REVIEW | LOG

Location	Glazing Type	Precrash Status	Impact Damage	Occupant Damage
WS	A5-1 - Laminated	Fixed	No glazing damage from impact	No occupant contact
LF				
RF				
LR				
LR2				
RR				
RR2				
LR/3				
X RR/3	No glazing	No glazing	No glazing	No glazing
BL				
LBL				
RBL				
Roof				
Other				

Save Close

Glazing Type and Damage Overview

Page 1 of 2

Glazing is defined for these variables as a covering for openings in the vehicle's structure which has the ability to allow light to pass. The areas of interest include: the windshield, sidelight windows, backlight (hatchback, tailgate, liftback, rear window), and roof. Composition of glazing materials in use include: glass, plastic, and glass-plastic.

The potential for occupant ejection is a major concern of rulemakers at NHTSA. These variables are designed to record the successes and failures of occupant containment by glazing when there is an occurrence of occupant contact to the glazing, or glazing damage by impact forces or vehicle damage.

There is glass that involves a plastic anti-lacerative layer applied to the inner surface of windshields (such as Inner Shield, Securiflex, etc.). Glass - plastic should not be confused with the current design of laminate windshields which are made with a layer of plastic (Polyvinyl Butyral) between two layers of annealed glass.

Researchers are required to thoroughly inspect all glazing for direct occupant contact/damage and encode their findings. This information is recorded independent of occupant ejection.

Glazing variables are divided into four sections.

Type
Precrash Glazing Status
Impact Damage
Occupant Damage

These sections are further divided into fourteen specific areas of interest or Locations:

WS	=	Windshield
LF	=	Left front window (driver's window)
RF	=	Right front window
LR	=	Left rear window (adjacent to LF window)
LR2	=	2 nd left rear window (adjacent to LR window)
LR3	=	3 rd left rear window (adjacent to LR2 window)
RR	=	Right rear window (adjacent to RF window)
RR2	=	2 nd right rear window (adjacent to RR window)
RR3	=	3 rd right rear window (adjacent to RR2 window)
BL	=	Backlight, tailgate / hatchback / liftgate window
LBL	=	Left backlight (left side of a divided backlight, i.e., rear doors on some vans)
RBL	=	Right backlight (right side of a divided backlight, i.e., rear doors on some vans)
Roof	=	Sun roof, moon roof, "T" roof, etc.
Other	=	Other sidelights, door wing windows, and any other light not identified above

Glazing Type and Damage Overview (cont'd)

Page 2 of 2

The "other" category (as noted) encompasses areas where glazing may be directly contacted by occupants or damaged from impact forces and not identified by a specific location. This would include wing windows located in door areas. In the event more than one "other" area was involved, select the area with the highest priority number as ranked above. When more than one glazing has priority, the researcher should select the glazing which is closest to the front of the vehicle with the left side taking precedence over the right side. The researcher must specify the selected glazing in the space provided.

LOCATION OF WINDOW/WINDSHIELD GLAZING

Screen Name: Location

SAS Data Set: *GLAZING*

SAS Variable: *GLOC*

Oracle Name: *VEHICLEGLAZING.GLAZINGLOCATIONID*

Element Attributes:

Oracle	SAS	
1	1	Windshield (WS)
2	2	Left front window (driver's window) (LF)
3	3	Right front window (RF)
4	4	Left rear window (adjacent to LF window) (LR)
5	5	2 nd left rear window (adjacent to LR window) (LR2)
		3 rd left rear window (adjacent to LR2 window) (LR3)
6	6	Right rear window (adjacent to RF window) (RR)
7	7	2 nd right rear window (adjacent to RR window) (RR2)
		3 rd right rear window (adjacent to RR2 window) (RR3)
10	8	Backlight, tailgate/hatchback/liftgate window (BL)
11	9	Left backlight (left side of a divided backlight, i.e., rear doors on some vans) (LBL)
12	10	Right backlight (right side of a divided backlight, i.e., rear doors on some vans) (RBL)
15	11	Sun roof, moon roof, "T" roof, etc. (Roof)
20	98	Other sidelights, door wing windows, and any other light not identified above (Other)

Source: Vehicle inspection.

Remarks:

Information is pre-coded and a choice is made for filling in subsequent variables.

TYPE OF WINDOW/WINDSHIELD GLAZING

Screen Name: Type

SAS Data Set: *GLAZING*

SAS Variable: *GLTYPE*

Oracle Name: *VEHICLEGLAZING.PICKGLAZINGTYPE*

Element Attributes:

Oracle	SAS	
1	0	NA No glazing
2	1	AS-1 - Laminated
3	2	AS-2 - Tempered
37	11	AS-2 - Laminated
38	12	AS-2 - Laminated-with after market tint
5	4	AS-2 - Tempered-with after market tint
4	3	AS-3 - Tempered-tinted (original)
39	13	AS-3 - Laminated tinted (original)
40	14	AS-3 - Laminated tinted (with additional after market tint)
6	5	AS-3 - Tempered-tinted (with additional after market tint)
41	15	AS-6 - Flexible plastic safety glazing
8	7	Glazing removed prior to crash
42	98	Other (specify):
43	99	Unknown

Source: Vehicle inspection.

Remarks:

Glazing types are identified by unique AS (American Standard) numbers which are etched in the glazing surface. The AS numbers are generally grouped with other glazing information and together make up an informational symbol referred to as a "watermark" (see diagram below). The arrow indicates the "AS number" within the watermark.



Glazing types are used whether or not the glazing area was identified as damaged from impact forces or direct occupant contact. When all side and rear windows have been broken out, examine the window track or frame for remnants of broken glass. If glass is present and the remnants are small clear granules (or cracked in granule size pieces), then it is permissible to select (AS-2 Tempered). If these remnants are tinted, then it is permissible to select [AS-3 - Tempered - tinted (original)]. If these remnants have any plastic tint shield clinging to them, then it is permissible to select (AS-2 Tempered – with after market tint) or [AS-3 Tempered - tinted (with additional after market tint)]. If the glazing of the side glass appears to be held together by plastic coating, then it is permissible to select AS2/3 Laminated, respectively.

No glazing

is selected for specific areas where the body structure was not designed to accept glazing (*i.e.*, solid roof structure, etc.).

AS-1 - Laminated

refers to a layer of plastic between two layers of glass. This type of glazing is widely used in current windshield installations.

AS-2 - Tempered

refers to glass which is designed to break into small glass granules when damaged.

AS-2 - Laminated

refers to glass which is composed of two pieces of glass laminated together by a plastic interlayer. This type of glass when damaged does not break into small granules.

AS-2 - Laminated-with after market tint

refers to AS-2-Laminated glazing which has an aftermarket plastic tint applied.

AS-2 - Tempered - with after market tint

refers to AS-2 glazing which has an aftermarket plastic tint shield applied.

AS-3 - Tempered - tinted (original)

refers to manufactured tinted (privacy) glass which has the ability to break into small glass granules when damaged. Glazing which has an aftermarket plastic tint shield applied should be listed as **AS-2 - Tempered - with after market tint**.

AS-3 - Laminated - tinted (original)

refers to manufactured tinted glass which is composed of two pieces of glass laminated together by a plastic interlayer. This type of glass when damaged does not break into small granules.

AS-3 - Laminated tinted (with additional after market tint)

refers to AS-3 Laminated glazing which has an additional aftermarket plastic tint shield applied.

AS-3 - Tempered – tinted (with additional after market tint)

refers to AS-3 glazing which has an additional aftermarket plastic tint shield applied.

AS-6 - Flexible plastic safety glazing

refers to plastic side and rear windows. This type of glazing is usually found in convertibles and Jeeps.

Glazing removed prior to crash

includes sun roofs, "T" tops, etc. which were removed from their respective areas prior to the crash.

Other (specify)

refers to any glazing which has an AS number different from AS-1, AS-2, AS-3 and AS-6. Write the AS number of the glazing in the "specify" space provided. This includes plastic (AS-11C), bullet proof (AS-10), and anti-lacerative (AS-14).

Unknown

is used in the following situations:

- Due to factors beyond the researcher's control, an adequate determination of glazing presence could not be made.
- A reasonable determination of the "AS" number could not be made.

WINDOW PRE-CRASH STATUS

Screen Name: Pre Crash Status

SAS Data Set: *GLAZING*

SAS Variable: *GLPRCRSH*

Oracle Name: *VEHICLEGLAZING.PICKPRECRASHSTATUS*

Element Attributes:

Oracle	SAS	
11	0	N/A [No glazing]
12	1	Fixed
13	2	Closed
14	3	Partially opened
15	4	Fully opened
16	7	Glazing removed prior to crash
17	9	Unknown

Source: Vehicle inspection with verification from interview, if possible.

Remarks:

This variable records the operational modes of the glazing prior to the crash.

No glazing

is used for specific areas where the body structure was not designed to accept glazing (*i.e.*, solid roof structure, etc.).

Fixed

identifies glazing which is not designed to open (*e.g.* windshields, etc.).

Closed

refers to any operable glazing which was fully closed (*i.e.*, no air gaps).

Partially opened

refers to any operable glazing which is not firmly closed (*i.e.*, air gaps present) and not fully opened. Note, the researcher should select the placement of the window in relationship to the opening and not by window design limitations (*i.e.*, rear sedan windows designed not to fully open).

Fully opened

refers to any operable glazing which is attached to the vehicle (*i.e.*, window tracks) and was placed in the open position such that the glazing was not restricting the opening of the vehicle structure. This element is assessed independently of window design limitations (*i.e.*, side windows designed to only roll down halfway cannot receive this attribute).

Glazing removed prior to crash

includes sun roofs, "T" tops, etc. which were removed from their respective areas prior to the crash.

Unknown

is used in the following situation:

- Due to factors beyond the researcher's control, an adequate determination of glazing presence could not be made.

GLAZING DAMAGE FROM IMPACT FORCES

Screen Name: Impact Damage

SAS Data Set: *GLAZING*

SAS Variable: *GLIMPACT*

Oracle Name: *VEHICLEGLAZING.PICKIMPACTDAMAGE*

Element Attributes:

Oracle	SAS	
18	0	N/A [No glazing]
19	1	No glazing damage from impact forces
20	2	Glazing in place and cracked from impact forces
21	3	Glazing in place and holed from impact forces
22	4	Glazing out-of-place (cracked or not) and not holed from impact forces
23	5	Glazing out-of-place and holed from impact forces
24	6	Glazing disintegrated from impact forces
25	7	Glazing removed prior to crash
26	9	Unknown if damaged

Source: Vehicle inspection

Remarks:

This variable identifies damage to the glazing as a result of impact forces and/or vehicle damage (including damage from interior loose objects). Damage caused by direct occupant contact should be recorded in the variable **Occupant Damage**.

NOTE: Glazing(s) which are retracted into vehicle body panels (*i.e.*, fully open) are to be assessed. Caution should be used in assessing glazing(s) that have post crash damage from sun/heat build up and or extrication.

No glazing

is used for specific areas where the body structure was not designed to accept glazing (*i.e.*, solid roof structure, etc.).

No glazing damage from impact forces

is selected when there was no damage to the glazing from impact forces. Glazing damage for these variables is defined as cracking, holed, out-of-place or disintegrated. Glazing which is scratched is considered not damaged.

Glazing in place and cracked from impact forces

is selected when the glazing remained within the confines of its specific area and was cracked. Displaced glazing which was not totally separated from the vehicle should be treated as "in place". This would include windshields with partial bond separation and dislodged side glazing(s).

Glazing in place and holed from impact forces

is selected when the glazing was "holed". "Holed" refers to a hole or slit in the glazing which is large enough in size to allow passage of an adult head (approximately 15-20 centimeters). For the purpose of this variable, the hole or slit must have been produced by impact force and/or vehicle damage and not by direct occupant contact.

Glazing out-of-place (cracked or not) and not holed from impact forces

refers to glazing which was totally separated from the vehicle as the result of impact forces and/or vehicle damage. Windshields with 100 percent bond separation should receive this attribute. Caution must be exercised by the researcher not to consider shattered tempered glass (*i.e.*, sidelights, etc.) as out-of-place. This situation should be identified as **Glazing disintegrated from impact forces**.

Glazing out-of-place and holed from impact forces

refers to glazing that was totally separated from the vehicle during the crash sequence and was holed/slit as the result of impact forces or vehicle damage. "Holed" refers to either a hole or slit in the glazing which is large enough in size to allow passage of an adult head (approximately 15-20 centimeters).

Glazing disintegrated from impact forces

refers to glazing that was totally destroyed by impact forces or vehicle damage. This usually occurs with shattered tempered glass (*i.e.*, sidelights, etc.). Windshields that are separated from the vehicle should not be considered disintegrated. Uncertainty may exist when determining the cause of shattered sidelight glazing when the collision occurred adjacent to an occupied seat. As a rule of thumb, impact forces and/or vehicle damage generally cause disintegration of the sidelight prior to occupant contact.

Glazing removed prior to crash

includes sun roofs, "T" tops, etc. which were removed from their respective areas prior to the crash.

Unknown if damaged

is selected in the following situations:

- The degree of damage could not be determined as the result of post impact damage (*i.e.*, extrication, towing operations, etc.).

- Due to factors beyond the researcher's control, an adequate determination of glazing damage could not be made (*i.e.*, catastrophic type vehicle damage, etc.). This should be a rare occurrence.
- The cause of glazing damage (*i.e.*, impact forces versus occupant contact) could not be determined by the researcher. Caution, it is anticipated this reason will be rarely used. When confronted with this dilemma, every effort must be made to select a known value for damaged glazing.

GLAZING DAMAGE FROM OCCUPANT CONTACT

Screen Name: Occupant Damage

SAS Data Set: *GLAZING*

SAS Variable: *GLOCCUPT*

Oracle Name: *VEHICLEGLAZING.PICKOCCUPANTDAMAGE*

Element Attributes:

Oracle	SAS	
27	0	NA [No glazing]
28	1	No occupant contact
29	2	Glazing contacted by occupant but no glazing damage
30	3	Glazing in place and cracked by occupant contact
31	4	Glazing in place and holed by occupant contact
32	5	Glazing out-of-place (cracked or not) by occupant contact and not holed by occupant contact
33	6	Glazing out-of-place by occupant contact and holed by occupant contact
34	7	[Glazing removed prior to crash]
35	8	Glazing disintegrated by occupant contact
36	9	Unknown if contacted by occupant

Source: Vehicle inspection.

Remarks:

These variables report direct occupant contact to the glazing during the crash sequence. The responses are prioritized, the further you go down the list, the higher the priority, [*i.e.*, **Glazing in place and holed by occupant contact** takes precedence over **Glazing in place and cracked by occupant contact**, etc.].

NOTE: Glazing(s) which are retracted into vehicle body panels (*i.e.*, fully open) are to be assessed.

No occupant contact

is selected when there are no direct occupant contact(s) detected on the glazing.

Glazing contacted by occupant but no glazing damage

is selected when an occupant directly contacted the glazing, but the contact did not result in glazing damage.

Glazing in place and cracked by occupant contact

refers to glazing that was damaged (not holed) by direct occupant contact. The term "in place" describes glazing which has remained within the confines of its specific area. Displaced glazing

which was not totally separated from the vehicle should be treated as "in place". This would include windshields with partial bond separation and dislodged side glazing.

Glazing in place and holed by occupant contact

is selected when the glazing was "holed". "Holed" refers to a hole or slit in the glazing which was produced by direct occupant contact. This opening is equivalent in size to the space necessary to allow passage of an adult head (approximately 15 -20 centimeters).

Glazing out-of-place (cracked or not) by occupant contact and not holed by occupant contact

refers to glazing which was directly contacted by an occupant and was totally separated from the vehicle during the crash sequence. Windshields with 100 percent bond separation are reported here. Caution must be exercised by the researcher not to consider shattered tempered glass (*i.e.*, sidelights, etc.) as out-of-place. This situation is reported as **Glazing disintegrated by occupant contact**

Glazing out-of-place by occupant contact and holed by occupant contact

refers to glazing which was contacted and holed by direct occupant contact and totally separated from the vehicle during the crash sequence. "Holed" refers to a hole or slit in the glazing which was produced by direct occupant contact. This opening is equivalent in size to the space necessary to allow passage of an adult head (approximately 15 -20 centimeters).

Glazing removed prior to crash

includes sun roofs, "T" tops, etc. which were removed from their respective areas prior to the crash. Glazing retracted into vehicle body panels (*i.e.*, fully open) is not considered in this element.

Glazing disintegrated by occupant contact

refers to glazing that was totally destroyed by direct occupant contact. This usually occurs with shattered tempered glass (*i.e.*, sidelights, etc.). Windshields that were separated from the vehicle should not be considered disintegrated. Uncertainty may exist when determining the cause of shattered sidelight glazing when the collision occurred adjacent to an occupied seat. As a rule of thumb, impact forces and/or vehicle damage generally cause disintegration of the sidelight prior to occupant contact. If the glazing is indicated in **Impact Damage** as "Disintegrated by Impact Forces" this variable must be coded as **No Occupant Contact**.

Unknown if contacted by occupant

is selected in the following situations:

- Direct occupant contact/damage could not be determined due to post impact damage (*i.e.*, extrication, towing operations, etc.).
- Due to factors beyond the researcher's control, an adequate determination of direct occupant contact/damage could not be made.

OCCUPANT AREA INTRUSION OVERVIEW

Page 1 of 4

If there is no intrusion select the "No Intrusion" button on the Sketch subtab.

Displacement of less than three centimeters is not considered to be an intrusion.

Intrusion results whenever the internal boundary surface of the passenger compartment is moved inward due to direct or indirect damage resulting from the application of a crushing force to the exterior surface of a vehicle. An exterior component can intrude into the passenger compartment. A passenger compartment is defined as that interior occupant space which is normally available for occupant seating, based upon both the vehicle design and seat configuration at the time of the crash. Adjacent cargo areas and other enclosed areas are included for consideration in the following situations.

The area behind the last row of seats designed by the manufacturer for cargo is integral with the passenger compartment.

An area where a seat row was either removed or folded down to accommodate cargo.

Intrusion can occur from the vertical, longitudinal, or lateral direction. Intrusion can also occur from the displacement of interior seatbacks and/or seat cushions.

Measurement of Passenger Compartment Intrusion***Types of Intrusion***

Two types of intrusions occur most often in crashes. They are:


Type A: Intrusion which is limited to one part of the passenger compartment and where the other side of the vehicle remains relatively free of distortion. This is likely to be the case in the majority of crashes. In many cases it will be possible to obtain undeformed vehicle dimensions as the vehicle is symmetrical about the longitudinal centerline.

Type B: Intrusion which occurs in many sections of the passenger compartment with little of the vehicle remaining free of distortion. In this case, it will be necessary to obtain "original" dimensions by comparison with a second (unintruded) vehicle of the same type.

FIGURE 1

Establishment of Reference Axis. In order to compare one side of a vehicle with the other or compare two vehicles, a coordinate system within the vehicle is required. An example of Type A and Type B intrusions are shown in Figure 1.

TYPE A INTRUSION: _____

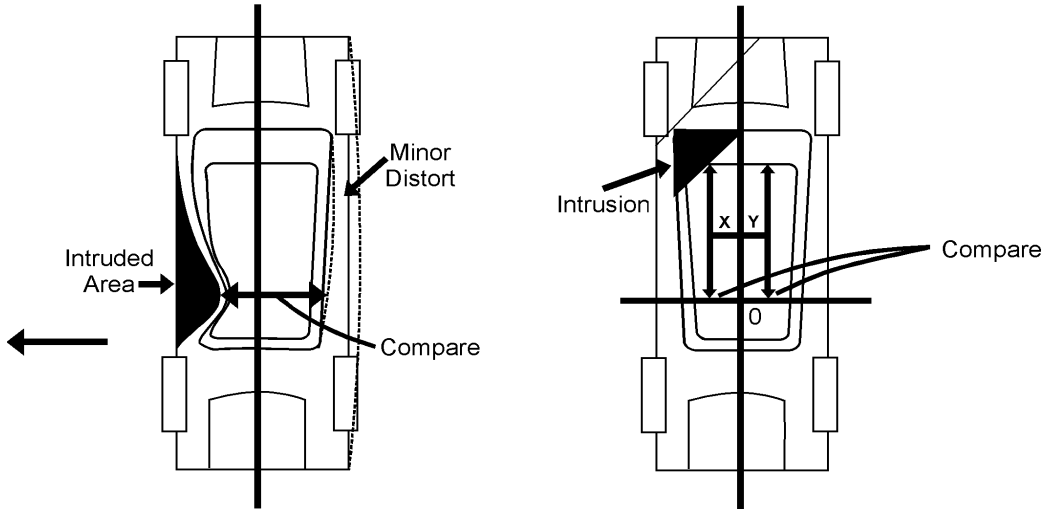

TYPE B INTRUSION: _____


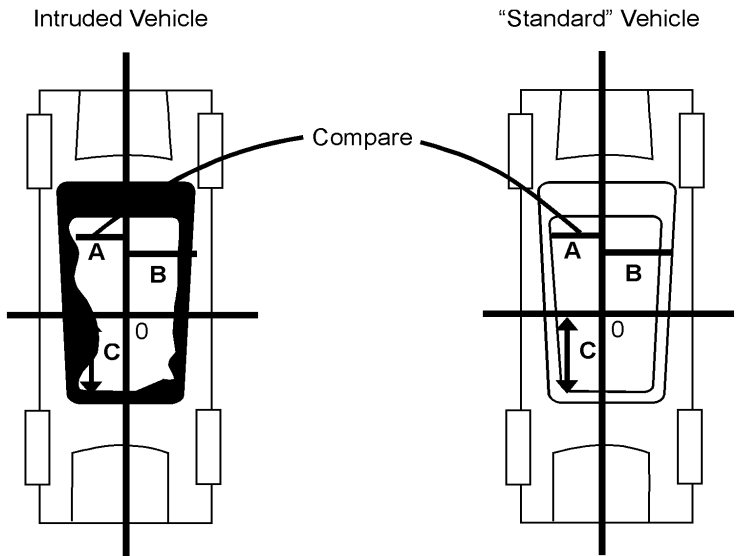


FIGURE 2

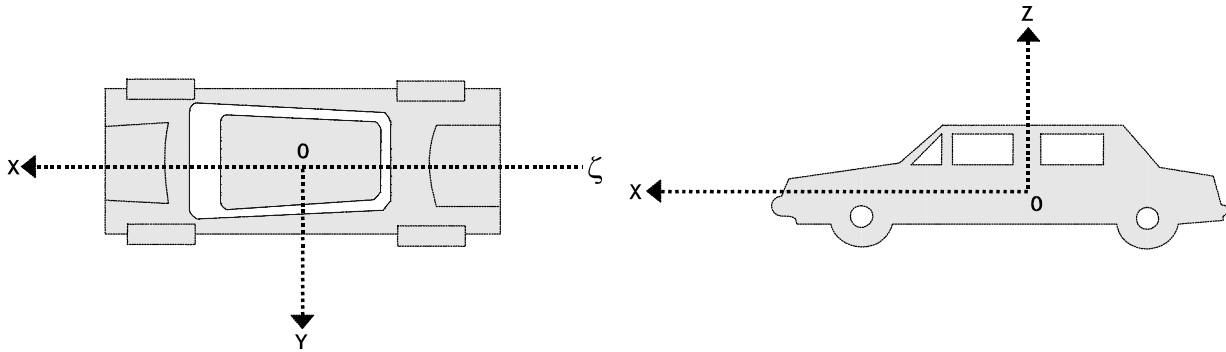

The x-axis is on the longitudinal centerline of the vehicle. This could be set up along the transmission drive shaft tunnel for a rear wheel drive vehicle or along a centerline which is equidistant from the sides of the vehicle in a front wheel drive vehicle.

The y-axis is in a side-to-side or lateral direction. This plane may be set up in any convenient location which can be readily established in the "reference" vehicle.

The z-axis is the vertical axis. A location at the top of the transmission drive shaft tunnel may be convenient to reference roof collapse in many cases. The point established by these intersecting planes defines the origin (**O**).

Establishing a frame of reference and measuring intrusion can be simplified.

- In a frontal collision, there is rarely intrusion at the rear, and vice-versa for a rear collision.
- Side impacts generally damage only one side of the vehicle.
- Roof impacts leave the floor pan undistorted.
- Not all intrusions require the establishment of all three axes.

The ordering of intrusions reflects the intrusion severity as recorded in column three (*i.e.*, Magnitude of Intrusion variables).

An intruded component is assessed for its Dominant Crush Direction as determined from the Magnitude of Intrusion. For example, an instrument panel may intrude both longitudinally and vertically. The coded intrusion will reflect the instrument panel with the dominant crush direction (vertical or longitudinally). If the dominant intrusion is not perceptibly different in the field (*i.e.*, an exemplar vehicle is required for comparison measurements) the Researcher should document the

component (i.e., instrument panel) in both directions. However, during the quality control process of the case, only the instrument panel intrusion with the greater magnitude is coded, the other intrusion row is deleted.

This system is defined by an orthogonal set of axes (x-y-z) and an origin (**O**) as shown in Figure 2. The position of the origin is typically on the longitudinal centerline of the vehicle and has an arbitrary location, both vertically and longitudinally. However, its location must be identical for the intruded and "reference" vehicle. Note, the axes are referenced to the floor plane of the vehicle.

NOTE: The extent of a component intrusion into a row sector should not exceed the pre-impact dimension of that sector. For example, if the front row width is 150 centimeters, each sector is equal to 50 centimeters. If the driver-side door panel intrudes 60 centimeters laterally, the intrusion is listed as:

Front Row Left (sector 11) Intrusion Magnitude = 50cm (maximum amount for that sector)

Front Row Middle (sector 12) Intrusion Magnitude = 10cm (the remaining amount for the door panel intrusion).

Catastrophic should only be used to describe intrusion damage which is so severe that the researcher is unable to discern any of the following:

- specific occupant locations,
- intruding components,
- magnitude of intrusions and dominant crush.

ROW WIDTHS

Interior Vehicle Form, Case 2007-996-900015/ Vehicle #1

INTEGRITY | GLAZING | INTRUSION | INSTRUMENT | STEERING | CONTACT | EJECTION | ENTRAPMENT | LOG | REVIEW

ROW WIDTHS | INTRUSIONS | DETAIL | SKETCH

Front Seat	<input type="text"/>	cm
Second Seat	<input type="text"/>	cm
Third Seat	<input type="text"/>	cm
Fourth Seat	<input type="text"/>	cm
Fifth Seat	<input type="text"/>	cm

Insert Save Close

ROW WIDTHS

Screen Name:

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: INTRUSIONWIDTH.ROWWIDTH

Element Attributes:

Oracle SAS
Record to the nearest centimeter
-9999 Unknown


Source: Vehicle inspection

Remarks:

The interior space of a vehicle is divided into specific sectors as outlined in the following diagram. These sectors are based upon seat rows and not occupant seat locations. Cargo areas open to the passenger area (i.e., station wagons, vans, etc.) are assessed in these variables. Intrusion into the trunk area of an automobile with a rear seat position or into a cargo area covered by a privacy curtain/shelf is excluded.

A vehicle row width is intended to capture the amount of lateral room available in the passenger compartment. However, the variety of designs incorporated in door and side panels makes it essential that row widths be measured at a uniform location. When obtaining a row width measurement:

- 1. Take the measurement at the beltline level, just below the greenhouse
2. Use a point longitudinally near the center of the door panel or side panel
3. Use an undamaged area of the door panel or side panel - if one side is damaged, a half-width measurement can be taken from the undamaged side, then doubled
4. Exclude any recessed or protruding components of the panel surface

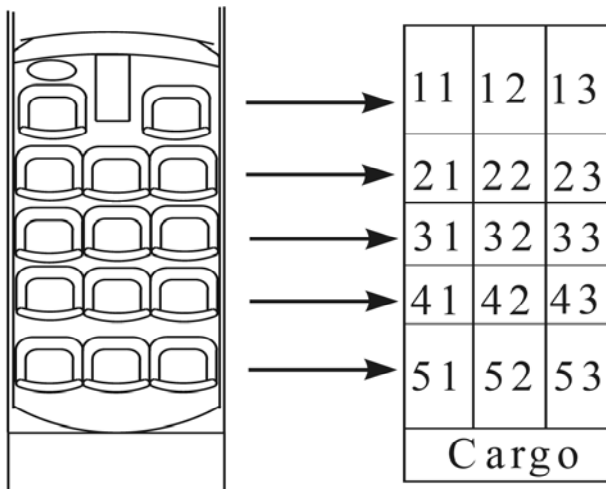

INTERIOR VEHICLE FORM

INTRUSIONS

INTRUSION

Interior Vehicle Form, Case 2007-996-900015/ Vehicle #1

INTEGRITY | GLAZING | INTRUSION | INSTRUMENT | STEERING | CONTACT | EJECTION | ENTRAPMENT | LOG | REVIEW

ROW WIDTHS | INTRUSIONS | DETAIL | SKETCH

Row	Position	Area	Intruded Component	Comparison	Intruded	Intrusion	Magnitude	Crush Direction

INTRUSION DETAIL

Interior Vehicle Form, Case 2007-996-900015/ Vehicle #1

INTEGRITY | GLAZING | INTRUSION | INSTRUMENT | STEERING | CONTACT | EJECTION | ENTRAPMENT | LOG | REVIEW

ROW WIDTHS | INTRUSIONS | DETAIL | SKETCH

Row

Position

Intrusion Area

Intrusion Component

Comparison

Intruded

Intrusion

Magnitude

Crush Direction

[INTRUSION NUMBER]

Screen Name: N/A

SAS Data Set: *INTRSN*

SAS Variable: *INTNUM*

Oracle Name: *INTRUSION.OCCUPANTINTRUSIONNUMBER*

Element Attributes:

Automatically generated by data entry system, sequential numbers

Source: Vehicle inspection.

Remarks:

ROW

Screen Name: Row

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *INTRUSION.PICKLOCATIONROW*


Element Attributes:

Oracle	SAS	
1	1	Front Row
2	2	Second Row
3	3	Third Row
4	4	Fourth Row
28627	5	Fifth Row
5	97	Catastrophic
8	8	Multiple/Other Severe Intrusions
6	98	Other
7	99	Unknown

Source: Vehicle inspection.

Remarks:

The interior space of a vehicle is divided into specific sectors as outlined in the following diagram. These sectors are based upon seat rows and **not** occupant seat locations. Cargo areas open to the passenger area (*i.e.*, station wagons, vans, etc.) are assessed in these variables but are not divided into sectors. Intrusion into the trunk area of an automobile with a rear seat position or into a cargo area covered by a privacy curtain/shelf is excluded.

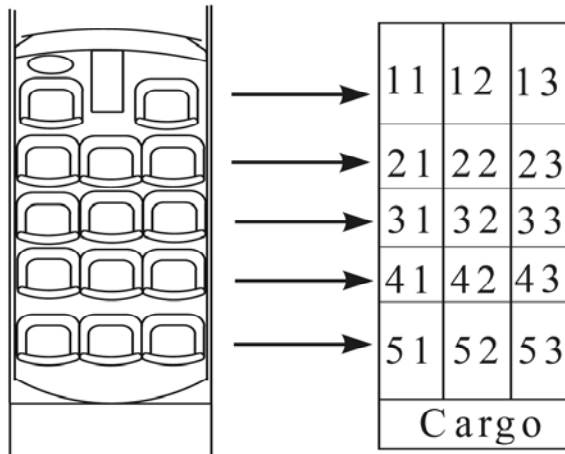

Row (cont'd)

Page 2 of 3

Front Row, Second Row, Third Row, Fourth Row and Fifth Row are identified by the presence of an installed seat. When the entire seat row is folded down or removed prior to the crash, this area is considered an **Other** enclosed area.

The following rules guide us in the determination of "seat rows" versus "other enclosed areas" and in the derivation of the lateral dimension of each row sector.

Cargo areas in passenger cars which are separated from the passenger compartment are not considered for intrusion. This would include trunk areas and rear cargo areas of hatchbacks and station wagons which were covered by a privacy curtain/shelf. The area above the seating rows is considered for intrusion and would be listed under **Other** enclosed area.

The area behind the front row of a pickup truck where jump seats are installed should be identified by the status of these seats prior to the crash. When at least one seat was in the operational mode (*i.e.*, open) at the time of the crash, the entire area is listed as row 2. Otherwise, this area is assessed under **Other** enclosed area.

A problematic area in vans is the situation where a row was removed prior to the crash. A seat row area that was removed prior to an crash should be selected as an **Other** enclosed area; however, it should be tabulated as a seat row to identify any sequential rows.

Vans with single seating positions behind the Front Row (usually high back swivel chairs) are compressed into a single seat row.

Catastrophic

is used when the intrusion damage to the occupant compartment is so severe that none of this vehicle's seat positions can be referenced to any of the following: specific occupant locations, intruding components, magnitude of intrusions, or dominant crush. When catastrophic is selected, the program automatically encodes the **Area** as "other"; the **Magnitude** as "Catastrophic"; and the **Crush Direction** as "Catastrophic". **The Researcher must** select the **Intruded Component** as "Catastrophic"; **AND** leave the columns for **Comparison**, **Intruded**, and **Intrusion** blank.

Multiple/Other Severe Intrusions

is used when passenger compartment intrusion is severe in multiple locations and when some intrusions can be fully or partially documented, but other intrusions are suspected and cannot be identified. At least one partial or complete intrusion must be coded when **Multiple/Other Severe Intrusions** is selected and this selection must be the last coded line of intrusion.

Row (cont'd)

Page 3 of 3

Other

is used for the following situations:

- Cargo areas open to the passenger area (i.e., station wagons, vans, etc.)
- When the entire seat row is folded down to the floor level or removed prior to the crash.

When **Other** is used to describe either of the situations above, that area is regarded as one sector and is not divided into the three sectors used for rows with seats.

Unknown

is used for the following situations:

- The researcher cannot determine if there was any intrusion.
- The vehicle was under repair (or repaired) at the time of inspection.

POSITION

Screen Name: Position

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *INTRUSION.PICKLOCATIONPOSITION*

Element Attributes:

Oracle	SAS	
1	1	Left
2	2	Middle
3	3	Right
5	5	Cargo [Catastrophic] [Multiple/Other Severe Intrusions]
99	99	Unknown

Source: Vehicle inspection.

Remarks:

Each row is equally divided into three sectors regardless of the seating configuration.

In the situation where half of the row is folded down (*i.e.*, split back seats) to accommodate cargo, the entire lateral area (wall-to-wall) is divided into three equal sectors.

The following rules guide us in the determination of "seat rows" versus "other enclosed areas" and in the derivation of the lateral dimension of each row sector.

The lateral occupant space dimension for the front seat row is obtained by measuring the distance from the vehicle's side-surface to side-surface (undamaged dimension) and dividing by three. **Note, there is no implied correlation between seating capacity and sectors.**

The area behind the front row of a pickup truck where jump seats are installed should be identified by the status of these seats prior to the crash. When at least one seat was in the operational mode (*i.e.*, open) at the time of the crash, the entire area is divided into three sectors.

Left

is defined as the left sector of the row (*i.e.*, sectors 11, 21, 31, 41, 51). The lateral dimension of this area is mathematically determined by dividing the original wall-to-wall dimension by three.

Position (cont'd)

Page 2 of 2

Middle

is defined as the center sector of the row (i.e., sectors 12, 22, 32, 42, 52).

Right

is defined as the right sector of the row (i.e., sectors 13, 23, 33, 43, 53).

Cargo

is defined as an entire seat row without seats or an area behind a seat row that is open to the passenger compartment. This area is not divided into three sections.

[INTRUSION LOCATION]

Page 1 of 3

Screen Name: N/A**SAS Data Set:** *INTRSN***SAS Variable:** *INLOC***Oracle Name:** *INTRUSION.PICKLOCATIONROW and
PICKLOCATIONPOSITION***Element Values:****Front Row**11 Left
12 Middle
13 Right**Second Row**21 Left
22 Middle
23 Right**Third Row**31 Left
32 Middle
33 Right**Fourth Row**41 Left
42 Middle
43 Right**Fifth Row**51 Left
52 Middle
53 Right**Source:** Vehicle inspection.**Remarks:**

The interior space of a vehicle is divided into specific sectors as outlined in the following diagram. These sectors are based upon seat rows and **NOT OCCUPANT SEAT LOCATIONS**. Cargo areas open to the passenger area (*i.e.*, station wagons, vans, etc.) are assessed in these variables.

[Intrusion Location] (cont'd)

Intrusion into the trunk area of an automobile with a rear seat position or into a cargo area covered by a privacy curtain/shelf is excluded.

11	12	13
21	22	23
31	32	33
41	42	43
51	52	53

When the entire seat row is folded down or removed prior to the crash, this area is considered an **Other** enclosed area.

The following rules guide us in the determination of "seat rows" versus "other enclosed areas" and in the derivation of the lateral dimension of each row sector.

Cargo areas in passenger cars which are separated from the passenger compartment are not considered for intrusion. This would include trunk areas and rear cargo areas of hatchbacks and station wagons which were covered by a privacy curtain/shelf. The area above the privacy curtain/shelf is considered for intrusion and would be listed under **Other** enclosed area.

The area behind the front row of a pickup truck where jump seats are installed should be identified by the status of these seats prior to the crash. When at least one seat was in the operational mode (*i.e.*, open) at the time of the crash, the entire area is listed as row 2. Otherwise, this area is assessed under **Other** enclosed area.

A problematic area in vans is the situation where a row was removed prior to the crash. A seat row area that was removed prior to an crash should be selected as an **Other** enclosed area; however, it should be tabulated as a seat row to identify any sequential rows.

Catastrophic

is used when the intrusion damage to the occupant compartment is so devastating that the researcher is not able to discern any of the following: specific occupant locations, intruding components, magnitude of intrusions, and dominant crush. When catastrophic is selected, the program automatically encodes the **Area** as “other”; the **Magnitude** as “Catastrophic”; and the **Crush Direction** as “Catastrophic”. **The Researcher must** select the **Intruded Component** as “Catastrophic”; **AND** leave the columns for **Comparison**, **Intruded**, and **Intrusion** blank.

Other (Specify):

is an area where no defined row exists. This would include an area where the entire seat row was folded down prior to the crash. Occasionally, the middle seat row in a passenger van will be removed leaving only the front and rearmost seat rows. If intrusion occurs within this area, the location should be identified here and specified.

Unknown

is used for the following situations:

- The researcher cannot determine if there was any intrusion.
- The vehicle was under repair (or repaired) at the time of inspection.

AREA

Screen Name: Area

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *INTRUSION.PICKINTRUDINGCOMPCLASS*

Element Attributes:

Oracle	SAS
1	Interior Components
2	Exterior Components
3	Other
4	Multiple/Other Severe Intrusions

Source: Vehicle inspection.

Remarks:

This variable filters the forthcoming intruding components with respect to whether they were internal or external to the occupant compartment.

INTRUDED COMPONENT

Screen Name: Intruded Component

SAS Data Set: *INTRSN*

SAS Variable: *INCOMP*

Oracle Name: *INTRUSION.PICKINTRUDINGCOMPONENT*

Element Attributes:

Oracle	SAS	Oracle	SAS
	Interior Components		Interior components cont'd
1	1 Steering assembly	20	20 Front seat back
2	2 Instrument panel left	21	21 Second seat back
3	3 Instrument panel center	22	22 Third seat back
4	4 Instrument panel right	23	23 Fourth seat back
5	5 Toe pan	24	24 Fifth seat back
6	6 A (A1/A2)-pillar	25	25 Seat cushion
7	7 B-pillar	26	26 Back door/panel (e.g., tailgate)
8	8 C-pillar		
9	9 D-pillar	27	27 Other interior component (specify):
10	10 Side panel - forward of the A1/A2-pillar		Door/Forward upper quadrant
12	12 Side panel - rear of the B-pillar		Door/Forward lower quadrant
13	13 Roof (or convertible top)		Door/Rear upper quadrant
14	14 Roof side rail		Door/Rear lower quadrant
15	15 Windshield		Exterior Components
16	16 Windshield header	28	30 Hood
17	17 Window frame	29	31 Outside surface of this vehicle (specify):
18	18 Floor pan (includes sill)		
19	19 Backlight header	30	32 Other exterior object in the environment (specify):
		31	33 Unknown exterior object
			97 [Catastrophic]
			Other Component
		40	96 [Multiple/Other severe intrusions]
		33	98 Intrusion of exterior unlisted component(s)

Source: Vehicle inspection.

Remarks:

Select the component which has reduced the occupant space for that sector. An intruded component is assessed for its Dominant Crush Direction as determined from the Magnitude of Intrusion. For example, an instrument panel may intrude both longitudinally and vertically. The final coded intrusion will reflect the instrument panel with the dominant crush direction (vertical or longitudinally). If the dominant intrusion cannot be determined in the field (i.e., an exemplar

vehicle is required for comparison measurements) the Researcher should document the component (i.e., instrument panel) in both directions. However, during final completion of the case, only the instrument panel intrusion with the greater magnitude is coded, the other intrusion row is deleted.

INTERIOR COMPONENTS:**Steering assembly**

consists of the entire steering column which includes the steering rim, hub, and spokes.

Instrument panel left

refers to the left one-third of the panel. This should correlate with the same lateral dimension generated for the sector "11" (Front Seat Left) in variables Row and Position.

Instrument panel center

refers to the center one-third area of the instrument panel. This should correlate with the same lateral dimension generated for the sector "12" (Front Seat Middle) in variable Row and Position.

Instrument panel right

refers to the right one-third of the instrument panel. This should correlate with the same lateral dimension generated for the sector "13" (Front Seat Right) in variables Row and Position.

Toe pan

refers to the front portion of the floor that angles up to meet the dash panel.

A (A1/A2)-pillar

refers to the upper and lower portion of the forward most structural post of the passenger compartment on both side planes. Some vehicles (e.g., GM APV minivan) are designed with two upper A-pillars on each side. The forward most pillar is called an A1-pillar which is primarily designed to secure the windshield to the vehicle. The second pillar is labeled as an A2-pillar. This pillar generally lends support to the roof and also helps to establish the front door opening. Annotation should be provided on the Interior Vehicle Form specifying which pillar was most severely intruded.

B-pillar

refers to the upper and lower portion of the structural post located at the rear edge of the front doors on both side planes. It should be noted, some vehicles do not have upper B-pillars.

C-pillar

refers to the upper and lower portion of the structural side post located at the rearmost edge of the rear door of a four door vehicle or the upper portion of the structural side post located between the backlight and side window glass on two door vehicles.

D-pillar

refers to the upper and lower portion of the structural post rearward of the C-pillar. D-pillars are usually available on station wagons, vans, or utility vehicles. The D-pillar is not to be confused with the C-pillar which is the rearmost pillar of the passenger compartment on most two and four door vehicles.

Side panel forward of the A1/A2-pillar

refers to the interior panel located on the side of the vehicle and forward of the front doors. This includes areas directly below the instrument panel sometimes referred to as a "kickpanel". See **A-pillar** for A1/A2 definition.

Side panel rear of the B-pillar

refers to any side surface area excluding doors, window frames, and associated glazing rearward of the B-pillar, below the roof rail, above the sill, and in front of any back door or wall.

Roof (or convertible top)

refers to the top structural member of the greenhouse supported by the side pillars, windshield header and backlight header.

Roof side rail

refers to the longitudinal horizontal stiffeners located along the edge of the roof.

Windshield

refers to the lateral glazing located at the forward most surface of the greenhouse.

Windshield header

refers to the front forward lateral edge of the roof directly above the windshield.

Window frame

refers to the longitudinal frame that encloses the side window glazings and composes that portion of the door above the window sill.

Floor pan (includes sill)

refers to the floor of the vehicle. This includes the lower portion of the passenger compartment (*e.g.*, door sills).

Backlight header

refers to the rear most lateral edge of the roof directly above the backlight.

Front seat back

refers to the back support of the front seat.

Second seat back

refers to the back support of any second-row seat.

Third seat back

refers to the back support of any third-row seat.

Fourth seat back

refers to the back support of any fourth-row seat.

Fifth seat back

refers to the back support of any fifth-row seat.

Seat cushion

refers to the horizontal portion of the seat assembly that was designed for seating.

Back door/panel (*e.g.*, tailgate)

refers to the interior surface and related components of the back door or if no door exists, the interior surface of the back wall.

Other interior component

refers to any interior component that may intrude into an occupant seating position.

Door/Forward upper quadrant/lower quadrant

The doors are visually divided into quadrants. The longitudinal measurement is taken at the beltline along the window frame. The vertical measurement is taken at the midpoint of the door, from the top edge to the bottom edge of the inner door panel.

The quadrants are rarely equal in size. They are named as follows: Forward Upper Quadrant (FUQ), Forward Lower Quadrant (FLQ), Rear Upper Quadrant (RUQ), and Rear Lower Quadrant (RLQ). Select the quadrant that best represents the most intruded quadrant of the door. Only one quadrant can be selected per door.

Door/Rear upper quadrant/lower quadrant

The doors are visually divided into quadrants. The longitudinal measurement is taken at the beltline along the window frame. The vertical measurement is taken at the midpoint of the door, from the top edge to the bottom edge of the inner door panel.

The quadrants are rarely equal in size. They are named as follows: Forward Upper Quadrant (FUQ), Forward Lower Quadrant (FLQ), Rear Upper Quadrant (RUQ), and Rear Lower Quadrant (RLQ). Select the quadrant that best represents the most intruded quadrant of the door. Only one quadrant can be selected per door.

**EXTERIOR COMPONENTS:****Hood**

refers to the horizontal structure covering the front compartment of the vehicle located forward of the windshield.

Outside surface of this vehicle

is selected when any outside surface of this vehicle not mentioned above has violated the internal boundary surface of the passenger compartment (*e.g.*, spare tire, jack, outside mirror, etc.).

Other exterior object in the environment

refers to an object external to the vehicle (trees, poles, other vehicle, etc.) which penetrates the internal boundary of this vehicle.

Unknown exterior object

is selected if there is evidence that an object intruded but it's unknown what that object was.

Intrusion of exterior unlisted component(s)

is used if there is intrusion of any component not listed above.

COMPARISON VALUE (OF INTRUSION)

Screen Name: Comparison

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *INTRSION.COMPARISONVALUE*

Element Attributes:

Oracle SAS

Record to the nearest centimeter

[Catastrophic]

-9999

[Unknown]

Source: Vehicle inspection.

Remarks:

Follow the instructions for determining vehicle intrusions, establishing axes, and determining comparison values found in **Occupant Area Intrusion Overview**.

Enter the Comparison value for the intruded component.

INTRUDED VALUE (OF INTRUSION)

Screen Name: Intruded

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: ***INTRUSION.INTRUDEDVALUE***

Element Attributes:

Oracle SAS

-9999 Record to the nearest centimeter
[Catastrophic]
[Unknown]

Range:

Source: Vehicle inspection.

Remarks:

Follow the instructions for determining vehicle intrusions, establishing axes, and determining intruded values found in **Occupant Area Intrusion Overview**.

Enter the Comparison value for the intruded component.

INTRUSION

Screen Name: Intrusion

SAS Data Set: *INTRSN*

SAS Variable: *INMEAS*

Oracle Name: *INTRUSION.INTRUSION*

Element Attributes:

Oracle	SAS	
		Record to the nearest centimeter
-8861	977	[Catastrophic]
-9999	999	[Unknown]

Source: Vehicle inspection.

Range: 1-160, 997(catastrophic), 999 (unknown)

Remarks:

Follow the instructions for determining vehicle intrusions, establishing axes, and determining Intrusion values found in **Occupant Area Intrusion Overview**.

The Intrusion value is computed if the Researcher enters both an **Intruded** value and a **Comparison** value.

The extent of a component intrusion into a row sector should not exceed the pre-impact dimension of that sector. For example, if the front row width is 150 centimeters, each sector is equal to 50 centimeters. If the driver-side door panel intrudes 60 centimeters laterally, the intrusion is listed as:

Front Row Left (sector 11) Intrusion Magnitude = 50cm (maximum amount for that sector)
Front Row Middle (sector 12) Intrusion Magnitude = 10cm (the remaining amount for the door panel intrusion).

If the magnitude cannot be measured, but can be visibly seen, estimate the intrusion in the Magnitude variable that follows this variable.

Unknown

is used in the following situations.

- The researcher cannot determine if there was any intrusion.
- The vehicle was under repair at the time of inspection.
- The researcher was not able to measure or reasonably estimate the intrusion.

MAGNITUDE OF INTRUSION

Screen Name: Magnitude

SAS Data Set: *INTRSN*

SAS Variable: *INMAG*

Oracle Name: *INTRUSION.PICKINTRUDINGMAGNITUDE*

Element Attributes:

Oracle	SAS	
0	0	<= 2 cm
1	1	>= 3 cm but < 8 cm
2	2	>= 8 cm but < 15 cm
3	3	>= 15 cm but < 30 cm
4	4	>= 30 cm but < 46 cm
5	5	>= 46 cm but < 61 cm
6	6	>=61 cm
7	7	[Catastrophic]
	8	[Multiple/Other Severe Intrusions]
8	9	[Unknown]

Source: Vehicle inspection.

Remarks:

When the **Intrusion** is calculated by the program, is automatically assigns a magnitude or range to the intrusion. The researcher may select a magnitude for an intruded component while awaiting comparison values. If the magnitude cannot be measured, due to physical limitations but can be visibly seen, estimate the magnitude of the intrusion.

Unknown

is used in the following situations:

- The researcher cannot determine if there was any intrusion.
- The vehicle was under repair at the time of inspection.
- The researcher was not able to measure or reasonably estimate the intrusion.

CRUSH DIRECTION

Screen Name: Crush Direction

SAS Data Set: *INTRSN*

SAS Variable: *CDRIR*

Oracle Name: *INTRUSION.PICKINTRUDINGDIRECTION*

Element Attributes:

Oracle	SAS	
1	1	Vertical
2	2	Longitudinal
3	3	Lateral
4	7	[Catastrophic]
	8	[Multiple/Other Severe Intrusions]
5	9	[Unknown]

Source: Vehicle inspection.

Remarks:

This variable assesses the direction of displacement for the intruded component. The direction of movement is determined independently from the PDOF applied to the vehicle.

Vertical

refers to components which intrude into the passenger compartment from either an upward or downward direction.

Longitudinal

refers to components which move forward or rearward into the passenger compartment.

Lateral


refers to components which are displaced either left or right within the passenger compartment.

Unknown


is used for the following situations:

- The researcher cannot determine if there was any intrusion.
- The vehicle was under repair at the time of inspection.

INTRUSION/SKETCH

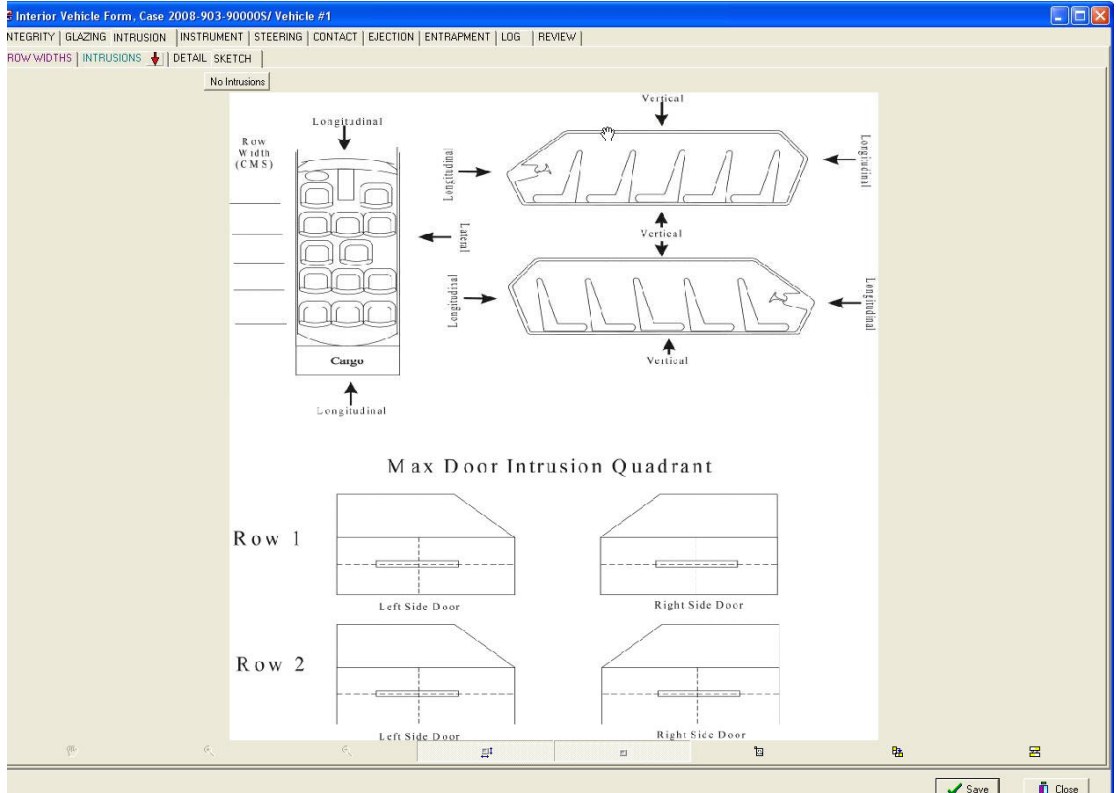

INTRUSION/SKETCH

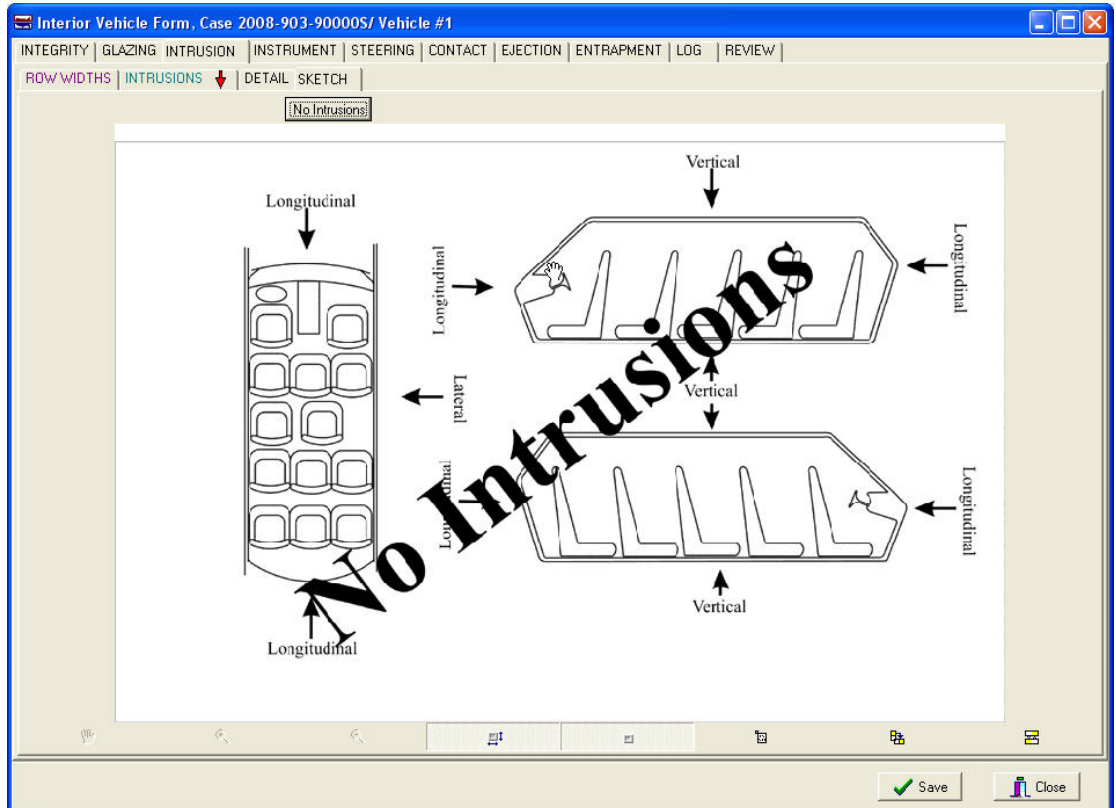

INTRUSION SKETCH COMPLETION

The following should be included for all intrusion sketches:

Row width for all rows in the vehicle.

Row widths are not required if no intrusions were observed.

A rough sketch of the Intruded components and their approximate displacement.


Cross out or erase rows which are not present in the vehicle.

Applicable annotations.


Max Door Intrusion Quadrant sketch:

Sketch the intruded component and indicate the amount of intrusion.

An example sketch is provided below:

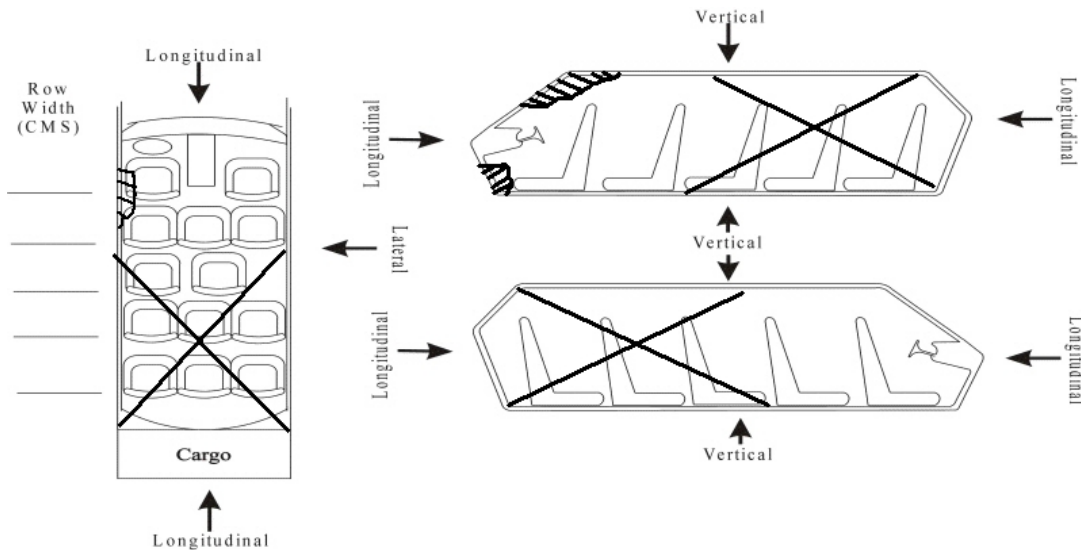

Max Door Intrusion Quadrant

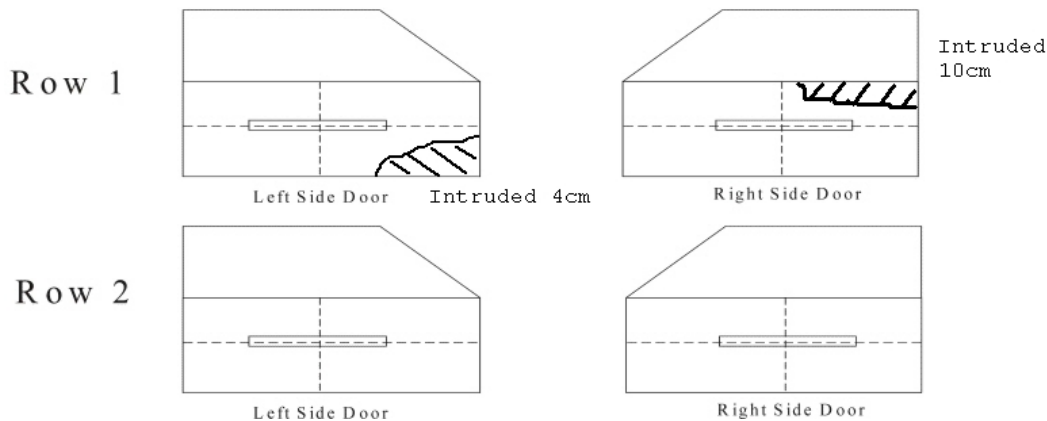

INSTRUMENT

Interior Vehicle Form, Case 2008-903-90000S/ Vehicle #1

INTEGRITY | GLAZING | INTRUSION | INSTRUMENT | STEERING | CONTACT | EJECTION | ENTRAPMENT | LOG | REVIEW

Odometer - Reading kilometers

- Source Adjustable Pedal

Adaptive Driving Equipment

Adaptive Equipment Right Mouse Click on Check Box to View Specify

<input type="checkbox"/> Hand Controls for braking/acceleration	<input type="checkbox"/> Wheelchair tie-downs	<input type="checkbox"/> Pedal Extender
<input type="checkbox"/> Steering control devices	<input type="checkbox"/> Modification to seat belts (specify)	<input type="checkbox"/> Unknown type of adaptive device
<input type="checkbox"/> Steering knob attached to steering wheel	<input type="checkbox"/> Additional or relocated switches (specify)	
<input type="checkbox"/> Low effort power steering (unit or device)	<input type="checkbox"/> Raised roof	
<input type="checkbox"/> Replacement steering wheel (i.e. reduced diameter)	<input type="checkbox"/> Wall mounted head rest (used behind wheel chair)	
<input type="checkbox"/> Joy-stick steering controls	<input type="checkbox"/> Other adaptive device (specify)	

ODOMETER READING

Screen Name: Odometer Reading

SAS Data Set: VI

SAS Variable: ODOMETER

Oracle Name: INTERIORVEHICLE.ODOMETER

Element Attributes:

Oracle	SAS	
		Enter odometer reading
-8868		Unknown Electric Odometer
-9999	9999999	Unknown

Range: 000,001 through 1,000,000

Source: Primary source is the vehicle inspection, secondary sources include the interviewee, and repair facility.

Remarks:

Enter the number of miles displayed on the odometer.

This variable measures the distance the vehicle has traveled. However, in cases where it is known that the odometer was working but had turned over (*i.e.*, recycled) the recorded value represents the total distance traveled by the vehicle rather than the reading on the odometer. Annotate in **Odometer Source** the source of information when it is determined that the odometer had turned over.

Unknown-Electric Odometer

Use if odometer is electronic and the vehicle does not have a power supply.

Unknown

used when:

- it is known that the odometer was disconnected or broken before the collision;
- the vehicle is equipped with an electronic instrument cluster and an analog "back-up" odometer is not present; or
- the vehicle's odometer reading is unknown.
- the vehicle was manufactured without an odometer.

ODOMETER SOURCE

Screen Name: Odometer - - Source

SAS Data Set: VI

SAS Variable: ODOMSRC

Oracle Name: INTERIORVEHICLE.PICKODOMETERSOURCE

Element Attributes:

Oracle	SAS	
	0	[Unknown odometer reading]
1	1	Vehicle Inspection
2	2	Interview
3	3	Repair Facility
4	8	Other

Source: Primary source is the vehicle inspection; secondary sources include Interviewees and repair facilities

Remarks:

Indicate the source that was used to make the vehicle's mileage determination. For example: if it is evident from the vehicle inspection that the vehicle has gone over 100,000 miles, and the odometer indicates 2,300 miles, code the mileage as 102,300 (164,636 kilometers) and indicate the source as **Vehicle Inspection**.

ADJUSTABLE PEDALS

Screen Name: Adjustable Pedal

SAS Data Set: VI

SAS Variable: ADJPED

Oracle Name: INTERIORVEHICLE.PEDALEXTENDID

Element Attributes:

Oracle	SAS	
1	1	No adjustable pedals
2	2	Full forward (toward toe pan)
3	3	Mid position
4	4	Full rearward (toward driver)
9	8	Position unknown
-9999	9	Unknown if present

Source: Investigator determined — primary source is the vehicle inspection, secondary source is driver interview.

Remarks:

ADAPTIVE (ASSISTIVE) DRIVING EQUIPMENT

Screen Name: Adaptive Driving Equipment

SAS Data Set: VI

SAS Variable: ADAPTEQ

Oracle Name: INTERIORVEHICLE.DRIVINGEQUIPEXIST

Element Attributes:

Oracle	SAS	
1	0	No adaptive driving equipment
2	1	Yes, adaptive driving equipment installed, check all that apply
3	9	Unknown

Source: Investigator determined — primary source is the vehicle inspection, secondary source is driver interview.

Remarks:

Adaptive driving equipment is defined as equipment whose primary purpose is to assist persons with disabilities in the operation of a vehicle. This variable is designed to capture those vehicles that have this type of after-market adaptive driving equipment installed. Use of the equipment at the time of the crash is irrelevant. Be alert for evidence of equipment that may have been removed between the time of the crash and the time of inspection. The device(s) must be present at the driving position (e.g., wheelchair tie downs).

No adaptive driving equipment

is used when it is determined that no adaptive equipment was present in the vehicle at the time of the crash.

Yes, adaptive driving equipment installed, check all that apply

is used when it is determined that adaptive equipment was present in the vehicle at the time of the crash. Use of the equipment at the time of the crash is not to be considered.

Unknown

is used when it cannot be determined if any adaptive driving devices were installed in the vehicle at the time of the crash.

ADAPTIVE (ASSISTIVE) DRIVING EQUIPMENT

Screen Name: Adaptive Driving Equipment

SAS Data Set: *ADAPTEQ*

SAS Variable: *EQUIPTYP*

Oracle Name: *VEHICLEADAPTIVEEQUIPMENT.ADAPTIVEEQUIPID*

Element Attributes:

Oracle	SAS	
1	1	Hand controls for braking/acceleration
2	2	Steering control devices (attached to OEM steering wheel)
3	3	Steering knob attached to steering wheel
4	4	Low effort power steering (unit or device)
5	5	Replacement steering wheel (<i>i.e.</i> reduced diameter)
6	6	Joy-stick steering controls
7	7	Wheelchair tie-downs
8	8	Modifications to seat belts (specify)
9	9	Additional or relocated switches (specify)
10	10	Raised roof
11	11	Wall mounted head rest (used behind wheelchair)
13	12	Pedal extender
12	98	Other adaptive device (specify)
99	99	Unknown type of adaptive device
		Unknown if adaptive driving equipment installed

Source: Investigator determined — primary source is the vehicle inspection, secondary source is driver interview.

Remarks:

Adaptive driving equipment is defined as equipment whose primary purpose is to assist persons with disabilities in the operation of a vehicle. This variable is designed to capture those vehicles that have this type of after-market adaptive driving equipment installed. Use of the equipment at the time of the crash is irrelevant. Be alert for evidence of equipment that may have been removed between the time of the crash and the time of inspection. The device(s) must be present at the driving position (e.g., wheelchair tie downs).

ADAPTIVE EQUIPMENT INSTALLED, CHECK ALL THAT APPLY

is used when it is determined that adaptive equipment was present in the vehicle at the time of the crash. Use of the equipment at the time of the crash is not to be considered.

Hand controls for braking/acceleration

does not include normal cruise control.

Steering control devices (attached to OEM steering wheel)

includes handles and arms used to assist in the operation of the vehicle.

Steering knob attached to steering wheel

is used to help in the turning of the vehicle. May sometimes be referred to as a "suicide knob".

Low effort power steering (unit or device)

can possibly be identified by looking under the hood for an enhanced pump.

Replacement steering wheel (i.e. reduced diameter)

some after-market suppliers have "chain-link" type steering wheels, they are **NOT** considered as adaptive equipment for persons with disabilities.

Joy-stick steering controls**Wheelchair tie-downs**

are selected **ONLY** if they are present at the drivers' location.

Modifications to seat belts (specify)

comfort devices such as lambs wool coverings are **NOT** considered here.

Additional or relocated switches (specify)**Raised Roof**

will look like a second roof, not a camper-van type

Wall mounted head rest (used behind wheelchair)

are selected **ONLY** if they are present at the drivers' location

Other adaptive device (specify)

must be specified and sketched if possible. As an example, after-market pedal extenders used specifically for assist persons with disabilities in the operation of the foot controls would be included in this element.

Unknown type of adaptive device

is used when it is known there is an adaptive device for the driver, but the type of device is unknown

STEERING COLUMN

Interior Vehicle Form, Case 2007-996-900015/ Vehicle #1

INTEGRITY | GLAZING | INTRUSION | INSTRUMENT | STEERING | CONTACT | EJECTION | ENTRAPMENT | LOG | REVIEW

STEERING COLUMN | WORKSHEET | DRAWING


Column Type

Tilt Adjustment

Telescoping Adjustment

Location of Rim/Spoke Deformation

Rim/Spoke Deformation (cms)



Save Close

STEERING COLUMN TYPE

Screen Name: Column Type

SAS Data Set: VI

SAS Variable: COLUMTYP

Oracle Name: INTERIORVEHICLE.PICKTYPEOFCOLUMN

Element Attributes:

Oracle	SAS	
1	1	Fixed column
2	2	Tilt column
3	3	Telescoping column
4	4	Tilt and telescoping column
5	8	Other column type (specify):
6	9	Unknown

Source: Vehicle inspection.

Remarks:

Fixed column

refers to a non-adjustable steering column. Note if “Fixed column” is selected the variables **Tilt Adjustment** and **Telescoping Adjustment** will be pre-coded as “No tilt steering column” and “No telescoping column”, respectively.

Tilt column

refers to a steering column designed to allow the steering wheel or column to be tilted at an angle selected by the operator to improve driving comfort. The presence of these types can generally be verified by the existence of an extra control stalk on the column. This stalk is separate from the turn signal, headlight, or wiper controls and is usually mounted near the bend point of the tilt wheel, or near the lower part of the instrument panel for the tilt column. Characteristically, the control stalk is unmarked and may be located on the left or right side of the column in relative proximity to the steering wheel end. Some vehicles are equipped with a “lever” device on the underside of the column, which allows placement of the entire column for driver comfort.

Telescoping column

refers to a steering column that has an adjustable length. The column can be shortened or lengthened to suit operator comfort. The telescoping feature can generally be identified by the presence of a knurled ring around the column. Rotating this ring allows the column to be lengthened or shortened, while re-tightening the ring locks the column at the desired adjustment.

Column Type (cont'd)

Page 2 of 2

Tilt and telescoping column

refers to a column that has both the tilt wheel and adjustable length features.

Other column type (specify)

includes steering columns which cannot be described above. This would include swing away columns, etc.

Unknown

Unknown is used if the column type cannot be determined.

TILT STEERING COLUMN ADJUSTMENT

Screen Name: Tilt Adjustment

SAS Data Set: VI

SAS Variable: COLMTILT

Oracle Name: INTERIORVEHICLE.PICKTILTADJUSTCOLUMN

Element Attributes:

Oracle	SAS	
1	0	[No tilt steering column]
2	1	Full up
3	2	Between full up and center
4	3	Center
5	4	Between center and full down
6	5	Full down
7	9	Unknown

Source: Investigator determined; primary source is the vehicle inspection, other input is driver interview.

Remarks:

This variable is used to describe the pre-impact tilt position of adjustable steering columns.

Full up

refers to a vertically adjustable steering column that was in its highest position possible at the time of the crash.

Between full up and center

refers to a vertically adjustable steering column that was somewhere between full up and the center position at the time of the crash.

Center

refers to a vertically adjustable steering column that was in the center-most position (*e.g.* equal amounts of adjustment both above and below this position) at the time of the crash.

Between center and full down

refers to a vertically adjustable steering column that was somewhere between the center and full down position at the time of the crash.

Full down

refers to a vertically adjustable steering column that in its lowest possible position at the time of the crash.

Unknown

is selected when: it cannot be determined if the vehicle was equipped with a vertically adjustable steering column or the researcher cannot determine the pre-impact position of the vertically adjustable steering column.

TELESCOPING STEERING COLUMN ADJUSTMENT

Screen Name: Telescoping Adjustment

SAS Data Set: VI

SAS Variable: COLMTELE

Oracle Name: INTERIORVEHICLE.PICKTELEADJUSTCOLUMN

Element Attributes:

Oracle	SAS	
1	0	[No telescoping steering column]
2	1	Full back
3	2	Between full back and midpoint
4	3	Midpoint
5	4	Between midpoint and full forward
6	5	Full forward
7	9	Unknown

Source: Investigator determined; primary source is the vehicle inspection, other input is driver interview.

Remarks:

This variable is used to describe the pre-impact telescoping position of adjustable steering columns.

No telescoping steering column

is selected when the steering column does not have an adjustment to move the steering column/wheel longitudinally (forward and backward).

Full back

refers to a longitudinally adjustable steering column that was in its rearward-most position (toward the rear of the vehicle) at the time of the crash.

Between full back and midpoint

refers to a longitudinally adjustable steering column that was somewhere between the full back position (toward the rear of the vehicle) and the center position at the time of the crash.

Midpoint

refers to a longitudinally adjustable steering column that was in the center-most position (mid-point of the overall movement range) at the time of the crash.

Between midpoint and full forward

refers to a longitudinally adjustable steering column that was somewhere between the center position and the full forward position (toward the front of the vehicle) at the time of the crash.

Full forward

refers to a longitudinally adjustable steering column that was in the forward most position (toward the front of the vehicle) at the time of the crash.

Unknown

is selected when it cannot be determined if the vehicle was equipped with a longitudinally adjustable steering column or the researcher cannot determine the pre-impact position of the longitudinally adjustable steering column.

LOCATION OF RIM/SPOKE DEFORMATION

Screen Name: Location of Rim / Spoke Deformation

SAS Data Set: VI

SAS Variable: RDEFLOC

Oracle Name: INTERIORVEHICLE.PICKLOCSTEERRIMDEF

Element Attributes:

Oracle	SAS	
1	0	No steering rim deformation

Quarter Sections

2	1	Section A
3	2	Section B
4	3	Section C
5	4	Section D

Half Sections

6	5	Upper half of rim/spoke
7	6	Lower half of rim/spoke
8	7	Left half of rim/spoke
9	8	Right half of rim/spoke
10	9	Complete steering wheel collapse
11	10	Undetermined location
12	99	Unknown


Source: Vehicle inspection.

Remarks:

The variable **Rim / Spoke Deformation** must be coded with a value, in order to classify the **Location of Rim / Spoke Deformation**.


The steering wheel rim is divided into four quarter sections (A through D) and four half sections (upper half, lower half, left half, right half).

Note, the half designation should not be considered as a grouping of quarter sections.

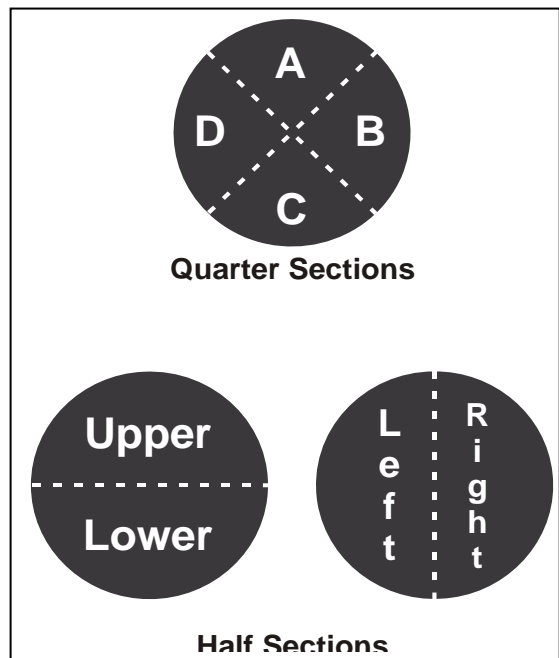


The accompanying diagrams identify the location of the quarter and half sections.

Evaluate the deformation of the rim with respect to the wheel design and not the wheel position observed during the vehicle inspection. For example, if the designed top section was deformed and rotated to the bottom position, then the correct response for this variable is Quarter Sections - Section A; see below.

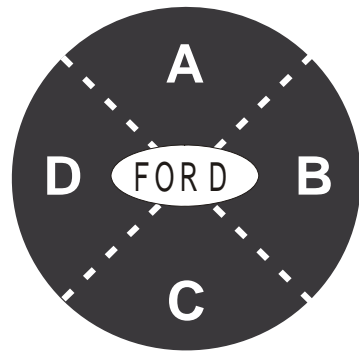

Straight Ahead Position

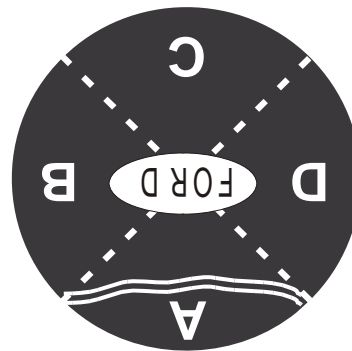

Post-Impact Position

When evaluating which quarter or half to encode, place primary emphasis upon downward deflection (toward the instrument panel) since the coding captures occupant-caused deformation. When two half sections are deformed, select the half with the greatest deformation.

Complete steering wheel collapse

is selected in the event two half sections are deformed axially downward (toward the instrument panel) beyond the hub.

Undetermined location

is selected when it is known the rim was deformed, but as the result of extrication or other post-impact activity the original deformed section could not be determined.

Unknown

is selected in the following situations:

- It is not known if the rim was deformed by occupant contact.
- An assessment of rim damage could not be made as the vehicle was repaired.

STEERING RIM/SPOKE DEFORMATION

Screen Name: Rim /Spoke Deformation

SAS Data Set: VI

SAS Variable: RIMDEF

Oracle Name: INTERIORVEHICLE.PICKSTEERRIMDEF

Element Attributes:

Oracle	SAS	
		Record actual measured deformation to the nearest centimeter
-8887	98	Indeterminate - Observed
-9999	99	Unknown

Source: Vehicle inspection.


Range: 0-20, 98, 99

Remarks:

The intent is to capture deformation caused by occupant contact rather than induced damage.

The center of the steering wheel hub is the reference plane for determining magnitude of deformation. A measurement is taken from this reference plane to that area of the rim which has the greatest deformation. This measurement should be referenced to an undisplaced area of the rim or compared to the rim of a similar undamaged vehicle.

The following diagram illustrates this measurement procedure. The undeformed edge is 8 centimeters from the reference line. The deformed edge is 5 centimeters from the reference line. Therefore, 3 centimeters of deformation occurred.

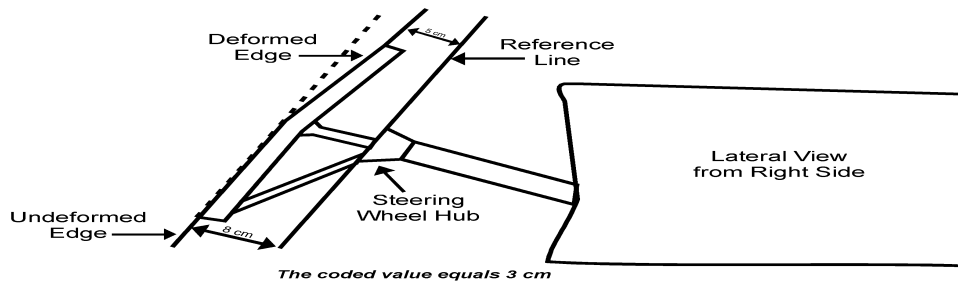

Value of Zero

is entered when there was no deformation caused by occupant contact of the rim or spokes. Check your observation by placing a flat object (*i.e.*, clipboard) across the plane of the steering rim prior to selecting this attribute.

Value of 1

is entered when the deformation is greater than zero but less than 1.5 centimeters.

Indeterminate - Observed

is selected when the situation does not permit the direct measurement of a deformed rim.

Unknown

is selected in the following situations:

- It is not known if the rim was deformed by occupant contact.
- An assessment of rim damage cannot be made because the vehicle is repaired.

STEERING/WORKSHEET

Interior Vehicle Form, Case 2007-996-90001S/ Vehicle #1

INTEGRITY | GLAZING | INTRUSION | INSTRUMENT | STEERING | CONTACT | EJECTION | ENTRAPMENT | LOG | REVIEW

STEERING COLUMN | WORKSHEET | DRAWING

	Comparison Value	Damage Value	Deformation
*	0	0	0

Save Close

COMPARISON VALUE

Screen Name: Comparison Value

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *STEERDEFORMATION.COMPVALUE*

Element Attributes:

Oracle	SAS	
0		No steering rim deformation Record actual measured deformation to the nearest centimeters. Actual measured value in centimeters
-9999		Unknown

Source: Vehicle inspection.

Remarks:

Refer to the measurement diagram illustrated in **Rim/Spoke Deformation**.

The intent is to capture deformation caused by occupant contact rather than induced damage.

The center of the steering wheel hub is the reference plane for determining magnitude of deformation. A measurement is taken from this reference plane to that area of the rim which has the greatest deformation. This measurement should be referenced to an undisplaced area of the rim or compared to the rim of a similar undamaged vehicle.

DAMAGE VALUE

Screen Name: Damage Value

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *STEERDEFORMATION.DAMAGEVALUE*

Element Attributes:

Oracle	SAS	
0		No steering rim deformation Record actual measured deformation to the nearest centimeters. Actual measured value in centimeters
-9999		Unknown

Source: Vehicle inspection.

Remarks:

Refer to the measurement diagram illustrated in **Rim/Spoke Deformation**.

The intent is to capture deformation caused by occupant contact rather than induced damage.

The center of the steering wheel hub is the reference plane for determining magnitude of deformation. A measurement is taken from this reference plane to that area of the rim which has the greatest deformation. This measurement should be referenced to an undisplaced area of the rim or compared to the rim of a similar undamaged vehicle.

DEFORMATION

Screen Name: Deformation

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *STEERDEFORMATION.DEFORMATIONVALUE*

Element Attributes:

Oracle SAS

0

No steering rim deformation

Record actual measured deformation to the nearest centimeters.

Actual measured value in centimeters

Source: Vehicle inspection.


Remarks:

Refer to the measurement diagram illustrated in **Rim/Spoke Deformation**.

The intent is to capture deformation caused by occupant contact rather than induced damage.

The center of the steering wheel hub is the reference plane for determining magnitude of deformation. A measurement is taken from this reference plane to that area of the rim which has the greatest deformation. This measurement should be referenced to an undisplaced area of the rim or compared to the rim of a similar undamaged vehicle.

STEERING/DRAWING

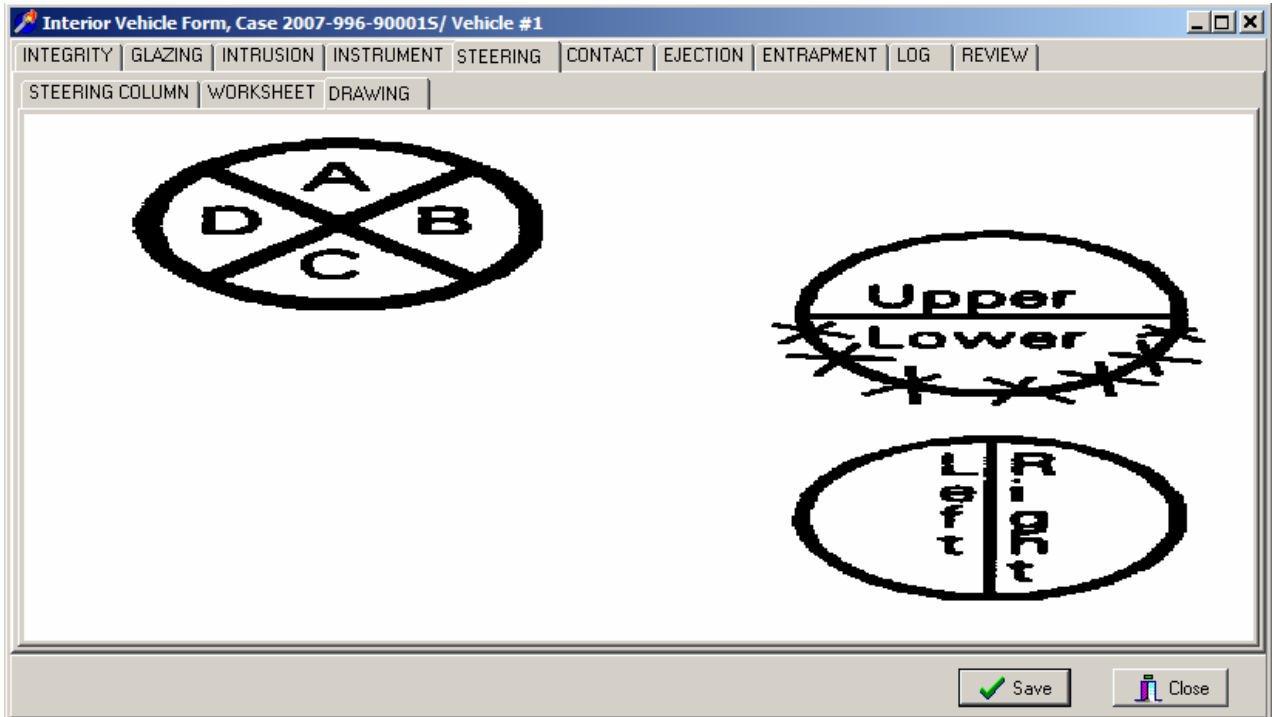

Instructions for completion of Steering Drawing Diagrams

The Steering Drawing Diagrams allows researchers to report data that are not encoded and might otherwise be omitted from the case. The intent is to capture deformation caused by occupant contact rather than induced damage.

The researcher should indicate on the drawings what portion of the rim/spoke was deformed. The drawings should reflect coded data in the Steering Column Tab/Location of Rim/Spoke Deformation.

CONTACT/LIST

Contact	Area	Component	Occ #	Body Region	Evidence	Confidence
---------	------	-----------	-------	-------------	----------	------------

CONTACT/CONTACT

Contact

Area

Component

Evidence

Confidence

Occ #

Body Region

Contact Overview

The Contact tab and corresponding Contact/Sketch sub-tabs provide a valuable link between vehicle interior documentation and occupant injury data. With the reduction of death and injury as the system-wide goal, occupant contacts to the vehicle are of critical concern. Identifying contact evidence helps relate the contacts to a body region of likely cause.

When identifying contact points, begin by assessing the occupant’s likely trajectory during the crash sequence. Consider issues such as impact configuration, direction of force, and the use of restraint systems. It is important to have a systematic approach to locating and documenting occupant contact points. Examine the vehicle interior from left to right, top to bottom, or in any similar pattern that allows for a complete and consistent methodology.

NOTE: It is important that contact identification be based on evidence. PDOF, restraint use, air bag deployment, and other such factors are NOT contact evidence. These issues certainly have an effect on contacts and where they may occur; they are not, however, sufficient basis for coding a contact point.

Begin by locating all of the occupant contact points and highlighting them with the standardized metric contact tape. When all of the identifiable contacts are marked, click on the Contact sub-tab to enter data. On the title bar, select “Edit” and then select “Insert” from the drop-down menu. Enter the tab data as outlined below. The first contact point entered will be identified as contact “A”; each additional contact will be assigned the next letter in the alphabet. Remember, the “Edit/Insert” process must be repeated for each new contact point to be entered. The following variables will be coded for each contact point.

- Area – Select the general area of the vehicle where the contact occurred.
- Component – Select the specific component contacted.
- Evidence – Select the type of evidence identified on the vehicle component.
- Confidence – Select the confidence level that best represents the level of certainty that this is indeed a contact point; **this variable is based on contact certainty, not body region or occupant number certainty.**
- Occupant number – Select the case assigned number of the contacting occupant. If it can not be determined, assign the contact to the occupant who most likely caused it.
- Body Region – Select the body region of the occupant that is suspected to have caused the contact point. In complex events such as rollovers, this variable will be difficult to code. Select the body region most consistent with the dynamics involved. Do not downgrade the confidence level of the contact based on body region uncertainty.

With all contact points entered in the Contact sub-tab, open the Sketch#1 and Sketch#2 tabs to document the contact points. Both sketch sub-tabs will open a diagram that can be modified by double clicking to open the image editor. Cross hatch the contacted area and place the corresponding alphabet letter (assigned during the “Edit/Insert” process) next to the marked area. It is important to be sure that the alphabet character on the sketch matches the contact with the same assigned character. See IV 90-92 for more details. In addition to contacts, areas of ejection or entrapment should be annotated on these sketches.

NOTE: Some researchers may prefer to sketch all of the contact points first, then “Edit/Insert” each on the contact sub-tab. The order of completion is not the key; a methodical, consistent approach is important.

CONTACT

Screen Name: Contact

SAS Data Set: *CONTACT*

SAS Variable: *REFID*

Oracle Name: *OCCUPANTCONTACT.CONTACTREFERENCE*

Element Attributes:

- A
- B
- C
- D, etc.

Source: Vehicle inspection

Remarks:

Identify the contact point. This will correspond to the label used in Sketch 1 or Sketch 2. To add contact points go to the main menu and select “**Edit**” and then “**Insert**” and contact point “B” will appear.

CONTACT AREA LABEL**Screen Name:** Area**SAS Data Set:** *CONTACT***SAS Variable:** *CONTAREA***Oracle Name:** *OCCUPANTCONTACT.PICKCOMPONENTAREA***Element Attributes:**

Oracle	SAS	
1	1	Front
2	2	Left Side
3	3	Right Side
4	4	Interior
5	5	Air Bag
6	6	Roof
7	7	Floor
8	8	Rear
10		Left Door Panel
11		Right Door Panel
9	50	Adaptive (Assistive) Driving Equipment

Source: Vehicle inspection**Remarks:**

Identify the name of the area of the vehicle interior an occupant contacted. Choose the area from the pick list of valid attributes for interior components.

CONTACTED COMPONENT

Screen Name: Component

SAS Data Set: *CONTACT*

SAS Variable: *CONTCOMP*

Oracle Name: *OCCUPANTCONTACT.PICKCOMPONENT*

Element Values:

FRONT

Oracle	SAS
1	1 Windshield
2	2 Mirror
3	3 Sunvisor
4	4 Steering wheel rim
5	5 Steering wheel hub/spoke
6	6 Steering wheel rim/hub/spoke
7	7 Steering column, transmission selector lever, other attachment
8	8 Cellular telephone or CB radio
9	9 Add on equipment (<i>e.g.</i> , tape deck, air conditioner)
13	13 Glove compartment door
15	15 [Dr only] WS incl 1/+: fr hdr, A pill, instr pnl, mirror, or steering assembly
16	16 [Pass only] WS incl 1/+: fr hdr, A pill, instr pnl, or mirror
17	17 Windshield reinforced by exterior object (specify)
18	19 Other front object (specify):
100	20 Sunvisor reinforced by front header
101	21 Left instrument panel
102	22 Center instrument panel
103	23 Right instrument panel
104	24 Left lower instrument panel (includes knee bolster)
105	25 Center lower instrument panel (includes knee bolster)

106 26 Right lower instrument panel (includes knee bolster)

LEFT SIDE

Oracle	SAS
21	53 Left A (A1/A2)-pillar
22	54 Left B-pillar
23	55 Other left pillar (specify):
24	56 Left side window glass
25	57 Left side window frame
26	58 Left side window sill
27	59 Lt side glass +: frame, win sill, A pill, B pill, or roof side rail
28	60 Left side glass (Laminated) reinforced by exterior object (specify)
77	61 Other left side object (specify):
595	62 Side panel forward A1/A2 pillar
596	63 Side panel rear of B-pillar

LEFT DOOR PANEL

576	576	Left door panel forward upper quadrant
577	577	Left door panel forward lower quadrant
578	578	Left door panel rear upper quadrant
579	579	Left door panel rear lower quadrant

INTERIOR VEHICLE FORM**CONTACT/POINT OF CONTACT/DETAIL**

Contacted Component (cont'd)

Page 2 of 6

Element Values: (cont'd)

Oracle SAS
 580 580 Left hardware/armrest forward upper quadrant
 581 581 Left hardware/armrest forward lower quadrant
 582 582 Left hardware/armrest rear upper quadrant
 583 583 Left hardware/armrest rear lower quadrant

588 588 Right hardware/armrest forward upper quadrant
 589 589 Right hardware/armrest forward lower quadrant
 590 590 Right hardware/armrest rear upper quadrant
 591 591 Right hardware/armrest rear lower quadrant

RIGHT SIDE

31 103 Right A (A1/A2)-pillar
 32 104 Right B-pillar
 33 105 Other right pillar (specify):
 34 106 Right side window glass
 35 107 Right side window frame
 36 108 Right side window sill
 37 109 Rt side glass +: frame, win sill, A pill, B pill, or roof side rail
 38 110 Right side glass (Laminated) reinforced by exterior object (specify)
 78 111 Other right side object (specify):
 597 112 Side panel forward A1/A2 pillar
 598 113 Side panel rear of B-pillar

39 151 Seat, back support
 40 152 Belt restraint webbing/buckle
 41 153 Belt restraint B-pillar or door frame attachment point
 42 154 Other restraint system component (specify):
 43 155 Head restraint system
 44 161 Interior loose object (specify)
 46 162 Other interior object (specify):
 47 163 Center console first row
 164 164 Center console second row
 165 165 Center console other row
 166 166 Fold down armrest first row
 167 167 Fold down armrest second row
 168 168 Fold down armrest other row
 592 592 Child safety seat shell
 593 593 Child safety seat harness system
 594 594 Unknown child safety seat component
 572 572 Seat LATCH points for child restraints
 573 573 Grab handles
 574 574 Engine shroud/cover
 575 575 Seatback trays
 576 576 Cargo in vehicle

RIGHT DOOR PANEL

584 584 Right door panel forward upper quadrant
 585 585 Right door panel forward lower quadrant
 586 586 Right door panel rear upper quadrant
 587 587 Right door panel rear lower quadrant

Element Values: (cont'd)

AIR BAG

Oracle	SAS
48	170 Air bag-driver side
49	175 Air bag compartment cover-driver side
50	180 Air bag-passenger side
51	185 Air bag compartment cover-passenger side
52	190 Other air bag (specify)
53	195 Other air bag compartment cover (specify)

ROOF

54	201 Front header
55	202 Rear header
56	203 Roof left side rail
57	204 Roof right side rail
58	205 Roof or convertible top
206	206 Roof maplight/console
207	207 Sunroof/components
208	208 Roll bar

FLOOR

59	251 Floor (including toe pan)
60	252 Floor or console mounted transmission lever, including console
61	253 Parking brake handle
62	254 Foot controls including parking brake

REAR

Oracle	SAS
63	301 Backlight (rear window)
64	302 Backlight storage rack, door, etc.
65	303 Other rear object (specify):

ADAPTIVE (ASSISTIVE) DRIVING EQUIPMENT

66	401 Hand controls for braking /acceleration
67	402 Steering control devices (attached to OEM steering wheel)
68	403 Steering knob attached to steering wheel
69	404 Replacement steering wheel (<i>i.e.</i> ,reduced diameter)
70	406 Joy stick steering controls
71	407 Wheelchair tie-downs
72	408 Modification to seat belts,(specify):
73	409 Additional or relocated switches,(specify):
74	410 Raised roof
75	411 Wall mounted head rest (used behind wheel chair)
76	412 Other adaptive device (specify):

Source: Vehicle inspection.

Remarks:

The researcher should record only those contact mechanisms which can be documented by some physical evidence (*e.g.*, scuffs, hair, smudges, dents, cracks, etc.).

* **Note:** Whenever an "other" code is selected as injury source, clearly identify, in the space provided a description of the "other" source.

Steering Rim / Hub / Spoke

is selected when there is continuous or simultaneous contact by a single body region to the Steering Rim / Hub / Spoke. Additionally, use this attribute when the steering wheel is determined to be the suspected injury source, but it cannot be further determined if the rim / hub/ spoke are involved.

[Dr only] WS incl 1/+: fr hdr, A pill, instr pnl, mirror, or steering assembly

should be selected for contacts on the left (driver) side of the vehicle interior. This code applies only when there is a continuous or simultaneous contact to the windshield and one of the listed components by a single Body Region of the occupant.

Note: Some vehicles (*e.g.*, GM APV minivans) are designed with two upper A-pillars on each side. The forward most pillar is called an A1-pillar which is primarily designed to secure the windshield to the vehicle. The second pillar is labeled as an A2-pillar. This pillar generally lends support to the roof and also helps to establish the front door opening. Annotation should be provided on the Interior Vehicle Form specifying which pillar was most severely intruded.

[Pass only] WS incl 1/+: fr hdr, A pill, instr pnl, or mirror

should be selected for contacts on the right (passenger) side of the vehicle interior. This code applies only when there is a continuous or simultaneous contact to the windshield and one of the listed components by a single Body Region of the occupant.

Windshield reinforced by exterior object

is selected when, for example, an occupant contacts a windshield which has been reinforced by the hood of the occupant's vehicle.

Lt (Rt) side glass +: frame, win sill, A pill, B pill, or roof side rail

apply when there is a simultaneous or continuous contact by a single body region of an occupant to the appropriate side window glass and at least one of the listed components. The window sill consists, for this element, of the upper portion of the side interior surface immediately adjacent to the bottom of the side window opening.

Right/Left side glass (Laminated) reinforced by exterior object (specify)

should be selected when an occupant contacts the side glass which has been determined to be laminated and an exterior object (hood of a vehicle) was reinforcing the glass.

Child safety seat

Child restraint devices have caused confusion when they are the source of the injury. The child restraint (*i.e.*, infant/child seat, booster seat, etc.) is considered to be an integral restraint (*e.g.*, the whole seat is the restraint). When the restraint is used by an infant or child it should be coded as one unit. In the CDS the analyst is concerned with the complete seat and its performance.


Select this component if contact with a child safety seat occurs from either:

- a) an infant or child restrained by the child safety seat or
- b) any passenger including an infant or child who contacts a child safety seat but is not restrained by that seat.

When any body member of an infant or child, restrained by a child safety seat, contacts an interior object other than the child safety seat, then code the appropriate interior object (*i.e.*, Seat, back support; Head restraint system etc.)

Instrument Panel


The instrument panel is visually divided in half longitudinally by placing a line through the steering wheel column at a midpoint where the column enters the panel (see diagram below). The visual separation will serve as the vertical delineation between the "Left Instrument Panel" and the "Left Lower Instrument Panel (including knee bolster)" code. If it cannot be determined if a contact falls above or below this delineation or the contact falls on the delineation, default to the upper part or the "Left Instrument Panel" code.

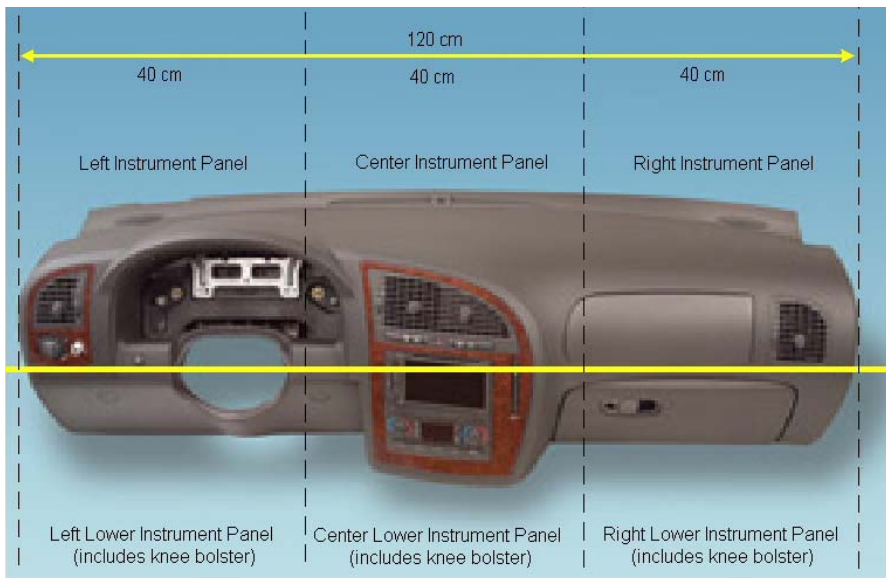

Left /Right door panel quadrants

The doors are visually divided into quadrants. The longitudinal measurement is taken at the beltline along the window frame. The vertical measurement is taken at the midpoint of the door, from the top edge to the bottom edge of the inner door panel.

The quadrants are rarely equal in size. They are named as follows: Forward Upper Quadrant (FUQ), Forward Lower Quadrant (FLQ), Rear Upper Quadrant (RUQ), and Rear Lower Quadrant (RLQ). Select the quadrant that best represents the contact.

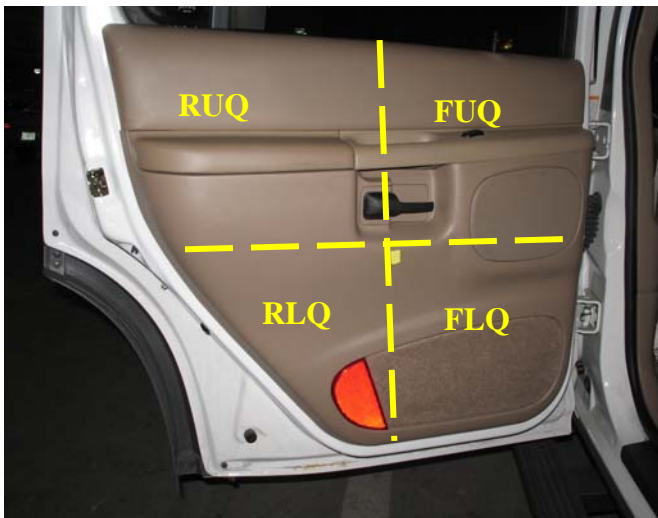

Left/Right hardware/armrest quadrants

The door panel is visually divided as described in Left/Right door panel quadrants. These attributes are selected if a portion of the armrest or hardware is located within a given quadrants and is contacted. Select the quadrant that best represents the contact.

Air bag-driver side

only includes the steering wheel hub and the lower IP/knee bolster air bags.

Air bag-passenger side

only includes the IP and lower IP/knee bolster air bags.

Other air bag (specify)

includes side air bags (i.e., curtains, seat back, door mounted and roof rail air bags, etc.)

OCCUPANT NUMBER

Screen Name: Occupant Number

SAS Data Set: *CONTACT*

SAS Variable: *OCCNO*

Oracle Name: *OCCUPANTCONTACT.OCCUPANTID*

Element Attributes:

Select occupant number from drop down list

Source: Vehicle inspection

Remarks:

The Researcher should identify the number of the occupant who is suspected of contacting the identified component, if it can be determined.

An occupant number must be selected, there is no unknown.

Note: If an occupant list for this vehicle does not appear, they must be added into the case structure on the Case Form, Structure tab, Occupant sub-tab).

BODY REGION

Screen Name: Body Region

SAS Data Set: *CONTACT*

SAS Variable: *CONTREGN*

Oracle Name: *OCCUPANTCONTACT.AISID*

Element Attributes:

Oracle	SAS		Oracle	SAS	
170	10	Abdomen	80	140	Knee – Left
25	15	Ankle – Left	70	145	Knee – Right
20	20	Ankle – Right	85	150	Knee – Unknown
27	22	Ankle - Unknown	320	155	Lower Arm – Left
180	25	Back	310	160	Lower Arm – Right
130	30	Buttock – Both	325	165	Lower Arm – Unknown
120	35	Buttock – Left	60	170	Lower Leg – Left
110	40	Buttock – Right	50	175	Lower Leg – Right
135	45	Buttock – Unknown	65	180	Lower Leg – Unknown
210	50	Chest	220	185	Neck
300	55	Elbow – Left	260	190	Shoulder – Left
290	60	Elbow – Right	250	195	Shoulder – Right
305	65	Elbow – Unknown	265	200	Shoulder – Unknown
240	70	Face	100	205	Thigh – Left
200	75	Flank – Left	90	210	Thigh – Right
190	80	Flank – Right	105	215	Thigh – Unknown
205	82	Flank - Unknown	280	220	Upper Arm – Left
15	85	Foot – Left	270	225	Upper Arm – Right
10	90	Foot – Right	285	230	Upper Arm – Unknown
16	95	Foot – Unknown	340	250	Wrist – Left
160	100	Genitals	330	255	Wrist – Right
360	105	Hand – Left	345	260	Wrist – Unknown
350	110	Hand – Right	400	999	Unknown
365	115	Hand – Unknown			
230	120	Head			
150	125	Hip-Left			
140	130	Hip – Right			
155	135	Hip – Unknown			

Body Region (cont'd)

Page 2 of 2

Source: Vehicle inspection.

Remarks:

The Researcher should identify the **suspected** body region of the occupant that contacted the identified component, if it can be determined or presumed.

EVIDENCE

Screen Name: Evidence

SAS Data Set: *CONTACT*

SAS Variable: *CONTEVID*

Oracle Name: *OCCUPANTCONTACT.PICKEVIDENCE*

Element Attributes:

Oracle	SAS	
1	1	Bent
2	2	Cracked
3	3	Scuffed
4	4	Transfer (specify)
5	5	Deformed
6	6	Blood
7	7	Hair
8	8	Stretched
9	9	Scratched
10	10	Teeth marks
11	11	Imprint
12	12	Spider Web
14	96	Combination (specify)
13	98	Other (specify)

Source: Vehicle inspection

Remarks:

The Researcher should identify the types of contact evidence present (i.e., scuff, tissue transfer, tooth mark, etc.) that indicates an occupant contact. Evidence is described as a thing or things that are helpful in forming a conclusion or judgment.

This variable is only for the researcher to determine that evidence existed that showed this object was/could have been contacted by an occupant. Occupant kinematics or the PDOF should not be used to determine contacts.

Bent

is described as an object that has been altered from its original shape. It is forced to assume a different direction or shape from its original shape.

Cracked

is described as an object that is broken so that fissures appear on the surface.

Scuffed

is described as to scrape and roughen the surface of an object.

Transfer (specify)

is described as to move a substance from one surface to another. The researcher must specify the type of transfer. Examples are:

- Make up or lipstick transferred from the occupant onto the air bag.
- Clothing transferred onto an object from the occupant.

Deformed

is described as an object that has been distorted in form and is misshapen.

Blood

is described as a fluid consisting of human plasma, blood cells, and platelets. Blood in and by itself, is not a reliable indicator of a contact point.

Hair

is described as cylindrical, keratinized, often pigmented filaments characteristically growing from the epidermis of a human. Evidence of a contact point by hair normally consists of hair embedded into an object.

Stretched

is described a relieving of stiffness by a pulling or a straining motion of an object.

Scratched

is described as to make a series of thin shallow cuts on a surface.

Teeth marks

is described as small punctures, usually characterized by "u" shaped, to an object.

Imprint

is described as an impression of a surface created by pressure.

Spider web

is described as being produced by an object coming in contact with automobile glass, i.e., windshield. The object impact the glass and a series of cracks emit from the center of the initial contact point.

Evidence (cont'd)

Page 3 of 3

Combination (specify)

is used when the researcher determines that more than one type of evidence existed for this contact point. Examples are:

- Hair embedded into the windshield with a spider web
- A cracked instrument panel with a scuff mark

Other (specify)

use this attribute when the contact evidence is not listed in the given attributes.

CONFIDENCE LEVEL OF OCCUPANT CONTACT

Screen Name: Confidence

SAS Data Set: *CONTACT*

SAS Variable: *CONTCONF*

Oracle Name: *OCCUPANTCONTACT.PICKCONFIDENCELEVEL*

Element Attributes:

Oracle	SAS	
1	1	Certain
2	2	Probable
3	3	Possible
9	9	Unknown

Source: Vehicle inspection

Remarks:

This variable specifies the researcher’s level of confidence that the component was **contacted by an occupant**, based on physical evidence collected during the vehicle inspection.

Certain

is coded when, based on **visible** physical evidence, it has been established beyond doubt or question that the component was contacted by an occupant.

Probable

is coded when, in all likelihood, an occupant contacted the component, although the evidence is insufficient to be absolutely sure.



Possible

is coded when there is more evidence for than against, however there is room for doubt, due to the lack of substantiating physical evidence.

Unknown

it is unknown whether the component listed as a contact point was contacted by an occupant or some type of induced or post-crash damage.

CONTACT/SKETCH 1 AND SKETCH 2

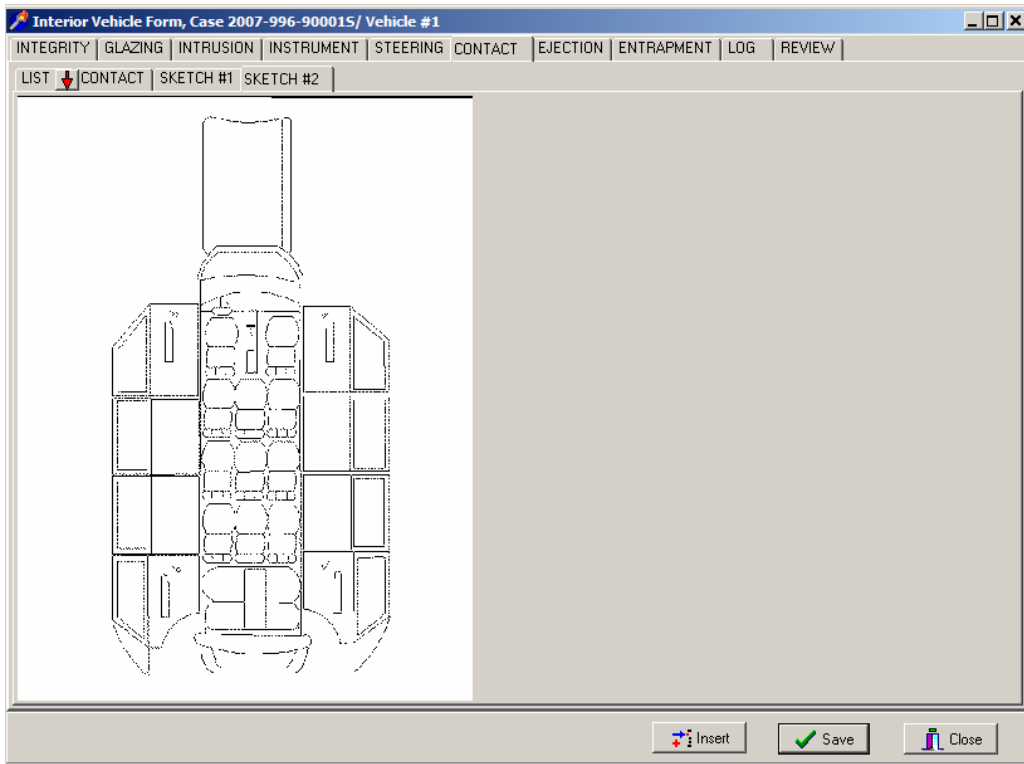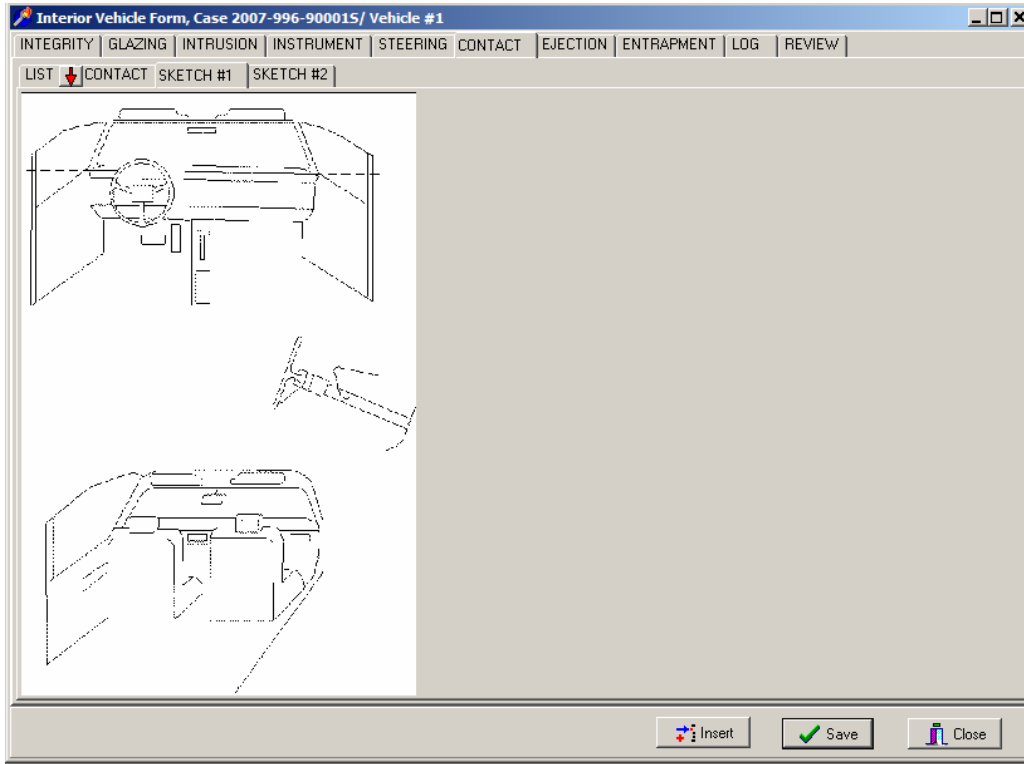

Instructions for Completion of Vehicle Interior Sketches

Open up Sketch 1 and Sketch 2 (by double clicking) the image.

Leave the Sketches open or minimized for ease in navigating between the Detail Tab, and the Sketches.


For each documented Contact Point:


Sketch the damaged area on Sketches 1 and 2 (e.g., windshield, instrument panel, glove compartment, front seat back, etc.).


Label the Contact point with a sequential alpha character beginning with the letter "A".

Provide any annotations as necessary. X out or erase any seats that are not available in the seating geometry of the vehicle. X out or erase any side doors/panels that are not available in the vehicle.

Examples of a basic vehicle interior sketch is shown:

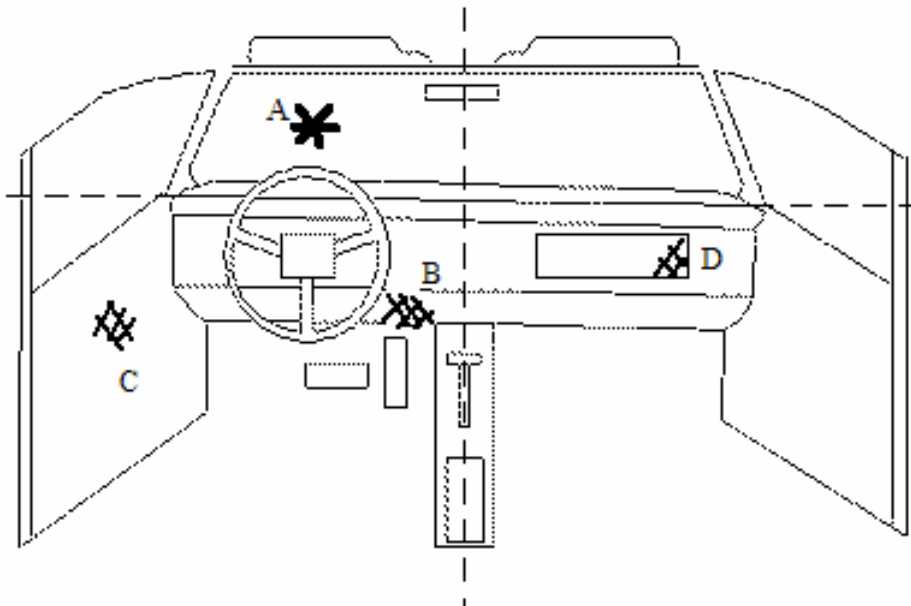

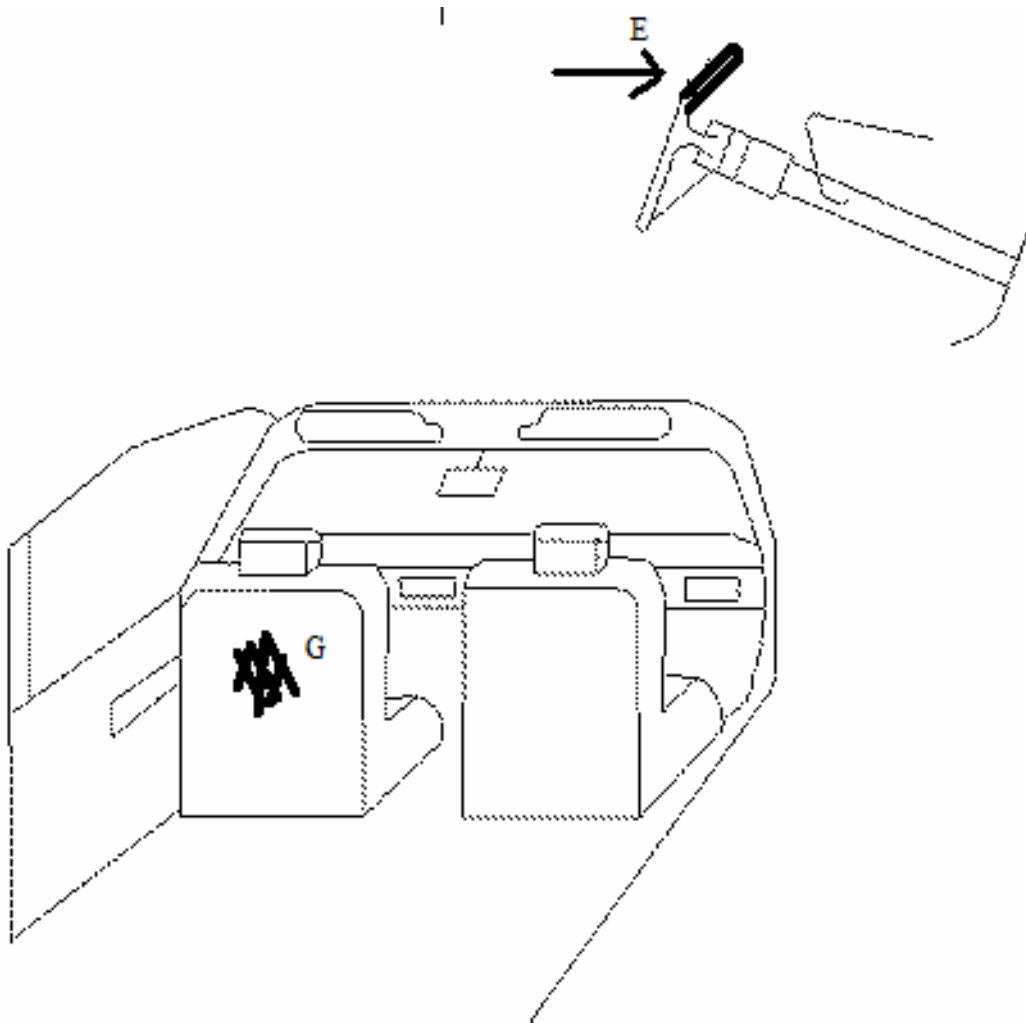

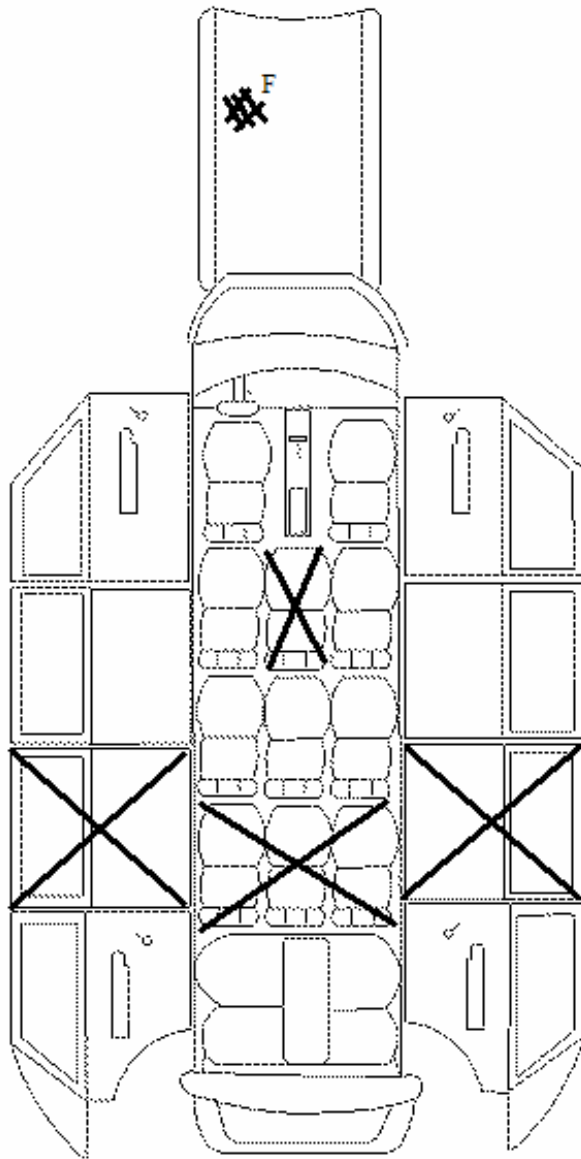

Ejection Overview

Page 1 of 2

Variables in this section provide an assessment of the occurrence of ejection of an occupant. These variables in this section are coded based upon vehicle inspection. Verification of questionable ejections will come from the interview.

Historically, ejection from the vehicle has been a major cause of increased fatalities and serious injuries. The chances of being killed if ejected are about 1 in 5; whereas, if the occupant remains inside the vehicle, the chances of dying are reduced to about 1 in 200. Unfortunately ejection from the vehicle is not that uncommon and has become a significant part of the fatality and severe injury crashes. Further contributing to the ejection problem is the increase in window surface area and more hatchback models. Despite the current emphasis on restraint use through legal requirements for occupants to be seat belted, a significant portion of the population continues to be unrestrained and at risk to ejection.

A problem not often addressed is that of partial ejection. This refers to those instances where some part but not all of an occupant's body is, at some time during the crash sequence, outside the occupant compartment. Although it would not seem to be a problem it can be, and often is, fatal if the part outside is the occupant's head. Because of the dynamics of the vehicle and the kinematics of the occupants during an ejection sequence, it is often the occupant's own vehicle which causes the injury as it rolls onto the occupant.

Federal Motor Vehicle Safety Standards (FMVSS) which were developed in response to the problems seen in these areas are FMVSS 201 (Occupant Protection in Interior Impact), FMVSS 205 (Glazing Materials), FMVSS 206 (Door Locks and Door Retention Components), FMVSS 212 (Windshield Mounting), and FMVSS 216 (Roof Crush Resistance Passenger Cars).

Analytically this group of variables is a stand alone package most of the time. It can form the basis of an analysis without the use or comparison to any other variables. This would be used mostly in exploring the number and types of ejections. Expanding the scope somewhat to include injury severity allows a determination of the increase or decrease in the ejection problem. Inclusion of injury source would provide an idea of the severity of all occurrences of entrapment and ejection. Injury source also provides an idea of the kinematics of the occupant during the sequence. The addition of a cross-tabulation for AIS level would show the relative severity between the injuries incurred inside the vehicle and those outside the vehicle.

Other areas of interest to the analyst are the ejection route and performance of integral structures. The integral structure performance is directly governed by the FMVSS 206 and 212. These areas are of increasing interest to NHTSA since the real world

performance can help support the findings from the staged collisions and will help determine the effectiveness of the standards.

Gathering the data, which will allow the researcher to accurately select the variables, is a multistage process. It will begin with the PAR which may give an indication of ejection. Inspection of the vehicle will provide the evidence needed to substantiate the ejection. Further, documentation should be obtained through the scene inspection, interview, and injury data. Particular attention should be paid to the vehicle inspection since most evidence of ejection will be less apparent and not easily discerned.

In summary, this group of variables assesses the level of a very significant problem in today's crash picture. Correct accurate assessment is a result of a multistage research process, which will be individualized by case. Attention to detail will result in a correct assessment. This is an example which is directly tied to the FMVSS, and all gathered data results are a direct evaluation of the applicable standards.

EJECTION DETAIL/LIST

Ejection #	Occ #	Type	Area	Medium
------------	-------	------	------	--------

Ejection/List

All ejections that are documented on the preceding tabs will be displayed on this tab. This tab is generally used as an overview for all of the ejections. No fields can be edited here. To edit an ejection, return to the Detail tab and make any corrections.

DETAIL

Interior Vehicle Form, Case 2007-996-900015/ Vehicle #1

INTEGRITY | GLAZING | INTRUSION | INSTRUMENT | STEERING | CONTACT | EJECTION | ENTRAPMENT | LOG | REVIEW

LIST | **DETAIL**

Type

Area

Medium

Medium Status

Ejection # of 0

EJECTION NUMBER

Screen Name: Ejection #

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: ***EJECTION.EJECTIONNUMBER***

Element Value:

Number as assigned

Source: Vehicle inspection

Remarks:**Remarks:**

Each potential ejection is added by the researcher as it is located. The system will automatically increment the count. To add an ejection, go to the Title Bar and select “**Edit**” and then “**Insert**”.

EJECTION - TYPE

Screen Name: Ejection -Type

SAS Data Set: *OA*

SAS Variable: *EJECTION*

Oracle Name: *EJECTION.PICKEJECTIONTYPE*

Element Value:

Oracle	SAS	
1	0	No Ejection
2	1	Complete ejection
3	2	Partial ejection
4	3	Ejection, unknown degree
5	9	Unknown if ejected

Source: Vehicle inspection

Remarks:

Ejection refers to persons being completely or partially thrown from the vehicle as a result of an impact or rollover. If a person already has a body part protruding from the vehicle (e.g., an elbow, arm, etc.) and the PDOF acting on the vehicle would likely cause further protrusions of the body part, then at least partial ejection is selected.

No Ejection

is selected when there is no indication of any occupant being either partially or fully ejected from the vehicle.

Complete ejection

is selected when an the occupant’s body is entirely outside of the vehicle during the crash sequence. It is important to note that even though the body may be outside the vehicle, it may still be in contact with the vehicle. This code also includes occupants who are not initially in the passenger and contiguous cargo area of the vehicle (e.g., pickup beds, boot of a convertible, and persons riding on open tailgates).

Partial ejection

is selected when part of the occupant’s body remains **in** the vehicle, and any part of it is forced outside of the vehicle during the crash sequence. This code **does not apply** to those occupants who are not initially in the passenger and contiguous cargo area of the vehicle, they are indicated as “**Complete ejection**”.

Ejection, unknown degree

is selected when it is suspected (or known) that an ejection of the occupant occurred, however, at the time of the vehicle inspection the researcher was unable to determine if the ejection was **Partial** or **Complete**.

Unknown

is selected when:

- the vehicle has been completely repaired
- it cannot be determined if an ejection is applicable.

EJECTION AREA

Screen Name: Ejection—Area

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: ***EJECTION.PICKEJECTIONAREA***

Element Attributes:

Oracle	SAS	
11	0	[No ejection]
1	1	Windshield
2	2	Left front
3	3	Right front
4	4	Left rear
5	5	Right rear
6	6	Rear
7	7	Roof
9	9	[Unknown if ejected]
8	8	Other area (specify)
-9999	99	Unknown ejection area

Source: Vehicle inspection

Remarks:

Rear

is restricted to persons riding in a passenger compartment and contiguous cargo area, who are ejected through the rear window, tailgate (*e.g.*, station wagon), hatchback, etc.

Roof

applies to all hardtops, convertibles, sun roofs, t-bar roofs, and detachable hardtops (such as fiberglass tops) that are used to cover areas designed for passenger protection.

Examples follow for how the variables, Ejection Medium, and Medium Status (Immediately Prior to Impact), should be selected when **Area** equals **Roof**.

Ejection	Roof Type	Area	Ejection Medium	Medium Status
Ejection	Hardtop, ripped open during crash	Roof	Integral Structure	Integral Structure
Ejection	Removable hardtop, <u>attached</u> prior to crash	Roof	Integral Structure	Integral Structure
Ejection	Removable hardtop, <u>detached</u> prior to crash	Roof	Non-fixed roof structure	Open
Ejection	Convertible, in down or open position	Roof	Non-fixed roof structure	Open
Ejection	Convertible, in closed position	Roof	Non-fixed roof structure	Closed
Ejection	Sun or t-bar, closed, and ripped open during crash	Roof	Non-fixed roof structure	Closed
Ejection	Sun or t-bar, open/removed prior to crash	Roof	Non-fixed roof structure	Open

Ejection Attributes are designated for use with areas designed for passenger protection (e.g., passenger cars, vans, light truck cabs, self-contained mini- Recreational Vehicles and mini-motor homes). Trailers, add-on campers, etc., are to be assigned **Other area**.

Other area

also applies to persons riding on open tailgates.

Unknown

is selected when it is known from the vehicle inspection that an occupant was ejected (i.e., partial, full, or unknown degree) however, the area of potential ejection is unknown.

EJECTION MEDIUM

Screen Name: Ejection—Medium

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *EJECTION.PICKEJECTIONMEDIUM*

Element Attributes:

Oracle	SAS	
11	0	[No ejection]
1	1	Door/hatch/tailgate
2	2	Non-fixed roof structure
3	3	Fixed glazing
4	4	Non-fixed glazing (specify)
5	5	Integral structure
	79	[Unknown ejection area]
7	9	[Unknown if ejected]
6	8	Other medium (specify)
-9999	99	Unknown

Source: Vehicle inspection

Remarks:

Door/hatch/tailgate

includes any door, hatch, or tailgate that is opened during the course of the impact sequence.

Non-fixed roof structure

applies only to convertible, sun roofs, t-bar roofs, and removable hardtops when retracted/detached prior to the crash.

Fixed glazing

refer to any glazing in the vehicle that cannot be opened.

Non-fixed glazing

refer to any glazing in the vehicle that can be opened to any degree.

Integral structure

includes removable hardtops when attached to the vehicle prior to the crash. This also should be used when any vehicle structure, not designed to be opened (*e.g.*, standard roof), is torn open during the crash such as to permit ejection.

Other medium

applies to persons riding in pickup beds, on open tailgates, and for other situations which cannot be classified above. In addition, use this attribute when someone is ejected from a trailer, add-on camper, etc.

Unknown

is selected when the ejection medium it is not known.

EJECTION MEDIUM STATUS

Screen Name: Ejection—Medium Status

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *EJECTION.PICKEJECTIONMEDIUMSTATUS*

Element Attributes:

Oracle	SAS	
11	0	[No ejection]
1	1	Open
2	2	Closed
3	3	[Integral Structure]
	79	[Unknown ejection area]
	89	[Unknown if ejected]
	99	Unknown status of medium

Source: Vehicle inspection

Remarks:

This variable is a description of the status of the area through which an occupant was ejected and is the status of the medium immediately prior to the impact.

Open

applies to convertible roofs, sunroofs, t-bar roofs, windows, doors or tailgates that are completely or partially open immediately prior to impact, or to other open areas of vehicles such as pickup beds, etc.

Closed

refers to a window that is completely closed when damaged, or to a convertible, sun, or t-bar roof that is closed when damaged. Sun and t-bar roofs are captured here if the ejection occurred through the designed opening in the sun or t-bar roof. However, if the roof was of a sun or t-bar type but the ejection occurred because a sizable opening was torn in the roof structure, then select **Integral structure**. This is also used for fixed glazings such as windshields and backlights which are in place prior to the collision. This also refers to a door that is closed, but when damaged, experiences latch and/or hinge failure causing the door to open.

Integral structure

should be used when any vehicle structure, not designed to be opened (*e.g.*, standard roof), is torn open during the crash such as to permit ejection.

Unknown

is used when the medium status prior to the impact is unknown.

Entrapment Overview

Entrapment poses a different problem area. Recent years have brought about a vast improvement in the delivery of emergency medical attention to motor vehicle crash victims. This improvement has been achieved through the establishment of regional trauma centers, well equipped Mobile Intensive Care Units manned by trained paramedics even in rural areas, and a general increase in the knowledge of how to treat acute trauma. This improvement has not helped those victims who are restrained within the vehicle by deformed components. The improved care cannot be delivered because the personnel are unable to get to the victim, remove the victim from the vehicle, and deliver the victim to a treatment facility in a reasonable amount of time.

Entrapment is caused by the structure components of the vehicle entangling or intermingling with the occupants, preventing the occupants from exiting the vehicle. Manufacturers have designed crumple zones into vehicles to absorb energy. These structural parts are designed to crumple in a predetermined pattern to absorb the energy during a crash while maintaining the integrity of the passenger compartment. In so doing, the occupants of the vehicle can become entrapped by the structure of the vehicle deforming around them.

Enter any observations or indications of possible entrapment or mobility restrictions. Careful observations should be made of intruding vehicle components, i.e., jammed doors, crushed roof, or other mechanisms that might have restrained the occupants, restricted their mobility, or limited egress from the vehicle.

Extrication tool marks are an indication of entrapment. Although, the cutting off of the roof of a vehicle is not an indication of entrapment.

ENTRAPMENT

The screenshot displays a software window titled "Interior Vehicle Form, Case 2007-996-900015/ Vehicle #1". The window features a menu bar with the following options: INTEGRITY, GLAZING, INTRUSION, INSTRUMENT, STEERING, CONTACT, EJECTION, ENTRAPMENT, LOG, and REVIEW. Below the menu bar is a "COMMENT" section containing a button labeled "No Entrapment". The main area of the window is a large, empty white rectangular box. At the bottom right of the window, there are two buttons: "Save" (with a green checkmark icon) and "Close" (with a red X icon).

Enter any observations or indications of possible entrapment or mobility restriction. Careful observation should be made of intruding vehicle components, jammed doors, crushed roof, or other mechanisms that might have restrained occupants or restricted or limited egress from the vehicle.

If no entrapment was indicated select the "No Entrapment" button and the note area is prefilled.

LOG

Interior Vehicle Form, Case 2007-996-900015/ Vehicle #1

INTEGRITY | GLAZING | INTRUSION | INSTRUMENT | STEERING | CONTACT | EJECTION | ENTRAPMENT | LOG | REVIEW

Documentation of

Integrity	<input type="text"/>	Steering Column/Wheel	<input type="text"/>
Glazing	<input type="text"/>	Occupant Contacts	<input type="text"/>
Intrusions	<input type="text"/>	Ejection /Entrapment	<input type="text"/>

Quality of Interior Slides

Subject	<input type="text"/>	Slides	<input type="text"/>
---------	----------------------	--------	----------------------

Save Close

PSU REVIEW

Interior Vehicle Form, Case 2007-996-900015/ Vehicle #1

INTEGRITY | GLAZING | INTRUSION | INSTRUMENT | STEERING | CONTACT | EJECTION | ENTRAPMENT | LOG | REVIEW

PSU REVIEW | ZONE REVIEW

LIST | DETAIL

Form Tab Veh# Occ #

Original Suggested

Comment

Save Close

ZONE REVIEW

Interior Vehicle Form, Case 2007-996-900015/ Vehicle #1

INTEGRITY | GLAZING | INTRUSION | INSTRUMENT | STEERING | CONTACT | EJECTION | ENTRAPMENT | LOG | REVIEW

PSU REVIEW | ZONE REVIEW

LIST | DETAIL

Form Tab Veh # Occ #

Original Final

Reason Change

Comment

Safety Systems Form Overview

The Safety System form captures information about all occupant protection systems in the vehicle. These systems include belt restraints, pretensioners, LATCH systems, air bags, child restraints and belt positioning devices. Record only information obtained during the vehicle inspection on the Safety Systems form. This form contains shared information on the Seat, Restraints, Air Bag, and Child Seat tabs with the Occupant form.

Researchers must determine the **usage and function level** of restraints **for every seating position in the vehicle, regardless of whether the seating position is occupied**. Evaluate belt usage for this crash only.

Consider the following evidence as indicating usage:

- **belts/fittings damaged by occupant loading:** deformed anchor components, stretched webbing, latch plate peening (loading impression on metal);
- **position of belts:** laying on seat cushion (cut or whole) or retracted into spool with no dust on the belt over the D-ring and the belt can be spooled out easily;
- **condition of belts:** slight fraying on belt edges close to latch plate position (older vehicles), no dust on belt at D-ring on pillar, cut for occupant extraction by emergency personnel (usually at an easily accessible position).

Consider the following evidence as evidence of non-usage:

- **Position of belts:** Shoulder portion behind seat back, lap portion tucked into the seat bight, belt locked into place in unused position.
- **Condition of belts:** dirty, dust covered, mechanically unusable (buckle or latchplate damaged, parts missing or otherwise not usable), size adjustment on fixed length belts inappropriate for occupant, cut for convenience or comfort (out of the way, near housings), tucked under seat cushions or into the seat bight.

The usage must be determined on this form using only the evidence in the vehicle at the time of inspection. Do not use inputs from any other sources in coding the Safety Systems screens. Final determination of belt restraint “usage in this crash” is coded on the Occupant Assessment form. Vehicle evidence along with police report information, interviews, relationship of contact points to seat position relative to the PDOF(s) assigned to the vehicle, presence of belt-caused occupant injuries, and presence or absence of ejection are considered before encoding restraint usage on the Occupant Assessment screens. In summary, agreement between the Safety Systems belt coding for usage and the coding in the Occupant form is not required.

Every air bag for every seating position, regardless of deployment, must be listed in the Air Bag tab and completely documented. Deployed air bags must be checked thoroughly to document possible damage to the bag or flaps. Determination of air bag function and injury causation depends on complete documentation of this data. Every air bag for every seating position must be listed in the Air Bag tab. If the bag is not deployed, presence can be more difficult to determine. Most frontal bags are clearly labeled. Some side and roof bags will also have labels. However, information on possible airbag presence should be obtained before inspection of the vehicle. This information should be obtained from the current MY (Model Year) Safety Equipment list, Zone Center, owner's manual or dealer body shop.

If a vehicle has air bags, it may also have pretensioners. Most recent model year vehicles have pretensioners for the outboard belt restraints in the first seat row and sometimes in the second seat row. These devices are attached to either the retractor or buckle stalk of lap/shoulder belts in seat positions with OEM air bags. The devices reduce slack in belt restraints just prior to air bag deployment. Removal of slack brings the occupant into the correct position for bag deployment. Many of the pretensioners cause the belt to remain in its at-crash position well after the crash. Thus, if the occupant was wearing the belt at deployment, the belt remains spooled out and locked in place. Conversely, if the occupant was unbelted, the belt can be locked in the stored position. Both of these occurrences confirm pretensioner presence. All buckle pretensioners must be measured if actuated.

Child restraints (integrated, booster, convertible or infant) must be inspected and completely documented. If the child restraint is in the vehicle at the time of inspection, photograph the restraint in its installed position, then remove and photograph the restraint according to the CDS Digital Photography Guidelines Manual. Complete all applicable coding at the time of inspection. Thoroughly document any damage to the restraint. Do not re-install the Child Safety Seat.

A Field Safety Notification (FSN) should be submitted when there is a suspected component failure that occurred during the crash sequence.

SEAT

SEAT DEFINITION	FIRST ROW	SECOND ROW	THIRD ROW	FOURTH ROW	FIFTH ROW
		No Seat	No Seat	No Seat	No Seat
	No Seat	No Seat	No Seat	No Seat	No Seat
< Front >	No Seat	No Seat	No Seat	No Seat	No Seat
	No Seat	No Seat	No Seat	No Seat	No Seat

No Cargo Area

Save

Select the available seats that are in the vehicle at the time of the inspection. If no seat is present do not define a seat.

SEAT DEFINITION

Safety Systems Form, Case 2007-996-900015/ Vehicle #1

SEAT | RESTRAINTS | AIR BAG | CHILD SEAT | LOG | REVIEW

SEAT DEFINITION | FIRST ROW | SECOND ROW | THIRD ROW | FOURTH ROW | FIFTH ROW

	Left	Center	Right
Head Restraint			
Type	<input type="text"/>	<input type="text"/>	<input type="text"/>
Damage	<input type="text"/>	<input type="text"/>	<input type="text"/>
Active	<input type="text"/>	<input type="text"/>	<input type="text"/>
Seat			
Type	<input type="text"/>	<input type="text"/>	<input type="text"/>
Orientation	<input type="text"/>	<input type="text"/>	<input type="text"/>
Track	<input type="text"/>	<input type="text"/>	<input type="text"/>
Performance	<input type="text"/>	<input type="text"/>	<input type="text"/>
Integrated Restraints	<input type="text"/>	<input type="text"/>	<input type="text"/>
Seat Back			
Prior	<input type="text"/>	<input type="text"/>	<input type="text"/>
Post	<input type="text"/>	<input type="text"/>	<input type="text"/>
AB EVER Available	<input type="text"/>	<input type="text"/>	<input type="text"/>

Save

OCCUPANT'S SEAT POSITION

Screen Name: Seat Location Identification

SAS Data Set: ***OA***

SAS Variable: ***SEATPOS***

Oracle Name: ***SEATLOC.SEATROW and SEATLOC.SEATLOCATION***

Front Row

- 11 Left side
- 12 Middle
- 13 Right side

Second Row

- 21 Left side
- 22 Middle
- 23 Right side
- 24 Far right side

Third Row

- 31 Left side
- 32 Middle
- 33 Right side
- 34 Far right side

Fourth Row

- 41 Left side
- 42 Middle
- 43 Right side
- 44 Far right side

Fifth Row

- 51 Left side
- 52 Middle
- 53 Right side
- 54 Far right side

Cargo Area

Source: Vehicle inspection

Remarks:

“Far right side” is only to be used if the seat has four seating positions.

More than one person may be assigned to a seating position. When this happens, the appropriate **Posture** must be selected to account for this.

The seating position by the steering wheel should be assigned to the assumed driver of a hit-and-run vehicle unless evidence indicates a different position for the person or persons.

If seating in the vehicle is longitudinal rather than lateral, use the basic idea of a vehicle interior being divided laterally into roughly equal thirds and visualize lateral rows of seats to determine what seat position is the best descriptor.

Persons appended to the vehicle in motion are not considered to be occupants of the vehicle.

HEAD RESTRAINT TYPE AT THIS OCCUPANT POSITION

Screen Name: Head Restraint -Type

SAS Data Set: SEATLOC

SAS Variable: HEADTYPE

Oracle Name: HEADRESTRAINT.PICKHEADRESTRAINTTYPE


Element Attributes:

Oracle	SAS	
1	1	No head restraints
2	2	Integral
4	3	Adjustable
6	4	Add-on
8	8	Other (specify)
9	9	Unknown

Source: Vehicle inspection.

Remarks:

FMVSS 202 (Head Restraints) only applies to 1st row seating positions. Although, the presence or non-presence of head restraints are captured for all seating positions in the vehicle. Some examples of head restraint styles are shown below.

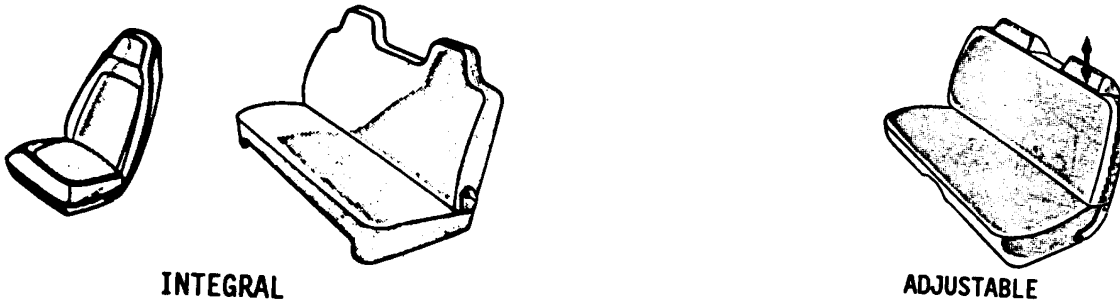

No head restraints

is used when (1) no head restraint is available for this seating position, or (2) there had been a head restraint but it had been removed prior to the crash.

Integral

refers to head restraints which are a continuous part of the seat back structure or those which are a separate structure but are not vertically adjustable. For rear seats only, if an obvious rise or sculpted head restraint is not observed, code as No Head Restraint.

Adjustable

applies to:

- head restraints which can be moved vertically to accommodate occupants of varying heights, and
- head restraints which have a fixed outer framework and a separate center section which is adjustable vertically.

Add-on

refers to clamp-on, strap-on, or even bolt-on head restraints on a vehicle not originally equipped with head restraints. This attribute should be infrequently used.

Unknown

is used when the type of head restraint cannot be determined

Note: Manufacturers are providing head restraints for rear seat occupants. These head restraints may be the same or similar to those used in the front seats, or they may be a slight rise in the rear seat back.

HEAD RESTRAINT DAMAGE BY OCCUPANT AT THIS OCCUPANT POSITION

Screen Name: Head Restraint – Damage

SAS Data Set: SEATLOC

SAS Variable: HEADDAMG

Oracle Name: HEADRESTRAINT.PICKHEADRESTRAINTDAMAGE

Element Attributes:

Oracle	SAS	
8	1	[No Head Restraints]
1	2	No damage
2	3	Damaged during crash
3	9	Unknown

Source: Vehicle inspection.

Remarks:

No damage

There was no damage to the head restraint by the occupant.

Damaged during crash

Any damage to a head restraint caused by the occupant in the seat position having the head restraint should be identified.

Unknown

is used when it is unknown if damage to the restraint was caused by an occupant in the appropriate seat position.

Note: Manufacturers are providing head restraints for rear seat occupants. These head restraints may be the same or similar to those used in the front seats, or they may be a slight rise in the rear seat back. **Any damage to a rear seat head restraint by the occupant in the seat position must be captured regardless of the height of the restraint.**

ACTIVE HEAD RESTRAINT

Screen Name: Head Restraint - Active

SAS Data Set: *SEATLOC*

SAS Variable: *HEADACT*

Oracle Name: *HEADRESTRAINT.ACTIVEHEADRESTRAINTID*

Element Attributes:

Oracle	SAS	
0	1	None Present
2	2	Present
3	9	Unknown

Source: Vehicle Inspection, interview

Remarks:

There should be a label on the seat indicating the presence of the active head restraint.

ROLLOVER PROTECTION

Screen Name: Rollover Protection

SAS Data Set:

SAS Variable:

Element Attributes:

Check Box

Oracle	SAS	
0	0	No/Unknown (unchecked)
1	1	Yes (checked)


Range:

Source: Vehicle inspection, researcher determined

Remarks:

The purpose of this variable is to determine if the vehicle's rollover protection system was actuated.

Different types of systems are being used by manufacturers, also different names are used (i.e., Rollover Protection Systems (ROPS) or (RPS)). In the event of a crash that induces a certain amount of inclination roll-over sensors activate roll-bars that are integrated in or behind the seats, ensuring there is sufficient clearance for occupant's heads in the event of a crash. Also, an independent module behind each of the two rear-seat passengers' heads could deploy. A rollover need not occur for the rollover protection system to actuate.

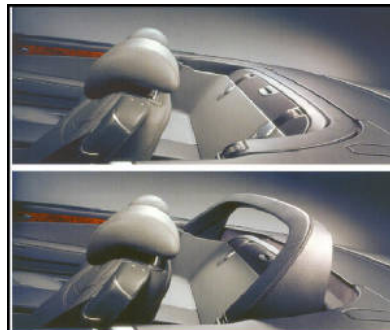

SEAT TYPE

Page 1 of 4

Screen Name: Seat – Type

SAS Data Set: SEATLOC

SAS Variable: SEATTYPE

Oracle Name: SEATLOC.PICKSEATTYPE

Element Attributes:

Oracle	SAS	
2	1	Bucket
3	2	Bucket with folding back
4	3	Bench
5	4	Bench with separate back cushions
6	5	Bench with folding back(s)
7	6	Split bench with separate back cushions
8	7	Split bench with folding back(s)
9	8	Pedestal (<i>i.e.</i> , column supported)
10	9	Box mounted seat (<i>i.e.</i> , van type)
11	10	Other seat type (specify)
12	99	Unknown Seat Type

Source: Vehicle inspection.

Remarks:

This variable assesses the type of seat present at each defined position. Because the type of seat may have an effect on occupant kinematics, the type of seat is important to analysts.

The term “folding back(s)” refers to seat backs that are designed to fold significantly forward of upright. These seats usually fold forward to allow easier access to the area behind the seat for egress, ingress and cargo. Seats that recline only rearward are not considered to be folding backs. Folding backs, because of the additional possibility of failure of the folding mechanism, take precedence over solid or separate back cushions. “Folding back(s)” is not selected if only the lower part of the seat back folds forward (for an armrest, console or trunk access). If a center seat back is separate from the outboard seat backs and folds forward for an armrest or console (in many light truck type vehicles), it is not coded as a folding back.

If a seat was folded down at the time of inspection, record the data as if the seat was in the upright position.

If a seat was removed or stowed prior to the crash, the seat position will not be defined. Thus, no seat or safety restraint systems data will be coded for that position.

The first row seats in two-door vehicles will usually have folding backs. The first row seats in four-door vehicles will usually not have folding backs.

Bucket

A bucket seat is a standalone seat intended for a single occupant, and shares no seatback hardware or cushion with any other seating position. Its bottom anchorage or track is attached directly to the vehicle floor, and is also not shared with any other seating position.

Bucket with folding back

A seat may be coded with this attribute if it meets the definition of a bucket seat and also has a seatback that folds forward.

Bench

A bench seat is intended for multiple occupants, has a single-piece cushion, and a single-piece seatback.

Bench with separate back cushions

Seats may be coded with this attribute if they have a bench type cushion, and have multiple unconnected seatbacks, and the seatbacks do not fold forward.

Bench with folding back(s)

Seats may be coded with this attribute if they have a bench type cushion and have single-piece or multiple-piece seatbacks which fold forward.

Split bench

A split bench is a bench seat, the cushion of which is divided into two or more unconnected pieces.

Split bench with separate back cushions

Seats may be coded with this attribute if they have a split-bench type cushion, and have multiple unconnected seatbacks, and the seatbacks do not fold forward.

Split bench with folding back(s)

Seats may be coded with this attribute if they have a split-bench type cushion, and have single-piece or multiple-piece seatbacks which fold forward.


Box mounted seat (i.e. van type)

Identifies elevated seats that are attached to a box that is fastened to the floor. The seat tracks are bolted to the top of the box. This type of seat is often found in the front row of vans.

Pedestal (i.e. column supported)

Pedestal seats are often found in vans and may have a swivel mechanism.

Examples of some seat types and the appropriate attributes:

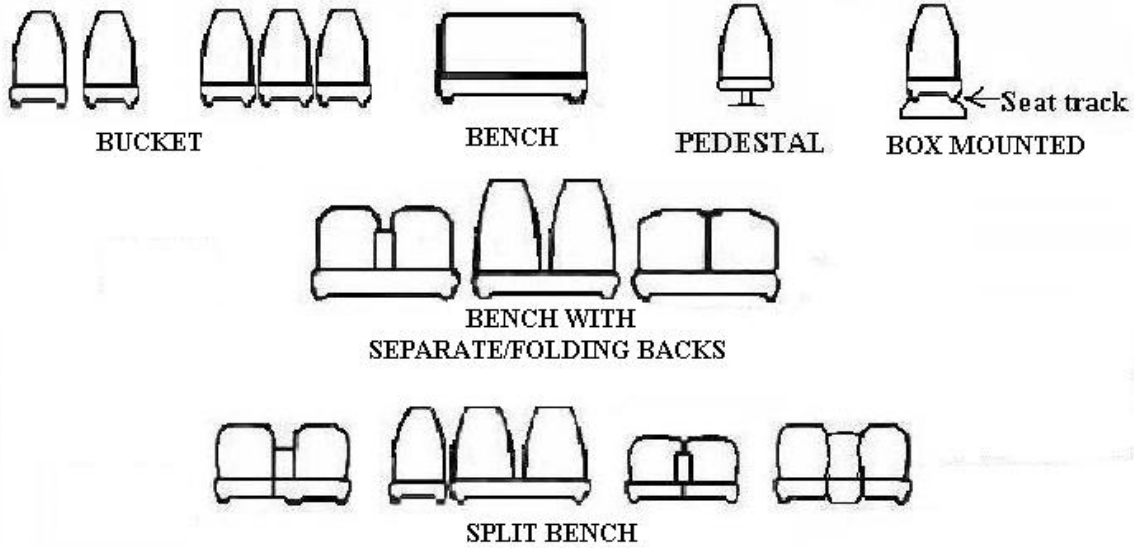


Unknown

Unknown will be coded if a seat was present for the crash but is unavailable for inspection.

BUCKET SEATS



BENCH SEATS

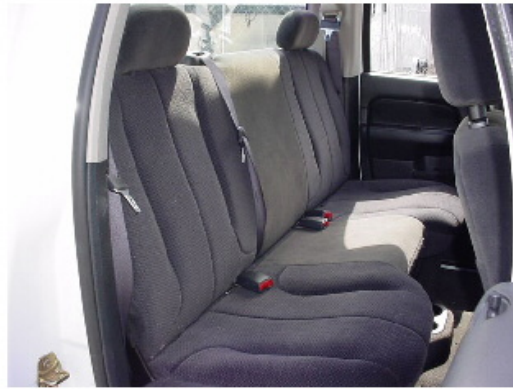

SPLIT BENCH SEATS



SEAT ORIENTATION

Screen Name: Seat – Orientation

SAS Data Set: SEATLOC

SAS Variable: STORIENT

Oracle Name: SEATLOC.PICKSEATORIENTATION

Element Attributes:

Oracle	SAS	
1	1	Forward facing seat
2	2	Rear facing seat
3	3	Side facing seat (inward)
4	4	Side facing seat (outward)
5	8	Other (specify):
6	9	Unknown Orientation

Source: Vehicle inspection.

Remarks:

Most seats are fixed in terms of their orientation within the vehicle; however, some seats (*e.g.*, swivel or reversible) can be oriented in more than one direction. Swivel seats and reversible seats (*e.g.*, some station-wagons or vans) are entered according to their orientation at the time of impact [*i.e.*, **Forward facing seat** or **Rear facing seat**].

Forward facing seat

is used when the seat is oriented towards the front plane of the vehicle.

Rear facing seat

is used when the seat is oriented towards the rear plane of the vehicle.

Side facing seat (inward)

is used when the seat is oriented towards either the right or left planes of the vehicle and faces inward.

Side facing seat (outward)

is used when the seat is oriented towards either the right or left planes of the vehicle and faces outward.

Other

is used when a seat is oriented such that the above attributes do not apply.

Unknown

is used when the seat orientation cannot be determined.

SEAT TRACK POSITION

Screen Name: Seat—Track

SAS Data Set: SEATLOC

SAS Variable: SEATRACK

Oracle Name: SEATLOC.PICKTRACKPOSITION

Element Attributes:

Oracle	SAS	
1	1	Non-adjustable seat track
2	2	Seat at forward most track position
3	3	Seat between forward most and middle track positions
4	4	Seat at middle track position
5	5	Seat between middle and rear most track position
6	6	Seat at rear most track position
7	9	Unknown Seat Track Position

Source: Vehicle inspection.

Remarks:

The researcher should attempt to determine the seat position at impact. When the researcher begins the interior inspection, he/she should note the position of the seat. The researcher should then move the seat forward and back along its track and determine the number of positions. Once this has been done, the seat should be moved to the position initially observed and photographed.

If the seat has electric adjusters with no distinct track positions, attempt to determine the relative position of the seat and select accordingly.

Non-adjustable seat track

Use this for seats that cannot be moved longitudinally.

Adjustable Seat Track

Seat at forward most track position

Use this if the seat is at the forward limit of the track.

Seat between forward most and middle track position

Use this if the seat is at any position between the most forward and middle seat positions.

Seat at middle track position

Use this if the seat is in the position mid-range between the forward and rear most track position.

Seat Track Position (cont'd)

Page 2 of 2

Seat between middle and rear most track position

Use this if the seat is at any position between the middle and rearmost track position.

Seat at rear most track position

Use this attribute if the seat is at the rear limit of the track.

Unknown

Use this attribute if the seat position at impact cannot be determined.

SEAT PERFORMANCE

Screen Name: Seat—Performance

SAS Data Set: SEATLOC

SAS Variable: SEATPERF

Oracle Name: SEATLOC.PICKSEATPERFORMANCE

Element Attributes:

Oracle	SAS	
1	1	Seat assembly intact
2	2	Seat adjuster mechanism separated/deformed
3	3	Seat back folding locks or seat back structure separation (specify)
4	4	Seat tracks/anchors separated/deformed
5	5	Deformed by occupant of this seat
6	6	Deformed by passenger compartment intrusion (specify)
10	10	Deformed by Cargo
11	11	Deformed by Other Occupant
7	7	Combination of above (specify)
88	98	Other (specify)
99	99	Unknown

Source: Vehicle inspection.

Remarks:

This variable assesses the performance of the seat. The attributes are indications of whether the seat failed or was deformed in any way. Select the attribute which corresponds to the appropriate seat performance failure or deformation. Minor smudges, scrapes, dents, etc. are not considered deformation. If a failure or deformity occurs, then document the failure or deformation with a diagram and explanation. In addition, include photographs of the seat failure or deformity.

Seat assembly intact

is used if the seat was not deformed or no portion of the seat structure separated during the crash.

Seat adjuster mechanism separated/deformed

is used if any of the mechanisms used to adjust a seat’s “comfort” position are separated or deformed during the crash as a result of occupant loading.

Seat adjuster mechanisms include:

- Height adjustment
- Longitudinal (horizontal) seat track adjustment
- Rocker adjustment

- Swivel/rotational adjustment
- Seat back recliner adjustment

For a seat back recliner separation, the seat back must have released in a rearward direction. Do not use this attribute if the seat back moved in a forward direction and the seat has a folding lock mechanism (*e.g.*, front seats in 2-door vehicles); see **Seat back folding locks or seat back structure separation** below. This should be used when multiple adjuster separations have been detected. Be sure to include supportive written and photographic documentation to support all separations/deformities.

Seat back folding locks or seat back structure separation (specify):

is used when the mechanism which is designed to lock the seat back in its upright position deforms or separates allowing the seat back to move forward during the collision as a result of occupant loading. "Seat back" separation refers to forward facing seats where seat back structural deformities (*e.g.*, seat back hinge points) resulted in a separation of the seat back from its anchorage points. Again, to be considered applicable for this, the seat must have separated/deformed while moving forward during the collision as a result of occupant loading.

Seat tracks/anchors separated/deformed

is used if the seat separates, to any degree, from a seat track during the crash. In addition, use this if the seat anchor that attaches the seat track to the floorpan separates, to any degree, during the crash. Box mounted seats are included in this if a separation occurred between the box and the floor or the box and the seat track/anchor. Seat track or anchor separations/deformities must be a result of occupant loading.

Deformed by occupant of this seat

is used when the seat is changed in form from its original design from occupant loading during the crash. Situations where seats are deformed and also experience mechanical separations should be identified under **Combination of above**.

Deformed by passenger compartment intrusion

is used when the seat is deformed or separated by intrusion of an interior vehicle component(s) or exterior vehicle component(s) into the passenger compartment.

Deformed by Cargo

is used when the seat is changed in form from its original design by impact from cargo during the crash. Examples of cargo: spare tire, luggage, construction equipment, tool(s), and tool box(es).

Deformed by Other Occupant

is used when the seat is changed in form from its original design by an occupant other than the occupant in this position, during the crash. Situations where seats are deformed and also experience mechanical separations should be identified under **Combination of Above**.

Combination of above (specify)

is used when any combination of the above occurs and describes multiple seat failures or deformations. Seat failures or deformations which are not described in the above are reported below. Seat failures or deformations listed in the above take priority over others.

Other

is used when the only seat failure(s) or deformation(s) which occur are not described in the above (*e.g.*, impact forces). If a seat doesn't have a comfort recline and is broken rearward code here.

Unknown

is used if the seat performance cannot be determined.

DOES THE SEAT HAVE INTEGRATED PASSENGER BELTS?

Screen Name: Seat—Integrated Restraints

SAS Data Set: SEATLOC

SAS Variable: INTGREST

Oracle Name: SEATLOC.INTEGRATEDRESTRAINTS

Element Attributes:

Oracle	SAS	
1	0	No
2	1	Yes
3	99	Unknown if integrated

Source: Vehicle inspection

Remarks:

An integrated seat belt is incorporated into the passenger seat. It is a three point seat belt system that includes a belt having one end affixed to the seat and an opposite end mounted to a retractor secured to the seat. A seat belt latch is mounted to the belt which has a releasable and lockable buckle on the opposite side of the seat. This allows the belt to pull across the passenger lap and the other portion of the belt to cross the upper torso. The belt extends through a guide located at the top of the seat. An integrated seat belt has no pillar attachment point.

If you were to remove the seat and the restraint comes with the seat indicate “Yes”.



SEAT BACK INCLINE PRIOR TO IMPACT

Screen Name: Seat Back -- Prior

SAS Data Set: SEATLOC

SAS Variable: STPRINCL

Oracle Name: SEATLOC.PICKPRIORINCLINE

Element Values:

Oracle	SAS	
1	1	Not Adjustable
2	2	Upright
3	3	Slightly Reclined
4	4	Completely Reclined
9	9	Unknown

Source: Vehicle inspection

Remarks:

This variable is for adjustable (reclining) seat backs only

Not adjustable

is used for seating positions where there is a seat back which is fixed in position.

Upright

is used when the seatback is in the fully upright position (i.e., perpendicular to the seat cushion)

Slightly reclined

is used when the seat back is in a slightly reclined position

Completely reclined

is used when the seat back is in a position that is rearward to the limit of its range of movement.

Unknown

is used when the pre-impact position could not be ascertained. Includes if the seatback is folded down.

SEAT BACK INCLINE POSITION POST IMPACT**Screen Name:** Seat Back -- Post**SAS Data Set:** SEATLOC**SAS Variable:** STPSINCL**Oracle Name:** SEATLOC.PICKPOSTINCLINE**Element Attributes:**

Oracle	SAS	
	01	[Not adjustable]
1,8	11,21	Moved to completely rearward position
2,9,16	12,22,32	Moved to rearward midrange position
3,17	13,33	Moved to slightly rearward position
4,10,15	14,23,31	Retained pre-impact position
11,18	24,34	Moved to upright position
5,12,19	15,25,35	Moved to slightly forward position
6,20,13	16,36,26	Moved to forward midrange position
7,14,21	17,27,37	Move to complete forward position
22	99	Unknown


*Values depended upon the coding of Seat Back Prior.

Source: Vehicle inspection**Remarks:**

This variable is for adjustable (reclining) seat backs only. Select the attribute that describes the backrest position post-impact as determined from the vehicle inspection. The final coding of this variable on the Occupant form will take into account information gathered from the occupant interviews.

Unknown

is used when the post crash seat back position could not be determined.

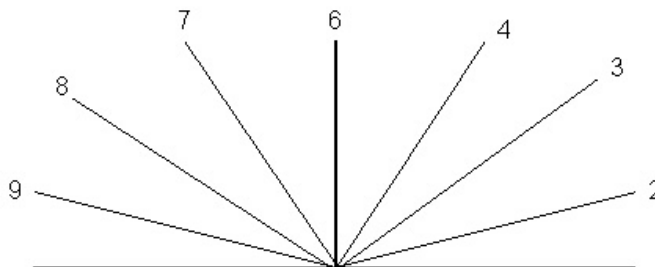

AIR BAG EVER AVAILABLE

Screen Name: Air Bag Ever Available

SAS Data Set: *SEATLOC*

SAS Variable: *BAGEVER*

Oracle Name: *SEATLOC.AIRBAGAVAIL*

Element Attributes:

Oracle	SAS	
1	0	No
2	1	Yes
3	99	Unknown

Source: Vehicle inspection

Remarks:

Code if this seating position has an air bag available.

RESTRAINTS/MANUAL/BELT

Safety Systems Form, Case 2007-996-900015/ Vehicle #1

SEAT | **RESTRAINTS** | AIR BAG | CHILD SEAT | LOG | REVIEW

MANUAL | AUTOMATIC

FIRST ROW | SECOND ROW | THIRD ROW | FOURTH ROW | FIFTH ROW

BELT | COMPONENTS

	Left	Center	Right
Availability	<input type="text"/>	<input type="text"/>	<input type="text"/>
Used in this crash?	<input type="text"/>	<input type="text"/>	<input type="text"/>
Failure	<input type="text"/>	<input type="text"/>	<input type="text"/>
Anchorage Adjustment	<input type="text"/>	<input type="text"/>	<input type="text"/>

Save

MANUAL (ACTIVE) BELT SYSTEM AVAILABILITY

Page 1 of 2

Screen Name: Availability

SAS Data Set: SEATLOC

SAS Variable: ACTAVAIL

Oracle Name: MANUALEATBELT.PICKMANUALBELTAVAIL

Element Attributes:

Oracle	SAS	
1	0	None available
2	1	Belt removed/destroyed
3	2	Shoulder belt
4	3	Lap belt
5	4	Lap and shoulder belt
6	5	Belt available - type unknown
7	6	Shoulder belt (lap belt destroyed/removed)
8	7	Lap belt (shoulder belt destroyed/removed)
9	8	Other belt (specify)
10	9	Unknown if available

Source: Vehicle inspection

Remarks:

Some belt restraint systems are a combination of manual (active) and automatic (passive) occupant protection devices. For this variable, consider only the manual portion of the system.

Availability is assessed based on the seat position regardless of whether it is occupied. Select the manual belt system which was available for use, if so desired, by the occupant relative to the seat position in the vehicle.

Not available

indicates: (1) that at the time of the crash the designated seating position was not equipped with a manufacture installed or post manufacturer installed manual belt (lap, shoulder, or lap and shoulder); (2) the seat position was equipped only with an automatic (passive) belt system.

Belt removed/destroyed

indicates that the manual belt, initially installed at this occupant's seating position, was subsequently removed or destroyed (*e.g.*, unbolted, cutout, etc.). If the belt is present but nonfunctional, then select the type of manual belt available on this variable and use **Inoperative** for **Used In This Crash?** Belts which are knotted, buckled at the rear of the seat (bench or bucket), stored below the seat, etc., are available if they were otherwise operative.

Shoulder belt

is used when this occupant's seat position was equipped with a manual upper torso restraint and no lap belt. The population of vehicles equipped with only manual shoulder belts is very small, therefore, care must be taken that a two-point passive belt is not identified as a manual belt (*e.g.*, Volkswagen Rabbits 1981-1984).

Lap belt

is used when this occupant's seat position is equipped with a manual belt that secures the pelvic area of the occupant in the seat and there is no manual upper torso belt.

Lap and shoulder belt

is used when both a manual upper torso belt and a manual lap (pelvic area) belt are present at this occupant's seat position.

Belt available — type unknown

When the specific manual belt system cannot be determined, but it is known some type of belt is present, then use this attribute (this **may** occur when inspecting completely burned or stripped vehicles).

Shoulder belt (lap belt destroyed/removed)

is used for integral noncontinuous loop manual belt systems when the lap belt portion of the belt has been removed or destroyed leaving only the shoulder belt portion present at this occupant's seating position.

Lap belt (shoulder belt destroyed/removed)

is used for integral noncontinuous loop manual belt systems when the shoulder belt portion of the belt has been removed or destroyed leaving only the lap belt portion present at this occupant's seating position.

Other belt (specify)

is used when the belt system is nonstandard or cannot be described with other attributes. Specify (write out in the Specify Box) the type of manual belt (*e.g.*, 5 point competition harness, 4 inch wide webbing, etc.). In addition, use this attribute if a properly positioned "self-contained" built-in child safety seat was available at this occupant's seating position. Other child restraints are not recorded here.

Unknown

is used when it cannot be determined whether or not manual belts were available for this occupant's seat position.

MANUAL (ACTIVE) BELT SYSTEM USED IN THIS CRASH?

Page 1 of 2

Screen Name: Used in this crash?

SAS Data Set: SEATLOC

SAS Variable: ACTUSE

Oracle Name: MANUALEATBELT.PICKMANBELTTYPE

Element Attributes:

Oracle	SAS	
0	0	None used not available/removed or destroyed
1	1	Inoperative (specify)
2	2	Shoulder belt
3	3	Lap belt
4	4	Lap and shoulder belt
5	5	Belt used — type unknown
6	8	Other belt used (specify)
7	12	Shoulder belt with child safety seat
8	13	Lap belt with child safety seat
9	14	Lap and shoulder belt with child safety seat
10	15	Belt with child safety seat — type unknown
11	18	Other belt with child safety seat (specify)
12	99	Unknown if belt used

Source: Vehicle Inspection

Remarks:

Select the manual belt system or portion of the system which was in use at the time of the crash by the occupant. The correctness of the use is not assessed on this variable. This variable only identifies manual belt usage; do not consider the presence and use of a passive belt system.

None used/not available/removed or destroyed

is used when a manual belt was available but not worn at the time of the crash. **Note:** the “**not available/removed or destroyed**” within this selection is automatically selected when the corresponding attribute is selected in **Manual Belt Availability**.

Inoperative

includes belts which are knotted, jammed, tucked behind the seat, or in any other fashion rendered unusable. In addition, use this attribute for belts which are inoperative because of extreme deterioration from aging. A belt system that was completely removed from or cut out of a vehicle is assigned **None used, not available, or belt removed/destroyed**.

Shoulder belt

is used when a manual shoulder belt alone was in use. This can occur when: (1) the vehicle was not equipped with a lap belt, (2) only the shoulder belt portion of a non-integral system was in use, or (3) when the lap belt portion of a noncontinuous loop integral lap and shoulder belt system was cut out leaving only a functional shoulder belt portion in use.

Lap belt

is used when a manual lap belt alone was in use. This can occur when: (1) the vehicle was not equipped with a shoulder belt, (2) only the lap belt portion of a non-integral system was in use, or (3) when the shoulder belt portion of a noncontinuous loop integral lap and shoulder belt system was cut out leaving only a functional lap belt portion in use. **Note**, manual lap belts can be used in conjunction with a two-point automatic belt system. For manual and automatic belt combinations, use this attribute for the manual lap belt usage.

Lap and shoulder belt

is used when the occupant is: (1) “encompassed” *both* in the lap and upper torso region by a manual lap and shoulder belt combination, or (2) using only a portion of an intact integral lap and shoulder belt system. For example, if a person has an integral lap and shoulder belt but is only using the lap portion (i.e., having the shoulder belt behind his or her back), then use this attribute. Improper use of the belt is assessed in Proper Use of Manual (Active) Belts.

Belt used — type unknown

is used when the type of manual belt system cannot be determined.

Shoulder/lap/lap and shoulder belt used with child seat

is used when the vehicle’s manual belt system anchors a child safety seat to the vehicle, or when the lap/shoulder belt is used to restrain a child who is sitting on a booster seat. These attributes do not refer to the belts which are part of the child seat itself.

Belt with child safety seat — type unknown

is used when the vehicle belt type is unknown, not the child safety seat type.

Other belt with child safety seat

is used when a built-in child safety seat is “self contained” (does not use any part of the regular existing manual belt system available at the occupant seating position).

Unknown if belt used

is used if it cannot be determined whether or not a manual belt was in use by the occupant at the time of the crash.

MANUAL (ACTIVE) BELT MALFUNCTION MODES DURING CRASH

Page 1 of 2

Screen Name: Malfunction

SAS Data Set: SEATLOC

SAS Variable: ACTFAIL

Oracle Name: MANUALEATBELT.PICKREASONBELTFAILURE

Element Attributes:

Oracle	SAS	
0	0	[None used/not available/removed or destroyed]
1	1	No manual belt malfunction(s)
2	2	Torn webbing (stretched webbing not included)
3	3	Broken buckle or latch plate
4	4	Upper anchorage separated
5	5	Other anchorage separated (specify)
6	6	Broken retractor
7	7	Combination of above (specify)
8	8	Other manual belt malfunction (specify)
9	9	Unknown if failed [unknown if available/unknown if used]

Source: Vehicle inspection

Remarks:

If any component of the manual belt system malfunctions during the impact as a result of occupant loading, the malfunction is captured in this variable. The malfunction is also recorded on the **Case Form/Summary Tab** and documented with images.

If a malfunction occurs, select the attribute which corresponds to the appropriate manual belt malfunction mode that describes the component of the restraint system which malfunctioned (*i.e.*, torn webbing, broken buckle or latchplate, anchorage separation, broken retractor). A complete and documented description of the malfunctioning component and the way it malfunctioned must accompany the case.

No manual belt malfunction

is used when there is no physical evidence from the vehicle inspection to indicate that a malfunction occurred.

Combination of above (specify)

is used when any combination of specified attributes occur and describes multiple manual belt malfunction modes. Manual belt malfunction modes which are not described are reported in **other**

manual belt malfunction. Manual belt malfunctions **with specific attributes** take priority over the **Other manual belt malfunction** code.

Other manual belt malfunction (specify)

is used when the only manual belt malfunction(s) which occur are not described with a specific attribute.

Unknown

is used when it can not be determined if the manual belt failed.

MANUAL SHOULDER BELT UPPER ANCHORAGE ADJUSTMENT

Page 1 of 2

Screen Name: Anchorage Adjustment**SAS Data Set:** SEATLOC**SAS Variable:** ACTANCH**Oracle Name:** MANUALEATBELT.PICKUPPERANCHORPOSITION**Element Attributes:**

Oracle	SAS	
0	0	[No manual shoulder belt]
1	1	None for manual shoulder belt
2	2	In full up position
3	3	In mid position
4	4	In full down position
5	5	Position unknown
6	9	Unknown if adjuster present

Source: Vehicle inspection**Remarks:**

Complete this variable regardless of manual shoulder belt usage.

No upper anchorage adjustment for manual shoulder belt

is used when a manual shoulder belt is present but there is no adjustment mechanism at the upper anchorage point.

In full up position

is used when the manual shoulder belt is equipped with an adjustable upper anchorage point and it was in its highest position at the time of the crash (*e.g.* closest position to the roof).

In mid position

is used when the manual shoulder belt is equipped with an adjustable upper anchorage point and it was in a middle position at the time of the crash (somewhere between full up and full down).

In full down position

is used when the manual shoulder belt is equipped with an adjustable upper anchorage point and it was in its lowest position at the time of the crash (closest position to the floor).

Position unknown

is used when the manual shoulder belt is equipped with an adjustable upper anchorage point but it cannot be determined what the position was at the time of the crash.

Unknown if adjuster present

Is used when it cannot be determined if the manual shoulder belt was equipped with an adjustable upper anchorage device. This distinguishes it from "Position unknown".

RESTRAINTS/MANUAL/COMPONENTS

Safety Systems Form, Case 2007-996-900015/ Vehicle #1

SEAT | RESTRAINTS | AIR BAG | CHILD SEAT | LOG | REVIEW

MANUAL | AUTOMATIC

FIRST ROW | SECOND ROW | THIRD ROW | FOURTH ROW | FIFTH ROW

BELT | COMPONENTS

Pretensioner

Pretensioner Distance cm cm cm

Positioning Device

Presence

Save

PRETENSIONER PRESENCE/ACTUATION

Screen Name: Pretensioner

SAS Data Set: SEATLOC, OA

SAS Variable: ACTPRET

Oracle Name: MANUALEATBELT.PRETENSEDEPLOYID

Element Attributes:

Oracle	SAS	
1	0	Not equipped
2	1	Pre-tensioner not actuated
3	2	Retractor type actuated
7	6	Buckle type actuated
8	7	Retractor and buckle type actuated
6	5	Pre-tensioner present, Unknown if actuated
-9999	9	Unknown if equipped

Source: Vehicle Inspection

Remarks:


Can tighten the belt up to 15 cm.

When a collision occurs, a seat belt with a pretensioner detects the incident and tightens the belt before the wearer is propelled forward. This holds the occupant more securely in the seat. Usually vehicles with air bags will have pretensioners, but they may be present in seating positions that do not have air bags ('80s Mercedes).

The seat belt pretensioners consist of a housing, an initiator, a canister of gas generating materials, a routing cable with a piston attached, and a piston tube. The initiator is part of the seat belt pretensioner deployment loop. When the vehicle is involved in a collision of sufficient force, a microprocessor causes current to flow through the seat belt deployment loops to the initiator. Current passing through the initiator ignites the material in the canister producing a rapid generation of gas. The gas produced from this reaction actuates the seat belt pretensioners and shortens the seat belt length.

Generally, when a front air bag (instrument panel, steering wheel) deploys, the pretensioner will actuate. However, it is possible for the pretensioner to actuate without the air bag deployment.

Buckle type pretensioner

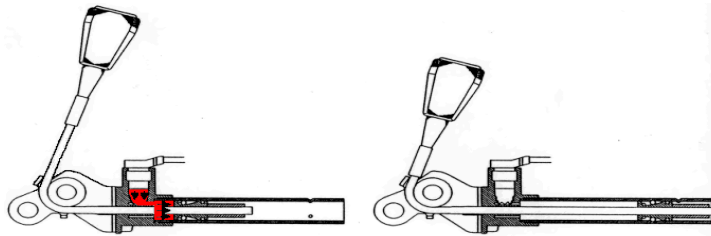

PRETENSIONER DISTANCE

Screen Name: Pretensioner Distance

SAS Data Set:

SAS Variable:

Oracle Name: *MANUALSEATBELT.PRETENSEDISTANCE*


Element Attributes:

Oracle	SAS	Measure to the nearest centimeter
-9999		Unknown

Source: Vehicle Inspection

Remarks:

If the vehicle is equipped with a buckle type pretensioner and it is actuated measure the distance. The measurement is of the collapse of the seat belt buckle stalk.

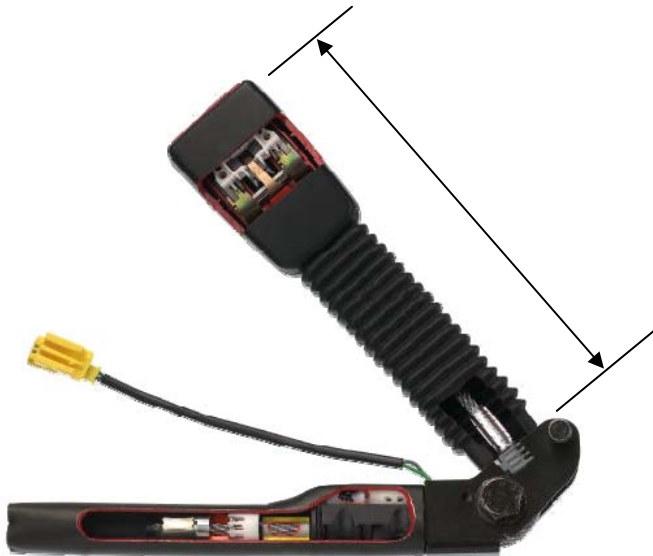

Screen Name: Positioning Device Presence

SAS Data Set: *SEATLOC*

SAS Variable: *IPOSPRES*

Oracle Name: *MANUALSEATBELT.BELTPOSDEVICEID*

Element Attributes:

Oracle	SAS	
1	0	None present
2	1	Buckle Buddy – Shoulder Belt Adjuster
3	2	Sta-n-Place – Shoulder Belt Adjuster
4	3	Belt-A-Way – Shoulder Belt Adjuster
5	4	Shoulder Strap Adjuster – Shoulder Belt Adjuster
6	5	Child Protector – Lap and Shoulder Belt Adjuster
7	6	SafeFit – Shoulder Belt Adjuster
8	7	SafeFit Supreme - Shoulder Belt Adjuster
9	8	Seat Belt Adjuster – Shoulder Belt Adjuster
10	9	Klunk-Klip – Shoulder Belt Adjuster
11	10	Child Safer – Shoulder Belt Adjuster
12	11	Comfort Ride – Shoulder Belt Adjuster
13	12	Belt Buddy
14	97	OEM device
15	98	Other (specify)
-9999	99	Unknown if present

Source: Vehicle Inspection

Remarks:

This variable is coded for any position containing a shoulder belt.
Aftermarket seat belt positioning devices are typically manufactured for use by small stature adults and children to adjust lap and shoulder belt fit and comfort.
These products are not considered “safety devices” and are not tested or regulated by NHTSA.

Other (specify)

includes belt extension devices. Annotate the name and type of device.



GM rear seat shoulder belt comfort guide



Belt buddy




Buckle buddy



Shoulder strap adjusters



Shoulder strap adjusters



Child safer



Child safer



Child safer

RESTRAINTS/AUTOMATIC

Safety Systems Form, Case 2007-996-900015/ Vehicle #1

SEAT | RESTRAINTS | AIR BAG | CHILD SEAT | LOG | REVIEW

MANUAL | AUTOMATIC

	Left	Right
Availability /Function	<input type="text"/>	<input type="text"/>
Used in this crash?	<input type="text"/>	<input type="text"/>
Motorized	<input type="text"/>	<input type="text"/>
Failure Modes	<input type="text" value="Not Equipped/Not Available/Not In Use"/>	<input type="text"/>

Save

AUTOMATIC (PASSIVE) BELT SYSTEM AVAILABILITY/FUNCTION

Screen Name: Availability/Function

SAS Data Set: SEATLOC

SAS Variable: PASAVAIL

Oracle Name: AUTOMATICSEATBELT.PICKAUTOBELTAVAIL

Element Attributes:

Oracle	SAS	
1	0	Not equipped/not available
2	1	2 point automatic belts
3	2	3 point automatic belts
4	3	Automatic type unknown
5	4	Automatic belts destroyed or rendered inoperative
6	9	Unknown

Source: Vehicle inspection

Remarks:

Some belt restraint systems are a combination of manual (active) and automatic (passive) occupant protection devices. For this variable, consider only the automatic portion of the system. Select the automatic belt system which was available at the time of the crash for this occupant.

Automatic belts are designed to restrain an occupant and allow an occupant egress (the act of going from an enclosed place) without the requirement of manually activating the belt. Some systems use only a torso belt (2 point automatic belts), while others are designed with a lap and torso belt (3 point automatic belts). A clue for proper system identification involves the egress issue. If you are sitting in the occupant's position and all belts are attached and you open the door, then determine if you *have to* detach any belt in order to exit the vehicle. Belts which do not require detaching are automatic belts. Note: The ease of egress is not considered because many automatic belt systems may appear cumbersome.

Availability is assessed based on the occupant's seating position. Select the automatic belt system which was available for use, if so desired, by the occupant relative to the occupant's seating position in the vehicle. Availability is also determined by presence, functional status, and use of the automatic belt system. Any occupant who is using a belt restraint system, or portion thereof, must by default have that system available to them.

Not equipped/not available

indicates:

- that at the time of the crash the designated seating position that the occupant was in, was not equipped with a manufacturer installed or post manufacture installed automatic belt (2- point or 3-point)
- the occupant was not in a designated seat position (*e.g.*, on the floor)
- the occupant was not the person assigned the designated seat position and was not using an automatic belt (*e.g.*, sitting side-by-side) **or**
the seat position that the occupant was in was equipped only with a manual (active) belt system.

2 point automatic belts

is used when a torso belt is anchored along the inboard side of the front seat and anchored either at the upper window frame of the door surface (adjacent to the upper B-pillar) or attached to a motorized track located along the upper A-pillar, roof side rail, and upper B-pillar. A two point automatic belt system requires the presence of either a manual lap belt or a knee bolster.

3 point automatic belts

is used for an automatic belt system consisting of a lap and torso belt. This system uses a common anchor for both belts located on the inboard side of the front seat and two anchors along the door surface (*e.g.*, commonly used in General Motors cars beginning in 1987 until mid- 1990's). This system can be detected by sitting in the occupant's position with the latch plate/buckle attached and opening the door. If the belt travels with the door and allows egress without detaching the belt, then use this attribute—the system is automatic.

Automatic belts — type unknown

is used when a vehicle inspection occurs and the occupant's seating position is known to have automatic belts but the researcher is not able to determine from the vehicle inspection what type of automatic belts are available. If the type of automatic belt system is determinable, then the system's mechanization can also be determined because most manufacturers use the same type of system for a given vehicular model. In addition, this code takes precedence over the following code.

Automatic belts destroyed or rendered inoperative.

is used when the automatic belt, initially installed at this occupant's seating position, was subsequently removed or destroyed (*e.g.*, unbolted, cutout, etc.) or in any way rendered inoperative.

In addition, use this attribute for belts which are extremely deteriorated from aging. Do not use this attribute for motorized belt tracks which are mechanically or electrically inoperative. This is considered under Automatic Belt Use System.

Belts which are knotted, buckled at the rear of the seat (bench or bucket), etc., are available if they were otherwise operative.

Unknown

is used for front out-board occupants of passenger vehicles when it cannot be determined whether or not this occupant's seating position was equipped with an automatic belt system.

AUTOMATIC (PASSIVE) BELT SYSTEM USE

Page 1 of 2

Screen Name: Used in this crash?**SAS Data Set:** SEATLOC**SAS Variable:** PASSUSE**Oracle Name:** AUTOMATICSEATBELT.PICKAUTOBELTUSE**Element Attributes:**

Oracle	SAS	
0	0	Not equipped/not available/destroyed or rendered inoperative
1	1	Automatic belt in use
2	2	Not in use (manually disconnected, motorized track inoperative) (specify)
3	3	Automatic belt use unknown
5	4	Automatic belt used with child restraint
4	9	Unknown

Source: Vehicle inspection**Remarks:****Not equipped/not available/destroyed or rendered inoperative**

is automatically selected when **Automatic Availability** is selected as “Not equipped not available”. Additionally, select this code when automatic belts are present, but were destroyed or rendered inoperative at the time of the crash.

Automatic belt in use

is used when this automatic belt was hooked up (in use) at the time of the crash. The correctness of the use is not assessed on this variable.

Not in use (manually disconnected, motorized track inoperative)

is used when the automatic belt’s latch plate/buckle was detached at the time of the crash. For example, this attribute is used to capture disconnected 3-point, door mounted automatic belts (*i.e.*, 1987 to mid-1990 General Motors vehicles) which can be used similar to an active lap and shoulder belt system.

This is also used for motorized tracks which were ***not in the restrained position*** at the time of the crash. The motorized track may be inoperative because of fuse removal, electric motor failure, or track failure when the malfunction prevents the automatic belt system from moving along its track into the restrained position.

Note! This variable does not assess how this occupant uses the automatic belt when entering or exiting the seating position. For example, this occupant may routinely manually detach/attach the

latch plate/buckle (*i.e.*, uses the automatic belt system as if it were a manual belt system). This variable assumes that the nonmotorized automatic belt is available and functioning and assesses whether or not the latch plate/buckle was attached at the time of the crash. If the latch plate/buckle was attached at the time of the crash, then use Automatic belt in use. On the other hand, if it was detached, then use Automatic belt not in use (manually disconnected, motorized track inoperative).

For motorized belts, this variable assumes that the motorized belt system is locked in the restrained position with the belt attached at the time of the crash. If the motorized belt system was locked in the restrained position and the belt was attached at the time of the crash, then use Automatic belt in use. If the motorized belt system was not locked in the restrained position or the belt was detached, then use Automatic belt not in use (manually disconnected motorized track inoperative).

Automatic belt used with child restraint

is used when the automatic belt is used to hold a child restraint in position.

Automatic belt use unknown

is used when the researcher is unable to determine if the automatic belt was in use.

AUTOMATIC (PASSIVE) BELT SYSTEM TYPE

Screen Name: Motorized

SAS Data Set: SEATLOC

SAS Variable: PASSTYPE

Oracle Name: AUTOMATICSEATBELT.PICKMOTORIZED

Element Attributes:

Oracle	SAS	
0	0	[Not equipped/not available/destroyed or rendered inoperative]
1	1	Non-motorized system
2	2	Motorized system
3	9	Unknown

Source: Vehicle inspection

Remarks:**Non-motorized system**

is used when the automatic belt system available to this occupant does not require a motor for operation.

Motorized system

is used when the automatic belt system available to this occupant requires a motor for operation.

Unknown

is used when it is known that an automatic belt is available but the type (non-motorized or motorized) cannot be determined.

AUTOMATIC (PASSIVE) BELT MALFUNCTION MODES DURING CRASH

Screen Name: Malfunction Modes

SAS Data Set: SEATLOC

SAS Variable: PASSFAIL

Oracle Name: AUTOMATICSEATBELT.PICKREASONBELTFAILURE

Element Attributes:

Oracle	SAS	
0	0	Not equipped/not available
1	1	No automatic belt malfunction(s)
2	2	Torn webbing (stretched webbing not included)
3	3	Broken buckle or latchplate
4	4	Upper anchorage separated
5	5	Other anchorage separated (specify)
6	6	Broken retractor
10	10	Belt integrity loss due to structural movement
7	7	Combination of above (specify)
8	8	Other automatic belt malfunction (specify)
-9999	99	Unknown

Source: Vehicle inspection

Remarks:

If any component of the automatic belt system malfunctions during the impact, the malfunction is captured in this variable. The malfunction is also recorded on the **Case Form/Summary Tab** and documented with images as needed. Automatic belt system malfunctions, unlike manual belt system malfunctions, are not limited to those that resulted from occupant loading.

If a malfunction occurs, select the attribute which corresponds to the appropriate automatic belt malfunction mode that describes the component of the restraint system which malfunctioned (*i.e.*, torn webbing, broken buckle or latchplate, anchorage separation, broken retractor). A complete and documented description of the malfunctioned component and the way it malfunctioned must accompany the case.

No automatic belt malfunction(s)

is used when there is no physical evidence from the vehicle inspection to indicate or support that a malfunction occurred.

Belt integrity loss due to structural movement

is used when a component of the vehicle moves due to crash forces, which causes the seat belt mechanism to move.

Combination of above, specify

is used when any combination of specified attributes occurs and describes multiple automatic belt malfunction modes. Automatic belt malfunctions which are not described are reported in **Other automatic belt malfunction**. Automatic belt malfunctions listed with specific attributes take priority over other attributes.

Other automatic belt malfunctions, specify

is used when the only automatic belt malfunction(s) which occur are not described in the specific attributes. An example of this would be when the 2 point automatic "track mouse" is ripped from the mechanism.

Unknown

is used when it cannot be determined if the automatic belt malfunctioned.

Air Bag Overview

Air bags are supplemental restraint systems that are designed to deploy in certain crashes. Both frontal and side-impact air bags can reduce occupant injuries. The Air Bag tab captures information about all air bags in the vehicle. All air bags in the vehicle must be inspected and documented completely; this includes the deployed and non-deployed air bags. Deployed air bags must be inspected to document occupant contacts, damage to the air bag membrane and module cover flaps. All contact evidence, damage, and module cover flap configurations must be documented in the appropriate Sketch tabs. Determination of air bag function and injury causation depends on the complete documentation of this data.

Every air bag for every seating position must be listed in the Air Bag tab; this includes non-deployed air bags. The presence of non-deployed air bags can be more difficult to determine. Most frontal bags are clearly labeled with the embossed letters SRS, SIR or SRS/Air Bag on the air bag cover located in the center of the steering wheel (for the driver) and the instrument panel for the front right occupant. Also look for the air bag warning labels typically located on the sun visor. For Side-impact air bags (SAB), look for the embossed letters SRS or Side Air Bag on areas such as the outboard side of the seatback, the door/panel or the overhead roof rail.

Information on possible air bag presence should be obtained before inspection of the vehicle. This information may be obtained from the current Model Year (MY) Safety Equipment list, Zone Center, owner's manual, body shops, etc.

Air Bag Types

Frontal Air Bags

Frontal air bags have been available in passenger cars since the 1970's. In the mid to late 1980's, air bags became more prevalent. By the late 1990's, air bags became standard in all passenger vehicles.

- Driver's air bags
 - Located in the steering wheel hub
 - Knee air bags located in the lower instrument panel area
- Front right occupant position
 - Located in the top, mid or bottom instrument panel areas

Side-impact Air Bags (SAB)

SABs are designed to lower the incidence of head or torso injuries during side-impact crashes. Some types of SABs may stay inflated for several seconds during a crash for additional protection in the event of a rollover.

There are three main types of SABs: chest (or torso), head and head/chest combination (or “combo”).

- Chest (or torso) SABs are mounted in the side of the seat (seatback mounted) or in the door/panel and are designed to help protect an occupant’s chest in a side-impact crash. Typically chest SABs are present in both front seats, but some newer vehicles have them mounted in the rear outboard seat positions.
- Head SABs are usually mounted in the roof rail above the side windows and are designed to help protect an occupant’s head in a side-impact crash. There are two types of head SABs: inflatable curtains and inflatable tubular structures. Typically, inflatable curtains help protect both front and rear occupants in a side-impact crash; some may also provide protection from ejection in rollover type crashes. In some vehicles, SABs extend and protect occupants in the 3rd row.
- Head/chest combination (“combo”) SABs are usually mounted in the side of the seat and are typically larger than chest (torso) air bags. Combinations are designed to help protect both the head and chest of an occupant. Some newer vehicles are equipped with combinations in the rear outboard seat positions.

AIR BAG

Safety Systems Form, Case 2007-996-900015/ Vehicle #1

SEAT | RESTRAINTS | AIR BAG | CHILD SEAT | LOG | REVIEW

AIR BAG

Function	Damage
Location <input type="text"/>	Flap open at tear pts? <input type="text"/>
Status <input type="text"/>	Flap damaged? <input type="text"/>
Type <input type="text"/>	Damage to the air bag? <input type="text"/>
	Source of damage <input type="text"/>
Deployment <input type="text"/>	
Indications of failure <input type="text"/>	
Switch Type <input type="text"/>	
Switch Status <input type="text"/>	

Seat Location Air Bag of View Sketches

AIR BAG NUMBER FOR THIS VEHICLE

Screen Name: Air Bag

SAS Data Set: *AIRBAG*

SAS Variable: *BAGNO*

Oracle Name: *AIRBAG.AIRBAGNUM*

Element Attributes:

Air bag number

Source: Vehicle inspection

Remarks:

Assigned by the system, one for every single air bag.

If air bags are available for the occupant, indicate the information on all air bags. Do so by inserting another air bag. To insert another air bag, go to the menu bar and select **Edit/Insert**, then indicate its location, and complete the information about the air bag.

SEAT LOCATION FOR AIR BAG(S) DATA

Screen Name: Seat Location

SAS Data Set: *BAGSEAT*

SAS Variable: *SEAT*

Oracle Name: *Derived*

Element Attributes:

 Seat Location (based on defined seats for this vehicle)

Source: Vehicle inspection

Remarks:

Select the seat location from the list of available seats for the available air bag(s).

If air bags are available for the occupant, indicate the information on all air bags. Do so by inserting another air bag. To insert another air bag, go to the menu bar and select **Edit/Insert**, then indicate its location, and complete the information about the air bag.

DEPLOYMENT LOCATION OF AIR BAG

Page 1 of 2

Screen Name: Function – Location**SAS Data Set:** *AIRBAG***SAS Variable:** *BAGLOC***Oracle Name:** *AIRBAG.PICKLOCATION***Element Attributes:**

Oracle	SAS	
1	1	Steering Wheel Hub
2	2	Top Instrument Panel
3	3	Mid Instrument Panel
4	4	Bottom Instrument Panel
5	5	Seat Back
8	6	Door/Panel
9	7	Roof Side Rail
10	98	Other (specify)
11	99	Unknown

Source: Vehicle inspection**Remarks:**

Enter the location of the air bag.

Steering Wheel

is used for an air bag that is designed to deploy from a module integrated with the steering wheel. It is designed to protect the vehicle's driver primarily from frontal impacts. It does not matter if the steering wheel is located on the right side of the vehicle, still code the location of the air bag to the steering wheel.

Top Instrument Panel Location

is used for those air bags that deploy rearward from a location on the top of the instrument panel. They are designed to protect front seat passengers primarily from frontal impacts.

Mid Instrument Panel Location

is used for those air bags that deploy rearward from a location in the middle of the instrument panel. They are designed to protect front seat passengers primarily from frontal impacts.

Bottom Instrument Panel Location

is used for those air bags that deploy rearward from a location in the bottom of the instrument panel. They are designed to protect front seat passengers primarily from frontal impacts. This includes “knee bags”.

Seat Back

is located on the outside portion of the seat back and is designed to protect the torso of occupants primarily from side impacts.

Door/Panel

is located in the door is designed to protect the torso of occupants primarily from side impacts. Included in this attribute are air bags that deploy from any side panels.

Roof Side Rail

is primarily a curtain type bag that is stored in the roof side rail and is designed to protect the head of occupants primarily from side impacts

Other (specify)

is used when the location of the air bag cannot be captured in the above attributes. This should be a rare occurrence. The location of the air bag must be specified.

Unknown

is used when the researcher is unable to determine the location of the air bag.

AIR BAG STATUS

Screen Name: Function - Status

SAS Data Set: *AIRBAG*

SAS Variable: *BAGFUNC*

Oracle Name: *AIRBAG.PICKAIRBAGFUNCTION*

Element Attributes:

Oracle	SAS	
1	1	Air Bag Available
2	2	Air bag disconnected (specify):
3	3	Air bag not reinstalled
4	9	Unknown status if available for this crash

Source: Vehicle inspection

Remarks:

Air bag available

is used when the vehicle is equipped with an air bag for this seating position. Deployment of the air bag system has no bearing on this variable.

Air bag disconnected

is used when any component of the air bag was rendered inoperative prior to the collision (*e.g.*, fuse removed).

Air bag not reinstalled

is used when the air bag for this seating position was not replaced after a prior deployment to the crash being researched.

Unknown

is used when it cannot be ascertained whether an air bag was available at the time of the crash.

TYPE OF AIR BAG

Screen Name: Function—Type

SAS Data Set: *AIRBAG*

SAS Variable: *BAGTYPE*

Oracle Name: *AIRBAG.PICKAIRBAGCLASSID*

Element Attributes:

Oracle	SAS	
1	1	Original manufacturer install
3	3	Replacement Air Bag
2	2	Retrofitted Air Bag
-8871	70	[No air bag available for this crash (disconnected/not reinstalled)]
	79	[Unknown status if air bag available for this crash]
4	99	Unknown Type

Source: Vehicle inspection

Remarks:**Original manufacturer install**

is used when it can be determined that the vehicle was equipped with an air bag system in this seating position that was installed by the manufacturer at the time the vehicle was built (OEM).

Replacement air bag

is used when it can be determined that the vehicle was equipped with an OEM air bag system for this seating position, and that this system had been replaced due to a previous deployment.

Retrofitted air bag

is used when it can be determined that the vehicle was equipped with an air bag system for this seating position but that the vehicle was not built with a manufacturer equipped air bag system.

This is an after market product and should not be confused with **Replacement air bag**.

Replacement retrofit air bags are also included in this category. Annotate the source of the information.

AIR BAG DEPLOYMENT

Page 1 of 2

Screen Name: Function—Deployment

SAS Data Set: AIRBAG

SAS Variable: BAGDEPLY

Oracle Name: AIRBAG.PICKAIRBAGDEPLOY

Element Attributes:

Oracle	SAS	
1	1	Deployed during crash (as a result of impact)
2	2	Deployed inadvertently just prior to crash
3	3	Deployed, details unknown
4	4	Non-collision deployment
6	7	Not deployed
-8871	70	[No air bag available for this crash (disconnected/not reinstalled)]
-8870	79	[Unknown status if air bag available for this crash]
5	99	Unknown if deployed

Source: Vehicle inspection

Remarks:**Deployed during crash (as a result of impact)**

is used when the vehicle is equipped with an air bag and the air bag deployed as a result of an impact which produced a longitudinal deceleration through the vehicle of sufficient magnitude to cause inflation of the air bag. Note, an air bag is not designed to deploy in every collision.

Deployed inadvertently just prior to crash

is used when an air bag deploys without an impact having caused its deployment, and the vehicle is subsequently involved in an crash.

Deployed, details unknown

is used when the researcher cannot determine if the air bag deployed (1) prior to the crash or (2) during the crash as a result of an impact which produced a deceleration through the vehicle of sufficient magnitude to cause inflation of the air bag.

Non-collision deployment

is used if the air bag deploys during a crash but not as a result of an impact.

For example, a vehicular fire, occurring as a result of:

- an impact or
- a noncollision event

prior to any impacts to this vehicle.

Unknown if deployed

is used when it is known that the vehicle was equipped with an air bag but the researcher is unable to determine if the air bag deployed (for whatever reason). For example, if the vehicle was sufficiently damaged so that a determination of deployment cannot be made from the vehicle inspection or the deployment status at the time of the crash cannot be determined.

Not deployed

is used when an air bag equipped vehicle has one or more impacts, and the air bag did not inflate during the crash.

INDICATIONS OF AIR BAG MALFUNCTION

Screen Name: Function—Indications of Malfunction

SAS Data Set: *AIRBAG*

SAS Variable: *BAGFAIL*

Oracle Name: *AIRBAG.PICKAIRBAGFAILURE*

Element Attributes:

Oracle	SAS	
1	0	No
2	1	Yes (specify)
-8871	70	[No air bag available for this crash (disconnected/not reinstalled)]
-8870	79	[Unknown status if air bag available for this crash]
3	99	Unknown if air bag failed

Source: Vehicle inspection

Remarks:

This variable flags “indications of an air bag malfunction” and means that something abnormal has occurred to the air bag system. It may not necessarily mean that the air bag system was defective. A vehicle inspection is required in order to report an indication of air bag malfunction.

No

is used whenever the air bag deployed and there are no obvious visual indications of an air bag malfunction.

Yes (specify)

is used whenever an indication of an air bag malfunction is suspected and specify the malfunction. An indication of an air bag malfunction could be a blowout of the fabric, a rupture along a fabric seam, a cover which does not open properly causing a misaligned deployment, partial inflation, or any number of other problems. If an indication of an air bag malfunction is suspected, then document the condition with images and then call your zone center for assistance.

Unknown

is used when it is not known if the bag malfunctioned.

TYPE OF CUTOFF SWITCH

Screen Name: Function -- Switch Type

SAS Data Set: *AIRBAG*

SAS Variable: *SWITCHTYP*

Oracle Name: *AIRBAG.SWITCHTYPE*

Element Attributes:

Oracle	SAS	
0	0	None present
1	1	Originally equipped
2	2	Retrofit
3	3	Switch present, type unknown
4	9	Unknown if switch present

Source: Vehicle inspection

Remarks:

This variable captures only manually operated switches, typically installed by the manufacturer. Air bag cutoff switches were designed to be installed by manufacturers in vehicles with only one row of occupant seating. This was done so that if a child seat was used, the air bag could be turned off. More recently NHTSA has permitted the public to request air bag cutoff switches to be installed by dealers. The retro fit switch can be located in the glove compartment. **Close up images of the switch are required.**

None present

is used when there is no air bag cutoff switch present for this occupant position.

Originally equipped

is used when a vehicle is originally equipped by the manufacturer with an air bag cutoff switch for this occupant position is present. This switch will not be present for the driver's position.

Retrofit

is used when an air bag cutoff switch for this occupant position has been added.

Switch present, type unknown

is used when an air bag cutoff switch for this occupant position is present and it is not known if it is original or retro fit.

Unknown if switch present

is used when it is not known if an air bag cutoff switch is present.

CUTOFF SWITCH POSITION STATUS

Screen Name: Function—Switch Status

SAS Data Set: *AIRBAG*

SAS Variable: *SWTCHSET*

Oracle Name: *AIRBAG.SWITCHSTATUS*

Element Attributes:

Oracle	SAS	
0	0	Switch on/Automatic
1	1	Switch off
4	7	[None present]
3	8	[Unknown if switch present]
2	9	Switch status unknown

Source: Vehicle inspection

Remarks:

Air bag cutoff switches were designed to be installed by manufacturers in vehicles with only one row of occupant seating. This was done so that if a child seat was used, the air bag could be turned off. NHTSA has permitted the public to request air bag cutoff switches to be installed by dealers. The retro fit switch can be located in the glove compartment. **Close up images of the switch are required.**

Switch on/Automatic

is used when an air bag cutoff switch for this occupant position is present and is in the on position or the Automatic position.

Switch off

is used when an air bag cutoff switch for this occupant position is present and is in the off position. The switch was manually rendered inoperative.

Switch position unknown

is used when an air bag cutoff switch for this occupant position is present and its position is unknown.

None present

is precoded when there is no air bag cutoff switch present for this occupant position.

Unknown if switch present

is precoded when it is not known if an air cutoff switch is present.

DID AIR BAG MODULE COVER FLAP(S)/SEAMS OPEN AT DESIGNATED TEAR POINTS?**Screen Name:** Damage – Flap Open at Tear Points?**SAS Data Set:** AIRBAG**SAS Variable:** BAGFLOPN**Oracle Name:** AIRBAG.PICKCOVERFLAPSOPEN**Element Attributes:**

Oracle	SAS	
1	0	No
2	1	Yes
-8885	60	[Air bag did not deploy]
4	69	[Unknown if air bag deployed]
-8871	70	[No air bag available for this crash (disconnected/not reinstalled)]
-8870	79	[Unknown status if air bag available for this crash]
3	99	Unknown flaps/seams opened at tear points

Source: Vehicle inspection**Remarks:**

A designated tear point is a weakened area of the flap material designed to allow the air bag easy escape from its storage area during deployment. Some air bags in the seat cushion and seat back may not have cover flaps, but will deploy through a seam that separates during the air bag deployment.

No

is used when it can be determined that the module cover flap(s) for this air bag opened somewhere other than their designated tear points. A non-linear tear in the flap is an indication that the flap opened irregularly, not at the designated tear point.

Yes

is used when it can be determined that the module cover flap(s) for this air bag opened up at their designated tear points. Linear and symmetrical tears are good indications of proper separation of the cover flap(s) at their designated tear points.

Unknown if flaps/seams open at tear points

is used when it is not known if the air bag opened at the tear points.

WERE THE COVER FLAP(S) DAMAGED

Screen Name: Damage—Flap Damaged

SAS Data Set: AIRBAG

SAS Variable: BAGFLDAM

Oracle Name: AIRBAG.PICKCOVERFLAPSDAMAGE

Element Attributes:

Oracle	SAS	
1	0	No
2	1	Yes (specify)
-8885	60	[Not Deploy]
4	69	[Unknown if deployed]
-8871	70	[No air bag available for this crash]
-8870	79	[Unknown if air bag available for this crash]
3	99	Unknown if flaps damaged

Source: Vehicle inspection.

Remarks:**No**

is used when it can be determined that no damage was present on the air bag module cover flap(s). Normal separation/tearing at the designated tear points does not constitute damage.

Yes (specify)

is used when it can be determined that the air bag module cover flap(s) sustained damage. Abnormal separation/tearing at the designated tear points constitutes damage. Damage can also be cuts, tears, holes, burns, abrasions, etc. The researcher must specify the type of damage that is being reported.

Unknown if flaps damaged

is used when it cannot be determined if the air bag flap(s) sustained damage.

WAS THERE DAMAGE TO THE AIR BAG?

Page 1 of 2

Screen Name: Damage—Damage to the Air Bag?**SAS Data Set:** AIRBAG**SAS Variable:** BAGDAMAG**Oracle Name:** AIRBAG.PICKAIRBAGDAMAGE**Element Attributes:**

Oracle	SAS	
1	0	Not damaged
		Yes — Air Bag Damaged
2	1	Ruptured
3	2	Cut
4	3	Torn
5	4	Holed
6	5	Burned
7	6	Abraded
97	60	[Air bag did not deploy]
11	69	[Unknown if air bag deployed]
-8871	70	[No air bag available for this crash (disconnected/not reinstalled)]
-8870	79	[Unknown status if air bag available for this crash]
8	88	Other damage (specify)
9	95	Damaged, details unknown
10	99	Deployed, unknown if damaged
-8872	96	Post crash damage

Source: Vehicle inspection**Remarks:**

If multiple damage types apply select the attribute that most deteriorates the effectiveness of the air bag. If you cannot make this determination then select the attribute in a hierarchical manner from the top of the list down.

Not damaged

is used when no damage to the air bag for this occupant position was sustained.

Ruptured

describes damage to the air bag that resembles a stellate or starlike pattern of damage, with multiple tears originating from a single point of origin.

Was there damage to the air bag? (cont'd)

Page 2 of 2

Cut

describes openings in the air bag which are generally linear and have smooth edges.

Torn

describes openings which have ragged edges but which are generally linear in appearance.

Holed

describes damage which is circular in appearance with or without ragged edges.

Burned

describes damage resulting from heat which scorches, melts or burns the bag.

Abraded

is a pattern of damage to the surface of the bag that appears as a fraying of the surface threads.

Other damage (specify)

is used to describe damage which is not captured in any of the attributes above.

Damaged, details unknown

is used when it is known that the air bag sustained damage, but the type of damage cannot be determined.

Deployed, unknown if damaged

is used when it cannot be determined if the air bag sustained damage.

Post crash damage

is used when rescue or emergency efforts caused damage to the air bag. Also, use this for damage caused by towing.

SOURCE OF AIR BAG DAMAGE

Page 1 of 2

Screen Name: Damage—Source of Damage**SAS Data Set:** AIRBAG**SAS Variable:** BAGDAMSO**Oracle Name:** AIRBAG.PICKSOURCEOFDAMAGE**Element Attributes:**

Oracle	SAS	
2	1	Object worn by occupant (specify)
3	2	Object carried by occupant (specify)
4	3	Adaptive/assistive controls, (specify)
12	4	Cover flaps
5	5	Fire in vehicle
6	6	Thermal burns
13	7	Glazing
	1 50	[Air Bag Not Damaged]
10	59	Deployed, unknown of damaged
97	60	[Air bag did not deploy]
11	69	[Unknown if air bag deployed]
-8871	70	[No air bag available for this crash (disconnected/not reinstalled)]
-9999	79	[Unknown status if air bag available for this crash]
8	88	Other damage source (specify)
9	99	Damaged unknown source [Post crash damage]

Source: Vehicle inspection**Remarks:**

This is a hierarchical variable, that is, if more than one element applies, then select the first attribute that applies.

Object worn by occupant (specify)

is selected when the object is fastened, attached, or worn by the occupant. Be sure to specify the object.

Object carried by occupant (specify)

is used when the object is held in the mouth, the hand(s), arm(s), etc., by the occupant. Be sure to specify the object.

Adaptive/assistive controls (specify)

is used when adaptive/assistive controls damages the air bag for this occupant position. Be sure to specify the object / control.

Fire in vehicle

is used when there was a fire in the occupant compartment which damaged the air bag.

Thermal burns

is used when the air bag is burned or scorched by the inflation or chemicals.

Other damage source (specify)


is used whenever there is damage to the air bag and it cannot be fit into any of the categories above.

Damaged, unknown source

is used when there is damage to the air bag, but the source of the damage cannot be determined.


Air Bag/Sketches/Driver

Sketch 1: Damage and Contact Evidence on Driver Air Bag

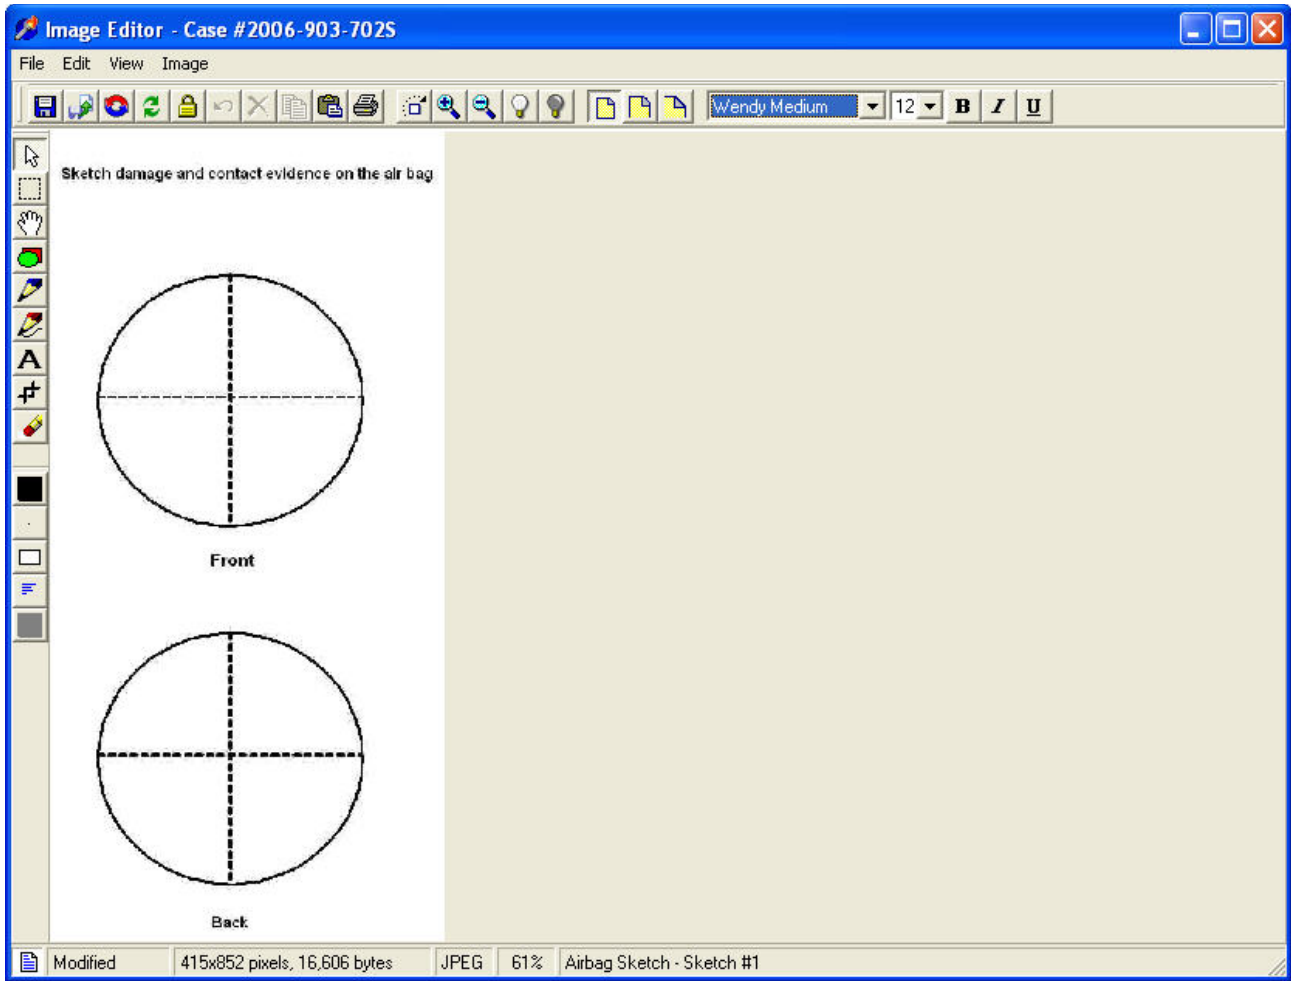


Air Bag/Sketches/Driver

Sketch 2: Driver Air Bag Module Cover Flap

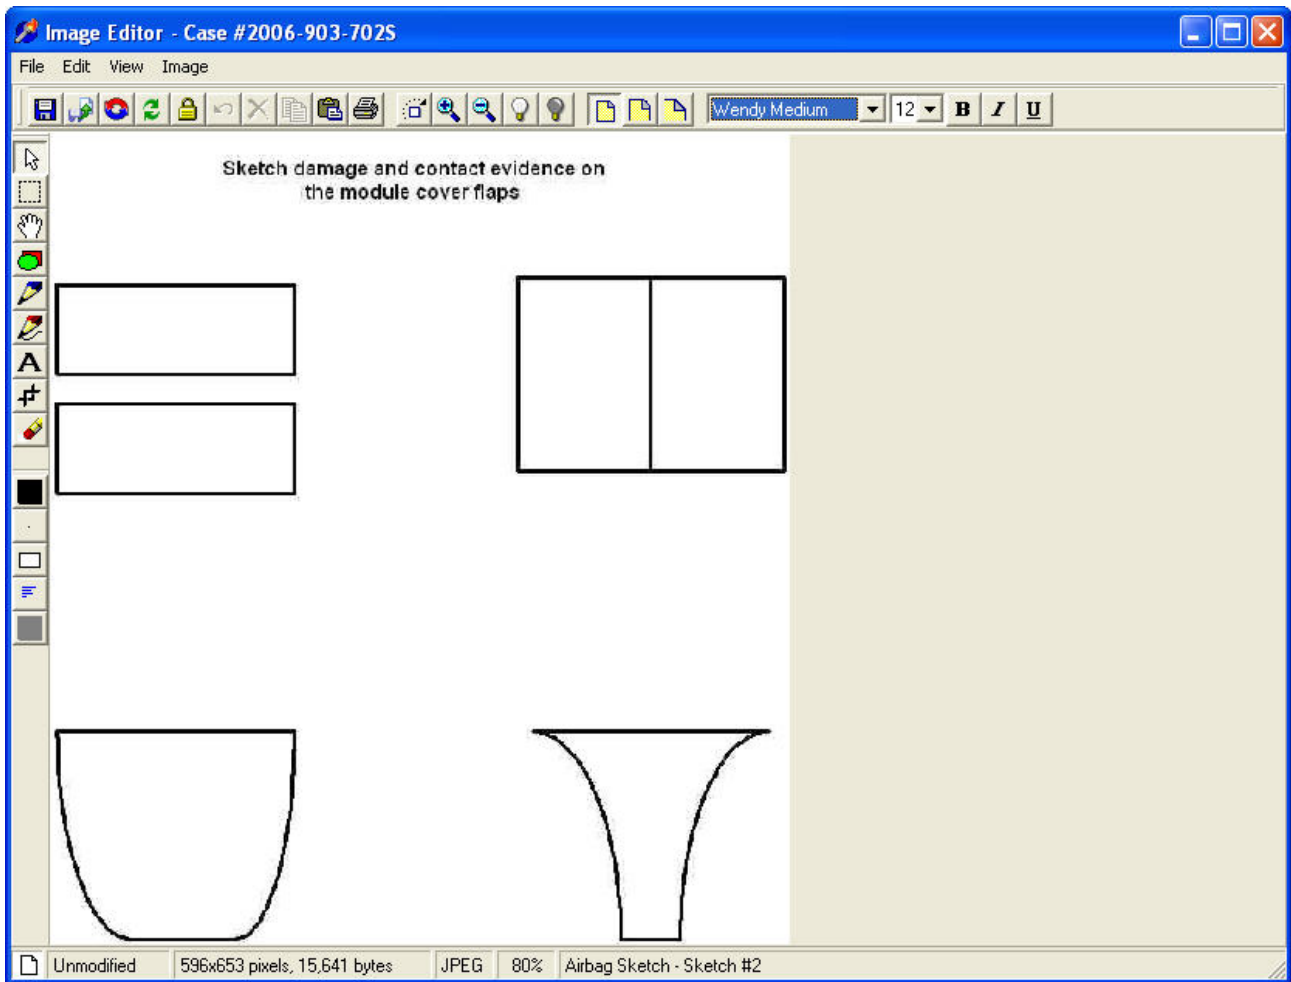


Air Bag/Sketches/Driver

Sketch 3: Sketch of Other Type of Air Bag Module

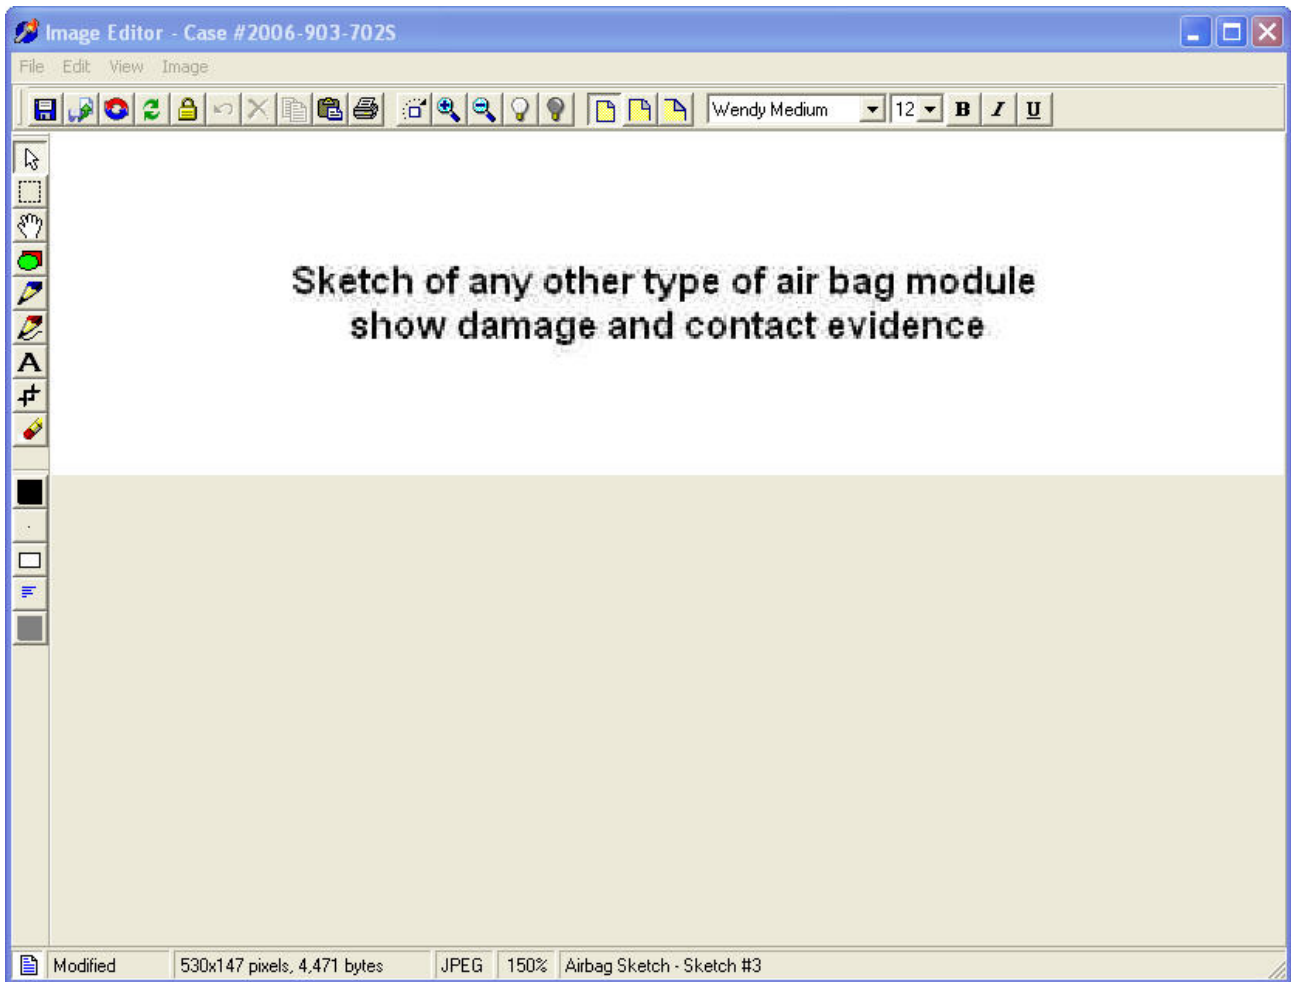


Air Bag/Sketches/Passenger

Sketch 1: Damage and Contact Evidence on Passenger Air Bag

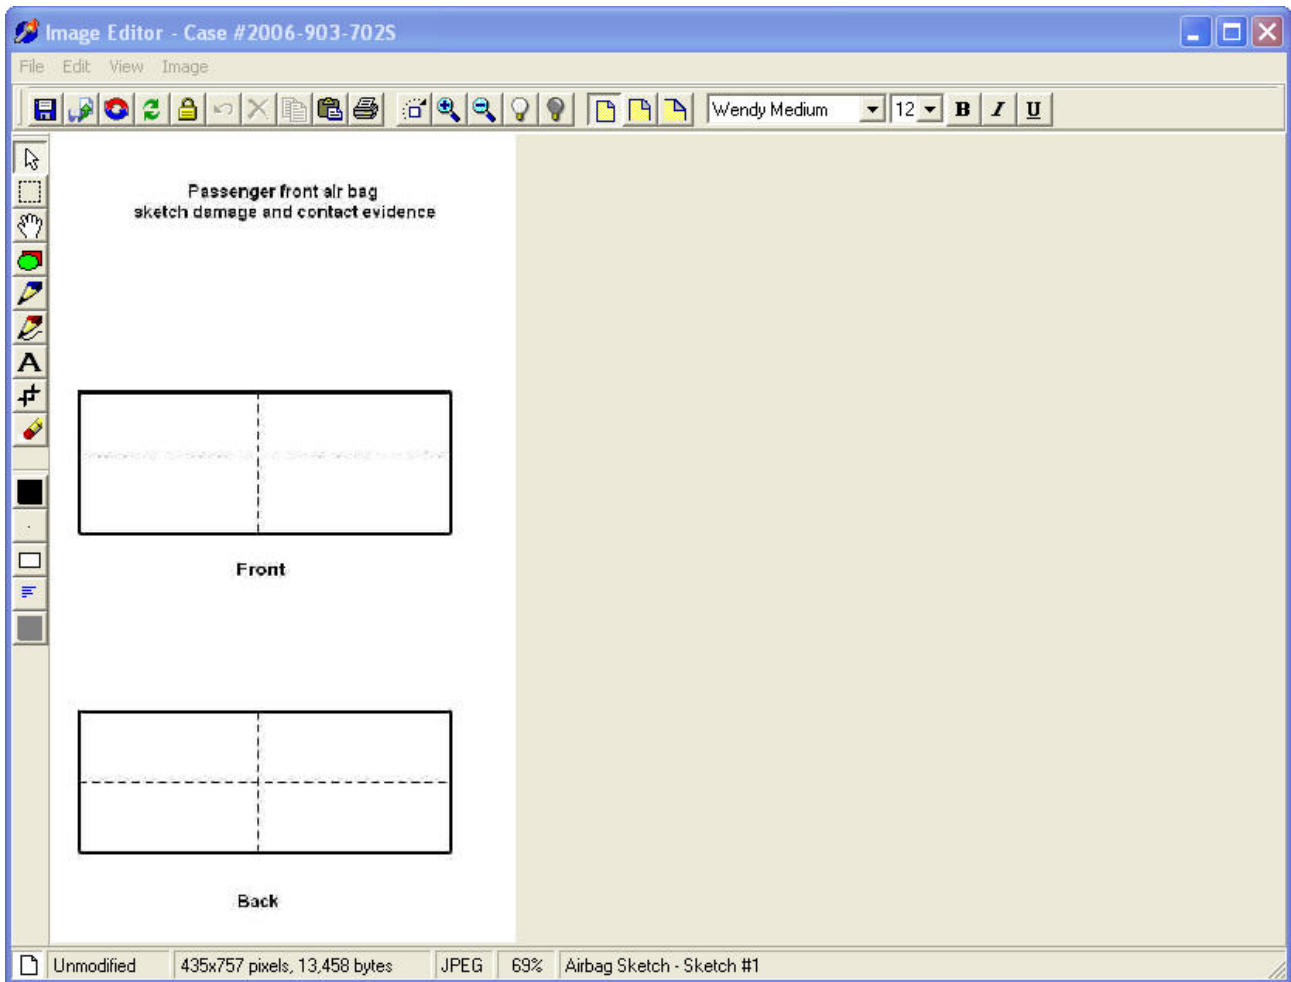


Air Bag/Sketches/Passenger

Sketch 2: Sketch Damage and Contact Evidence on Passenger Air Bag Module Cover Flap

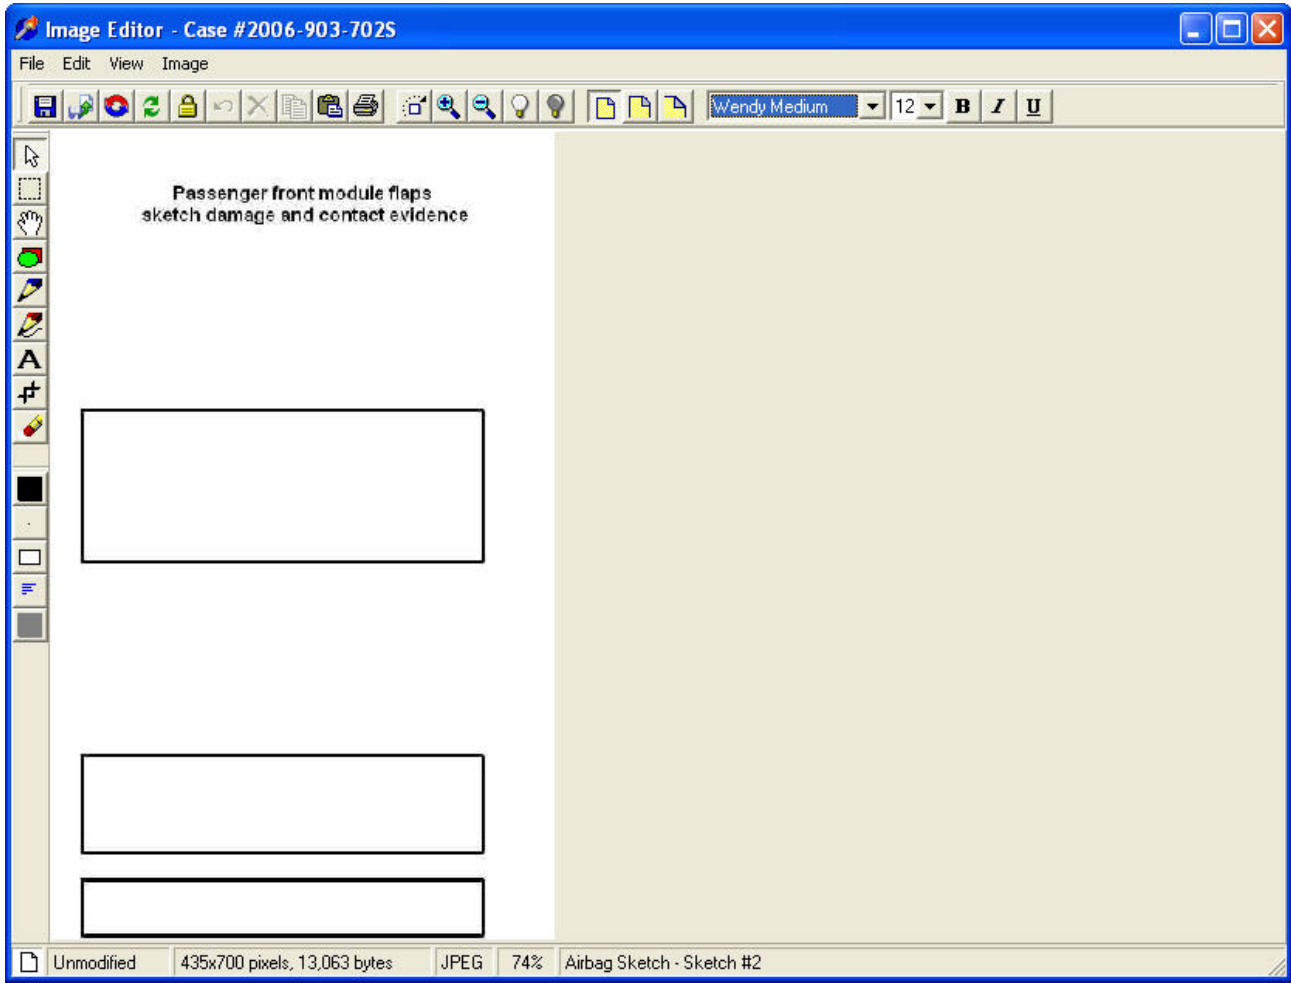


Air Bag/Sketches/Passenger

Sketch 3 Sketch any other Passenger Air Bag Module Flaps

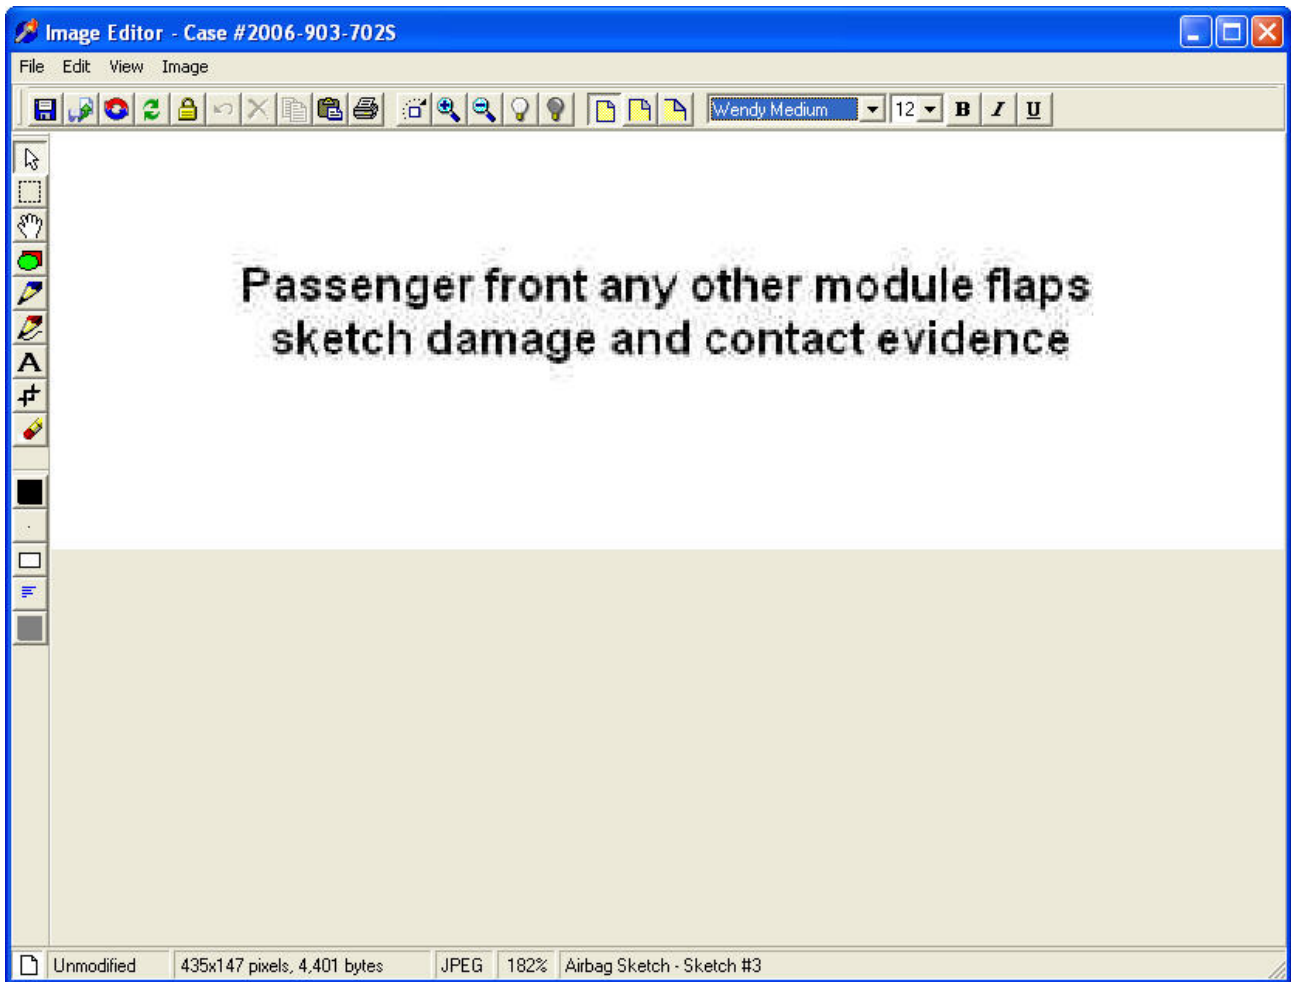


Air Bag/Sketches/Door Mounted

Sketch 1: Damage and Contact Evidence on Door Mounted Bag

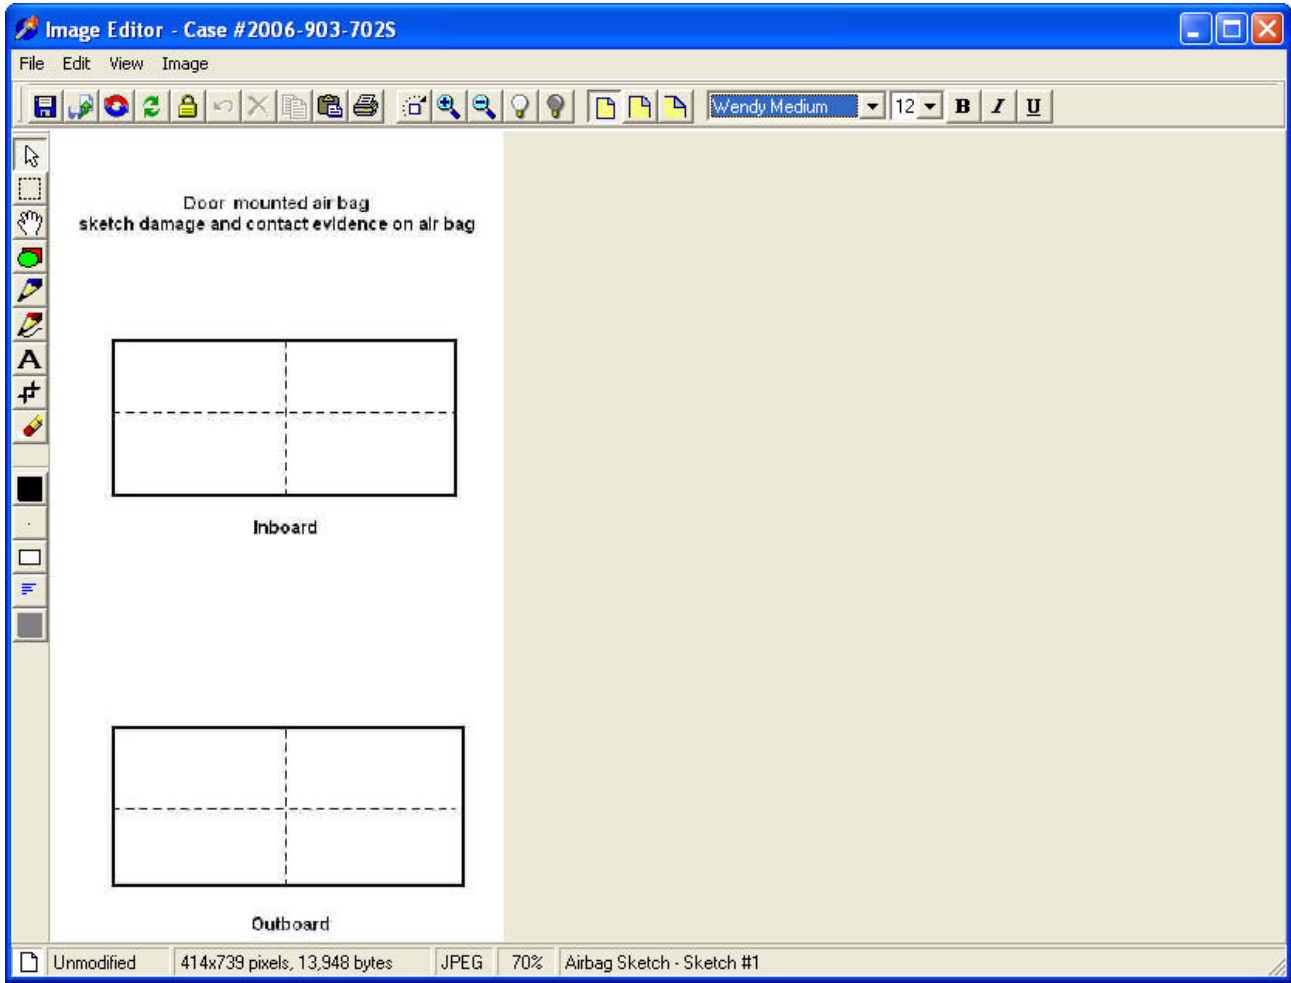


Air Bag/Sketches/Door Mounted

Sketch 2: Sketch any other Damage and Contact Evidence

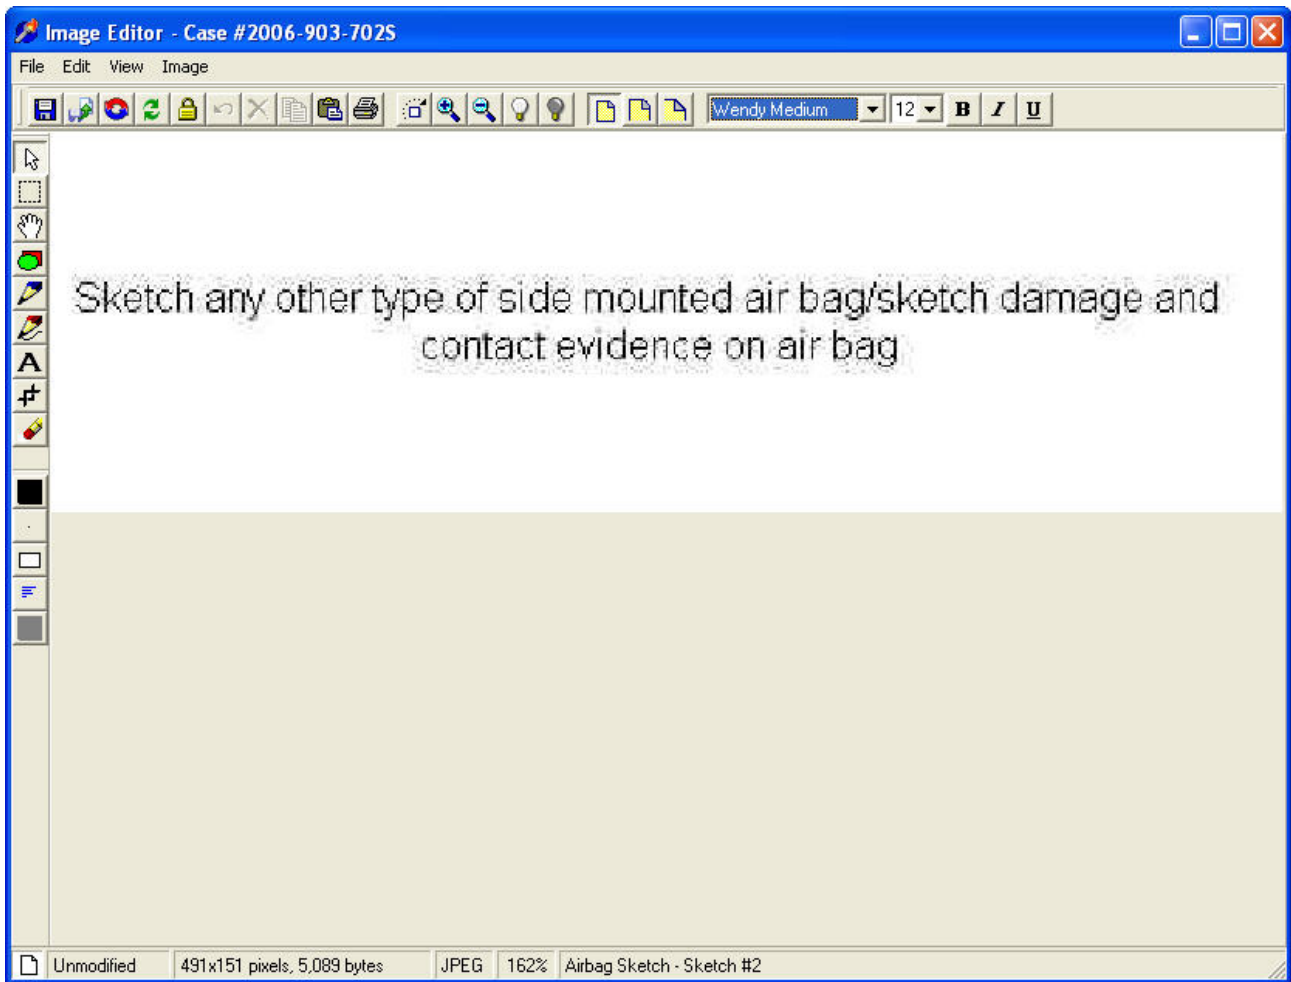


Air Bag/Sketches/Seat Back Mounted

Sketch 1: Damage and Contact Evidence on Seat Back Mounted Bag

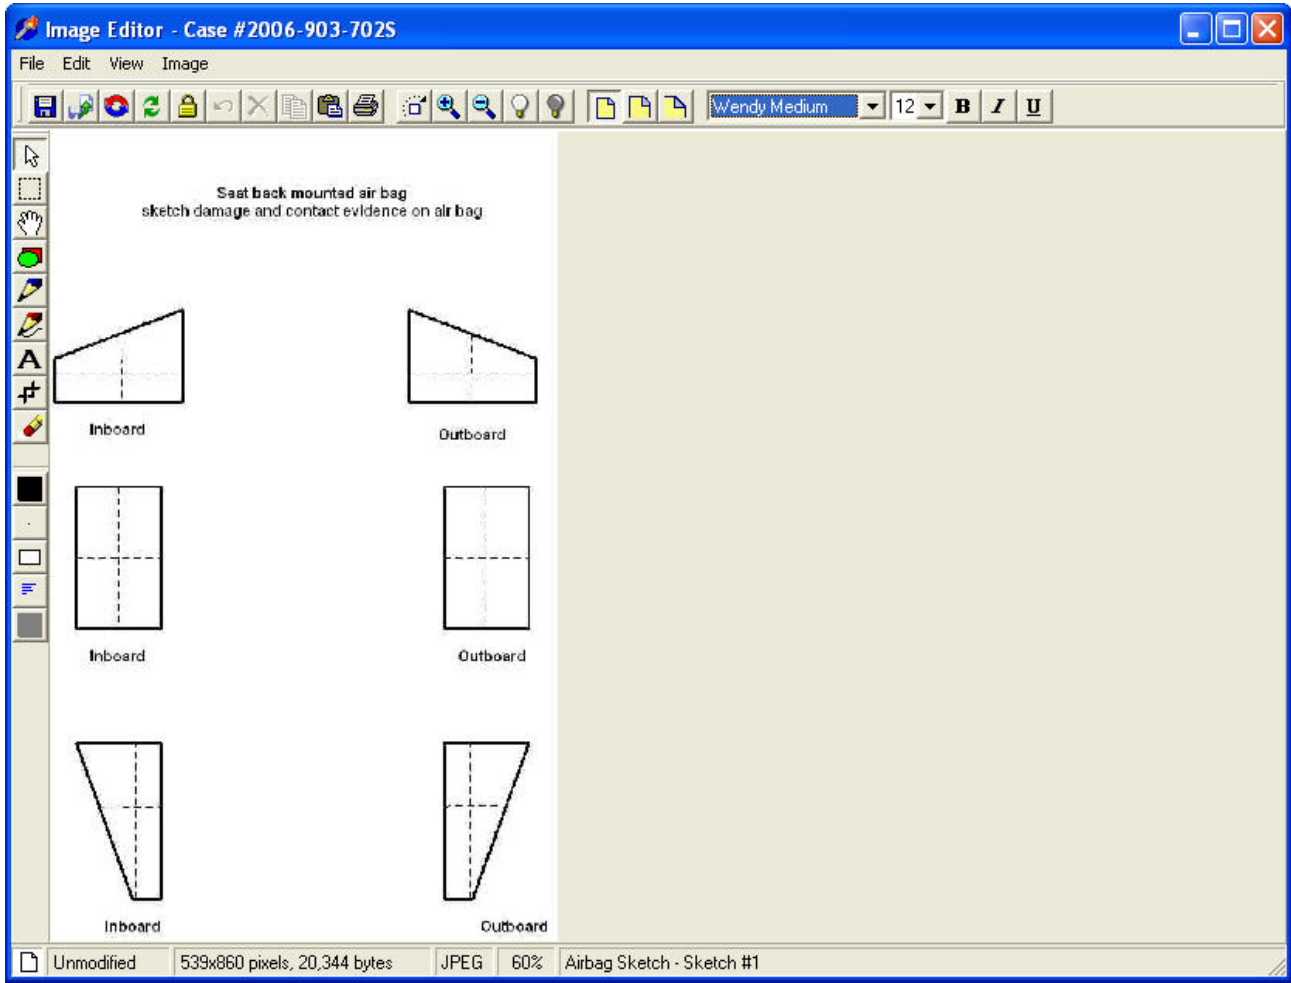

Air Bag/Sketches/Side Curtain or Tube Style Air Bag

Sketch 1: Damage and Contact Evidence on Side Curtain/Tube Bag.

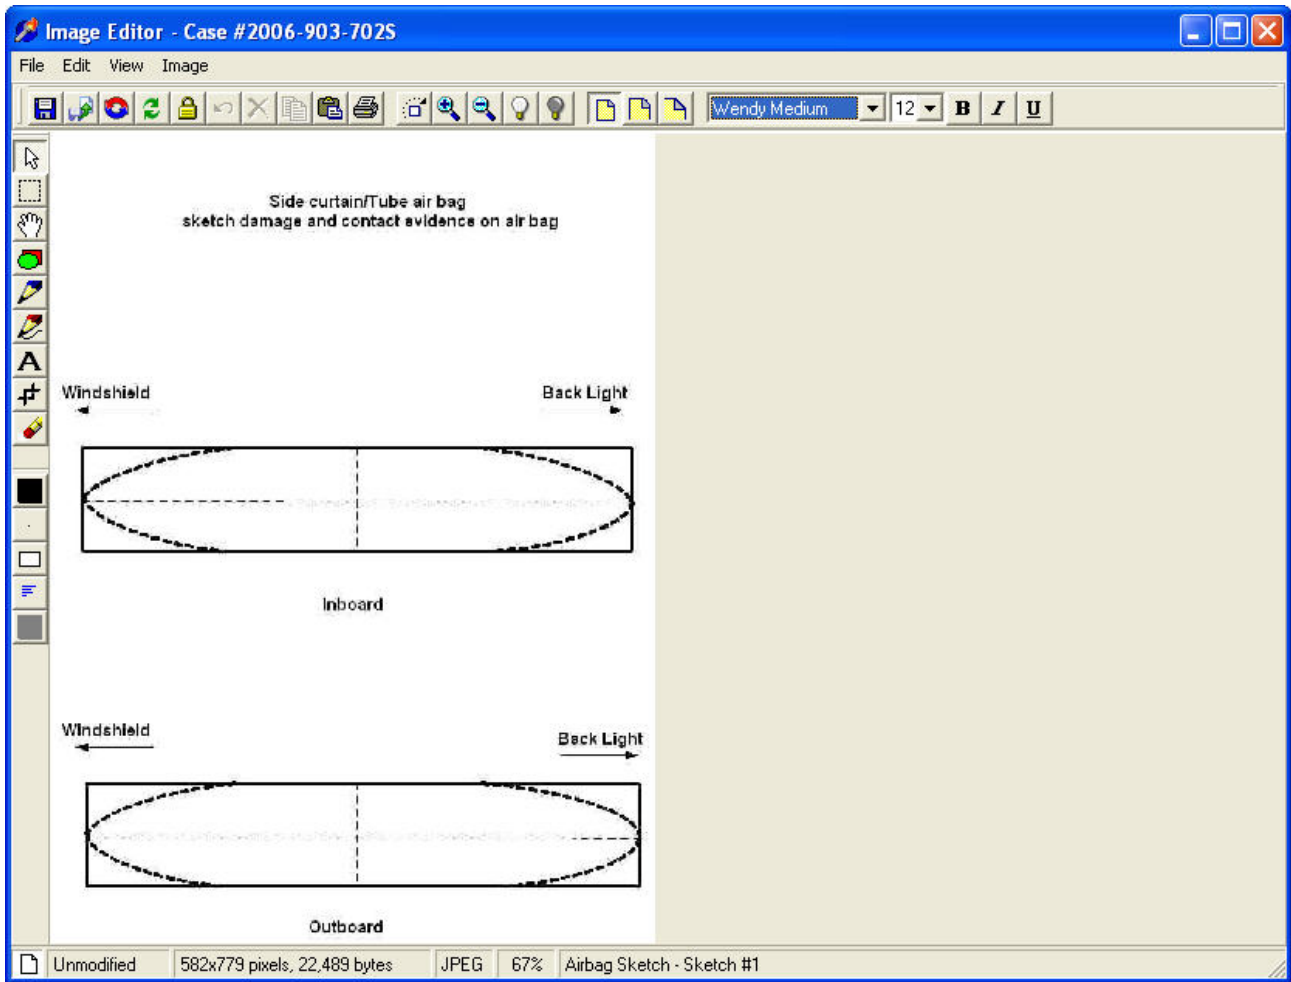


SAFETY SYSTEM FORM

AIR BAG/SKETCHES

Air Bag/Sketches/Side Curtain or Tube Style Air Bag

Sketch 2: Damage and Contact Evidence on Any other Side Curtain/Tube Bag.

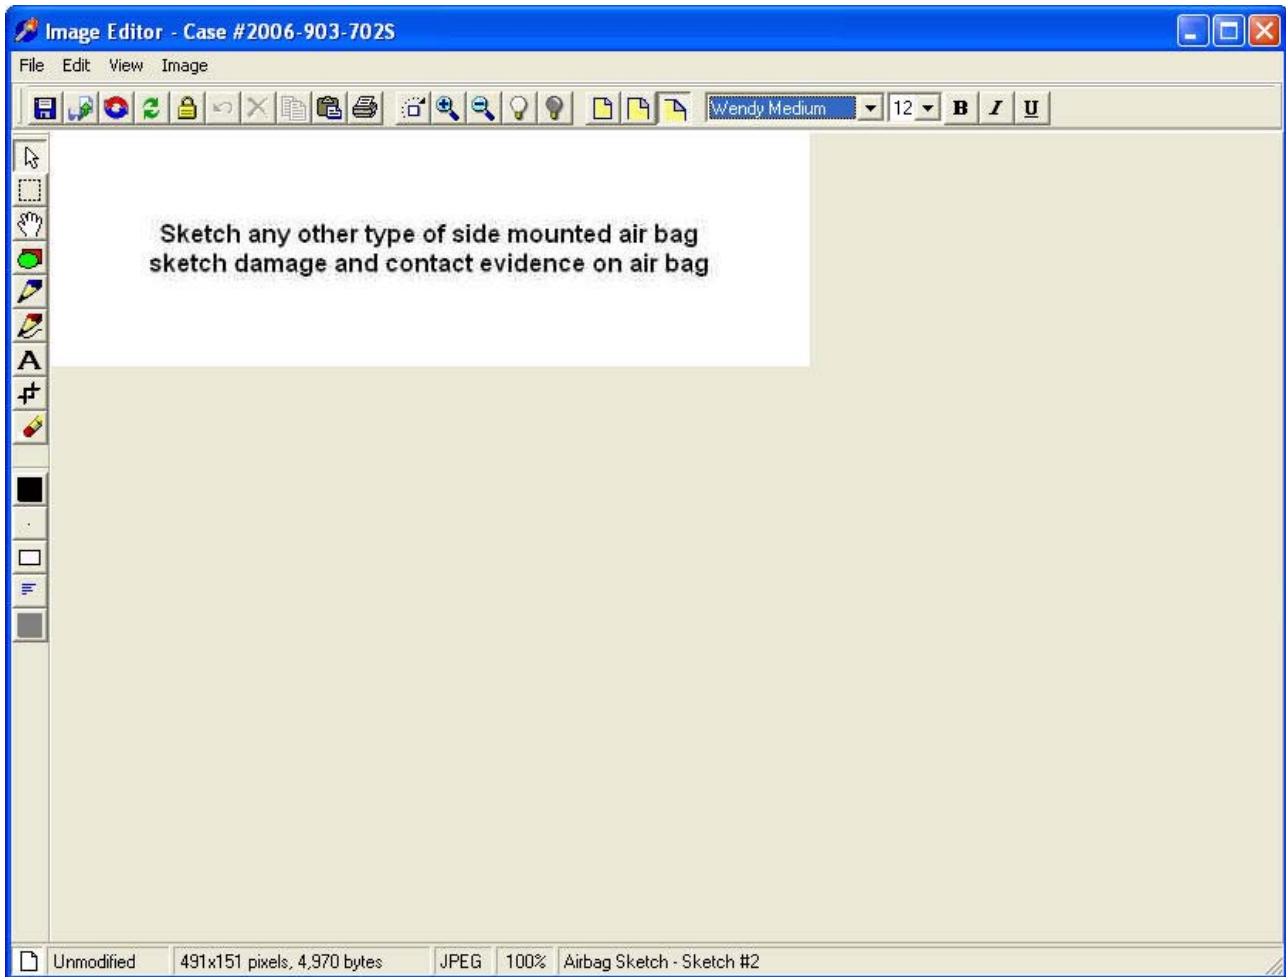

Child Restraint Overview

Page 1 of 2

These variables are designed to describe child restraints used in all the towed CDS applicable vehicles involved in the crash. Information about the seat is of two types: characteristics and usage.

Injury and death of young children has long been a significant part of the motor vehicle crash problem. Unrestrained children have a much greater tendency to be out of place (*i.e.* not in a designated seating position and generally standing or kneeling on the seat cushion). On impact this makes them very susceptible to injury or death since they are unrestrained. For a number of years, motor vehicle crashes have been one of the leading causes of injury and death to all children. Many states have attempted to address this problem by legislation requiring young children to be protected by some sort of child restraint. While these efforts have resulted in a reduction of injuries and deaths, little data on the real world performance of the child seats has been gathered. Police reports many times fail to note the use of such a restraint, and/or fail to properly identify the type of restraint.

Specifications for these seats come from Federal Motor Vehicle Safety Standard's 213 and 225 (Child Restraint Systems, and Child Restraint Anchorage Systems). Testing the performance and design of child restraints is the responsibility of the NHTSA. Most states with child restraint laws require the use of a DOT approved seat. Other than staged laboratory tests, very little data exists on what happens to these seats and how well they perform in protecting the occupants. Analysts will compare use, injury severity levels, and delta V's for initial gross performance levels. Once that type of analysis is done, source of injury will be examined, along with seat type and make/model. All of these analyses will initially be used to evaluate the effectiveness of FMVSS 213 and 225 to help determine if these standards should be updated or modified. The other main use of performance analysis is to determine if any significant problems exist in any particular type or make/model.

All of the analyses are very dependent on having enough data. Researchers noting that a child was an occupant in a CDS applicable vehicle must pursue the inspections and interview questions with the presumption that a child seat was present, especially if the jurisdiction has a child restraint law or ordinance. **Probing questions should be asked during the interview, and whenever possible, an inspection of the seat should take place. Of course, if the seat is still with the vehicle it should be inspected and photographed at the same time as the vehicle. However, finding the seat with the vehicle is not a common occurrence. This is another area where the perseverance of the researcher pays off in obtaining needed information. If the child restraint is not present during the vehicle inspection, researchers must attempt to locate, obtain an inspection, and photograph the child safety seat.**

If the child seat is belted into a specific seat location, identify that location. If it is not, leave it blank. All child seats are to be identified, whether or not they are known to be occupied. Seat locations that can be selected are only those previously defined on the **Occupant Form/Seat tab**.

Some manufacturers incorporate Child Safety Seats (CSS) into the vehicle's seat installed in the vehicle. This type of CSS is termed an Integrated Child Safety Seat. Should the Researcher encounter this seat type during a vehicle inspection, the documentation of the seat and CSS are required on the Safety Systems Form, regardless of whether it was occupied at the time of the crash.

Child restraints are a major issue, and data collection in this area has a high priority. Much information is needed to provide a reliable evaluation of the real world performance of these safety devices.

CHILD SEAT LIST

Safety Systems Form, Case 2007-996-900015/ Vehicle #1

SEAT | RESTRAINTS | AIR BAG | CHILD SEAT | LOG | REVIEW

LIST | DETAIL

Make	Model	Occ #	Seat
------	-------	-------	------

CHILD SEAT DETAIL

Safety Systems Form, Case 2007-996-900015/ Vehicle #1

SEAT | RESTRAINTS | AIR BAG | CHILD SEAT | LOG | REVIEW

LIST | DETAIL

CHILD SEAT | VEHICLE

Make Occ #s


Model

Type Date of Manufacture Model No

Source of Data

Design Feature Used		How Feature Used	
Harness/ Shield	<input type="text"/>	Orientation	<input type="text"/>
Retainer Clip	<input type="text"/>		<input type="text"/>
Tether	<input type="text"/>		<input type="text"/>
LATCH	<input type="text"/>		<input type="text"/>
		Belt Routing / Use	<input type="text"/>
		Locking Clip Use	<input type="text"/>

Seat Location Placement Child Position

 Save

[CHILD RESTRAINT NUMBER]

Screen Name: N/A

SAS Data Set: *CHILDSEAT*

SAS Variable: *CHSEATNO*

Oracle Name: *CHILDSEAT.CHILDSEATID*

Element Attributes:

Source: As created by the system.

Remarks:

CHILD RESTRAINT MAKE**Screen Name:** Make**SAS Data Set:** *CHILDSEAT***SAS Variable:** *CHMAKE***Oracle Name:** *CHILDSEAT.CHILDSEATMAKEID***Element Attributes:**

Oracle SAS

997 Refer to listing of Child Restraints
Other make (specify)
-999 Unknown make

Source: Vehicle inspection, Child safety seat inspection, Interview**Remarks:**

A child seat's manufacturer/make name may be difficult to determine unless it is stamped/sewn/molded into the child seat itself. Refer to the manufacturer's instruction booklet which accompanied the child seat, if available, for specific manufacturer and make of seat. The child seat should have a label permanently attached which identifies the seats date of manufacture and model number; this information alone may be used to identify the specific manufacturer and make/model of seat, if no other identifiers exist. Take several photos of the seat which may also help in its identification. If there is no manufacturer/make name or number provided on the seat, then make should be coded as "Unknown".

CHILD RESTRAINT MODEL


Screen Name: Model
SAS Data Set: *CHILDSEAT*
SAS Variable: *CHMODEL*
Oracle Name: *CHILDSEAT.PICKMODELID*

Element Attributes:

Oracle SAS
-998 Refer to listing of child restraints
-999 Other (specify)
Unknown model

Source: Vehicle inspection

A child seats make and model name may be difficult to determine unless the information is stamped/sewn/molded into the child seat itself. Refer to the manufacturer’s instruction booklet which accompanied the child seat, if available, for specific make and model of seat. The child seat should have a label permanently attached which identifies the seat’s date of manufacture and model number; this information alone may be used to identify the specific model of seat, if no other identifiers exist. Take several photos of the seat which will also help in its identity. If there is no make/model name or number information provided on the seat, then the model should be coded as “Unknown”.

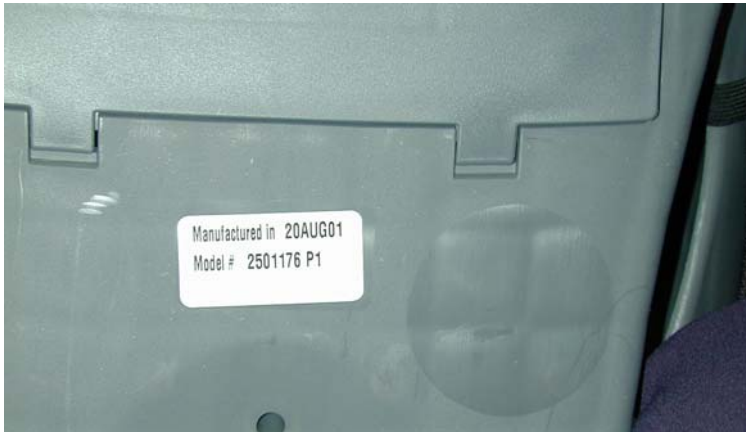

Date of Manufacture: 20AUG01
(August 20, 2001)

Model #: 2501176 P1

CHILD RESTRAINT TYPE

Screen Name: Type

SAS Data Set: *CHILDSEAT*

SAS Variable: *CHTYPE*

Oracle Name: *CHILDSEAT.PICKCHILDSEATTYPE*

Element Attributes:

Oracle	SAS	
1	1	Infant seat (ISS)
2	2	Convertible seat (CSS)
3	3	Forward facing only (FSS)
4	4	Booster seat (BSS)
5	5	Booster/Forward facing seat (BSS/FSS)
6	6	Booster/Convertible facing seat (BSS/CSS)
7	7	Integrated seat (INT)
8	8	Harness (HSS)
9	9	Vest (VSS)
10	10	Special needs (SNSS)
98	98	Other (specify)
-99	99	Unknown

Source: Vehicle inspection

Remarks:

Once the child seat has been identified by make and model, the child seat TYPE will automatically be defined. However, this information can be determined by child seat examination, interview and photographs if no make or model information is available.

Infant Seat (ISS)

Designed and intended to be used rear facing only by newborns and infants weighing up to about 22 pounds, typically equipped with either a 3 or 5-point harness. Some infant seats have detachable bases which can be left secured in the vehicle, while the infant seat is removed and used as a carrier. When used in the vehicle as a child restraint the carrier-type infant seat's carrying handle should be folded back, in the down position and the seat should recline at a 45-degree angle.

Infant only seats are typically designed with 2 or 3 sets of harness strap slots in the back of the seat which allow for proper shoulder strap placement (below or at the infant's shoulders). Most harness adjustment mechanisms are behind the seat back and are typically affixed/locked by a metal bar, or clip-type lock. These seats are normally equipped with a harness retainer clip which should be positioned at the infant's armpit level. The vehicle belt system (lap or lap portion of a lap/shoulder belt combination) or vehicle lower LATCH anchors must be used to secure the seat and/or its base to the vehicle.



Infant Seat with base attached
Shown with 5-pt Harness and handle
in the "up" position



Infant Seat and base separate



Infant Seat with base Attached with a 3-pt Harness

Convertible Seat (CSS)

Designed and intended to be used either rear or forward facing for a child ranging from birth to approximately 40 pounds (this information will normally be found on the child seat labeling as well as in the manufacturer's instructions). All have a harness system to secure the child to the seat which consists of a 5-point harness, T-Shield or Tray-Shield. Most seats have 3 sets of harness slots, the lowest and middle set of slots are typically used for rear facing use only, and the top set of slots are normally used for forward facing. Most harness straps have a harness retainer clip which helps position the shoulder straps up on the child's shoulders. Refer to manufacturers' instructions for proper use orientation according to the child's height and weight. When used rear facing the weight of the child ranges from birth up to about 35 pounds (some older convertible seats only allowed for infants rear facing up to about 20 pounds). In the rear facing mode the seat is reclined at a 45-degree angle for infant use. In the forward facing mode most seats are used fully upright, but some allow for a slight recline forward facing. Refer to manufacturers' instructions for proper use orientation according to the child's height and weight.



Convertible with TrayShield



Convertible with T-Shield



Convertible with 5-pt Harness

The vehicle belt system (lap or lap portion of a lap/shoulder belt combination) or LATCH (lower anchors and tethers for children) must be used to secure the child seat to the vehicle. Child restraints manufactured after September 1, 2002 may come equipped with a top tether and lower anchor strap attachments which, when used in combination with anchors in the vehicle, secures the child seat to the vehicle in lieu of the vehicle belt system. Refer to the child seat and vehicle owners manual for proper tether and lower anchor attachment and use.

Forward Facing Only Seat (FSS):

A forward facing only seat is intended to be used by children who are over 1 year old and who weigh at least 20 pounds. The majority are recommended for use by children who weigh at least 20 pounds up to about 40 pounds, though some have higher lower weight use recommendations of 30 pounds and upper weight limits above 40 pounds. These seats come equipped with a harness or shield to restrain the child and most have a harness retainer clip. The seat must be secured to the vehicle seat with a lap and/or lap/shoulder belt combination or by using the vehicle and child restraint LATCH system. These seats are used with the child sitting in an upright position. These seats typically have 3 sets of harness slots in the back of the seat which allows for proper harness placement over the child's shoulders as the child grows. Harness straps should be at or above the child's shoulder level and since this type of seat is intended for forward facing use only, all sets of slots can be used.

The majority of these seats convert to belt-positioning boosters by removing the harness or shield system after a child reaches 40 pounds. Always check manufacturer instructions for proper use recommendations

Boosters with shields are considered forward facing only seats and when used with the shield are not currently certified for use by children over 40 pounds.



Booster with shield Forward Facing Seat



Forward Facing Seat with 5-pt harness

Booster Seat (BSS) Belt-positioning. Designed and intended as a forward facing platform which raises a child's sitting height, enabling them to use the adult lap and shoulder belt for restraint. Belt-positioning booster seats are primarily designed to "fill the gap" between a child restraint with a harness or shield and the adult lap and shoulder belt used alone. Belt-positioning boosters should never be used with a lap belt only across the child.

Belt-positioning boosters come in high-back and backless models. High-back models provide head protection for the child when used in vehicle seats with low seat backs or no head restraints. Most high-back models have shoulder belt clips/positioners on the upper sides of the seat which may help position the vehicle shoulder belt across the child properly. Backless models provide a base which the child sits on to raise their sitting height, which provides for a better fit of the adult lap and shoulder belt. Some backless boosters have removable shields, e.g., shield boosters, which when used with the shield are considered forward facing only seats for children up to 40 pounds. Most backless boosters with shields convert to belt-positioning boosters by removing the shield and using the booster base with the adult lap and shoulder belt.

These seats are NOT installed using the vehicle belt or LATCH system so **No Belt Routing** would typically be coded. The only Belt/Routing which might be coded would be in those cases where the shoulder belt was routed through the positioning clips on either side of the Hi-back Booster.



Low/No Back
Booster



Hi-Back Booster



Hi-Back Booster

Integrated Seat (INT) Built-In Child Restraint. Built-into the vehicle seat, typically “camouflaged” within or under an adult seating position in the back seat. Designed for forward facing use only by children who weigh between 20 and 40 pounds and whose height ranges between 33 and 40 inches, typically a child at least 1 year old and over 20 pounds. Most of these seats have a 5-pt harness system, e.g., one strap over each shoulder, one strap across each upper thigh and a strap with a buckle or recessed buckle in the crotch area. Some models convert into belt-positioning booster seats for use by children up to about 60 pounds after the child reaches 40 pounds and can no longer use the 5-pt harness system.



Integrated Seat with 5 point harness

Harness (HSS). Intended to be used forward facing for children, who have outgrown a child seat, typically over 40 pounds, age 5 and older who are passengers of vehicles with lap belts only in the rear seat. Typically a harness consists of two straps with bottom loops which rest across the child’s shoulders and chest connected at the top by a tether anchorage. The vehicle lap belt routes through the loop at the bottom of each strap, resting across the child’s lap/upper thigh area.



Vest (VSS). Designed for forward facing use only and generally intended for use by children weighing 25-40 pounds; however, some vests can be made according to chest and waist measurements (e.g., EZ-On Products) which can accommodate small children to adults. Some models have a 5-pt type harness system and some have adjustable zipper closures in the back which typically require a top tether/anchor strap to be used along with the vehicle belt system. Some vests such as those used on school buses when transporting children with special transportation needs may require its own "seat mount" belt system for proper use of the vest.



Special Needs Safety Seat (SNSS)

Designed and modified for children with special transportation needs who range from newborn to about 100 pounds. The majority of these devices are intended for forward facing use only, however some devices can be used rear and forward facing. All have a harness system to secure the child to the seat which may consist of a 3 or 5-point harness, T-shield, etc.



Other – Not meant for vehicle travel

Other items, other than a certified child restraint used to hold, adjust sitting height, or otherwise contain or position a child while in a motor vehicle. Defines a product for which no type, make or model could be identified through the listing of child restraints and/or manufacturers instructions dated 1996 and 1999, nor found in the typical examples: Infant carriers, phone books/books, restaurant-home style booster seat, portable crib/cradle/playpen, wood platform, plastic platform, cushion or pillow.

Unknown

Is coded when any child restraint attribute, e.g., make, model, type design feature or use is not known.

DATE OF MANUFACTURE

Screen Name: Date of Manufacture

SAS Data Set: *CHILDSEAT*

SAS Variable: *MANDATE*

Oracle Name: *CHILDSEAT.DATEMADE*

Element Attributes:

Oracle SAS

MM/DD/YYYY


Indicate the date of manufacture as indicated on the child restraint

12/30/1899 99/99/9999 Unknown date

Source: Vehicle inspection

Remarks:

Indicate the date of manufacture as indicated on the child restraint. This information can be used for recalls and for determining the model of the child seat if it is not known.

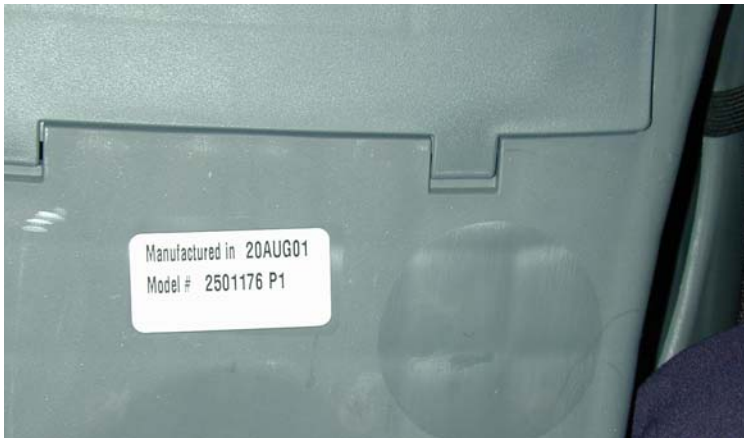

Date of Manufacture 20AUG01 (August 20, 2001)

MODEL NUMBER

Screen Name: Model No

SAS Data Set: *CHILDSEAT*

SAS Variable: *MODELNO*

Oracle Name: *CHILDSEAT.MODELNO*


Element Attributes:

Indicate the model number as indicated on the child restraint

Source: Vehicle inspection

Remarks:

Indicate the model number as indicated on the child restraint. This information can be used for recalls and for determining the model of the child seat if it is not known.

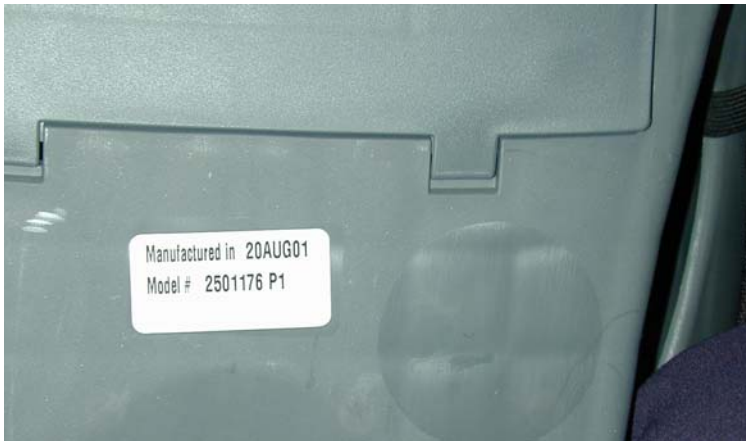

Model #: 2501176 P1

SOURCE OF DATA

Screen Name: Source of Data

SAS Data Set:

SAS Variable:

Oracle Name: *CHILDSEAT.SOURCEID*

Element Attributes:

Oracle	SAS	
1	1	Vehicle
2	2	Interview
3	3	Vehicle and Inspection
4	4	Photographs Only
5	5	Official Records

Source: Researcher determined

Remarks:

Indicate the source of data for the Child Seat information.

Official Records

includes medical records, police supplemental reports, autopsy reports, and police accident reports.

CHILD RESTRAINT HARNESS/SHIELD DESIGN

Page 1 of 3

Screen Name: Harness/Shield

SAS Data Set: *CHILDSEAT*SAS Variable: *HARDES*Oracle Name: *CHILDSEAT.PICKHARNESSDESIGN***Element Attributes:**

Oracle	SAS	
-8887	0	No harness/shield available (or not designed with harness/shield)
1	1	3-pt harness
2	2	5-pt harness
6	6	6-pt harness
3	3	T-shield
4	4	Tray-shield
5	5	Shield
-9999	9	Unknown

Source: Vehicle inspection

Remarks:

This variable indicates how the seat is designed to be used. It does not indicate either how it was used, or whether it was used properly.

Some seats can be purchased in different configurations. For these seats the make and model DO NOT uniquely define the harness/shield design.

A harness is a belt-type restraint integral to the child seat, for the specific purpose of holding the child in the seat.

3-pt/V-Harness

Two straps crossing both shoulders attached to a latch plate which typically inserts into a buckle on a piece of webbing or recessed at the crotch area, visually forming a V. Applicable to rear facing only infant seats



Infant seat with 3-pt harness

5-pt Harness

Two straps crossing both shoulders, two straps crossing each upper thigh and a strap between the legs (crotch strap). This type harness can be adjusted to fit a variety of infants rear facing and toddlers in forward facing orientations. Typically available in convertible seats, forward facing only seats and some infant only seats.



Convertible seat with 5-pt harness



Forward facing only seat with 5-pt harness

T-Shield

Secures two shoulder harness straps to a “T” shaped shield which is positioned in front of the torso and hips. Typically found in convertible and forward facing only seats.



Convertible seat with T-shield

Tray-Shield

Secures two shoulder harness straps to a broad padded tray positioned in front of the torso. The crotch strap may be separate or integral with the shield. Found on convertible and forward facing only seats.



Convertible seat with Tray shield

Shield

(Typically shield-boosters) The over-body shield was originally designed for use in seating positions with lap belts only for children weighing between 30-60 pounds. The shield is attached to a base which raises the child's sitting height and pre- 1996 models recommended use with the shield up to 60 pounds. Boosters with shields made after 1996 recommend an upper weight limit of 40 pounds. Most shield-boosters made after 1996 allow the 40 pound child to use the booster base with the shield removed, converting the seat to a belt-positioning booster. When used with the shield, the seat Type is coded as a Forward Facing only seat.



CHILD RESTRAINT HARNESS RETAINER CLIP

Screen Name: Retainer Clip

SAS Data Set: *CHILDSEAT*

SAS Variable: *CLIPDES*

Oracle Name: *CHILDSEAT.RETAINERCLIPID*

Element Attributes:

Oracle	SAS	
0	0	No clip available (or not designed with Harness Retainer Clip)
1	1	Clip available (or designed with Harness Retainer Clip)
-9999	9	Unknown

Source: Vehicle inspection

Remarks:

This variable indicates how the seat is designed to be used. It does not indicate either how it was used, or whether it was used properly.

A harness retainer clip is a plastic device/clip which is placed between the two shoulder harness straps, holding the two together for correct pre-crash positioning. The retainer clip should be threaded correctly and placed at armpit level to help keep the shoulder straps up-on the child's shoulders.



PHOTOS SHOW

HARNESS RETAINER CLIP PLACED BETWEEN BOTH SHOULDER STRAPS



CHILD RESTRAINT TETHER DESIGN

Screen Name: Tether

SAS Data Set: *CHILDSEAT*

SAS Variable: *TETHDES*

Oracle Name: *CHILDSEAT.PICKTETHERDESIGN*

Element Attributes:

Oracle	SAS	
0	0	No tether available (or not designed with Tether)
1	1	Tether available (or designed with Tether)
-9999	9	Unknown

Source: Vehicle inspection

Remarks:

This variable indicates how the seat is designed to be used. It does not indicate either how it was used, or whether it was used properly.

The top tether system is part of LATCH (Lower Anchors and Tethers for Children) and vehicles manufactured after September 1999 come equipped with a tether anchor for attaching the top tether of the child seat.



Child Seat LATCH Attachments



Child Seat Installed Using Top Tether Anchor in Vehicle

CHILD RESTRAINT LATCH DESIGN

Screen Name: LATCH

SAS Data Set: *CHILDSEAT*

SAS Variable: *LATCHDES*

Oracle Name: *CHILDSEAT.LATCHDESIGNID*

Element Attributes:

Oracle	SAS	
0	0	No LATCH available (or not designed with LATCH)
2	1	LATCH available (or designed with LATCH)
-9999	9	Unknown

Source: Vehicle inspection

Remarks:

This variable indicates how the seat is designed to be used. It does not indicate either how it was used, or whether it was used properly.

LATCH (Lower Anchors and Tethers for Children). All child seats manufactured after September 1, 2002 will have two lower attachments which connect to anchorage points between a vehicles' seat back and bottom cushion for the majority of vehicles manufactured after September 1, 2002. Child seats with corresponding attachments can be attached to these lower anchorages instead of being held by the vehicle seat belt. Child seats manufactured after September 1, 2002 will still have designated vehicle belt paths for proper orientation to accommodate older vehicles.



Typical Soft Anchor, Lower LATCH Attachments

CHILD RESTRAINT USAGE ORIENTATION**Screen Name:** Orientation**SAS Data Set:** *CHILDSEAT***SAS Variable:** *ORIENT***Oracle Name:** *CHILDSEAT.PICKORIENTATION***Element Attributes:**

Oracle	SAS	
1	1	Rear facing
2	2	Forward facing
3	3	Supine
-9998	8	Other (specify)
-9999	9	Unknown

Source: Vehicle inspection, Child Seat inspection, Interview**Remarks:**

The actual orientation of the child seat at the time of impact must be determined and coded.

Rear Facing

At the time of the crash the child seat was rear facing/facing the rear of the vehicle

Forward Facing

At the time of the crash the child seat was facing forward/front of the vehicle

Supine

At the time of the crash the child seat was laying flat

Other (specify)

At the time of the crash the seat was facing other than the rear, supine or forward (e.g., sideways, on top of or underneath something)

Unknown

A child seat is present but the orientation at the time of the crash is unknown.

CHILD RESTRAINT HARNESS/SHIELD USE

Page 1 of 2

Screen Name: Harness/Shield

SAS Data Set: *CHILDSEAT*SAS Variable: *HARUSE*Oracle Name: *CHILDSEAT.PICKHARNESSUSAGE***Element Attributes:**

Oracle	SAS	
1	0	Not designed with harness
2	1	Harness/shield not used
3	2	Harness straps in Top/Highest slot
4	3	Harness straps in Middle slot(s)
	4	Harness straps in the Bottom slot
5	5	Harness used - Slot Used Unknown
6	6	Retrofitted with Harness
7	7	Shield used
8	9	Other (specify)
-9999	10	Unknown if harness/shield used

Source: Vehicle inspection

Remarks:

The actual child seat harness usage at the time of the crash must be determined and coded.

Not designed with harness

is used if the child seat did not have an internal harness.

Harness/shield not used

is used if the child seat had a harness, but it was not in use during the crash.

Harness straps in the Top/Highest slot

is used if the harness straps were routed through the top/highest slots.

Harness straps in Middle slot(s)

is used if the harness straps were routed through the middle slots. Some child seats have three or more sets of slots and if the harness was routed through any slots between the top and bottom slots, use this attribute.

Harness straps in the Bottom slot

is used if the harness straps were routed through the bottom slots.

Harness used – Slot Used Unknown

is used if the researcher was unable to determine what slots the harness straps were routed through.

Retrofitted with Harness

is used if the original harness straps were replaced prior to the crash.

Shield used

is used if the child seat was equipped with a Tray or T-shield in lieu of an internal harness strap system.

Other (specify)

is used if the harness straps were routed unconventionally or the usage of the harness straps fell outside the parameter or the other attributes. For example, if the right strap was routed through the top slot and the left strap was routed through one of the middle slots, this attribute would be selected. In any instance where the proper harness strap usage was questionable, use this attribute and specify how the straps were routed.

Unknown if harness/shield used

is used if it could not be determined if the harness system was used during the crash.

Refer to the Manufacturers' Instructions for Child Safety Seats and the Child Seat List to determine the design of the seat, its respective harness design and use according to the weight/height of the child.

CHILD RESTRAINT RETAINER CLIP USE**Screen Name:** Retainer Clip**SAS Data Set:** *CHILDSEAT***SAS Variable:** *CLIPUSE***Oracle Name:** *CHILDSEAT.RETAINERCLIPUSEID***Element Attributes:**

Oracle	SAS	
1	0	Not Designed with Harness Retainer Clip
2	1	Harness Retainer Clip Not Used
3	2	Harness Retainer Clip Used – Neck Level
4	3	Harness Retainer Clip Used –Chest/Armpit Level
5	4	Harness Retainer Clip Used –Stomach Level
7	5	Harness Retainer Clip used – Unknown Level
6	6	Retrofitted with Harness Retainer Clip
-9999	9	Unknown if Retainer Clip used

Source: Vehicle inspection**Remarks:**

The actual child seat harness retainer clip use at the time of the crash must be determined and coded.

Refer to the Manufacturers' Instructions for Child Safety Seats and the Child Seat List to determine if the respective child seat comes equipped with a harness retainer clip.

CHILD RESTRAINT TETHER USE

Screen Name: Tether

SAS Data Set: *CHILDSEAT*

SAS Variable: *TETHUSE*

Oracle Name: *CHILDSEAT.PICKTETHERUSAGE*

Element Attributes:

Oracle	SAS	
1	0	Not designed with Tether
2	1	Tether Not Used
3	2	OEM Tether used
-9999	9	Unknown if Tether Used

Source: Vehicle inspection

Remarks:

Refer to Manufacturers' Instructions for Child Safety Seats and Child Seat listing for applicability of tether.

CHILD SEAT LATCH USE

Screen Name: LATCH

SAS Data Set: *CHILDSEAT*

SAS Variable: *LATCHUSE*

Oracle Name: *CHILDSEAT.LATCHUSEID*

Element Attributes:

Oracle	SAS	
1	0	Not designed with LATCH
4	3	Lower Anchors – Not used
2	1	Lower Anchors Used
-9999	9	Unknown if LATCH used

Source: Vehicle inspection

Remarks:

The actual child seat Lower Anchors and Tethers for Children (LATCH) usage at the time of the crash must be determined and coded.

Refer to the Manufacturers' Instructions for Child Safety Seats and the Child Seat List to determine applicability of LATCH.

BELT ROUTING/USE

Page 1 of 2

Screen Name: Belt Routing/Use**SAS Data Set:** *CHILDSEAT***SAS Variable:** *BELTROUT***Oracle Name:** *CHILDSEAT.BELTROUTING***Element Attributes:**

Oracle	SAS	
5	0	No belt routing
-9998	1	No belt used
1	2	Belt routed through belt positioning slots/channels
2	3	Belt routed through forward facing slots/channels
3	4	Belt routed through rear facing slots/channels
4	5	Belt routed unconventionally (specify)
-9999	9	Unknown belt path

Source: Vehicle inspection**Remarks:****No belt routing**

The belt was not routed through any slots/channels in the seat (if they exist at all). The belt was used solely to restrain the child sitting on/in the seat. This will be automatically filled in for Integrated child restraints.

No belt used

When no seat belt was used. No belt was used to either restrain the child or install the seat.

Belt routed through belt positioning slots/channels

The belt was routed through the belt positioning slots or channels built into the child restraint.

Belt routed through forward facing slots/channels

The belt was routed through the forward facing slots or channels built into the child restraint.

Belt routed through rear facing slots/channels

The belt was routed through the rear facing slots or channels built into the child restraint.

Belt routed unconventionally (specify)

The belt was routed unconventionally.

Unknown belt path

It is not known what path the belt took around the child/seat. If it is not known if a belt was used, indicate that on the belt availability/use variables and choose unknown belt path for this variable.

USE OF LOCKING CLIP ON VEHICLE BELT

Page 1 of 2

Screen Name: Locking Clip Use

SAS Data Set: CHILDSEAT

SAS Variable: LOCKCLIP

Oracle Name: CHILDSEAT.LOCKINGCLIPID

Element Attributes:

Oracle	SAS	
1	0	None Present
2	1	Locking clip used on lap and shoulder belt
3	2	Locking clip used on lap belt only
4	3	Locking clip used on shoulder belt only
5	8	Other (specify)
9	9	Unknown

Source: Vehicle Inspection, Child Seat Inspection, Interview

Remarks:

When found in a vehicle, be sure to photograph. This variable is NOT ASSESSING the proper use of the locking clip, only in identifying on what belt it is found.

A **locking clip** is typically provided by the child seat manufacturer and found clipped/fastened to a new child seat when purchased. A **locking clip** is used to lock an emergency locking retractor (ELR) lap and shoulder combination belt with a sliding latch plate. Some belts are labeled indicating the need for the locking clip, and vehicles requiring a locking clip provide information about its use in the owner manual.

Heavy Duty Locking clips are used to shorten lap belts that have emergency locking retractors which do not switch or lock.

None Present

When there is no locking clip present on any seat belt.

Locking Clip Used on Lap and Shoulder Belt

When the lap and shoulder belts are threaded through the locking clip.

Locking Clip Used on Lap Belt Only

When the lap belt is threaded through the locking clip.

Locking Clip Used on Shoulder Belt Only

When the shoulder belt is threaded through the locking clip.

Other (specify)

is used when the researcher determines a locking clip was used but not in a manner as stated above. Specify how the locking clip was used.

Unknown

is used when the researcher can not determine if a locking clip was used.



Locking clip on belt



Locking clip instructions



Locking clip belt



Locking clip in use

SEAT LOCATION FOR CHILD RESTRAINT

Page 1 of 2

Screen Name: Seat Location

SAS Data Set: CHILDSEAT

SAS Variable: SEATPOS

Oracle Name: SEATLOC.SEATROW and SEATLOCATION

Element Attributes: Seat Number

Front Seat11 Left side
12 Middle
13 Right side**Third Seat**31 Left side
32 Middle
33 Right side
34 Other (specify)**Second Seat**21 Left side
22 Middle
23 Right side
24 Other (specify)**Fourth Seat**41 Left side
42 Middle
43 Right side
44 Other (specify)**Fifth Seat**51 Left side
52 Middle
53 Right side
54 Other (specify)**Other Seating**

Cargo Area

Source: Vehicle Inspection, Child Seat inspection, Interview

Remarks:See the variable Occupant's Seat Position for more detail on this variable.

All child seats shall be coded as to whether or not the child seat is occupied or belted into the vehicle seat and its specific location in the vehicle, *if known*. **When the Occupant Form is completed you will be indicating the location of the seat based upon all the information in the case.** Select seating locations are defined in the Seat tab.

There are occasions when a child is sitting in a child seat, but the child seat is not restrained by the vehicle belt system or the child in the child seat is sitting on another occupants lap; and there are times when a child seat is restrained by the vehicle belt system, yet is not in use by a child at the

time of a crash. Likewise there are occasions when a child seat is inside the vehicle not in use and not belted into the vehicle and is considered cargo, as a possible injury source, etc. Information will be collected on every child seat and its location (*if known*) at the time of a crash whether or not it is in use or restrained by the vehicle belt system at the time of the crash.

The majority of child seats involved in crashes do not remain with the vehicle where it can be visually inspected; however, a child seat's location inside the vehicle can also be determined by interview. Some information can be collected from interviews with the driver/child seat installer, e.g., child seat location, type of belt/LATCH used to secure child seat, etc.

CHILD RESTRAINT PLACEMENT

Screen Name: Placement

SAS Data Set: *CHILDSEAT*

SAS Variable: *PLCMNT*

Oracle Name: *CHILDSEAT.PLACEMENTID*

Element Attributes:

Oracle	SAS	
1	1	Seat
2	2	Floor
3	3	Lap of other occupant
4	4	Console
-9998	8	Other (specify)
-9999	9	Unknown

Source: Vehicle inspection

Remarks:**Seat**

Child restraint sitting on vehicle seat.

Floor

Child restraint sitting on vehicle floor.

Lap of Occupant

Child restraint sitting on lap of other occupant.

Console

Child restraint sitting on front, middle or rear console.

Other (specify)

Other position of child restraint (specify).

Unknown

Position of child restraint is not known.

CHILD POSITION IN CHILD RESTRAINT

Page 1 of 2

Screen Name: Child Position

SAS Data Set: CHILDSEAT

SAS Variable: POSTN

Oracle Name: CHILDSEAT.POSTUREINUSEID

Element Attributes:

Oracle	SAS	
-9997	0	[Not occupied]
1	1	Upright
2	2	Reclined/lying back
3	3	Supine, facing upwards
4	4	Slumped forward
5	5	Slumped to the Side
6	6	Kneeling
-9998	8	Other (specify)
-9999	9	Unknown

Source: Interview

Remarks:**Upright**

Child was sitting upright, facing forward.

Reclined/Lying Back

Child was reclined, between 90 and 45 degrees.

Supine

Child was laying flat, outstretched facing upwards.

Slumped Forward

Child was leaning forward from the waist up and their back was not against the back of the child restraint or vehicle seat in the case of a belt-positioning booster.

Slumped to the Side

Child was leaning to the side from the waist up and their back was not against the back of the child restraint or vehicle seat in the case of a belt-positioning booster.

Kneeling

Child was resting on their knees while in the child restraint.

Child Position (cont'd)

Page 2 of 2

Other (specify)

Any other position of child (specify).

Unknown

Unknown position of child in restraint.

VEHICLE

Safety Systems Form, Case 2007-996-900015/ Vehicle #1

SEAT | RESTRAINTS | AIR BAG | CHILD SEAT | LOG | REVIEW

LIST | DETAIL


CHILD SEAT | VEHICLE

Belt Retractor Type

Latch Plate Type

Latch Anchor

Latch Tether

 Save

BELT RETRACTOR TYPE

Page 1 of 2

Screen Name: Belt Retractor**SAS Data Set:** SEATLOC**SAS Variable:** ACTBLRET**Oracle Name:** MANUALEATBELT.RETRACTORTYPEID**Element Attributes:**

Oracle	SAS	
3	0	None Present
2	1	Emergency Locking Retractor
7	2	Automatic Locking Retractor
4	3	Switchable Retractor in ELR Mode
5	4	Switchable Retractor in ALR Mode
6	5	Switchable Retractor in Unknown Mode
9	9	Unknown Type of Retractor

Source: Vehicle Inspection, interview**Remarks:**

This variable is coded for all manual seat belts that are coded for any vehicle position.

If a sewn on latch plate is present, there will most likely be a retractor for both the shoulder portion and the lap portion of the belt. Most likely the shoulder portion will be an ELR and the lap portion will be switchable from ELR to ALR. In this variable we are only interested in the retractor of the lap portion of the belt.

Another type of switchable retractor switches when the belt is pulled all the way out causing the retractor to switch to ALR mode.

Retractors wind up the loose webbing of the unused 3-point safety belt, take up the slack, and provides slight tension on belts that are in use. They are usually located out of sight at an anchor point. Check the vehicle owner's manual and also look for labels on the belt webbing to determine the retractor type.

NOTE that some newer vehicles have a switchable retractor that can be manually adjusted from ELR to ALR. Most of them can be switched by pulling the webbing all the way out of the retractor to activate the ALR. In some models, the retractors switch from ELR to ALR with the push of a button. Most switchable retractors have a label on the belt with instructions on how to switch it. Enter the information for the position of the retractor.

Automatic locking retractor (ALR)

The ALR locks in place after being pulled out and allowed to retract about ½" The belt cannot be extended unless it is first fully rewound. It is generally uncomfortable for adults to wear.

Emergency locking retractor (ELR)

The ELR allows the belt to be freely extended or rewound. It locks only when the vehicle slows, changes direction, or stops suddenly. Since the retractor rarely locks during normal driving, it provides more freedom and comfort to an adult driver than an ALR. Some ELRs are vehicle sensitive and lock in direct response to the deceleration of the vehicle. Other ELRs are webbing or belt-sensitive and temporarily lock in response to a quick jerk or pull on the belt. Some ELRs are both vehicle and belt sensitive. Some ELRs have a window shade tension reliever system designed to make 3-point belts more comfortable by allowing "slack" in the shoulder belt. Occupants using these belts "tug" on the shoulder belt to tighten it after they lean forward.

Unknown

is used when the type of retractor cannot be determined.

LATCH PLATE TYPE

Page 1 of 2

Screen Name: Latch Plate**SAS Data Set:** SEATLOC**SAS Variable:** ACTLPLAT**Oracle Name:** MANUALESEATBELT.LATCHTYPEID**Element Attributes:**

Oracle	SAS	
8	0	Not used/not available
1	1	Sliding
2	2	Light weight locking/cinching
3	3	Locking
4	4	Switchable
5	5	Sewn On
6	9	Unknown Type

Source: Vehicle Inspection**Remarks:**

This variable is coded for all manual seat belts that are coded for any vehicle position.

Sliding

The webbing is threaded through a slot in the latch plate and there is no locking bar. The latch plate slides freely along the webbing, regardless of the angle. Allows the webbing to slip through unrestricted.

Locking

The webbing threads through a locking bar or an adjuster in the latch plate. Once it is tightened, the belt will not loosen until the plate is tilted and the belt is unbuckled.

Lightweight locking/cinching

The same as locking but with more moving parts. As long as the plate is parallel with the webbing the latch plate is locked.

Switchable

Switchable has a switch that locks the belt webbing by sliding a button.

Sewn on

If a sewn on latch plate is present, there will be a retractor for both the shoulder portion and the lap portion of the belt. Most likely the shoulder portion will be an ELR and the lap portion will be switchable.

Unknown type

is used when the type of latch plate is not determined.



Sliding



Sliding



Lightweight locking/cinching



Lightweight locking/cinching



Locking



Locking



Switchable



Switchable



Sewn on



Sewn on


LATCH LOWER ANCHOR AVAILABILITY**Screen Name:** LATCH Anchor**SAS Data Set:** SEATLOC**SAS Variable:** LATANCH**Oracle Name:** SEATLOC.LATCHANCHORID**Element Attributes:**

Oracle	SAS	
1	0	No
2	1	Yes
3	9	Unknown if anchor

Source: Interior Vehicle Inspection (and/or Interview)**Remarks:**

Currently, some new passenger vehicles are equipped with lower child seat anchorage points between a vehicle's seat cushion and seat back. Together, the two lower anchorage points and top tether anchorage make the Lower Anchor and Tether for Children (LATCH) system. Since 2002, this system is required in two rear seating positions of all cars, minivans, and light trucks.

A lower anchorage is a small rod or bar located between a vehicle's seat cushion and seat back allowing a child safety seat to be attached or snapped into the vehicle instead of being held secure by the vehicle's belt system. By September 1, 2002, all child safety seats will have two attachments which will connect to the vehicle's lower anchorage attachment points. (Some child seat manufacturers have included lower anchorage points in year 2000 models.)

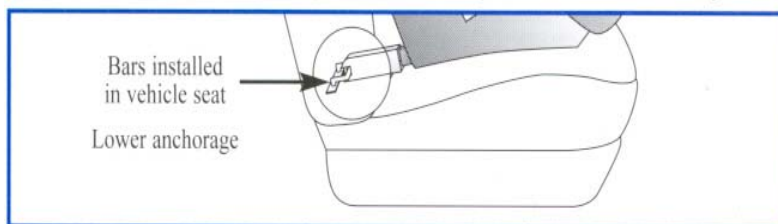

LATCH TETHER AVAILABILITY

Screen Name: LATCH Tether

SAS Data Set: SEATLOC

SAS Variable: LATTETH

Oracle Name: SEATLOC.LATCHANCHORID


Element Attributes:

Oracle	SAS	
1	0	No
2	1	Yes
3	9	Unknown if tether

Source: Interior Vehicle Inspection (and/or Interview)

Remarks:

In some vehicles, such as mini-vans and station wagons, the tether anchor may be found on the rear floor of the vehicle, on the back of the rear seat, and on the roof area. It may be concealed by some sort of covering which can be removed or “flipped up”.

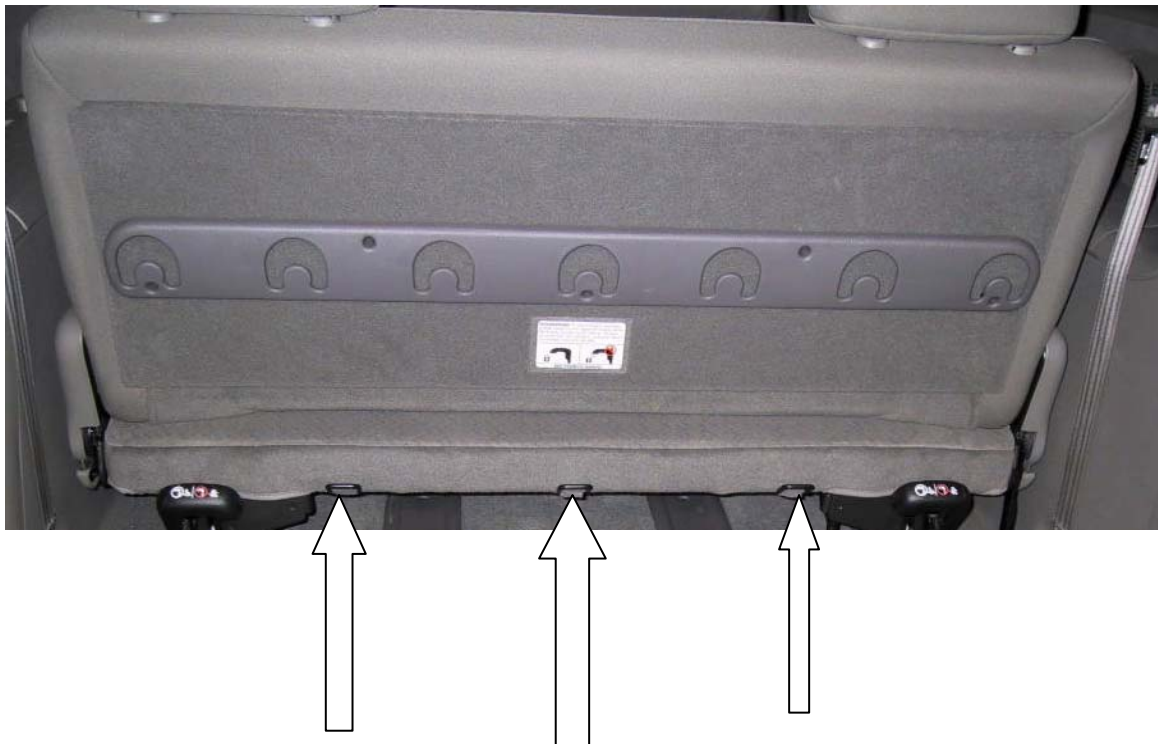

LOG

Safety Systems Form, Case 2007-996-90001S/ Vehicle #1

SEAT | RESTRAINTS | AIR BAG | CHILD SEAT | LOG | REVIEW

Documentation of

Seat Belt

Air Bag

Seats

Quality of Interior Slides

Subject Slides

Save

PSU REVIEW

Safety Systems Form, Case 2007-996-900015/ Vehicle #1

SEAT | RESTRAINTS | AIR BAG | CHILD SEAT | LOG | REVIEW

PSU REVIEW | ZONE REVIEW

LIST | DETAIL

Form Tab Veh# Occ#

Original Suggested

Comment

ZONE REVIEW

Safety Systems Form, Case 2007-996-900015/ Vehicle #1

SEAT | RESTRAINTS | AIR BAG | CHILD SEAT | LOG | REVIEW

PSU REVIEW | ZONE REVIEW

LIST | DETAIL

Form Tab Veh # Occ #

Original Final

Reason Change

Comment

OCCUPANT

Occupant Form, Case #2009-8701-001F/Vehicle # 1/Occupant #1

OCCUPANT | EJECTION | ENTRAPMENT | SEAT | AIR BAG | CHILD SEAT | SEAT BELT | INJURY | INJURY CODES | REVIEW | LOG

Number: 1

Age: 30 years

Height: 152 cm.

Weight: 66 kg.

Sex: Male

Fetal mortality: Not applicable

Role: Driver

Race: White

Ethnicity: Not Hispanic or Latino

Eye Wear: No

Child Seat Used: No

Police Reported

Belt Use: Lap and shoulder belt

Air Bag Avail/Function: Deployed

PAR Severity:

Save Close

Occupant Overview

This section provides a base of information that is vital to the analytical process. Ergonomic engineers design the interior of vehicles to be most comfortable for a range of occupants. The height and weight for a particular age bracket are considered in establishing the leg room, head room, and other interior dimensions for a vehicle. Restraint design relies heavily on this type of information. Initial designs of active belts were determined to be very uncomfortable and difficult to wear. The use of a wider range of heights and weights, which also has a bearing on seat adjustments, resulted in belts which were much more comfortable to wear and therefore encouraged use.

Occupant demographics and position play an important role in the injury mechanism, restraint system effectiveness, and vehicle design analysis. For example, the vehicle design, which includes the restraint system, must take into consideration the differences between a 163 centimeters, 45 kilograms driver and a 198 centimeters, 136 kilograms passenger. Both of these occupants must be provided with the same amount of protection by the vehicle in a crash.

Societal costs are also derived from these variables and the related injury assessment variables in this and the Occupant Injury Form.

In many cases the only source for this information is the interview. For this reason the researcher should ask probing questions to elicit complete and accurate responses to these, and all other, variables.

Federal Motor Vehicle Safety Standards--FMVSS 202 (Head Restraints), FMVSS 206 (Door Locks and Door Retention Components), FMVSS 207 (Seating Systems), FMVSS 208 (Occupant Protection), FMVSS 212 (Windshield Mountings), FMVSS 213 (Child Restraint System), FMVSS 214 (Side Door Strength), and FMVSS 216 (Roof Structure) are all assessed relative to their potential for reduction of injury to occupants. For this reason it is necessary to have the occupant's characteristics as complete as possible for correct and accurate assessment of the various vehicle components and FMVSSs which apply.

The Occupant Form is also where the Researcher makes their final determination of certain data that is collected from different sources within the case. For example, the Interviewee may say they were wearing the seatbelt; the interior vehicle inspection may indicate that no belt was in use at the time of the crash, as recorded in the Safety Systems Form; the medical report **may not** indicate either way. The researcher must then make their final decision, based on all available evidence, whether or not the seatbelt was worn on the Seatbelt Tab of this form.

OCCUPANT NUMBER

Screen Name: Number

SAS Data Set: *OA*

SAS Variable: *OCCNO*

Oracle Name: *OCCUPANT.OCCUPANTNUMBER*

Element Attributes:

Pre-assigned

Source: User assigned on Case Form

Remarks:

Occupants for this vehicle must be added into the case structure on the Case Form, Structure tab, Occupant sub-tab.

1. Occupant numbers must be assigned sequentially, beginning in the passenger compartment area with "1". No numbers may be skipped. Assign numbers left to right and front to back among occupants.
2. Assign numbers last to persons on the vehicle or in an unenclosed area. Persons appended to vehicle for motion (*e.g.*, bicyclist holding onto vehicle) are either pedestrians or other nonmotorists and not occupants; therefore, no form is completed, and no number is assigned.
3. For seating locations where more than one occupant occupies the seat, begin numbering the occupant seated in the seat first. For each additional occupant in the lap or lying across, assign one number higher. If an occupant is on the floor in front of a person(s) assign one number higher.
4. Occupants sharing a seating position should be assigned numbers using the guidelines stated in item #3.

OCCUPANT'S AGE

Screen Name: Age
SAS Data Set: OA
SAS Variable: AGEMONTH, AGEYEAR
Oracle Name: OCCUPANT.AGE, DERIVED

Element Attributes:

Oracle SAS
Enter actual age in months if under 2 years, in years or months if older than 2 years.
-9999 99/999 Unknown

Range: AGEMONTH:
1-24, 36, 48 (multiples of 12 up to 1440) 9999
AGEYEAR:
999

Source: Primary source is interviewee; secondary sources include police reports and other official records (*i.e.*, medical records).

Remarks:

The occupant's age at the time of the crash is recorded with respect to the occupant's last birthday.

If under the age of two years enter the actual age in months. If less than one month old enter one month.

If you are unable to obtain the age of a driver, request a driver's license record. **This action must be discussed with your zone center and COTR. Licensing file data takes precedence over police or interview data.**

AGEMONTH contains the age of the people two years and under and is expressed in months.
AGEYEAR contains the age of the people two years and older and is expressed in years.

OCCUPANT'S HEIGHT

Screen Name: Height
SAS Data Set: OA
SAS Variable: *HEIGHT*
Oracle Name: *OCCUPANT.HEIGHT*

Element Attributes:

Oracle	SAS	
		Entry defaults to inches, but may also be entered in centimeters
-9999	999	Unknown

Range: 30 – 220+, 999 cms

Source: Researcher determined--inputs include interviewee or official records (*e.g.*, medical).

Remarks:

Enter actual height to nearest inch/centimeter (program automatically converts inches to centimeters). If the height is greater than 220 cms code as 220 cms and annotate the actual height.

The PAR may be used as a source if it contains this data, but it is superseded if other data exists.

Autopsies often include this information; use it when present.

If you are unable to obtain the height of a driver, request a driver's license record. **This action must be discussed and a policy determined with your zone center and COTR. Licensing file data takes precedence over police or interview data. If other sources are found to be more reliable, use that source and annotate.**

OCCUPANT'S WEIGHT

Screen Name: Weight
SAS Data Set: OA
SAS Variable: *WEIGHT*
Oracle Name: *OCCUPANT.HEIGHT*

Element Attributes:

Oracle SAS
-9999 9999 Entry defaults to pounds, but may also be entered in kilograms.
Unknown

Range: 2 – 275+ kgs, 999

Source: Researcher determined--inputs include interviewee or official records (*e.g.*, medical).

Remarks:

Enter actual weight to nearest pound/kilogram. **The appropriate units must be selected for the English or Metric system.** If the weight is greater than 275 kgs code as 275 kgs and annotate the actual weight.

The PAR may be used as a source if it contains this data, but it is superseded if other data exists.

Autopsies often include this information; use it when present.

OCCUPANT'S SEX

Screen Name: Sex
SAS Data Set: OA
SAS Variable: SEX
Oracle Name: OCCUPANT.SEX

Element Attributes:

Oracle	SAS	
1	1	Male
2	2	Female
3	3	Female — pregnant - 1st trimester (1st-3rd month)
4	4	Female — pregnant - 2nd trimester (4th-6th month)
5	5	Female — pregnant - 3rd trimester (7th-9th month)
6	6	Female — pregnant - trimester unknown
9	9	Unknown

Source: Primary source is the interview, secondary sources include police report and official records (e.g. medical).

Remarks:

Male

Female

This includes any females for whom pregnancy status is unknown.

Female — pregnant - 1st trimester (1st-3rd month)

consists of women and girls who are reported to be pregnant and were in the first three months of their pregnancy at the time of the crash.

Female — pregnant - 2nd trimester (4th-6th month)

consists of women and girls who were reported to be pregnant and were in the second three months of their pregnancy at the time of the crash.

Female — pregnant - 3rd trimester (7th-9th+ month)

consists of women and girls who were reported to be pregnant and were in the final third of their pregnancy at the time of the crash. Pregnant females who were over nine months pregnant are also included.

Female — pregnant - trimester unknown

consists of women and girls who were reported to be pregnant at the time of the crash but the stage of their pregnancy could not be determined.

Unknown

is used when the sex of the occupant cannot be determined.

WAS THERE ANY INDICATION THAT THIS PREGNANT OCCUPANT LOST THE FETUS?

Screen Name: Fetal Mortality

SAS Data Set:

SAS Variable:

Oracle Name: *OCCUPANT.FETALMORTALITY*

Element Attributes:

Oracle	SAS	
2	2	No
1	1	Yes
	8	[Not Applicable]

Source: Primary source is the interview, secondary sources include police report and official records (*e.g.* medical records and autopsy reports).

Remarks:

A fetal fatality is indicated when fetal death occurs within 30 days of the crash. The death must have occurred as a consequence of the crash.

No

No is used for a no response during the interview and when not reported. If the researcher determines that it is unknown if there was a fetal fatality then the correct response is No.

Yes

is used when a fetal death occurs with 30 days of the crash and as result of the crash.

N/A

Is a prefill when Sex is not equal to a pregnant female.

OCCUPANT'S ROLE

Screen Name: Role

SAS Data Set: *OA*

SAS Variable: *ROLE*

Oracle Name: *OCCUPANT.PICKROLE*

Element Attributes:

Oracle	SAS	
1	1	Driver
2	2	Passenger
9	9	Unknown

Source: Primary source is interviewee; secondary source is other official records.

Remarks:

Hit-and-run vehicles are assumed to have only one occupant (unless reliable evidence to the contrary exists), and that person is assumed to be the driver. A driver is an occupant who is in actual physical control of the vehicle. All other persons riding in or on the vehicle are considered to be passengers.

RACE

Page 1 of 2

Screen Name: Driver Race

SAS Data Set: GV

SAS Variable: D_RACE

Oracle Name: OCCUPANT.RACE

Element Attributes:

Oracle	SAS	
1	1	White
2	2	Black or African American
3	3	Asian
4	4	Native Hawaiian or Other Pacific Islander
5	5	American Indian or Alaska Native
7	7	Other (specify):
8	8	[No driver present]
-9999	9	Unknown

Source: Researcher determined; primary source is the interviewee; secondary sources include police report, medical records, and other official documents.

Remarks:

Note: Although this variable is on the **Official Records Tab**, this variable is a “self identification” by the occupant. This information can be obtained from any of the above sources, however is not always an “official record”. When using secondary sources, the Race must be specifically mentioned in the document.

The concept of race as used by the U.S. Census Bureau reflects self-identification; it does not denote any clear-cut scientific definition of biological stock. Self-identification represents self-classification by people according to the race with which they identify themselves. For drivers with parents of different races who cannot provide a single response, use the race of the driver's mother; however, if a single response cannot be provided for the driver's mother, the first race reported by the driver is encoded.

Prioritization of data sources:

First, use interviewee data. Ask the interviewee what the driver considers their race to be. If the response does not clearly fit into one of the race categories, then use the information provided by the interviewee concerning the driver's nationality to select the correct element value.

Second, use the PAR. If race is given on the PAR and the PAR scheme is compatible with this variable, then use the PAR information.

In addition, the driver's *name* is not a reliable indicator of race and **cannot be used** when selecting the applicable element value for this variable.

Third, use official records (e.g., medical). If the data needed cannot be obtained from the interviewee and is not available or usable from the PAR, then use official records, if available, to determine the correct element attribute.

Element Attributes

White

is selected for drivers who consider themselves a person having origins in any of the original peoples of Europe, the Middle East or North Africa.

Black or African American

is for drivers who consider themselves a person having origins in any of the black racial groups of Africa. Terms such as "Haitian" or "Negro" can be used in addition to "Black or African American."

Asian

is selected for drivers who consider themselves a person having origins in any of the original peoples of the Far East, Southeast Asia, or the Indian subcontinent including, for example, Cambodia, China, India, Japan, Korea, Malaysia, Pakistan, the Philippine Islands, Thailand and Vietnam.

Native Hawaiian or Other Pacific Islander

is selected for drivers who consider themselves a person having origins in any of the original peoples of Hawaii, Guam, Samoa, or other Pacific Islands.

American Indian or Alaska Native

is selected for drivers who consider themselves a person having origins in any of the original peoples of North and South America (including Central America), and who maintains tribal affiliation or community attachment.

Other

is selected for drivers who consider themselves to be of a race not described above. Use this attribute for descriptions such as: Eurasian, Cosmopolitan, inter-racial, etc

Unknown

is selected when the source(s) available do not provide sufficient information to classify the driver's race.

ETHNICITY

Page 1 of 2

Screen Name: Driver Ethnicity

SAS Data Set: *GV*

SAS Variable: *D_ETHNIC*

Oracle Name: *OCCUPANT.ETHNICITY*

Element Attributes:

Oracle	SAS	
1	1	Hispanic or Latino
2	2	Not Hispanic or Latino
8	8	[No driver present]
-9999	9	Unknown

Source: Researcher determined; primary source is the interviewee; secondary sources include police report, medical records, and other official documents.

Remarks:

Note: Although this variable is on the **Official Records Tab**, this variable is a “self identification” by the occupant. This information can be obtained from any of the above sources, however it is not always an “official record”. When using secondary sources, the ethnicity must be specifically mentioned in the document.

The concept of ethnicity as used by the U.S. Census Bureau reflects self-identification; it does not denote any clear-cut scientific definition of biological stock. Self-identification represents self-classification by people according to the ethnicity with which they identify themselves. For drivers with parents of different ethnicity who cannot provide a single response, use the ethnicity of the driver's mother; however, if a single response cannot be provided for the driver's mother, the first ethnicity reported by the driver is encoded.

Prioritization of data sources:

First, use interviewee data. Ask the interviewee what the driver considers their ethnicity to be. If the response does not clearly fit into one of the ethnicity categories, then use the information provided by the interviewee concerning the driver's nationality/ethnic origin to select the correct element value.

Second, use the PAR. If ethnicity is given on the PAR and the PAR scheme is compatible with this variable, then use the PAR information.

If the PAR only indicates White/Caucasian, Black/Negro, or Other, then the PAR contains insufficient information for this variable. Additional information is required to determine the ethnicity. In addition, the driver's *name* is not a reliable indicator of ethnicity and **cannot be used** when selecting the applicable element value for this variable. For example, a name such as: Hector Smith, does not indicate the ethnicity (*e.g.*, Hispanic or Not Hispanic) since the person may or may not consider themselves to be of Hispanic descent.

Third, use official records (*e.g.*, *medical*). If the data needed cannot be obtained from the interviewee and is not available or usable from the PAR, then use official records, if available, to determine the correct element attribute.

Element Attributes:**Hispanic or Latino**

is selected for drivers who consider themselves a person of Cuban, Mexican, Puerto Rico, South or Central American or other Spanish culture or origin, regardless of race. The term, "Spanish origin," can be used in addition to "Hispanic or Latino."

Not Hispanic or Latino

is selected for drivers who consider themselves as not being of Cuban, Mexican, Puerto Rico, South or Central American or other Spanish culture or origin, regardless of race.

Unknown

is selected when the source(s) available do not provide sufficient information to classify the driver's ethnic origin.

OCCUPANT'S EYE WEAR

Screen Name: Eye Wear
SAS Data Set: OA
SAS Variable: EYEWEAR
Oracle Name: OCCUPANT.PICKEYEWEARTYPE

Element Attributes:

Oracle	SAS	
1	0	No
2	1	Eyeglasses/sunglasses
3	2	Contact lenses
4	3	Contact lenses with sunglasses
10	8	Other (specify)
9	9	Unknown

Source: Researcher determined — primary source is the interview and secondary sources includes vehicle inspection and medical records.

Remarks:

The occupant must be wearing the glasses/lenses at the time of the crash.

The presence of glasses in the vehicle does not in itself mean that an occupant was wearing them. Additional information must be obtained to determine that they were worn (injuries, air bag damage, etc.)

No

no eyeglasses/sunglasses or contact lenses were worn by this occupant.

Eyeglasses/sunglasses

if this occupant was wearing eyeglasses or sunglasses at the time of impact.

Contact lenses

if this occupant was wearing contact lenses at the time of impact.

Contact lenses with sunglasses

if the occupant is wearing contact lenses with sunglasses at the time of impact..

Unknown

it is not known if the occupant in this position was wearing eyewear at the time of impact..

CHILD SAFETY SEAT USED

Screen Name: Child Seat Used

SAS Data Set: OA

SAS Variable: CHUSED

Oracle Name: OCCUPANT.CHILDSEATAVAILABLE

Element Attributes:

Oracle	SAS	
1	0	No
2	1	Yes
3	9	Unknown

Source: Researcher determined-inputs include vehicle inspections, interview, police reports.

Remarks:

No
is used when a child safety seat is not being used by this occupant.

Yes
is used when a child safety seat is being used by this occupant.

Unknown
is used when it is unknown if this person was using a child safety seat.

POLICE REPORTED AIR BAG AVAILABILITY/FUNCTION

Screen Name: Police Reported–Air Bag Avail/Function

SAS Data Set: *OA*

SAS Variable: *BAGAVRPT*

Oracle Name: *OCCUPANT.PICKPOLICEAIRBAG*

Element Attributes:

Oracle	SAS	
1	0	No air bag available
2	1	Police did not indicate air bag availability/function
3	2	Deployed
4	3	Not deployed
5	4	Unknown if deployed
6	9	Police indicated "unknown"

Source: Police report.

Remarks:

This variable captures what was documented on the PAR regarding the availability and functioning of any air bag system. The entire PAR (especially narrative) must be reviewed to make a determination to code this variable.

Police did not indicate air bag availability/function

is used in two instances. The first is when the PAR has a space, box, line, etc. to indicate air bag availability/function but there is no response present. The second is when there is no area of the PAR for the officer to report air bag availability/function.

POLICE REPORTED BELT USE

Screen Name: Police Reported—Belt Use
SAS Data Set: *OA*
SAS Variable: *PARUSE*
Oracle Name: *OCCUPANT.PICKPOLICEBELTUSE*

Element Attributes:

Oracle	SAS	
1	0	None used
2	1	Police did not indicate belt use
3	2	Shoulder belt
4	3	Lap belt
5	4	Lap and shoulder belt
6	5	Belt used, type not specified
7	6	Child safety seat
8	7	Automatic belt
9	8	Other type belt (specify)
10	9	Police indicated "unknown"

Source: Police report.

Remarks:

This variable captures what was documented on the PAR regarding occupant use of available vehicle restraints (*i.e.*, manual belts, child safety seat, or automatic restraints). Select the first attribute which applies. The entire PAR (especially narrative) must be reviewed to make a determination to code this variable.

None used

includes if the PAR indicates the belt is unavailable.

Police did not indicate belt use

is used in two instances. The first is when the PAR has a space, box, line, etc. to indicate restraint use but there is no response present. The second is when there is no area of the PAR for the officer to report restraint use.

Belt used, type not specified

is used when the PAR indicates that available *belts* were used, but it is unclear what type of belts were actually in use.

POLICE INJURY SEVERITY (POLICE RATING)

Page 1 of 7

Screen Name: PAR Severity**SAS Data Set:** OA**SAS Variable:** INJSEV**Oracle Name:** OCCUPANTINJURY.PICKPOLICEINJURYSEVERITY**Element Attributes:**

Oracle	SAS	
1	0	O — No injury
2	1	C — Possible injury
3	2	B — Nonincapacitating injury
4	3	A — Incapacitating injury
5	4	K — Killed
6	5	U — Injury, severity unknown
7	6	Died prior to crash
8	9	Unknown

Source: Police report.**Remarks:**

If the police report contains a detailed description of the injuries but does not translate the injuries into the KABCO codes, use the police method for doing so. For example, injuries which are considered to be of an incapacitating nature are classified as "A", Nonincapacitating-evident injuries are classified as "B", and possible injuries are "C". Property damage only (i.e., no injury) is classified as "O".

Enter **Injured, Severity Unknown** if the police report indicates a "U" or in any other way communicates the idea that the person was injured but the severity is unknown.

Enter **Died Prior to Crash** only if the police explicitly states the person died prior to the crash. This code is also used if the police report indicates the person died as a result of natural causes (e.g., heart attack), disease, drug overdose or alcohol poisoning. This code does not apply if the police report specifically states that the cause of death is a result of crash-related injury or that on-set occurred after the crash. Further clarification: this code applies if the police report indicates that the person died as a result of natural causes (e.g., heart attack), disease, drug overdose or alcohol poisoning, but is silent about the time of on-set and if on-set is the result of injuries sustained in the crash.

As a general rule, if the PAR is "blank" where the injury severity is assessed and the person was at the scene during the police investigation, enter **No Injury (O)**. If the PAR is "blank" and the person was not present during the police investigation, enter **Unknown**.

U — Injury, severity unknown

is used when the police report indicates a "U" or in any other way communicates the idea that the person was injured but their severity is unknown.

Died prior to crash

is only used if the police explicitly so indicate.

As a general rule, if the PAR is "blank" where the injury severity is assessed and the person was at the scene during the police investigation, then select "O" - No injury. If the PAR is "blank" and the person was not present during the police investigation, then select "Unknown".

The following states use the KABCO injury coding scheme: Illinois (incl. Chicago), Michigan, New Mexico, North Carolina, Texas (incl. Dallas), Wisconsin, and the city of Los Angeles.

Not all states use the KABCOU scheme. Listed below, by state, are alternative schemes; a mapping to the NASS scheme is provided.

State	PAR Code/Definition		NASS Scheme/Code
Alabama	K	= Killed	K - 4
	A	= Visible or carried from scene	A - 3
	B	= Bruise/abrasion/swelling	B - 2
	C	= Not visible - has pain/faint	C - 1
	Blank	= No documentation of driver or occupant injury	Blank - 0
		= No set unknown code	
Arizona	5	= Fatal Injury	K - 4
	4	= Incapacitating injury	A - 3
	3	= Non-incapacitating Evident	B - 2
	2	= Possible Injury	C - 1
	1	= No injury	O - 0
	6	= Unknown	U - 9

Police Injury Severity (Police Rating) (cont'd)

Page 3 of 7

California	1	= Fatal	K - 4
	2	= Severe injury	A - 3
	3	= Other visible injury	B - 2
	4	= Complaint of pain	C - 1
	Blank	= Occupant present	O - 0
	Blank	= Occupant not present	- 9

Colorado	5	= Fatal	K - 4
	4	= Evident - incapacitating	A - 3
	3	= Evident - non-incapacitating	B - 2
	2	= Possible injury	C - 1
	1	= No injury	O - 0

	*There is a box at the top of the PAR indicating number of persons injured. If this box is marked 0 and the injury code is left "blank", assume "No injury". If the box is marked 1 (or more) pertaining to the vehicle occupants in question and the injury code is "blank", assume "Injured, severity unknown". If "blanks" are present in both the persons injured box and the injury code box, assume "Unknown".		
--	--	--	--

Florida	5	= Fatal (within 90 days) injury	K - 4
	4	= Incapacitating	A - 3
	3	= Non-Incapacitating	B - 2
	2	= Possible	C - 1
	1	= None	O - 0
		= No set unknown code	- 9
	6	= Non-traffic fatality	- 9

Indiana

Nature of Most Severe Injury	Location of Most Severe Injury	Victim's Injury Status	
1-11 Any Entry	1-12 Any Entry	6 Dead	K-4
1-11 Any Entry	1-12 Any Entry	2 Semiconscious 3 Incoherent 4 Unconscious	A-3
1 Severed 2 Internal 4 Severe Burn 7 Severe Bleed (Arterial) 8 Fracture/Dislocation	1-12 Any Entry	1 Conscious 5 Shock 7 Refused Med	A-3
3 Minor Burn 6 Minor Bleed 10 Complaint 11 None Visible	1-2, 4-12 Eye	1 Conscious 5 Shock 7 Refused Med	A-3
3 Minor Burn 6 Minor Bleed	1-2, 4-12 Any EXCEPT eye)	1 Conscious 5 Shock 7 Refused Med	B-2
5 Abrasion 9 Contusion/Bruise	1-12 Any Entry	1 Conscious 5 Shock 7 Refused Med	B-2
10 Compliant of Pain 11 None Visible	1-2, 4-12 (Any EXCEPT eye)	1 Conscious 5 Shock 7 Refused Med	C-1
11 None Visible	Blank or Slashed	1 Conscious	0-0
Blank or Slashed	Blank or Slashed	Blank or Slashed	0-0
Unknown	Unknown	Unknown	U-9

State	PAR Code/Definition		NASS Scheme/ Code
Iowa			
	1	= Fatal Injury	K - 4
	2	= Major (incapacitating)	A - 3
	3	= Minor (bruises and abrasions)	B - 2
	4	= Possible (complaint of pain)	C - 1
	0	= Unknown	U - 9
	Blank	= No documentation of driver or occupants on back of PAR	O - 0
Kentucky			
	1	= Fatal	K - 4
	2	= Incapacitating	A - 3
	3	= Non-Incapacitating	B - 2
	4	= Possible Injury	C - 1
	5	= None Detected	O - 0
Maryland			
	05	= Fatal	K - 4
	04	= Disabled (Incapacitated)	A - 3
	03	= Injured - not Incapacitated	B - 2
	02	= Possible injury	C - 1
	01	= Not Injured (& present)	O - 0
	01	= Not Known (if left scene)	- 9
	Blank	= No documentation of driver or occupants on front of PAR	

State	PAR Code/Definition		NASS Scheme/ Code
Massachusetts			
	1	= Killed	K - 4
	2	= Serious Visible Injury	A - 3
	3	= Minor Visible Injury	B - 2
	4	= No visible injury but complaints of pain	C - 1
	Blank	= No documentation of driver or occupants on front of PAR	O - 0
		= No set unknown code	- 9
Missouri			
	1	= Fatal	K - 4
	2	= Disabling	A - 3
	3	= Evident-Not Disabling	B - 2
	4	= Probable-Not Apparent	C - 1
	5	= None Apparent	O - 0
	6	= Unknown	U - 9
Nebraska			
	1	= Killed	K - 4
	2	= Disabling - cannot leave scene without assistance	A - 3
	3	= Visible but not disabling	B - 2
	4	= Possible but not visible	C - 1
	Blank	= Occupant present	O - 0
	Blank	= Occupant not present	- 9

New Jersey

Location of Injury	Type of Injury	Victim's Condition	
Any Entry	Any Entry	Killed	K-4
Any Entry	Any Entry	Incapacitated	A-3
Any Entry	amputation, concussion, internal, fracture/dislocation	Moderate injury complaint of pain	A-3
Eye	burn, bleeding, complaint of pain	Moderate injury complaint of pain	A-3
Any Entry	bleeding, contusion bruise, abrasion	Moderate Injury	B-2
Any Entry (EXCEPT Eye)	complaint of pain	complaint of pain	C-1
-	-	-	0-0
U	U	U	U

New York

Location of Injury	Type of Injury	Victim's Condition	
Any Entry	Any Entry	Apparent Death	K-4
Any Entry	Any Entry	Unconscious, Semi-Conscious, Incoherent	A-3
Any Entry	amputation, concussion, internal, severe burn, moderate burn, fracture/dislocation	Shock, Normal	A-3
Eye	minor bleeding, minor burn, complaint of pain	Shock, Normal	A-3
All but eye	minor bleeding minor burn	Shock, Normal	B-2
Any Entry	contusions-bruise abrasion	Shock, Normal	B-2
All but eye	complaint of pain	Shock, Normal	C-1 0-0
X	X	X	X

Ejection Overview

Page 1 of 2

Variables in this section provide an assessment of the occurrence of ejection of an occupant. These variables in this section are coded based upon vehicle inspection. Verification of questionable ejections will come from the interview.

Historically, ejection from the vehicle has been a major cause of increased fatalities and serious injuries. The chances of being killed if ejected are about 1 in 5; whereas, if the occupant remains inside the vehicle, the chances of dying are reduced to about 1 in 200. Unfortunately ejection from the vehicle is not that uncommon and has become a significant part of the fatality and severe injury crashes. Further contributing to the ejection problem is the increase in window surface area and more hatchback models. Despite the current emphasis on restraint use through legal requirements for occupants to be seat belted, a significant portion of the population continues to be unrestrained and at risk to ejection.

A problem not often addressed is that of partial ejection. This refers to those instances where some part but not all of an occupant's body is, at some time during the crash sequence, outside the occupant compartment. Although it would not seem to be a problem it can be, and often is, fatal if the part outside is the occupant's head. Because of the dynamics of the vehicle and the kinematics of the occupants during an ejection sequence, it is often the occupant's own vehicle which causes the injury as it rolls onto the occupant.

Federal Motor Vehicle Safety Standards (FMVSS) which were developed in response to the problems seen in these areas are FMVSS 201 (Occupant Protection in Interior Impact), FMVSS 205 (Glazing Materials), FMVSS 206 (Door Locks and Door Retention Components), FMVSS 212 (Windshield Mounting), and FMVSS 216 (Roof Crush Resistance Passenger Cars).

Analytically this group of variables is a stand alone package most of the time. It can form the basis of an analysis without the use or comparison to any other variables. This would be used mostly in exploring the number and types of ejections. Expanding the scope somewhat to include injury severity allows a determination of the increase or decrease in the ejection problem. Inclusion of injury source would provide an idea of the severity of all occurrences of entrapment and ejection. Injury source also provides an idea of the kinematics of the occupant during the sequence. The addition of a cross-tabulation for AIS level would show the relative severity between the injuries incurred inside the vehicle and those outside the vehicle.

Other areas of interest to the analyst are the ejection route and performance of integral structures. The integral structure performance is directly governed by the FMVSS 206 and 212. These areas are of increasing interest to NHTSA since the real world performance can help support the findings from the staged collisions and will help determine the effectiveness of the standards.

Gathering the data, which will allow the researcher to accurately select the variables, is a multistage process. It will begin with the PAR which may give an indication of ejection. Inspection of the

vehicle will provide the evidence needed to substantiate the ejection. Further, documentation should be obtained through the scene inspection, interview, and injury data. Particular attention should be paid to the vehicle inspection since most evidence of ejection will be less apparent and not easily discerned.

In summary, this group of variables assesses the level of a very significant problem in today's crash picture. Correct accurate assessment is a result of a multistage research process, which will be individualized by case. Attention to detail will result in a correct assessment. This is an example which is directly tied to the FMVSS, and all gathered data results are a direct evaluation of the applicable standards.

Special Conditions for *Ejection and Entrapment*

Using the guidelines given below, *Ejection/Entrapment* variables may be completed for towed CDS applicable vehicles based on PAR and crash severity when there is ***no vehicle inspection, no interview, and the answer is obvious***. If there is any doubt, annotate accordingly and select **Unknown**.

1. Select **Not entrapped** for occupants fleeing from towed CDS applicable vehicles.
2. For other towed CDS applicable vehicles:
 - (a) **No Ejection** may be used ***if the PAR specifically so states for a given occupant***. For all other occupants about whom the PAR is silent, select **Unknown**.

If the PAR indicates that an occupant is ejected, this is sufficient to select **Complete ejection** or **Partial ejection** if the PAR so states. If complete versus partial ejection is not stated on the PAR, then select **Ejection, unknown degree** may be used.

Note, however, that these three variables can be used only if the PAR provides sufficient detail.

- (b) Entrapment may be selected as **Not entrapped** ***if the PAR specifically so states for a given occupant***. For all other occupants about whom the PAR is silent, use **Unknown**.

Recall, however, that if the PAR states that an occupant is entrapped, this is ***not sufficient*** to select Entrapment (because PAR definition of entrapment is different from NASS definition). Unless Entrapment is verified through other sources, Entrapment must be selected as **Unknown**.

EJECTION LIST

Occupant Form, Case #2007-996-900015/Vehicle # 2/Occupant #1

OCCUPANT | EJECTION | ENTRAPMENT | SEAT | AIR BAG | CHILD SEAT | SEAT BELT | INJURY | INJURY CODES | LOG | REVIEW

LIST | DETAIL | COMMENTS

Ejection #	Occ #	Type	Area	Medium
------------	-------	------	------	--------

Save Close

EJECTION DETAIL

Occupant Form, Case #2007-996-900015/Vehicle # 2/Occupant #1

OCCUPANT | EJECTION | ENTRAPMENT | SEAT | AIR BAG | CHILD SEAT | SEAT BELT | INJURY | INJURY CODES | LOG | REVIEW

LIST | DETAIL | COMMENTS

Occupants:

Type:

Area:

Medium:

Medium Status:

Ejection # of 0

TYPE OF EJECTION

Page 1 of 2

Screen Name: Type

SAS Data Set: OA

SAS Variable: EJECTION

Oracle Name: EJECTION.PICKEJECTIONTYPE

Element Value:

Oracle	SAS	
1	0	No ejection
2	1	Complete ejection
3	2	Partial ejection
4	3	Ejection, unknown degree
5	9	Unknown

Source: Researcher determined--inputs include the vehicle inspection, interviewee, medical records, and the police report.

Remarks:

Ejection refers to persons being completely or partially thrown from the vehicle as a result of an impact or rollover. If a person already has a body part protruding from the vehicle (*e.g.*, an elbow, arm, etc.) and the PDOF acting on the vehicle would likely cause further protrusions of the body part, then at least partial ejection is selected.

No Ejection

is selected when there is no indication of any occupant being either partially or fully ejected from the vehicle.

Complete ejection

is selected when an the occupant's body is entirely outside of the vehicle during the crash sequence. It is important to note that even though the body may be outside the vehicle, it may still be in contact with the vehicle. This code also includes occupants who are not initially in the passenger and contiguous cargo area of the vehicle (*e.g.*, pickup beds, boot of a convertible, and persons riding on open tailgates).

Partial ejection

is selected when part of the occupant's body remains **in** the vehicle, and any part of it is forced outside of the vehicle during the crash sequence. This code **does not apply** to those occupants who are not initially in the passenger and contiguous cargo area of the vehicle, they are indicated as "**Complete ejection**".

Ejection, unknown degree

is selected when it is suspected (or known) that an ejection of the occupant occurred, however, at the time of the vehicle inspection the researcher was unable to determine if the ejection was **Partial** or **Complete**.

Unknown

is selected when:

- the vehicle has been completely repaired
- it cannot be determined if an ejection is applicable.

EJECTION AREA

Page 1 of 2

Screen Name: Area

Oracle Name: *EJECTION.PICKEJECTIONAREA*

Element Attributes:

Oracle	SAS	
11	0	[No ejection]
1	1	Windshield
2	2	Left front
3	3	Right front
4	4	Left rear
5	5	Right rear
6	6	Rear
7	7	Roof
	89	[Unknown if ejected]
8	98	Other area (<i>e.g.</i> , back of pickup, etc.) (specify)
9	99	Unknown

Source: Researcher determined — inputs include the vehicle inspection, interviewee, and the police report.

Remarks:

The coding of ejection for this variable is done by either linking it to an ejection that has been noted during the vehicle inspection, if present, or inserting one. If No Ejections is selected a link must be completed. In either condition, the information can be modified.

Left Front

is defined as starting at the front of the vehicle and ending at the rear portion of the left front door.

Right Front

is defined as starting at the front of the vehicle and ending at the rear portion of the right front door.

Left Rear

is defined as starting at the b-pillar and extending to the rear of the vehicle.

Right Rear

is defined as starting at the b-pillar and extending to the rear of the vehicle.

Rear

is restricted to persons riding in a passenger compartment, who are ejected through the rear window, tailgate (*e.g.*, station wagon), hatchback, etc.

Roof

applies to all hardtops, convertibles, sun roofs, t-bar roofs, and detachable hardtops (such as fiberglass tops) that are used to cover areas designed for passenger protection.

When **Ejection Area** equals **Roof**, follow examples illustrated below when selecting **Ejection Medium** and **Medium Status** (immediately prior to impact).

Ejection	Roof Type	Area	Ejection Medium	Medium Status
Ejection	Hardtop, ripped open during crash	Roof	Integral Structure	Integral Structure
Ejection	Removable hardtop, <u>attached</u> prior to the crash	Roof	Integral Structure	Integral Structure
Ejection	Removable hardtop, <u>detached</u> prior to crash	Roof	Non-fixed roof structure	Open
Ejection	Convertible, in down or open position prior to crash	Roof	Non-fixed roof structure	Open
Ejection	Convertible, in closed position	Roof	Non-fixed roof structure	Closed
Ejection	Sun or t-bar, closed and ripped open during the crash	Roof	Non-fixed roof structure	Closed
Ejection	Sun or t-bar, open/removed prior to the crash	Roof	Non-fixed roof structure	Open

The specific Ejection--Area attributes are designated for use with areas designed for passenger protection (e.g., passenger cars, vans, light truck cabs, self-contained mini- RVs and mini-motor homes). Trailers, add-on campers, etc., are to be assigned **Other area**.

Other area

also applies to persons riding on open tailgates.

Unknown

if the sole source for the ejection is the police report, unless the PAR provides a clear, distinguishable avenue of occupant ejection.

EJECTION MEDIUM

Screen Name: Medium

SAS Data Set: OA

SAS Variable: EJECTMED

Oracle Name: EJECTION.PICKEJECTIONMEDIUM

Element Attributes:

Oracle	SAS	
11	0	[No ejection]
1	1	Door/hatch/tailgate
2	2	Nonfixed roof structure
3	3	Fixed glazing
4	4	Nonfixed glazing (specify)
5	5	Integral structure
	79	[Unknown ejection area]
	89	[Unknown if ejected]
6	98	Other medium (specify)
7	99	Unknown

Source: Researcher determined — inputs include the vehicle inspection, interviewee, and the police report.

Remarks:

The coding of ejection for this variable is done by either linking it to an ejection that has been noted during the vehicle inspection, if present, or inserting one. In either condition, the information can be modified.

Door/hatch/tailgate

includes any door, hatch, or tailgate that is opened during the course of the impact sequence.

Non-fixed roof structure

applies only to convertible, sun roofs, t-bar roofs, and removable hardtops when detached / retracted prior to the crash.

Fixed glazing

refers to any glazing in the vehicle that cannot be opened

Non-fixed glazing

refers to any glazing in the vehicle that can be opened to any degree.

Integral structure

includes removable hardtops when attached to the vehicle prior to the crash. This also should be used when any vehicle structure, not designed to be opened (*e.g.*, standard roof), is torn open during the crash such as to permit ejection.

Other medium

applies to persons riding in pickup beds, on open tailgates, and for other situations which cannot be classified above. In addition, use this attribute when someone is ejected from a trailer, add-on camper, etc.

Unknown

if the sole source for the ejection is the police report, unless the PAR provides a clear, distinguishable avenue of occupant ejection.

EJECTION MEDIUM STATUS (IMMEDIATELY PRIOR TO IMPACT)

Page 1 of 2

Screen Name: Medium Status

SAS Data Set: OA

SAS Variable: MEDSTA

Oracle Name: EJECTION.PICKEJECTIONMEDIUMSTATUS

Element Attributes:

Oracle	SAS	
11	0	[No ejection]
1	1	Open
2	2	Closed
3	3	[Integral Structure]
	79	[Unknown ejection area]
	89	[Unknown if ejected]
4	99	Unknown status

Source: Researcher determined — inputs include the vehicle inspection, interviewee, and the police report.

Remarks:

The coding of ejection for this variable is done by either linking it to an ejection that has been noted during the vehicle inspection, if present, or inserting one. In either condition, the information can be modified. This variable is a description of the status of the area through which an occupant was ejected and is the status of the medium immediately prior to the impact.

Open

applies to convertible roofs, sun roofs, t-bar roofs, windows, doors or tailgates that are completely or partially open immediately prior to impact, or to other open areas of vehicles such as pickup beds, etc.

Closed

refers to a window that is completely closed when damaged, or to a convertible, sun, or t-bar roof that is closed when damaged. Sun and t-bar roofs are captured here if the ejection occurred through the designed opening in the sun or t-bar roof. However, if the roof was of a sun or t-bar type but the ejection occurred because a sizable opening was torn in the roof structure, then select **Integral structure**. This is also used for fixed glazings such as windshields and backlights which are in place prior to the collision. This also refers to a door that is closed, but when damaged, experiences latch and/or hinge failure causing the door to open.

Integral structure

includes removable hardtops when attached to the vehicle prior to the crash. This also should be used when any vehicle structure, not designed to be opened (*e.g.*, standard roof), is torn open during the crash such as to permit ejection.

Unknown

if the sole source for the ejection is the police report, unless there is a clear indication on the PAR of the medium status.

EJECTION COMMENTS

The screenshot shows a software window titled "Occupant Form, Case #2007-996-900015/Vehicle # 2/Occupant #1". The window has a menu bar with the following items: OCCUPANT, EJECTION, ENTRAPMENT, SEAT, AIR BAG, CHILD SEAT, SEAT BELT, INJURY, INJURY CODES, LOG, and REVIEW. Below the menu bar is a sub-menu bar with LIST, DETAIL, and COMMENTS. The main content area is a large, empty rectangular text box. At the bottom right of the window, there are two buttons: "Save" (with a green checkmark icon) and "Close" (with a red X icon).

This screen is for adding further annotations about any ejection.

Entrapment Overview

Entrapment poses a different problem area. Recent years have brought about a vast improvement in the delivery of emergency medical attention to motor vehicle crash victims. This improvement has been achieved through the establishment of regional trauma centers, well equipped Mobile Intensive Care Units manned by trained paramedics even in rural areas, and a general increase in the knowledge of how to treat acute trauma. This improvement has not helped those victims who are restrained within the vehicle by deformed components. The improved care cannot be delivered because the personnel are unable to get to the victim, remove the victim from the vehicle, and deliver the victim to a treatment facility in a reasonable amount of time.

Entrapment is caused by the structure components of the vehicle entangling or intermingling with the occupants, preventing the occupants from exiting the vehicle. Manufacturers have designed crumple zones into vehicles to absorb energy. These structural parts are designed to crumple in a predetermined pattern to absorb the energy during a crash while maintaining the integrity of the passenger compartment. In so doing, the occupants of the vehicle can become entrapped by the structure of the vehicle deforming around them.

Enter any observations or indications of possible entrapment or mobility restrictions. Careful observations should be made of intruding vehicle components, i.e., jammed doors, crushed roof, or other mechanisms that might have restrained the occupants, restricted their mobility, or limited egress from the vehicle.

Extrication tool marks are an indication of entrapment. Although, the cutting off of the roof of a vehicle is not an indication of entrapment.

ENTRAPMENT DETAILS

Occupant Form, Case #2007-996-900015/Vehicle # 2/Occupant #1



OCCUPANT | EJECTION | ENTRAPMENT | SEAT | AIR BAG | CHILD SEAT | SEAT BELT | INJURY | INJURY CODES | LOG | REVIEW

DETAILS | COMMENT

Entrapment

Occupant Mobility

Intrusions > 2cm

 Save  Close

ENTRAPMENT

Page 1 of 2

Screen Name: Entrapment

SAS Data Set: *OA*

SAS Variable: *ENTRAP*

Oracle Name: *ENTRAPMENT.PICKENTRAPMENT*

Element Attributes:

Oracle	SAS	
1	0	Not entrapped/exit not inhibited
2	1	Entrapped/pinned — mechanically restrained
5	2	Could not exit vehicle due to jammed doors
6	3	Could not exit vehicle due to external circumstances (specify)
4	9	Unknown

Source: Researcher determined — inputs include the vehicle inspection, interview and police report.

Remarks:**Not entrapped/exit not inhibited**

is used when this occupant exited the vehicle and his/her egress was not inhibited in any way by intruding vehicle components, jammed doors, etc.

Entrapped/pinned — mechanically restrained

is used when this occupant was physically restrained in the seat position by an intruding vehicle component. The occupant could not move from the post impact position without some part of the vehicle being cut away, bent or moved.

Could not exit vehicle due to jammed doors

is used when this occupant could not exit the vehicle due to jammed door(s). This occupant, however could move about within the vehicle. Refers to doors, not row specific. Doors are usually used for ingress/egress of the occupant seating area. A door must have hinges and a locking mechanism. Except as follows:

- If a barrier is placed between rows, such as in some taxis and limos, jammed doors would be coded by specific rows.

Could not exit vehicle due to external circumstances (specify)

is used when exiting the vehicle could cause more harm to the occupants. Examples are:

- Fire
- Live electrical wires
- High water

This code requires a specific annotation.

Unknown

is used when there is no knowledge of the manner of this occupant's exit from the vehicle and generally, no inspection of the vehicle.

OCCUPANT MOBILITY

Screen Name: Occupant Mobility

SAS Data Set: *OA*

SAS Variable: *OCCMOBIL*

Oracle Name: *ENTRAPMENT.MOBILITYRESTRICTION*

Element Attributes:

Oracle	SAS	
1	0	Occupant fatal before removed from vehicle
2	1	Removed from vehicle while unconscious or not oriented to time or place
3	2	Removed from vehicle due to perceived serious injuries
4	3	Exited from vehicle with some assistance
5	4	Exited from vehicle under own power
6	5	Occupant fully ejected
7	8	Removed from vehicle for other reasons (specify):
8	9	Unknown

Source: Researcher determined — inputs include fire and or EMS personnel/records, interviews, witnesses, medical records, PAR.

Remarks:

The variable attributes are hierarchical.

Do not rely on the interview alone to make this selection. Consider all information (EMS, medicals, etc.) when making your selection.

Occupant fatal before removed from vehicle

is used when it can be determined that the occupant was deceased prior to removal from the vehicle.

Removed from vehicle while unconscious or not oriented to time or place

is used when it can be determined that the occupant was unconscious or had diminished awareness (not oriented to time and place) due to the crash when they were removed from the vehicle.

Removed from the vehicle due to perceived serious injuries

is used when it can be determined that the occupant was injured but conscious and oriented and had to be removed from the vehicle due to their serious injuries (*e.g.* broken femur). A key factor to consider is the perceived seriousness of the injury. Generally this involves removal by EMS personnel.

Exited the vehicle with some assistance

is used when the occupant was able to exit the vehicle partially under their own power but their condition was such that some assistance in exiting was necessary.

Exited the vehicle under own power

is used when the occupant was able to exit the vehicle without assistance from another person.

Occupant fully ejected

is used when the occupant was completely ejected from the vehicle.

Removed from vehicle for other reasons (specify):

includes those people who require assistance in exiting the vehicle and would have required assistance even if there had not been a crash i.e., infants, severely disabled, intoxicated persons.

Unknown

is used when the researcher cannot reasonably determine the manner of exit by the occupant.

ENTRAPMENT/COMMENT

The screenshot shows a software window titled "Occupant Form, Case #2007-996-90001S/Vehicle # 2/Occupant #1". The window has a menu bar with options: OCCUPANT, EJECTION, ENTRAPMENT, SEAT, AIR BAG, CHILD SEAT, SEAT BELT, INJURY, INJURY CODES, LOG, and REVIEW. Below the menu bar are two tabs: "DETAILS" and "COMMENT". The "COMMENT" tab is active, showing a button labeled "No Entrapment" at the top left of a large, empty white text area. At the bottom right of the window, there are two buttons: "Save" with a green checkmark icon and "Close" with a red X icon.

This screen is for adding further annotations about any entrapment.

The screenshot shows the same software window as above. In this view, a button labeled "Clear All" is positioned at the top left of the large text area. The text "No Entrapment" is now visible at the top left of the text area. The "Save" and "Close" buttons remain at the bottom right.

If no entrapment is identified, select "No Entrapment" button and the application prefills.

SEAT DEFINITION





















Occupant Form, Case #2007-996-900015/Vehicle # 2/Occupant #1

OCCUPANT | EJECTION | ENTRAPMENT | SEAT | AIR BAG | CHILD SEAT | SEAT BELT | INJURY | INJURY CODES | LOG | REVIEW

DEFINITION | ATTRIBUTES

Row Location Posture

UNKNOWN

Role Seat Type

Save Close

OCCUPANT'S SEAT POSITION

Screen Name: Seat Location Identification

SAS Data Set: *OA*

SAS Variable: *SEATPOS*

Oracle Name: *SEATLOC.SEATROW and SEATLOC.SEATLOCATION*

Element Attributes:

Front Row

- 11 Left side
- 12 Middle
- 13 Right side

Second Row

- 21 Left side
- 22 Middle
- 23 Right side
- 24 Far right side

Third Row

- 31 Left side
- 32 Middle
- 33 Right side
- 34 Far right side

Fourth Row

- 41 Left side
- 42 Middle
- 43 Right side
- 44 Far right side

Fifth Row

- 51 Left side
- 52 Middle
- 53 Right side
- 54 Far right side

Other or unknown seating

- 97 In or on unenclosed area (specify)
- 98 Other enclosed area (specify)
- 99 Unknown seat location

Source: Interviewee, police report and vehicle inspection

Remarks:

SEATING POSITIONS INDICATE AREAS OF THE VEHICLE, AND MAY NOT INDICATE THE ACTUAL PRESENCE OF A SEAT.

Identify the seat location where this occupant was located. "Click" on the appropriate seat on the screen. "Far right side" is only to be used if the seat has four seating positions.

More than one person may be assigned to a seating position. When this happens, the appropriate **Posture** must be selected to account for this.

The seating position by the steering wheel should be assigned to the assumed driver of a hit-and-run vehicle unless evidence indicates a different position for the person or persons.

If a person is between two bucket seats, then they are assigned to that position and their **Posture** is "Sitting on a console". An occupant sitting side-by-side of another occupant in the same seating position is placed in that position with their **Posture** indicated as "Sitting side by side another occupant" and the posture is described in the place indicated.

If the only seat in the front seating area is a driver's seat (*e.g.*, bucket, pedestal, etc.) and the occupant was in the area but not in the seat, assign the appropriate seating position (maybe the front right seating location) and the "Posture" will be indicated appropriately

The area at the rear of the vehicle is the location to indicate those occupants riding on a fender, the boot of a convertible, the open cargo box on a light truck, etc. or for anyone in the sixth or higher numbered seat area. See below for clarification.

If seating in the vehicle is longitudinal rather than lateral, use the basic idea of a vehicle interior being divided laterally into roughly equal thirds and visualize lateral rows of seats to determine what seat position is the best descriptor.

Persons appended to the vehicle in motion are not considered to be occupants of the vehicle.

In or on Unenclosed Area

includes those occupants riding on a fender, the boot of a convertible, the open cargo box on a light truck, etc.

To select "Unenclosed area", you must first "click on" the large area in the rear of the vehicle on the screen. Then using the variable **Seat Type**, you will select "In or on other Unenclosed area (specify)."

Other enclosed area (specify)

is used when any seat row is folded down or removed prior to the crash. A pickup truck with jump seats that are folded away, the status of the seat is the determining factor. Cargo areas of hatchback and station wagons that are covered by a shelf or curtain are considered cargo areas. The area above the shelf or curtain is considered as "other enclosed area." Use concise language in identifying the area is the specify window.

Other Seat

is used for anyone in the sixth or higher numbered seat area (highly unlikely). In addition, use this code when an occupant(s) is in an enclosed area where no defined seating exists.

To select "Other seat", you must first "click on" the large area in the rear of the vehicle on the screen. Then using the variable **Seat Type**, you will select "In other Enclosed area (specify)."

OCCUPANT'S POSTURE

Page 1 of 3

Screen Name: Posture

SAS Data Set: OA

SAS Variable: POSTURE

Oracle Name: OCCUPANT.PICKPOSTURE

Element Attributes:

Oracle	SAS	
1	0	Normal posture
2	1	Kneeling or standing on seat
3	2	Lying on or across seat
4	3	Kneeling, standing or sitting in front of seat
5	4	Sitting sideways or turned
6	5	Sitting on a console
7	6	Lying back in a reclined seat position
8	7	Bracing with feet or hands on a surface of the vehicle
9	8	In the lap of another occupant
10	9	Sharing a seat-sitting side by side
11	10	In a child seat
80	88	Other posture (specify):
99	99	Unknown

Source: Primary source is interviewee; secondary sources include vehicle inspection, police report, or official records (*i.e.*, medical).

Remarks:

This variable is designed to capture those instances where an occupant was not in the usual upright, **forward facing seated position** except for occupants correctly seated in child safety seats.

The occupant's posture is assessed as the last known position that the occupant was in just prior to impact. If the occupant cannot recall his/her position just prior to impact, then assign the last known position just prior to recognizing an impending danger.

The posture of an occupant of a seat or a child safety seat is normal if the occupant is correctly seated in the seat as designed. If the occupant is not seated (*i.e.*, kneeling or standing) in the child safety seat as designed, then the occupant's posture is abnormal and **Other abnormal posture** is used.

It is extremely important in locating injuries associated with various items within the passenger compartment to know as much as possible about the occupant's trajectory or path inside the vehicle

during the collision. The accuracy of this analysis depends on knowing exactly where the occupant was before the collision. Therefore, details about the occupant's posture are necessary.

As an example, if the right front passenger was sitting sideways in the seat facing the driver immediately prior to a frontal collision, it is reasonable to assume that his injuries would be confined to the right side of his body from contact with the instrument panel area. If he is reported simply as "sitting on the seat", his normal position would be with his right toward the door. For the same collision situation described above he would probably then contact the instrument panel with the front of his body rather than the side.

Kneeling or standing on seat

is used whenever an occupant is not seated but is kneeling or standing on a seat.

Lying on or across seat

is used whenever an occupant is not seated but is lying with body, or body and legs across one or more seating positions.

Kneeling, standing or sitting in front of seat

is used whenever an occupant is not seated but is on the floor kneeling, standing, or sitting in front of a seat, which may be occupied.

Sitting sideways or turned

is used whenever an occupant is seated but is sitting sideways or turned to talk with another occupant or to look out a rear window just prior to impact.

Sitting on a console

is used whenever an occupant is not in a seat position but is sitting on a console.

Lying back in a reclined seat position

is used whenever an occupant in a seat position has reclined the seat back rearward and is lying back in the seat.

Bracing with feet or hands on a surface of the vehicle

is used whenever a seated occupant has assumed a position of bracing on any surface of the vehicle (not including the steering wheel for the driver) just prior to the collision.

Sitting on or in the lap of another occupant

is used whenever two occupants occupy the same seat position by sitting on, or in the lap of, the other occupant.

Sharing a seat-sitting side by side

is used when a seated occupant is in the same seating location as another occupant but is not in their lap. Both occupants are considered sharing a seat.

Other abnormal posture (specify)

includes but is not limited to:

- sitting normally (not kneeling, etc.) in a designed rearward or side-facing seat except for occupants correctly seated in child safety seat
- leaning over in the seat
- being in an enclosed area that does not have designated seating positions
- being in an unenclosed area
- incorrectly seated in a child safety seat

Unknown

if the occupant's posture cannot be determined.

OCCUPANT'S ROLE

Screen Name: Role

SAS Data Set: *OA*

SAS Variable: *ROLE*

Oracle Name: *OCCUPANT.PICKROLE*

Element Attributes:

Oracle	SAS	
1	1	Driver
2	2	Passenger
9	9	Unknown

Source: Primary source is interviewee; secondary source is police report.

Remarks:

Hit-and-run vehicles are assumed to have only one occupant (unless reliable evidence to the contrary exists), and that person is assumed to be the driver. All other persons riding in or on the vehicle are considered to be passengers.

SEAT ATTRIBUTES

Occupant Form, Case #2007-996-900015/Vehicle # 2/Occupant #1

OCCUPANT | EJECTION | ENTRAPMENT | SEAT | AIR BAG | CHILD SEAT | SEAT BELT | INJURY | INJURY CODES | LOG | REVIEW

DEFINITION | ATTRIBUTES

Head Restraint
Type: [dropdown]
Damage: [dropdown]
Active: [dropdown]

Seat
Type: [dropdown]
Orientation: [dropdown]
Track: [dropdown]
Performance: [dropdown]
Integrated Restraints: [dropdown]

Seat Location: 11

Seat Back Position
Prior: [dropdown]
Post: [dropdown]
Air Bag EVER Available: [dropdown]

Save Close

Save Close

Remarks:

Attributes tab information will roll over from the completed Safety Systems Form except for Seat Back Position Post and Child Seat Used variables.

HEAD RESTRAINT TYPE AT THIS OCCUPANT POSITION

Screen Name: Head Restraint--Type

SAS Data Set: OA

SAS Variable: HEADTYPE

Oracle Name: HEADRESTRAINT.PICKHEADRESTRAINTTYPE


Element Attributes:

Oracle	SAS	
	0	[Occupant not seated or no seat]
1	1	No head restraints
2	2	Integral
4	3	Adjustable
6	4	Add-on
8	8	Other (specify)
9	9	Unknown

Source: Primary source is the vehicle inspection, secondary sources include: interviewee; police report, or official records (i.e., medical).

Remarks:

FMVSS 202 (Head Restraints) only applies to 1st row seating positions. Although, the presence or non-presence of head restraints are captured for all seating positions in the vehicle. Some examples of head restraint styles are shown below.

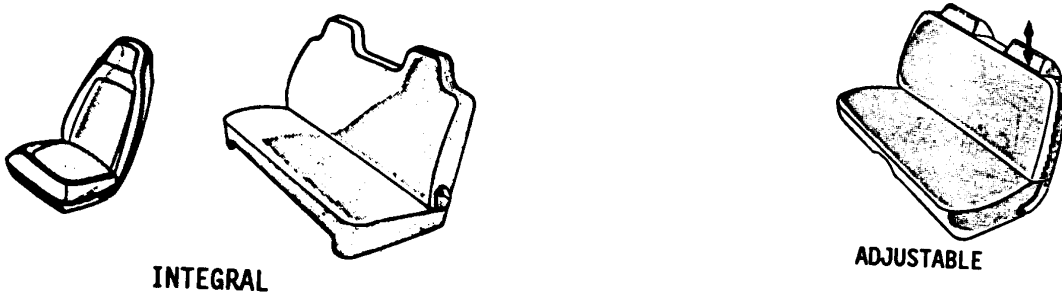

Some manufacturers are providing head restraints for rear seat occupants.

No head restraints

is used when (1) no head restraint is available for this seating position, or (2) there had been a head restraint but it had been removed prior to the crash.

Integral

refers to head restraints which are a continuous part of the seat back structure or those which are a separate structure but are not vertically adjustable. For rear seats only, if an obvious rise or sculpted head restraint is not observed, code as No Head Restraint.

Adjustable

applies to:

- head restraints which can be moved vertically to accommodate occupants of varying heights, **and**
- head restraints which have a fixed outer framework and a separate center section which is adjustable vertically.

Add-on

refer to clamp-on, strap-on, or even bolt-on head restraints on a vehicle not originally equipped with head restraints. This attribute should be infrequently used.

Unknown

is used when the type of head restraint cannot be determined.

HEAD RESTRAINT DAMAGE BY OCCUPANT AT THIS OCCUPANT POSITION

Screen Name: Head Restraint—Damage

SAS Data Set: *OA*

SAS Variable: *HEADDAMG*

Oracle Name: *HEADRESTRAINT.PICKHEADRESTRAINTDAMAGE*

Element Attributes:

Oracle	SAS	
	0	[Occupant not seated or no seat]
8	1	[No Head Restraints]
1	2	No damage
2	3	Damaged during crash
3	9	Unknown

Source: Primary source is the vehicle inspection, secondary sources include: interviewee; police report, or official records (*i.e.*, medical).

Remarks:

Some manufacturers are providing head restraints for rear seat occupants. These head restraints may be the same or similar to those used in the front seats, or they may be a slight rise in the rear seat back. Any damage to a rear seat head restraint by the occupant in the seat position must be captured regardless of the height of the restraint.

No damage

There was no damage to the head restraint by the occupant.

Damaged during crash

Any damage to a head restraint caused by the occupant in the seat position having the head restraint should be identified and photographed.

Unknown

is used when it is unknown if damage to the restraint was caused by an occupant in the appropriate seat position.

ACTIVE HEAD RESTRAINT

Screen Name: Head Restraint - Active

SAS Data Set: *OA*

SAS Variable: *HEADACT*

Oracle Name: *HEADRESTRAINT.ACTIVERESTRAINTD*

Element Attributes:

Oracle	SAS	
	0	[Occupant not seated or no seat]
0	1	None Present
2	2	Present
3	9	Unknown

Source: Vehicle Inspection, interview

Remarks:

There should be a label on the seat indicating the presence of the active head restraint.

ROLLOVER PROTECTION

Screen Name: Rollover Protection

SAS Data Set:

SAS Variable:

Element Attributes:

Check Box

Oracle	SAS	
0	0	No/Unknown (unchecked)
1	1	Yes (checked)


Range:

Source: Vehicle inspection, researcher determined

Remarks:

The purpose of this variable is to determine if the vehicle's rollover protection system was actuated.

Different types of systems are being used by manufacturers, also different names are used (i.e., Rollover Protection Systems (ROPS) or (RPS)). In the event of a crash that induces a certain amount of inclination roll-over sensors activate roll-bars that are integrated in or behind the seats, ensuring there is sufficient clearance for occupant's heads in the event of a crash. Also, an independent module behind each of the two rear-seat passengers' heads could deploy. A rollover need not occur for the rollover protection system to actuate.

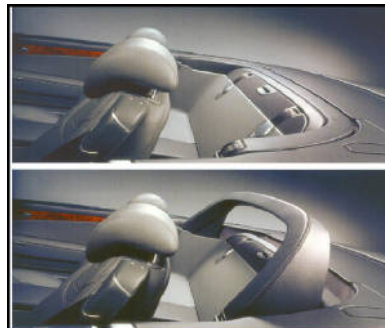

SEAT TYPE

Page 1 of 4

Screen Name: Seat – Type

SAS Data Set: OA

SAS Variable: SEATTYPE

Oracle Name: SEATLOC.PICKSEATTYPE

Element Attributes:

Oracle	SAS	
1	0	Occupant not seated or no seat
2	1	Bucket
3	2	Bucket with folding back
4	3	Bench
5	4	Bench with separate back cushions
6	5	Bench with folding back(s)
7	6	Split bench with separate back cushions
8	7	Split bench with folding back(s)
9	8	Pedestal (<i>i.e.</i> , column supported)
10	9	Box mounted seat (<i>i.e.</i> , van type)
11	10	Other seat type (specify)
12	99	Unknown seat type/location

Source: Primary source is the vehicle inspection, secondary sources include: interviewee; police report, or official records (*i.e.*, medical).

Range: 0-10, 99

Remarks:

This variable assesses the type of seat present at each defined position. Because the type of seat may have an effect on occupant kinematics, the type of seat is important to analysts.

The term “folding back(s)” refers to seat backs that are designed to fold significantly forward of upright. These seats usually fold forward to allow easier access to the area behind the seat for egress, ingress and cargo. Seats that recline only rearward are not considered to be folding backs. Folding backs, because of the additional possibility of failure of the folding mechanism, take precedence over solid or separate back cushions. “Folding back(s)” is not selected if only the lower part of the seat back folds forward (for an armrest, console or trunk access). If a center seat back is separate from the outboard seat backs and folds forward for an armrest or console (in many light truck type vehicles), it is not coded as a folding back.

If a seat was folded down at the time of inspection, record the data as if the seat was in the upright position.

If a seat was removed or stowed prior to the crash, the seat position will not be defined. Thus, no seat or safety restraint systems data will be coded for that position.

The first row seats in two-door vehicles will usually have folding backs. The first row seats in four-door vehicles will usually not have folding backs.

Bucket

A bucket seat is a standalone seat intended for a single occupant, and shares no seatback hardware or cushion with any other seating position. Its bottom anchorage or track is attached directly to the vehicle floor, and is also not shared with any other seating position.

Bucket with folding back

A seat may be coded with this attribute if it meets the definition of a bucket seat and also has a seatback that folds forward.

Bench

A bench seat is intended for multiple occupants, has a single-piece cushion, and a single-piece seatback.

Bench with separate back cushions

Seats may be coded with this attribute if they have a bench type cushion, and have multiple unconnected seatbacks, and the seatbacks do not fold forward.

Bench with folding back(s)

Seats may be coded with this attribute if they have a bench type cushion and have single-piece or multiple-piece seatbacks which fold forward.

Split bench

A split bench is a bench seat, the cushion of which is divided into two or more unconnected pieces.

Split bench with separate back cushions

Seats may be coded with this attribute if they have a split-bench type cushion, and have multiple unconnected seatbacks, and the seatbacks do not fold forward.

Split bench with folding back(s)

Seats may be coded with this attribute if they have a split-bench type cushion, and have single-piece or multiple-piece seatbacks which fold forward.


Box mounted seat (i.e. van type)

Identifies elevated seats that are attached to a box that is fastened to the floor. The seat tracks are bolted to the top of the box. This type of seat is often found in the front row of vans.

Pedestal (i.e. column supported)

Pedestal seats are often found in vans and may have a swivel mechanism.

Examples of some seat types and the appropriate attributes:

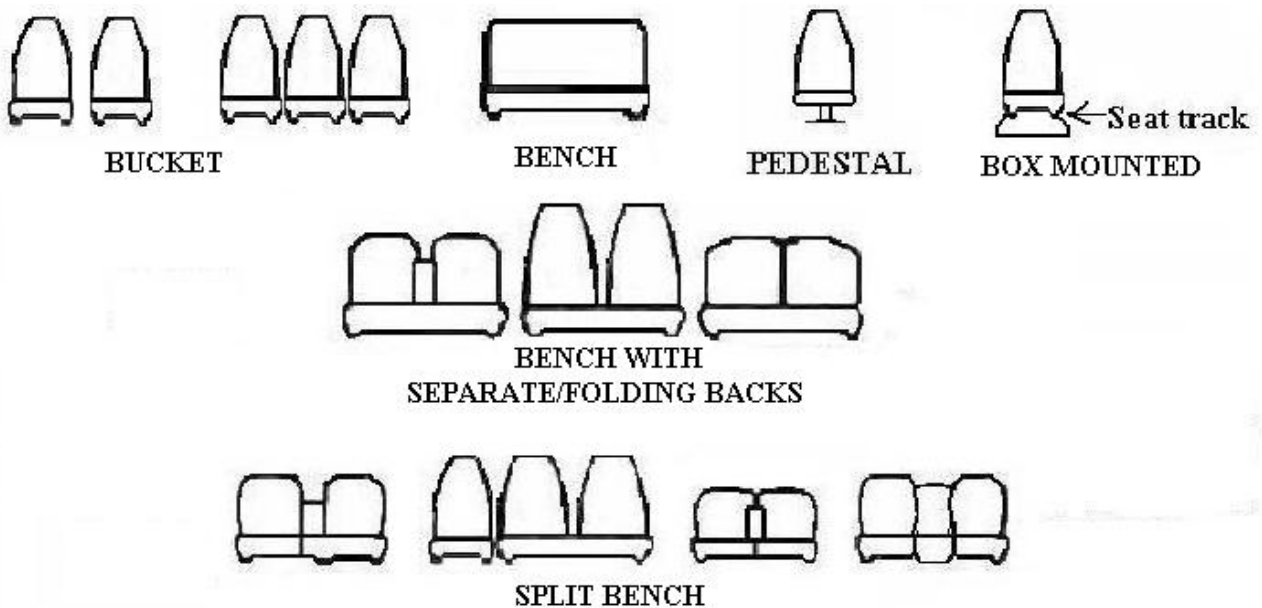


Unknown

Unknown will be coded if a seat was present for the crash but is unavailable for inspection.

BUCKET SEATS



BENCH SEATS

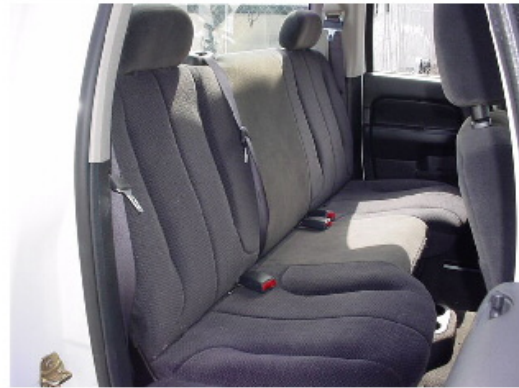

SPLIT BENCH SEATS



Screen Name: Seat—Orientation

SAS Data Set: *OA*

SAS Variable: *STORIENT*

Oracle Name: *SEATLOC.PICKSEATORIENTATION*

Element Attributes:

Oracle	SAS	
	0	[Occupant not seated or no seat]
1	1	Forward facing seat
2	2	Rear facing seat
3	3	Side facing seat (inward)
4	4	Side facing seat (outward)
5	8	Other (specify):
6	9	Unknown

Source: Primary source is the vehicle inspection, secondary sources include: interviewee; police report, or official records (*i.e.*, medical).

Remarks:

Most seats are fixed in terms of their orientation within the vehicle; however, some seats (*e.g.*, swivel or reversible) can be oriented in more than one direction. Swivel seats and reversible seats (*e.g.*, some station-wagons or vans) are entered according to their orientation at the time of impact [*i.e.*, **Forward facing seat** or **Rear facing seat**].

Forward facing seat

is used when the seat is oriented towards the front plane of the vehicle.

Rear facing seat

is used when the seat is oriented towards the rear plane of the vehicle.

Side facing seat (inward)

is used when the seat is oriented towards either the right or left planes of the vehicle and faces inward.

Side facing seat (outward)

is used when the seat is oriented towards either the right or left planes of the vehicle and faces outward.

Other

is used when a seat is oriented such that the above attributes do not apply.

Seat Orientation (cont'd)

Page 2 of 2

Unknown

is used when the seat orientation cannot be determined.

SEAT TRACK POSITION

Screen Name: Seat—Track

SAS Data Set: OA

SAS Variable: SEATRACK

Oracle Name: SEATLOC.PICKTRACKPOSITION

Element Attributes:

Oracle	SAS	
	0	[Occupant not seated or no seat]
1	1	Non-adjustable seat track
2	2	Seat at forward most track position
3	3	Seat between forward most and middle track positions
4	4	Seat at middle track position
5	5	Seat between middle and rear most track position
6	6	Seat at rear most track position
7	9	Unknown seat track position

Source: Researcher determined--Vehicle inspection, interviews confirming or secondary source.

Remarks:

The researcher should attempt to determine the seat position at impact. When the researcher begins the interior inspection, he/she should note the position of the seat. The researcher should then move the seat forward and back along its track and determine the number of positions. Once this has been done, the seat should be moved to the position initially observed and photographed.

If the seat has electric adjusters with no distinct track positions, attempt to determine the relative position of the seat and select accordingly.

Non-adjustable seat track

Use this for seats that cannot be moved longitudinally.

Adjustable Seat Track

Seat at forward most track position

Use this if the seat is at the forward limit of the track.

Seat between forward most and middle track position

Use this if the seat is at any position between the most forward and middle seat positions.

Seat at middle track position

Use this if the seat is in the position mid-range between the forward and rear most track position.

Seat between middle and rear most track position

Use this if the seat is at any position between the middle and rearmost track position.

Seat at rear most track position

Use this attribute if the seat is at the rear limit of the track.

Unknown

Use this attribute if the seat position at impact cannot be determined.

SEAT PERFORMANCE

Page 1 of 3

Screen Name: Seat—Performance

SAS Data Set: OA

SAS Variable: SEATPERF

Oracle Name: SEATLOC.PICKSEATPERFORMANCE

Element Attributes:

Oracle	SAS	
	0	[Occupant not seated or no seat]
1	1	No seat performance failure(s)
2	2	Seat adjusters failed
3	3	Seat back folding locks or "seat back" failed (specify)
4	4	Seat tracks/anchors failed
5	5	Deformed by occupant of this seat
6	6	Deformed by passenger compartment intrusion (specify)
10	10	Deformed by Cargo
11	11	Deformed by Other Occupant
7	7	Combination of above (specify)
8	98	Other (specify)
9	99	Unknown

Source: Primary source is the vehicle inspection, secondary sources include: interviewee; police report, or official records (*i.e.*, medical) for verification.

Remarks:

This variable assesses the performance of the seat during the crash sequence. The attributes are indications of whether the seat failed or was deformed in any way. Select the attribute which corresponds to the appropriate seat performance failure or deformation. Minor smudges, scrapes, dents, etc. are not considered deformation. Interviews can be used as a confirming source for coding this variable.

If a failure or deformity occurs, then document the failure or deformation with a diagram and explanation. In addition, include photographs of the seat failure or deformity.

No seat performance failure(s)

is used if the seat was not deformed or no portion of the seat structure failed during the crash.

Seat adjusters failed

is used if any of the mechanisms used to adjust a seat's "comfort" position are separated or deformed during the crash as a result of occupant loading.

Seat adjuster mechanisms include:

- Height adjustment
- Longitudinal (horizontal) seat track adjustment
- Rocker adjustment
- Swivel/rotational adjustment
- Seat back recliner adjustment

For a seat back recliner failure, the seat back must have released in a rearward direction. Do not use this attribute if the seat back failed in a forward direction and the seat has a folding lock mechanism (*e.g.*, front seats in 2-door vehicles); see **Seat back folding locks failed** below.

This code should be used when multiple adjuster failures have been detected. Be sure to include supportive written and photographic documentation to support all failures.

Seat back folding locks or "seat back" failed

is used when the mechanism which is designed to lock the seat back in its upright position fails or separates allowing the seat back to move forward during the collision as a result of occupant loading.

"Seat back" failed refers to forward facing seats where seat back structural failures (*e.g.*, seat back hinge points) resulted in a separation of the seat back from its anchorage points. Again, to be considered applicable for this, the seat must have failed while moving forward during the collision as a result of occupant loading.

Seat tracks/anchors failed

is used if the seat separates, to any degree, from a seat track during the crash. In addition, use this if the seat anchor that attaches the seat track to the floorpan separates, to any degree, during the crash. Box mounted seats are included in this if a separation occurred between the box and the floor or the box and the seat track/anchor. Seat track or anchor failures must be a result of occupant loading.

Deformed by occupant of this seat

is used when the seat is changed in form from its original design from occupant loading during the crash. Situations where seats are deformed and also experience mechanical failures should be identified under **Combination of above**.

Deformed by passenger compartment intrusion

is used when the seat is deformed or failed by intrusion of an interior vehicle component(s) or exterior vehicle component(s) into the passenger compartment.

Deformed by Cargo

is used when the seat is changed in form from its original design by impact from cargo during the crash. Examples of cargo: spare tire, luggage, construction equipment, tool(s), and tool box(es).

Deformed by Other Occupant

is used when the seat is changed in form from its original design by an occupant other than the occupant in this position, during the crash. Situations where seats are deformed and also experience mechanical failures should be identified under **Combination of Above**.

Combination of above

is used when any combination of the above occurs and describes multiple seat failures or deformations. Seat failures or deformations which are not described in the above are reported below. Seat failures or deformations listed in the above take priority over others.

Other

is used when the only seat failure(s) or deformation(s) which occur are not described in the above (*e.g.*, impact forces). If a seat doesn't have a comfort recline and is broken rearward code here.

Unknown

is used if the seat performance cannot be determined.

DOES THE SEAT HAVE INTEGRATED PASSENGER BELTS?

Screen Name: Seat—Integrated Restraints

SAS Data Set: SEATLOC

SAS Variable: INTGREST

Oracle Name: SEATLOC.INTEGRATEDRESTRAINTS

Element Attributes:

Oracle	SAS	
1	1	No
2	2	Yes
3	9	Unknown if integrated

Source: Vehicle inspection

Remarks:

An integrated seat belt is incorporated into the passenger seat. It is a three point seat belt system that includes a belt having one end affixed to the seat and an opposite end mounted to a retractor secured to the seat. A seat belt latch is mounted to the belt which has a releasable and lockable buckle on the opposite side of the seat. This allows the belt to pull across the passenger lap and the other portion of the belt to cross the upper torso. The belt extends through a guide located at the top of the seat. An integrated seat belt has no pillar attachment point.

If you were to remove the seat and the restraint comes with the seat indicate “Yes”.



SEAT BACK INCLINE PRIOR TO IMPACT

Screen Name: Seat Back Position – Prior

SAS Data Set: *OA*

SAS Variable: *STPRINCL*

Oracle Name: *SEATLOC.PICKPRIORINCLINE*

Element Values:

Oracle	SAS	
	0	[Occupant not seated or no seat]
1	1	Not adjustable
2	2	Upright
3	3	Slightly reclined
4	4	Completely reclined
9	9	Unknown

Source: Researcher determined--driver/occupant interview and vehicle inspection when the seat back incline position prior to impact can be determined from the vehicle inspection.

Remarks:

This variable is for adjustable (reclining) seat back only.

Not adjustable

is used for seating positions where there is a seat back which is fixed in position.

Upright

is used when the seatback is in the fully upright position (i.e., perpendicular to the seat cushion).

Slightly reclined

is used when the seat back is in a slightly reclined position.

Completely reclined

is used when the seat back is in a position that is rearward to the limit of its range of movement.

Unknown

is used when the pre-impact seat back position could not be determined from any source.

SEAT BACK INCLINE POSITION POST IMPACT

Screen Name: Seat Back Position -- Post
SAS Data Set: OA
SAS Variable: STPSINCL
Oracle Name: SEATLOC.PICKPOSTINCLINE

Element Attributes:

Oracle	SAS	
	0	[Occupant not seated or no seat]
	01	[Not adjustable]
1,8	11,21	Moved to completely rearward position
2,9,16	12,22,32	Moved to rearward midrange position
3,17	13,33	Moved to slightly rearward position
4,10,15	14,23,31	Retained pre-impact position
11,18	24,34	Moved to upright position
5,12,19	15,25,35	Moved to slightly forward position
6,20,13	16,36,26	Moved to Forward midrange position
7,14,21	17,27,37	Complete forward position
22	99	Unknown


Source: Researcher determined--driver/occupant interview and vehicle inspection when the seat back incline position post impact can be determined from the vehicle inspection.

Remarks:

This variable is for adjustable (reclining) seat backs only. This variable reflects the change in the seat back incline position as a result of forces upon it during the crash sequence. Select the attribute that describes the backrest position post-impact as a result of these forces.

Unknown

is used when the post crash seat back position could not be determined.

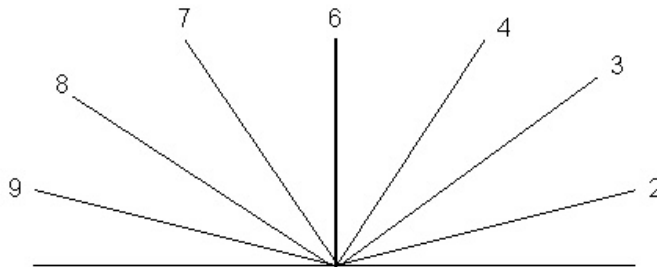

AIR BAG EVER AVAILABLE

Screen Name: Air Bag Ever Available

SAS Data Set: *OA*

SAS Variable: *BAGEVER*

Oracle Name: *SEATLOC.AIRBAGAVAIL*

Element Attributes:

Oracle	SAS	
1	0	No
2	1	Yes
3	9	Unknown

Source: Researcher determined — primary source is the vehicle inspection; secondary sources include the interview and medical records.

Remarks:

This variable indicates whether there was ever an air bag present of any type for this seating location. Additional information about the availability or non-availability is coded on the **Air Bag Tab**.

AIR BAG FUNCTION

The screenshot shows a software window titled "Occupant Form, Case #2007-996-900015/Vehicle # 2/Occupant #1". The window has a menu bar with options: OCCUPANT, EJECTION, ENTRAPMENT, SEAT, AIR BAG (selected), CHILD SEAT, SEAT BELT, INJURY, INJURY CODES, LOG, and REVIEW. Below the menu bar are three tabs: FUNCTION (selected), DAMAGE, and EVALUATION. The main area contains several dropdown menus: Location, Status, Type Of Air Bag, System Deployment, Indications of Failure, Switch Type, and Switch Status. At the bottom of the main area, there is a "Seat Location" dropdown, "Air Bag" and "of" text, a checked "View Sketches" checkbox, and four navigation arrows. At the very bottom of the window are "Save" and "Close" buttons.

Remarks:

Airbag Function and Damage Tabs roll over from Safety Systems Air Bag Tabs. The Air Bag Evaluation Tab is completed in the Occupant Form.

When the vehicle inspection is not completed and there is known air bag information from the interview, the air bag information is completed in the Occupant Form.

[AIR BAG NUMBER FOR THIS VEHICLE]

Screen Name: Air Bag

SAS Data Set: *AIRBAG*

SAS Variable: *BAGNO*

Oracle Name: *AIRBAG.AIRBAGNUM*

Element Attributes:

Air bag number

Source: Vehicle inspection

Remarks:

Assigned by the system, one for every single air bag.

If air bags are available for the occupant, indicate the information on all air bags. Do so by inserting another air bag. To insert another air bag use the menu bar and select Edit/Insert, then indicate its location, and complete the information about the air bag.

LOCATION OF AIR BAG

Screen Name: Location

SAS Data Set: AIRBAG

SAS Variable: BAGLOC

Oracle Name: AIRBAG.PICKLOCATION

Element Attributes:

Oracle	SAS	
1	1	Steering Wheel Hub
2	2	Top Instrument Panel
3	3	Mid Instrument Panel
4	4	Bottom Instrument Panel
5	5	Seat Back
8	6	Door/Panel
9	7	Roof Side Rail
10	98	Other (specify)
11	99	Unknown

Source: Researcher determined: primary source; vehicle inspection, secondary source; interview

Remarks:

Enter the location of the air bag. If air bags are available for the occupant, indicate the information on all air bags. Do so by inserting another air bag. To insert another air bag go to the menu bar and select **Edit/Insert**, then indicate its location, and complete the information about the air bag.

Steering Wheel

is used for an air bag that is designed to deploy from a module integrated with the steering wheel. It is designed to protect the vehicle’s driver primarily from frontal impacts. Does not matter is the steering wheel is located on the right side of the vehicle, still code the location of the air bag to the steering wheel.

Top Instrument Panel

is used for those air bags that deploy rearward from a location on the top of the instrument panel. They are designed to protect front seat passengers primarily from frontal impacts.

Mid Instrument Panel

is used for those air bags that deploy rearward from a location in the middle of the instrument panel. They are designed to protect front seat passengers primarily from frontal impacts.

Bottom Instrument Panel

is used for those air bags that deploy rearward from a location in the bottom of the instrument panel. They are designed to protect front seat passengers primarily from frontal impacts. This includes "knee bags".

Seat Back

is located on the outside portion of the seat back and is designed to protect the torso of occupants primarily from side impacts.

Seat Cushion

is located on the outside portion of the seat cushion and is designed to protect the torso of occupants primarily from side impacts.

Pillar (A or B)

is primarily a tubular shaped bag that is tethered at the A pillar and is stored in the roof side rail and is designed to protect the head of occupants primarily from side impacts

Door/Panel

is located in the door is designed to protect the torso of occupants primarily from side impacts. Included in this attribute are air bags that deploy from any side panels.

Roof Side Rail

is primarily a curtain type bag that is stored in the roof side rail and is designed to protect the head of occupants primarily from side impacts

Other (specify)

is used when the location of the air bag cannot be captured in the above attributes. This should be a rare occurrence. The location of the air bag must be specified.

AIR BAG STATUS

Screen Name: Status

SAS Data Set: *AIRBAG*

SAS Variable: *BAGFUNC*

Oracle Name: *AIRBAG.PICKAIRBAGFUNCTION*

Element Attributes:

Oracle	SAS	
1	1	Air Bag Available
2	2	Air bag disconnected (specify):
3	3	Air bag not reinstalled
4	9	Unknown status if available for this crash

Source: Researcher determined--, primary source is vehicle inspection, secondary sources include interview, repair facilities, tow facility, medical records.

Remarks:**Air bag available**

is used when the vehicle is equipped with an air bag for this seating position. Non-deployment of the air bag system has no bearing on this variable.

Air bag disconnected

is used when any component of the air bag was rendered inoperative prior to the collision (e.g., fuse removed).

Air bag not reinstalled

is used when the air bag for this seating position was not replaced after a prior deployment to the crash being researched.

Unknown

is used when it cannot be ascertained whether an air bag was available at the time of the crash.

TYPE OF AIR BAG**Screen Name:** Type Of Air Bag**SAS Data Set:** *AIRBAG***SAS Variable:** *BAGTYPE***Oracle Name:** *AIRBAG.PICKAIRBAGCLASSID***Element Attributes:**

Oracle	SAS	
1	1	Original manufacturer install
3	3	Replacement Air Bag
2	2	Retrofitted Air Bag
-8871	70	[No air bag available for this crash (disconnected/not reinstalled)]
	79	[Unknown status if air bag available for this crash]
4	99	Unknown Type

Source: Researcher determined—primary source is the interview, secondary sources may include the repair facility and documents found in the vehicle.**Remarks:****Original manufacturer install**

is used when it can be determined that the vehicle was equipped with an air bag system in this seating position that was installed by the manufacturer at the time the vehicle was built (OEM—Original Equipment Manufacturer).

Replacement air bag

is used when it can be determined that the vehicle was equipped with an OEM air bag system for this seating position and that this system had been replaced due to a previous deployment.

Retrofitted air bag

is used when it can be determined that the vehicle was equipped with an air bag system for this seating position but that the vehicle was not built with a manufacturer equipped air bag system. This is an after market product and should not be confused with Replacement Air Bag. Replacement Retrofit Air Bags are also included in this category.

Unknown type

With no interview or other confirming source, assume that the type of air bag is unknown.

AIR BAG DEPLOYMENT

Screen Name: System Deployment

SAS Data Set: AIRBAG

SAS Variable: BAGDEPLY

Oracle Name: AIRBAG.PICKAIRBAGDEPLOY

Element Attributes:

Oracle	SAS	
1	1	Deployed during crash (as a result of impact)
2	2	Deployed inadvertently just prior to crash
3	3	Deployed, detail unknown
4	4	Non-collision deployment
6	7	Nondeployed
-8871	70	[No air bag available for this crash (disconnected/not reinstalled)]
-8870	79	[Unknown status if air bag available for this crash]
5	99	Unknown if deployed

Source: Researcher determined--, primary source is vehicle inspection, secondary sources include interview, repair facilities, tow facility, medical records.

Remarks:

Although rarely occurring, an air bag may partially deploy. These air bags should be coded under **Deployed during crash.**

Deployed during crash (as a result of impact)

is used when the vehicle is equipped with an air bag and the air bag deployed (or partially deployed) as a result of an impact which produced a longitudinal deceleration through the vehicle of sufficient magnitude to cause inflation of the air bag. Note, an air bag is not designed to deploy in every collision.

Deployed inadvertently just prior to crash

is used when an air bag deploys without an impact having caused its deployment, and the vehicle is subsequently involved in a crash.

Deployed, crash details unknown

is used when the researcher cannot determine if the air bag deployed (1) prior to the crash or (2) during the crash as a result of an impact which produced a deceleration through the vehicle of sufficient magnitude to cause inflation of the air bag.

Non-collision deployment

is used if the air bag deploys during a crash but not as a result of an impact.

For example, the air bag deploys due to a vehicular fire, occurring as a result of:

- an impact
- or**
- a noncollision event

prior to any impacts to this vehicle.

Unknown if deployed

is used when it is known that the vehicle was equipped with an air bag but the researcher is unable to determine if the air bag deployed (for whatever reason). For example, if the vehicle was sufficiently damaged so that a determination of deployment cannot be made from the vehicle inspection or the deployment status at the time of the crash cannot be determined.

Non-deployed

is used when an air bag equipped vehicle has one or more impacts, and the air bag did not inflate during the crash.

INDICATIONS OF AIR BAG MALFUNCTION

Screen Name: Indications of Malfunction

SAS Data Set: *AIRBAG*

SAS Variable: *BAGFAIL*

Oracle Name: *AIRBAG.PICKAIRBAGFAILURE*

Element Attributes:

Oracle	SAS	
1	0	No
2	1	Yes (specify):
-8871	70	[No air bag available for this crash (disconnected/not reinstalled)]
-8870	79	[Unknown status if air bag available for this crash]
3	99	Unknown if air bag malfunctioned

Source: Researcher determined-- primary source is vehicle inspection, secondary sources include interview, repair facilities, tow facility, medical records.

Remarks:

This variable flags "indications of air bag malfunctions" and means that something abnormal has occurred to the air bag system. It may not necessarily mean that the air bag system was defective. A vehicle inspection is required in order to report an indication of air bag malfunction.

No

is used whenever the air bag deployed and there are no obvious visual indications of an air bag malfunction.

Yes, specify

is used whenever an indication of an air bag malfunction is suspected and specify the malfunction. An indication of an air bag malfunction could be a blowout of the fabric, a rupture along a fabric seam, a cover which does not open properly causing a misaligned deployment, partial inflation, or any number of other problems. If an indication of an air bag malfunction is suspected, then document the condition with images, then call your zone center for assistance.

Unknown

is used when it is not known if the bag malfunctioned.

TYPE OF CUTOFF SWITCH

Screen Name: Switch Type
SAS Data Set: AIRBAG
SAS Variable: SWITCHTYP
Oracle Name: AIRBAG.SWITCHTYPE

Element Attributes:

Oracle	SAS	
0	0	None present
1	1	Originally equipped
2	2	Retro fit
3	3	Switch present, type unknown
4	9	Unknown if switch present

Source: Researcher determined--, primary source is vehicle inspection, secondary sources include interview, repair facilities, tow facility.

Remarks:

This variable captures only manually operated switches, typically installed by the manufacturer. Air bag cutoff switches were designed to be installed by manufacturers in vehicles with only one row of occupant seating. This was done so that if a child seat was used, the air bag could be turned off. More recently NHTSA has permitted the public to request air bag cutoff switches to be installed by dealers. The retro fit switch can be located in the glove compartment. **Close up images of the switch are required.**

None

is used when there is no air bag cutoff switch present for this occupant position.

Originally equipped

is used when a vehicle is originally equipped by the manufacturer with an air bag cutoff switch for this occupant position is present. This switch will not be present for the driver's position.

Retro fit

is used when an air bag cutoff switch for this occupant position has been added.

Switch present, type unknown

is used when an air bag cutoff switch for this occupant position is present and it is not known if it is original or retro fit.

Type of Cutoff Switch (cont'd)

Page 2 of 2

Unknown if switch present

is used when it is not known if an air bag cutoff switch is present.

CUTOFF SWITCH POSITION STATUS

Screen Name: Switch Status

SAS Data Set: *AIRBAG*

SAS Variable: *SWITCHSET*

Oracle Name: *AIRBAG.SWITCHSTATUS*

Element Attributes:

Oracle	SAS	
0	0	Switch on/automatic
1	1	Switch off
4	7	[None present]
3	8	[Unknown if switch present]
2	9	Switch status unknown

Source: Researcher determined--, primary source is vehicle inspection, secondary sources include interview, repair facilities, tow facility.

Remarks:

Air bag cutoff switches were designed to be installed by manufacturers in vehicles with only one row of occupant seating. This was done so that if a child seat was used, the air bag could be turned off. NHTSA has permitted the public to request air bag cutoff switches to be installed by dealers. The retro fit switch can be located in the glove compartment. **Close up images of the switch are required.**

Switch on/automatic

is used when an air bag cutoff switch for this occupant position is present and is in the on position.

Switch off

is used when an air bag cutoff switch for this occupant position is present and is in the off position.

Switch status unknown

is used when an air bag cutoff switch for this occupant position is present and its position is unknown.

None present

is precoded when there is no air bag cutoff switch present for this occupant position.

Unknown if switch present

is precoded when it is not known if an air cutoff switch is present.

AIR BAG/DAMAGE

Occupant Form, Case #2008-903-90000S/Vehicle # 1/Occupant #1

OCCUPANT | EJECTION | ENTRAPMENT | SEAT | AIR BAG | CHILD SEAT | SEAT BELT | INJURY | INJURY CODES | REVIEW | LOG

FUNCTION | DAMAGE | EVALUATION

Module Cover Flap Open At Tear Pts

Module Cover Flap Damaged

Damage to Air Bag

Source of Damage

Seat Location Air Bag 2 of 2 View Sketches

DID AIR BAG MODULE COVER FLAP(S)/SEAM(S) OPEN AT DESIGNATED TEAR POINTS?

Screen Name: Module Cover Flap Open at Tear Pts?

SAS Data Set: *AIRBAG*

SAS Variable: *BAGFLOPN*

Oracle Name: *AIRBAG.PICKCOVERFLAPSOPEN*

Element Attributes:

Oracle	SAS	
1	0	No
2	1	Yes
-8885	60	[Air bag did not deploy]
4	69	[Unknown if air bag deployed]
-8871	70	[No air bag available for this crash (disconnected/not reinstalled)]
-8870	79	[Unknown status if air bag available for this crash]
3	99	Unknown flaps/seams opened at tear points

Source: Vehicle inspection.

Remarks:

A designated tear point is a weakened area of the flap material designed to allow the air bag easy escape from its storage area during deployment. Some air bags in the seat cushion and seat back may not have cover flaps, but will deploy through a seam that separates during the air bag deployment.

No

is used when it can be determined that the module cover flap(s)/seam(s) for this air bag opened somewhere other than their designated tear points. A non-linear tear in the flap is an indication that the flap opened irregularly, not at the designated tear point.

Yes

is used when it can be determined that the module cover flap(s)/seam(s) for this air bag opened up at their designated tear points. Linear and symmetrical tears are good indications of proper separation of the cover flap(s) at their designated tear points.

Unknown if flaps/seams opened at tear points

is used when it is not known if the air bag opened at the tear points.

WERE THE COVER FLAP(S) DAMAGED

Screen Name: Module Cover Flap Damaged

SAS Data Set: AIRBAG

SAS Variable: BAGFLDAM

Oracle Name: AIRBAG.PICKCOVERFLAPSDAMAGE

Element Attributes:

Oracle	SAS	
1	0	No
2	1	Yes (specify)
-8885	60	[Not Deploy]
4	69	[Unknown if deployed]
-8871	70	[No air bag available for this crash]
-8870	79	[Unknown if air bag available for this crash]
3	99	Unknown if flaps damaged

Source: Vehicle inspection.

Remarks:

No

is used when it can be determined that no damage was present on the air bag module cover flap(s). Normal separation/tearing at the designated tear points does not constitute damage.

Yes (specify)

is used when it can be determined that the air bag module cover flap(s) sustained damage. Abnormal separation/tearing at the designated tear points constitutes damage. Damage can also be cuts, tears, holes, burns, abrasions, etc.. The researcher must specify the type of damage that is being reported.

Unknown if flaps damaged

is used when it cannot be determined if the air bag flap(s) sustained damage.

WAS THERE DAMAGE TO THE AIR BAG?

Screen Name: Damage to Air Bag?

SAS Data Set: AIRBAG

SAS Variable: BAGDAMAG

Oracle Name: AIRBAG.PICKAIRBAGDAMAGE

Element Attributes:

Oracle	SAS	
1	0	Not damaged
Yes — Air Bag Damaged		
2	1	Ruptured
3	2	Cut
4	3	Torn
5	4	Holed
6	5	Burned
7	6	Abraded
97	60	[Air bag did not deploy]
11	69	[Unknown if air bag deployed]
-8871	70	[No air bag available for this crash (disconnected/not reinstalled)]
-8870	79	[Unknown status if air bag available for this crash]
8	88	Other damage (specify)
9	95	Damaged, details unknown
10	99	Deployed, unknown if damaged
-8872	96	Post crash damage

Source: Vehicle inspection

Remarks:

Damage to the air bag must occur during the crash sequence. If multiple damage types apply select the attribute that most deteriorates the effectiveness of the air bag. If you cannot make this determination then select the attribute in a hierarchical manner from the top of the list down.

Not damaged

is used when no damage to the air bag for this occupant position was sustained.

Ruptured

describes damage to the air bag that resembles a stellate or starlike pattern of damage, with multiple tears originating from a single point of origin.

Was There Damage To The Air Bag? (cont'd)

Page 2 of 2

Cut

describes openings in the air bag which are generally linear and have smooth edges.

Torn

describes openings which have ragged edges but which are generally linear in appearance.

Holed

describes damage which is circular in appearance with or without ragged edges. If a burn causes a hole, then select burned

Burned

describes damage resulting from heat which scorches, melts or burns the bag.

Abraded

is a pattern of damage to the surface of the bag that appears as a fraying of the surface threads.

Other damage (specify)

is used to describe damage which is not captured in any of the attributes above.

Damaged, details unknown

is used when it is known that the air bag sustained damage, but the type of damage cannot be determined.

Deployed, unknown if damaged

is used when cannot be determined if the air bag sustained damage.

Post crash damage

is used when rescue or emergency efforts caused damage to the air bag. Also, use this for damage caused by towing.

SOURCE OF AIR BAG DAMAGE

Screen Name: Source of Damage

SAS Data Set: AIRBAG

SAS Variable: BAGDAMSO

Oracle Name: AIRBAG.PICKSOURCEOFDAMAGE

Element Attributes:

Oracle	SAS	
2	1	Object worn by occupant (specify)
3	2	Object carried by occupant (specify)
4	3	Adaptive/assistive controls, (specify)
12	4	Cover flaps
5	5	Fire in vehicle
6	6	Thermal burns
		Glazing
		[Post crash damage]
1	50	[Air Bag Not Damaged]
10	59	Deployed, unknown of damaged
97	60	[Air bag did not deploy]
11	69	[Unknown if air bag deployed]
-8871	70	[No air bag available for this crash (disconnected/not reinstalled)]
-9999	79	[Unknown status if air bag available for this crash]
8	88	Other damage source (specify)
9	99	Damaged unknown source

Source: Vehicle inspection (with interview/medical records as confirming source for objects worn/carried by occupant)

Remarks:

This is a hierarchical variable, that is, if more than one element applies, then select the first attribute that applies. The attribute **Rescue or emergency efforts** should **only** be used when:

- no other sources of damage apply,
AND
- it is known the damage was from rescue or emergency efforts, or any other post-crash source.

Object worn by occupant (specify)

is selected when the object is fastened, attached, or worn by the occupant. Be sure to specify the object.

Object carried by occupant (specify)

is used when the object is held in the mouth, the hand(s), arm(s), etc., by the occupant. Be sure to specify the object.

Adaptive/assistive controls (specify)

is used when adaptive/assistive controls damages the air bag for this occupant position. Be sure to specify the object/control.

Cover flaps

is used when the air bag cover flaps damaged the air bag for this occupant position.

Fire in vehicle

is used when there was a fire in the occupant compartment which damaged the air bag.

Thermal burns

is used when the air bag is burned or scorched by the inflator or chemicals.

Other damage source (specify)

is used whenever there is damage to the air bag and it cannot be fit into any of the categories above. Be sure to specify the object/source.

Unknown

is used when there is damage to the air bag, but the source of the damage cannot be determined.

AIR BAG/EVALUATION

Occupant Form, Case #2008-903-90000S/Vehicle # 1/Occupant #1

OCCUPANT | EJECTION | ENTRAPMENT | SEAT | AIR BAG | CHILD SEAT | SEAT BELT | INJURY | INJURY CODES | REVIEW | LOG

FUNCTION | DAMAGE | EVALUATION | SKETCH #1 | SKETCH #2 | SKETCH #3

Vehicle Previous Accidents

Prior Maintenance/Service

Event Number

DELTA V PDOF degrees CDC

Total	Longtdl	Lateral	Energy	Impact	Barrier	Estimated	Rank
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

CDC for Deployment Impact

Seat Location Air Bag of 1 View Sketches

HAD THE VEHICLE BEEN IN PREVIOUS CRASHES?

Screen Name: Vehicle Previous Crashes

SAS Data Set: AIRBAG

SAS Variable: PREVACC

Oracle Name: AIRBAG.PICKPRIORACCIDENT

Element Attributes:

Oracle	SAS	
1	1	No previous crashes
2	2	Previous crash(es) without deployment(s)
3	3	One previous crash with deployment
4	4	More than one previous crash with at least one deployment
5	8	Previous crashes, unknown deployment status
6	9	Unknown

Source: Researcher determined — primary source is the interview, secondary source may include a repair facility.

Remarks:

No previous crashes

is used for vehicles which are equipped with an air bag for this occupant position, and have not been involved in any previous crashes.

Previous crash(es) without deployment(s)

is used when it can be determined that the vehicle had been in previous crash(es) which did not involve an air bag deployment for this occupant position.

One previous crash with deployment

is used when it can be determined that the vehicle had been in only one previous crash and the air bag for this occupant position deployed in that crash.

More than one previous crash with at least one deployment

is used when it can be determined that the vehicle had been in more than one previous crash at least one of which involved an air bag deployment for this occupant position.

Previous crashes, unknown deployment status

is used when it can be determined that the vehicle had been in at least one previous crash, but the deployment status for this occupant position in any of these previous crashes cannot be determined.

Had the Vehicle Been in Previous Crashes? (cont'd)

Page 2 of 2

Unknown

is used when it cannot be determined if the vehicle had been in previous crash(es) and/or the air bag deployment status for this occupant position cannot be determined.

HAD ANY PRIOR MAINTENANCE/SERVICE BEEN PERFORMED ON THIS AIR BAG SYSTEM?

Screen Name: Prior Maintenance/Service

SAS Data Set: *AIRBAG*

SAS Variable: *BAGMAINT*

Oracle Name: *AIRBAG.PICKPRIORMAINTENANCE*

Element Attributes:

Oracle	SAS	
1	1	No prior maintenance
2	2	Yes, prior maintenance (specify)
3	9	Unknown

Source: Researcher determined — primary source is the interview, secondary sources may include repair facilities and or documents found in the vehicle.

Remarks:

This variable is specific for the air bag at this occupant’s position.

No prior maintenance

is used when it can be determined that the vehicle was equipped with an air bag system, but never had any maintenance/service performed on the air bag system.

Yes, prior maintenance, specify

is used when it can be determined that the vehicle was equipped with an air bag system and that the system had some previous maintenance/service performed. If possible, the researcher must specify exactly what type of maintenance/service was performed and a date of service if possible.

Unknown

is used when it cannot be determined if the vehicle's air bag system had previous maintenance/service.

AIR BAG DEPLOYMENT ACCIDENT EVENT SEQUENCE NUMBER

Screen Name: Event Number

SAS Data Set: *AIRBAG*

SAS Variable: *BAGEVENT*

Oracle Name: *EVENT.EVENTSEQUENCENUMBER*

Element Attributes:

	Event #
60	[Air bag did not deploy]
69	[Unknown if air bag deployed]
70	[No air bag available for this crash (disconnected/not reinstalled)]
79	[Unknown status if air bag available for this crash]
99	Deployed, unknown event

Source: Primary sources are the scene and vehicle inspections; secondary sources include the police report and the interviewee.

Range: 1-35, 60, 69, 70, 79, 99

Remarks:**Event #**

Select the event number that is directly related to the deployment for of this occupant position air bag.

Deployed, unknown event

is used when this air bag for this occupant position deployed, but the event associated with the deployment cannot be determined.

CDC FOR AIR BAG DEPLOYMENT IMPACT

Screen Name: CDC For Deployment Impact

SAS Data Set: *AIRBAG*

SAS Variable: *BAGCDC*

Oracle Name: *AIRBAG.PICKCDCIMPACTDELTA V*

Element Attributes:

Oracle	SAS	
1	1	Highest Delta V
2	2	Second highest Delta V
3	3	Other Delta V (specify)
7	60	[Air bag did not deploy]
5	69	[Unknown if air bag deployed]
-8871	70	[No air bag available for this crash (disconnected/not reinstalled)]
-8870	79	[Unknown status if air bag available for this crash]
4	99	Deployed, unknown event

Source: Researcher determined — primary sources are the scene and vehicle inspection; secondary sources are the police report and the interviewee.

Remarks:

It is not necessary to run a reconstruction program to code this variable. Determination of the proper code can be made by visual estimation if no other means are available.

Highest delta V

is used when it is determined that the crash event which is associated with the air bag deployment for this occupant position is also the event which produced the highest delta V for this vehicle.

Second highest delta V

is used when it is determined that the crash event which is associated with the air bag deployment for this occupant position is also the event that produced the second highest delta V for this vehicle.

Other Delta V (specify)

is used when it is determined that the crash event which is associated with the air bag deployment for this occupant position did not produce either the highest or second highest delta V.

Deployed, unknown event

is used when it cannot be determined which crash event is associated with the air bag deployment for this occupant position.

Child Restraint Overview

Page 1 of 2

These variables are designed to describe child restraints used in all the towed CDS applicable vehicles involved in the crash. Information about the seat is of two types: characteristics and usage.

Injury and death of young children has long been a significant part of the motor vehicle crash problem. Unrestrained children have a much greater tendency to be out of place (*i.e.* not in a designated seating position and generally standing or kneeling on the seat cushion). On impact this makes them very susceptible to injury or death since they are unrestrained. For a number of years, motor vehicle crashes have been one of the leading causes of injury and death to all children. Many states have attempted to address this problem by legislation requiring young children to be protected by some sort of child restraint. While these efforts have resulted in a reduction of injuries and deaths, little data on the real world performance of the child seats has been gathered. Police reports many times fail to note the use of such a restraint, and/or fail to properly identify the type of restraint.

Specifications for these seats come from Federal Motor Vehicle Safety Standard's 213 and 225 (Child Restraint Systems, and Child Restraint Anchorage Systems). Testing the performance and design of child restraints is the responsibility of the NHTSA. Most states with child restraint laws require the use of a DOT approved seat. Other than staged laboratory tests, very little data exists on what happens to these seats and how well they perform in protecting the occupants. Analysts will compare use, injury severity levels, and delta V's for initial gross performance levels. Once that type of analysis is done, source of injury will be examined, along with seat type and make/model. All of these analyses will initially be used to evaluate the effectiveness of FMVSS 213 and 225 to help determine if these standards should be updated or modified. The other main use of performance analysis is to determine if any significant problems exist in any particular type or make/model.

All of the analyses are very dependent on having enough data. Researchers noting that a child was an occupant in a CDS applicable vehicle must pursue the inspections and interview questions with the presumption that a child seat was present, especially if the jurisdiction has a child restraint law or ordinance. **Probing questions should be asked during the interview, and whenever possible, an inspection of the seat should take place. Of course, if the seat is still with the vehicle it should be inspected and photographed at the same time as the vehicle. However, finding the seat with the vehicle is not a common occurrence. This is another area where the perseverance of the researcher pays off in obtaining needed information. If the child restraint is not present during the vehicle inspection, researchers must attempt to locate, obtain an inspection, and photograph the child safety seat.**

If the child seat is belted into a specific seat location, identify that location. If it is not, leave it blank. All child seats are to be identified, whether or not they are known to be occupied. Seat locations that can be selected are only those previously defined on the **Occupant Form/Seat tab**.

Some manufacturers incorporate Child Safety Seats (CSS) into the vehicle's seat installed in the vehicle. This type of CSS is termed an Integrated Child Safety Seat. Should the Researcher encounter this seat type during a vehicle inspection, the documentation of the seat and CSS are required on the Safety Systems Form, regardless of whether it was occupied at the time of the crash.

Child restraints are a major issue, and data collection in this area has a high priority. Much information is needed to provide a reliable evaluation of the real world performance of these safety devices.

CHILD SEAT/LIST

Occupant Form, Case #2007-996-900015/Vehicle # 2/Occupant #1

OCCUPANT | EJECTION | ENTRAPMENT | SEAT | AIR BAG | CHILD SEAT | SEAT BELT | INJURY | INJURY CODES | LOG | REVIEW

LIST | DETAIL

Make	Model	Occ #	Seat

Save Close

CHILD SEAT/DETAIL

Occupant Form, Case #2007-996-900015/Vehicle # 2/Occupant #1

OCCUPANT | EJECTION | ENTRAPMENT | SEAT | AIR BAG | CHILD SEAT | SEAT BELT | INJURY | INJURY CODES | LOG | REVIEW

LIST | DETAIL

CHILD SEAT | VEHICLE

Make [] Occ #s []
Model []
Type [] Date of Manufacture [] Model No []
Source of Data []

Design Feature Used		How Feature Used	
Harness/ Shield	[]	Orientation	[]
Retainer Clip	[]	[]	[]
Tether	[]	[]	[]
LATCH	[]	[]	[]
		Belt Routing / Use	[]
		Locking Clip Use	[]

Seat Location [] Placement [] Child Position []

[CHILD RESTRAINT NUMBER]

Screen Name: N/A

SAS Data Set: *CHILDSEAT*

SAS Variable: *CHSEATNO*

Oracle Name: *CHILDSEAT.CHILDSEATID*

Element Attributes:

1, 2, 3, etc.,

Source: As created by system

Remarks:

CHILD RESTRAINT MAKE**Screen Name:** Make**SAS Data Set:** *CHILDSEAT***SAS Variable:** *CHMAKE***Oracle Name:** *CHILDSEAT.CHILDSEATMAKEID***Element Attributes:**

Oracle SAS

-999 Refer to listing of child restraints
Unknown make

Source: Vehicle inspection, Child safety seat inspection, Interview**Remarks:**

A child seat's manufacturer/make name may be difficult to determine unless it is stamped/sewn/molded into the child seat itself. Refer to the manufacturer's instruction booklet which accompanied the child seat, if available, for specific manufacturer and make of seat. The child seat should have a label permanently attached which identifies the seats date of manufacture and model number; this information alone may be used to identify the specific manufacturer and make/model of seat, if no other identifiers exist. Take several photos of the seat which may also help in its identification. If there is no manufacturer/make name or number provided on the seat, then make should be coded as "Unknown".

CHILD RESTRAINT MODEL

Screen Name: Model
SAS Data Set: *CHILDSEAT*
SAS Variable: *CHMODEL*
Oracle Name: *CHILDSEAT.PICKMODELID*

Element Attributes:

Oracle	SAS	Refer to listing of child restraints
-998		Other (specify)
-999		Unknown model

Source: Vehicle inspection

A child seat’s manufacturer/make name may be difficult to determine unless it is stamped/sewn/molded into the child seat itself. Refer to the manufacturer’s instruction booklet which accompanied the child seat, if available, for specific manufacturer and make of seat. The child seat should have a label permanently attached which identifies the seats date of manufacture and model number; this information alone may be used to identify the specific manufacturer and make/model of seat, if no other identifiers exist. Take several photos of the seat which may also help in its identification. If there is no manufacturer/make name or number provided on the seat, then make should be coded as “Unknown”.



Date of Manufacture: 20AUG01 (August 20, 2001)
Model #: 2501176 P1

CHILD RESTRAINT TYPE

Screen Name: Type

SAS Data Set: *CHILDSEAT*

SAS Variable: *CHTYPE*

Oracle Name: *CHILDSEAT.PICKCHILDSEATTYPE*

Element Attributes:

Oracle	SAS	
3	3	Infant seat (ISS)
1	1	Convertible seat (CSS)
2	2	Forward facing only (FSS)
4	4	Booster seat (BSS)
10	10	Booster/Forward facing seat (BSS/FSS)
11	11	Booster/Convertible facing seat (BSS/CSS)
5	5	Integrated seat (INT)
8	8	Harness (HSS)
7	7	Vest (VSS)
6	6	Special needs (SNSS)
98	98	Other (specify)
99	99	Unknown

Source: Vehicle inspection

Remarks:

Once the child seat has been identified by make and model, the child seat TYPE will automatically be defined. However, this information can be determined by child seat examination, interview and photographs if no make or model information is available.

Infant Seat (ISS)

Designed and intended to be used rear facing only by newborns and infants weighing up to about 22 pounds, typically equipped with either a 3 or 5-point harness. Some infant seats have detachable bases which can be left secured in the vehicle, while the infant seat is removed and used as a carrier. When used in the vehicle as a child restraint the carrier-type infant seat's carrying handle should be folded back, in the down position and the seat should recline at a 45-degree angle.

Infant only seats are typically designed with 2 or 3 sets of harness strap slots in the back of the seat which allow for proper shoulder strap placement (below or at the infant's shoulders). Most harness adjustment mechanisms are behind the seat back and are typically affixed/locked by a metal bar, or clip-type lock. These seats are normally equipped with a harness retainer clip which should be positioned at the infant's armpit level. The vehicle belt system (lap or lap portion of a lap/shoulder belt combination) or vehicle lower LATCH anchors must be used to secure the seat and/or its base to the vehicle.



Infant Seat with base attached
Shown with 5-pt Harness and handle
in the "up" position



Infant Seat and base separate



Infant Seat with base Attached with a 3-pt Harness

Convertible Seat (CSS)

Designed and intended to be used either rear or forward facing for a child ranging from birth to approximately 40 pounds (this information will normally be found on the child seat labeling as well as in the manufacturer's instructions). All have a harness system to secure the child to the seat which consists of a 5-point harness, T-Shield or Tray-Shield. Most seats have 3 sets of harness slots, the lowest and middle set of slots are typically used for rear facing use only, and the top set of slots are normally used for forward facing. Most harness straps have a harness retainer clip which helps position the shoulder straps up on the child's shoulders. Refer to manufacturers' instructions for proper use orientation according to the child's height and weight. When used rear facing the weight of the child ranges from birth up to about 35 pounds (some older convertible seats only allowed for infants rear facing up to about 20 pounds). In the rear facing mode the seat is reclined at a 45-degree angle for infant use. In the forward facing mode most seats are used fully upright, but some allow for a slight recline forward facing. Refer to manufacturers' instructions for proper use orientation according to the child's height and weight.



Convertible with TrayShield



Convertible with T-Shield



Convertible with 5-pt Harness

The vehicle belt system (lap or lap portion of a lap/shoulder belt combination) or LATCH (lower anchors and tethers for children) must be used to secure the child seat to the vehicle. Child restraints manufactured after September 1, 2002 may come equipped with a top tether and lower anchor strap attachments which, when used in combination with anchors in the vehicle, secures the child seat to the vehicle in lieu of the vehicle belt system. Refer to the child seat and vehicle owners manual for proper tether and lower anchor attachment and use.

Forward Facing Only Seat (FSS):

A forward facing only seat is intended to be used by children who are over 1 year old and who weigh at least 20 pounds. The majority are recommended for use by children who weigh at least 20 pounds up to about 40 pounds, though some have higher lower weight use recommendations of 30 pounds and upper weight limits above 40 pounds. These seats come equipped with a harness or shield to restrain the child and most have a harness retainer clip. The seat must be secured to the vehicle seat with a lap and/or lap/shoulder belt combination or by using the vehicle and child restraint LATCH system. These seats are used with the child sitting in an upright position. These seats typically have 3 sets of harness slots in the back of the seat which allows for proper harness placement over the child's shoulders as the child grows. Harness straps should be at or above the child's shoulder level and since this type of seat is intended for forward facing use only, all sets of slots can be used.

The majority of these seats convert to belt-positioning boosters by removing the harness or shield system after a child reaches 40 pounds. Always check manufacturer instructions for proper use recommendations

Boosters with shields are considered forward facing only seats and when used with the shield are not currently certified for use by children over 40 pounds.



Booster with shield Forward Facing Seat



Forward Facing Seat with 5-pt harness

Booster Seat (BSS) Belt-positioning. Designed and intended as a forward facing platform which raises a child’s sitting height, enabling them to use the adult lap and shoulder belt for restraint. Belt-positioning booster seats are primarily designed to “fill the gap” between a child restraint with a harness or shield and the adult lap and shoulder belt used alone. Belt-positioning boosters should never be used with a lap belt only across the child.

Belt-positioning boosters come in high-back and backless models. High-back models provide head protection for the child when used in vehicle seats with low seat backs or no head restraints. Most high-back models have shoulder belt clips/positioners on the upper sides of the seat which may help position the vehicle shoulder belt across the child properly. Backless models provide a base which the child sits on to raise their sitting height, which provides for a better fit of the adult lap and shoulder belt. Some backless boosters have removable shields, e.g., shield boosters, which when used with the shield are considered forward facing only seats for children up to 40 pounds. Most backless boosters with shields convert to belt-positioning boosters by removing the shield and using the booster base with the adult lap and shoulder belt.

These seats are NOT installed using the vehicle belt or LATCH system so **No Belt Routing** would typically be coded. The only Belt/Routing which might be coded would be in those cases where the shoulder belt was routed through the positioning clips on either side of the Hi-back Booster.



Low/No Back
Booster



Hi-Back Booster



Hi-Back Booster

Integrated Seat (INT) Built-In Child Restraint. Built-into the vehicle seat, typically “camouflaged” within or under an adult seating position in the back seat. Designed for forward facing use only by children who weigh between 20 and 40 pounds and whose height ranges between 33 and 40 inches, typically a child at least 1 year old and over 20 pounds. Most of these seats have a 5-pt harness system, e.g., one strap over each shoulder, one strap across each upper thigh and a strap with a buckle or recessed buckle in the crotch area. Some models convert into belt-positioning booster seats for use by children up to about 60 pounds after the child reaches 40 pounds and can no longer use the 5-pt harness system.



Integrated Seat with 5 point harness

Harness (HSS). Intended to be used forward facing for children, who have outgrown a child seat, typically over 40 pounds, age 5 and older who are passengers of vehicles with lap belts only in the rear seat. Typically a harness consists of two straps with bottom loops which rest across the child’s shoulders and chest connected at the top by a tether anchorage. The vehicle lap belt routes through the loop at the bottom of each strap, resting across the child’s lap/upper thigh area.



Vest (VSS). Designed for forward facing use only and generally intended for use by children weighing 25-40 pounds; however, some vests can be made according to chest and waist measurements (e.g., EZ-On Products) which can accommodate small children to adults. Some models have a 5-pt type harness system and some have adjustable zipper closures in the back which typically require a top tether/anchor strap to be used along with the vehicle belt system. Some vests such as those used on school buses when transporting children with special transportation needs may require its own "seat mount" belt system for proper use of the vest.



Special Needs Safety Seat (SNSS)

Designed and modified for children with special transportation needs who range from newborn to about 100 pounds. The majority of these devices are intended for forward facing use only, however some devices can be used rear and forward facing. All have a harness system to secure the child to the seat which may consist of a 3 or 5-point harness, T-shield, etc.



Other – Not meant for vehicle travel

Other items, other than a certified child restraint used to hold, adjust sitting height, or otherwise contain or position a child while in a motor vehicle. Defines a product for which no type, make or model could be identified through the listing of child restraints and/or manufacturers instructions dated 1996 and 1999, nor found in the typical examples: Infant carriers, phone books/books, restaurant-home style booster seat, portable crib/cradle/playpen, wood platform, plastic platform, cushion or pillow.

Unknown

Is coded when any child restraint attribute, e.g., make, model, type design feature or use is not known.

DATE OF MANUFACTURE

Screen Name: Date of Manufacture

SAS Data Set: *CHILDSEAT*

SAS Variable: *MANDATE*

Oracle Name: *CHILDSEAT.DATEMADE*

Element Attributes:

Oracle SAS

MM/DD/YYYY


Indicate the date of manufacture as indicated on the child restraint

12/30/1899 99/99/9999 Unknown date

Source: Vehicle inspection

Remarks:

Indicate the date of manufacture as indicated on the child restraint. This information can be used for recalls and for determining the model of the child seat if it is not known.

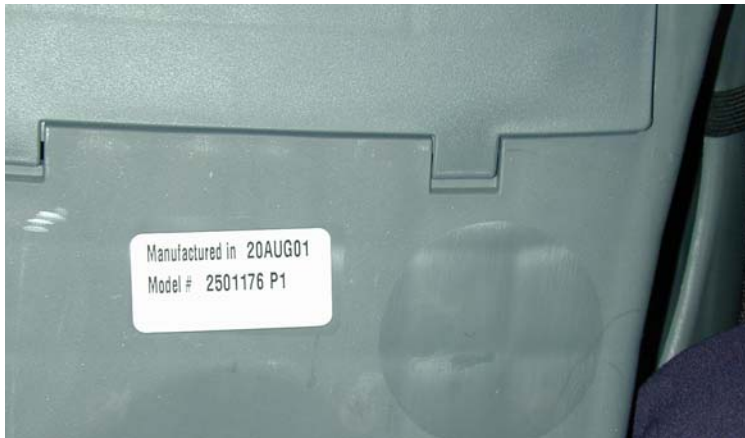

Date of Manufacture 20AUG01 (August 20, 2001)

MODEL NUMBER

Screen Name: Model No

SAS Data Set: *CHILDSEAT*

SAS Variable: *MODELNO*

Oracle Name: *CHILDSEAT.MODELNO*


Element Attributes:

Indicate the model number as indicated on the child restraint

Source: Vehicle inspection

Remarks:

Indicate the model number as indicated on the child restraint. This information can be used for recalls and for determining the model of the child seat if it is not known.

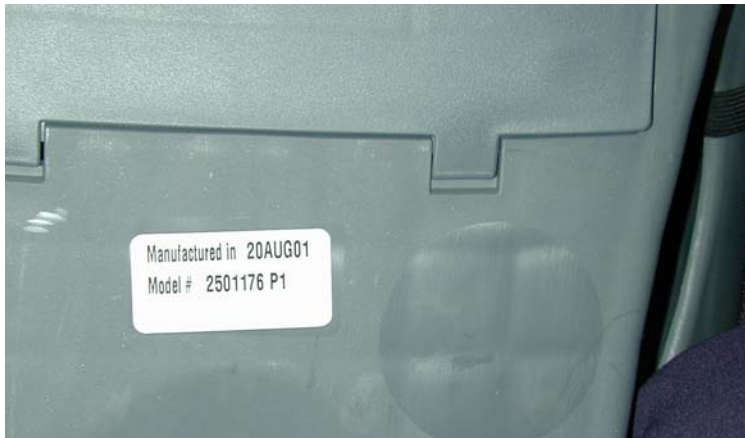

Model #: 2501176 P1

SOURCE OF DATA

Screen Name: Source of Data

SAS Data Set:

SAS Variable:

Oracle Name: *CHILDSEAT.SOURCEID*

Element Attributes:

Oracle	SAS	
1	1	Vehicle
2	2	Interview
3	3	Vehicle and Inspection
4	4	Photographs Only
5	5	Official Records

Source: Researcher determined

Remarks:

Indicate the source of data for the Child Seat information.

Official Records

includes medical records, police supplemental reports, autopsy reports, and police accident reports.

CHILD RESTRAINT HARNESS/SHIELD DESIGN

Screen Name: Harness/Shield
SAS Data Set: *CHILDSEAT*
SAS Variable: *HARDES*
Oracle Name: *CHILDSEAT.PICKHARNESSDESIGN*

Element Attributes:

Oracle	SAS	
-8870	0	No harness/shield available (or not designed with harness/shield)
1	1	3-pt harness
2	2	5-pt harness
6	6	6-pt harness
3	3	T-shield
4	4	Tray-shield
5	5	Shield
-9999	9	Unknown

Source: Vehicle inspection

Remarks:

This variable indicates how the seat is designed to be used. It does not indicate either how it was used, or whether it was used properly.

Some seats can be purchased in different configurations. For these seats the make and model DO NOT uniquely define the harness/shield design.

A harness is a belt-type restraint integral to the child seat, for the specific purpose of holding the child in the seat.

3-pt/V-Harness

Two straps crossing both shoulders attached to a latch plate which typically inserts into a buckle on a piece of webbing or recessed at the crotch area, visually forming a V. Applicable to rear facing only infant seats.



Infant seat with 3-pt harness

5-pt Harness

Two straps crossing both shoulders, two straps crossing each upper thigh and a strap between the legs (crotch strap). This type harness can be adjusted to fit a variety of infants rear facing and toddlers in forward facing orientations. Typically available in convertible seats, forward facing only seats and some infant only seats.



Convertible seat with 5-pt harness



Forward facing only seat with 5-pt harness

T-Shield

Secures two shoulder harness straps to a “T” shaped shield which is positioned in front of the torso and hips. Typically found in convertible and forward facing only seats.



Convertible seat with T-shield

Tray-Shield

Secures two shoulder harness straps to a broad padded tray positioned in front of the torso. The crotch strap may be separate or integral with the shield. Found on convertible and forward facing only seats.



Convertible seat with Tray shield

Shield

(Typically shield-boosters) The over-body shield was originally designed for use in seating positions with lap belts only for children weighing between 30-60 pounds. The shield is attached to a base which raises the child's sitting height and pre- 1996 models recommended use with the shield up to 60 pounds. Boosters with shields made after 1996 recommend an upper weight limit of 40 pounds. Most shield-boosters made after 1996 allow the 40 pound child to use the booster base with the shield removed, converting the seat to a belt-positioning booster. When used with the shield, the seat Type is coded as a Forward Facing only seat.



CHILD RESTRAINT HARNESS RETAINER CLIP

Screen Name: Retainer Clip

SAS Data Set: *CHILDSEAT*

SAS Variable: *CLIPDES*

Oracle Name: *CHILDSEAT.RETAINERCLIPID*

Element Attributes:

Oracle	SAS	
0	0	No clip available (or not designed with Harness Retainer Clip)
1	1	Clip available (or designed with Harness Retainer Clip)
-9999	9	Unknown

Source: Vehicle inspection

Remarks:

This variable indicates how the seat is designed to be used. It does not indicate either how it was used, or whether it was used properly.

A harness retainer clip is a plastic device/clip which is placed between the two shoulder harness straps, holding the two together for correct pre-crash positioning. The retainer clip should be threaded correctly and placed at armpit level to help keep the shoulder straps up-on the child's shoulders.



PHOTOS SHOW

HARNESS RETAINER CLIP PLACED BETWEEN BOTH SHOULDER STRAPS



CHILD RESTRAINT TETHER DESIGN

Screen Name: Tether

SAS Data Set: *CHILDSEAT*

SAS Variable: *TETHDES*

Oracle Name: *CHILDSEAT.PICKTETHERDESIGN*

Element Attributes:

Oracle	SAS	
0	0	No tether available (or not designed with Tether)
1	1	Tether available (or designed with Tether)
-9999	9	Unknown

Source: Vehicle inspection

Remarks:

This variable indicates how the seat is designed to be used. It does not indicate either how it was used, or whether it was used properly.

The top tether system is part of LATCH (Lower Anchors and Tethers for Children) and vehicles manufactured after September 1999 come equipped with a tether anchor for attaching the top tether of the child seat.



Child Seat LATCH Attachments



Child Seat Installed Using Top Tether Anchor in Vehicle

CHILD RESTRAINT LATCH DESIGN

Screen Name: LATCH

SAS Data Set: *CHILDSEAT*

SAS Variable: *LATCHDES*

Oracle Name: *CHILDSEAT.LATCHDESIGNID*

Element Attributes:

Oracle	SAS	
0	0	No LATCH available (or not designed with LATCH)
1	1	LATCH available (or designed with LATCH)
-9999	9	Unknown

Source: Vehicle inspection

Remarks:

This variable indicates how the seat is designed to be used. It does not indicate either how it was used, or whether it was used properly.

LATCH (Lower Anchors and Tethers for Children). All child seats manufactured after September 1, 2002 will have two lower attachments which connect to anchorage points between a vehicles seat back and bottom cushion for the majority of vehicles manufactured after September 1, 2002. Child seats with corresponding attachments can be attached to these lower anchorages instead of being held by the vehicle seat belt. Child seats manufactured after September 1, 2002 will still have designated vehicle belt paths for proper orientation to accommodate older vehicles.



Typical Soft Anchor, Lower LATCH Attachments

CHILD RESTRAINT USAGE ORIENTATION**Screen Name:** Orientation**SAS Data Set:** *CHILDSEAT***SAS Variable:** *ORIENT***Oracle Name:** *CHILDSEAT.PICKORIENTATION***Element Attributes:**

Oracle	SAS	
1	1	Rear facing
2	2	Forward facing
3	3	Supine
-9998	8	Other (specify)
-9999	9	Unknown

Source: Vehicle inspection**Remarks:**

The actual orientation of the child seat at the time of impact must be determined and coded.

Rear Facing

At the time of the crash the child seat was rear facing/facing the rear of the vehicle

Forward Facing

At the time of the crash the child seat was facing forward/front of the vehicle

Supine

At the time of the crash the child seat was laying flat

Other (specify)

At the time of the crash the seat was facing other than the rear, supine or forward (e.g., sideways, on top of or underneath something)

Unknown

A child seat is present but the orientation at the time of the crash is unknown

CHILD RESTRAINT HARNESS/SHIELD USE

Page 1 of 2

Screen Name: Harness/Shield

SAS Data Set: *CHILDSEAT*SAS Variable: *HARUSE*Oracle Name: *CHILDSEAT.PICKHARNESSUSAGE***Element Attributes:**

Oracle	SAS	
1	0	Not designed with harness
2	1	Harness/shield not used
3	2	Harness straps in Top/Highest slot
4	3	Harness straps in Middle slot(s)
	4	Harness straps in the Bottom slot
5	5	Harness used - Slot Used Unknown
6	6	Retrofitted with Harness
7	7	Shield used
8	9	Other (specify)
-9999	10	Unknown if harness/shield used

Source: Vehicle inspection

Remarks:

The actual child seat harness usage at the time of the crash must be determined and coded.

Not designed with harness

is used if the child seat did not have an internal harness.

Harness/shield not used

is used if the child seat had a harness, but it was not in use during the crash.

Harness straps in the Top/Highest slot

is used if the harness straps were routed through the top/highest slots.

Harness straps in Middle slot(s)

is used if the harness straps were routed through the middle slots. Some child seats have three or more sets of slots and if the harness was routed through any slots between the top and bottom slots, use this attribute.

Harness straps in the Bottom slot

is used if the harness straps were routed through the bottom slots.

Harness used – Slot Used Unknown

is used if the researcher was unable to determine what slots the harness straps were routed through.

Retrofitted with Harness

is used if the original harness straps were replaced prior to the crash.

Shield used

is used if the child seat was equipped with a Tray or T-shield in lieu of an internal harness strap system.

Other (specify)

is used if the harness straps were routed unconventionally or the usage of the harness straps fell outside the parameter or the other attributes. For example, if the right strap was routed through the top slot and the left strap was routed through one of the middle slots, this attribute would be selected. In any instance where the proper harness strap usage was questionable, use this attribute and specify how the straps were routed.

Unknown if harness/shield used

is used if it could not be determined if the harness system was used during the crash.

Refer to the Manufacturers' Instructions for Child Safety Seats and the Child Seat List to determine the design of the seat, its respective harness design and use according to the weight/height of the child.

CHILD RESTRAINT RETAINER CLIP USE**Screen Name:** Retainer Clip**SAS Data Set:** *CHILDSEAT***SAS Variable:** *CLIPUSE***Oracle Name:** *CHILDSEAT.RETAINERCLIPUSEID***Element Attributes:**

Oracle	SAS	
1	0	Not Designed with Harness Retainer Clip
2	1	Harness Retainer Clip Not Used
3	2	Harness Retainer Clip Used – Neck Level
4	3	Harness Retainer Clip Used at – Chest/Armpit Level
5	4	Harness Retainer Clip Used – Stomach Level
7	5	Harness Retainer Clip used – Unknown Level
6	6	Retrofitted with Harness Retainer Clip
-9999	9	Unknown if Retainer Clip used

Source: Vehicle inspection**Remarks:**

The actual child seat harness retainer clip use at the time of the crash must be determined and coded.

Refer to the Manufacturers' Instructions for Child Safety Seats and the Child Seat List to determine if the respective child seat comes equipped with a harness retainer clip.

CHILD RESTRAINT TETHER USE**Screen Name:** Tether**SAS Data Set:** *CHILDSEAT***SAS Variable:** *TETHUSE***Oracle Name:** *CHILDSEAT.PICKTETHERUSAGE***Element Attributes:**

Oracle	SAS	
1	0	Not designed with Tether
2	1	Tether Not Used
3	2	OEM Tether used
-9999	9	Unknown if Tether Used

Source: Vehicle inspection**Remarks:**

Refer to Manufacturers' Instructions for Child Safety Seats and Child Seat listing for applicability of tether.

CHILD SEAT LATCH USE

Screen Name: LATCH
SAS Data Set: *CHILDSEAT*
SAS Variable: *LATCHUSE*
Oracle Name: *CHILDSEAT.LATCHUSEID*

Element Attributes:

Oracle	SAS	
1	0	Not designed with LATCH
4	3	Lower Anchors – Not used
2	1	Lower Anchors Used
-9999	9	Unknown if LATCH used

Source: Vehicle inspection

Remarks:

The actual child seat Lower Anchors and Tethers for Children (LATCH) usage at the time of the crash must be determined and coded.

Refer to the Manufacturers' Instructions for Child Safety Seats and the Child Seat List to determine applicability of LATCH.

BELT ROUTING/USE

Page 1 of 2

Screen Name: Belt Routing/Use**SAS Data Set:** *CHILDSEAT***SAS Variable:** *BELTROUT***Oracle Name:** *CHILDSEAT.BELTROUTING***Element Attributes:**

Oracle	SAS	
5	0	No belt routing
-9998	1	No belt used
1	2	Belt routed through belt positioning slots/channels
2	3	Belt routed through forward facing slots/channels
3	4	Belt routed through rear facing slots/channels
4	5	Belt routed unconventionally (specify)
-9999	9	Unknown belt path

Source: Vehicle inspection**Remarks:****No belt routing**

The belt was not routed through any slots/channels in the seat (if they exist at all). The belt was used solely to restrain the child was sitting on/in the seat. This will be automatically filled in for Integrated child restraints

No belt used

When no seat belt was used. No belt was used to either restrain the child or install the seat.

Belt routed through belt positioning slots/channels

The belt was routed through the belt positioning slots or channels built into the child restraint.

Belt routed through forward facing slots/channels

The belt was routed through the forward facing slots or channels built into the child restraint

Belt routed through rear facing slots/channels

The belt was routed through the rear facing slots or channels built into the child restraint

Belt routed unconventionally (specify)

The belt was routed unconventionally

Unknown belt path

It is not known what path the belt took around the child/seat. If it is not known if a belt was used indicate that on the belt availability/use variables and choose unknown belt path for this variable.

USE OF LOCKING CLIP ON VEHICLE BELT

Page 1 of 2

Screen Name: Locking Clip Use**SAS Data Set:** *CHILDSEAT***SAS Variable:** *LOCKCLIP***Oracle Name:** *CHILDSEAT.LOCKINGCLIPID***Element Attributes:**

Oracle	SAS	
1	0	None Present
2	1	Locking Clip Used on Lap and Shoulder Belt
3	2	Locking Clip Used on Lap Belt Only
4	3	Locking Clip Used on Shoulder Belt Only
5	8	Other (Specify)
9	9	Unknown

Source: Child Seat Inspection and Interview**Remarks:**

When found in a vehicle, be sure to photograph. This variable is NOT ASSESSING the proper use of the locking clip, only in identifying on what belt it is found.

A **locking clip** is typically provided by the child seat manufacturer and found clipped/fastened to a new child seat when purchased. A **locking clip** is used to lock an emergency locking retractor (ELR) lap and shoulder combination belt with a sliding latch plate. Some belts are labeled indicating the need for the locking clip, and vehicles requiring a locking clip provide information about its use in the owner manual.

Heavy Duty Locking clips are used to shorten lap belts that have emergency locking retractors which do not switch or lock.

None Present

When there is no locking clip present on any seat belt.

Locking Clip Used on Lap and Shoulder Belt

When the lap and shoulder belts are threaded through the locking clip.

Locking Clip Used on Lap Belt Only

When the lap belt is threaded through the locking clip.

Locking Clip Used on Shoulder Belt Only

When the shoulder belt is threaded through the locking clip.

Other (Specify)


is used when the researcher determines a locking clip was used but not in a manner as stated above, (specify how the locking clip was used).

Unknown

is used when the researcher can not determine if a locking clip was used.



Locking clip on belt

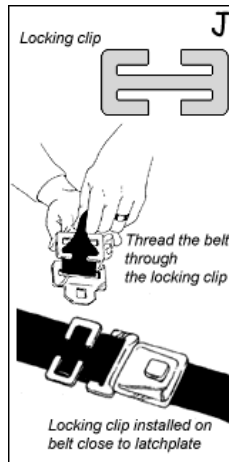

Locking clip instructions



Locking clip belt



Locking clip in use

SEAT LOCATION FOR CHILD RESTRAINT

Screen Name: Seat Location

SAS Data Set: *CHILDSEAT*

SAS Variable: *SEATPOS*

Oracle Name: *SEATLOC.SEATROW and SEATLOCATION*

Element Attributes:

Seat Number

Front Row

- 11 Left side
- 12 Middle
- 13 Right side

Third Row

- 31 Left side
- 32 Middle
- 33 Right side
- 34 Other (specify)

Fifth Row

- 51 Left side
- 52 Middle
- 53 Right side
- 54 Other (specify)

Other Seating

Cargo Area

Second Row

- 21 Left side
- 22 Middle
- 23 Right side
- 24 Other (specify)

Fourth Row

- 41 Left side
- 42 Middle
- 43 Right side
- 44 Other (specify)

Source: Vehicle Inspection/interview

Remarks:

See the variable Occupant's Seat Position for more detail on this variable.

All child seats shall be coded as to whether or not the child seat is occupied or belted into the vehicle seat and its specific location in the vehicle, *if known*. **When the Occupant Form is completed you will be indicating the location of the seat based upon all the information in the case.** Select seating locations are defined in the Seat tab.

There are occasions when a child is sitting in a child seat, but the child seat is not restrained by the vehicle belt system or the child in the child seat is sitting on another occupants lap; and there are times when a child seat is restrained by the vehicle belt system, yet is not in use by a child at the time of a crash. Likewise there are occasions when a child seat is inside the vehicle not in use and not belted into the vehicle and is considered cargo, as a possible injury source, etc. Information will

be collected on every child seat and its location (*if known*) at the time of a crash whether or not it is in use or restrained by the vehicle belt system at the time of the crash.

The majority of child seats involved in crashes do not remain with the vehicle where it can be visually inspected; however, a child seat's location inside the vehicle can also be determined by interview. Some information can be collected from interviews with the driver/child seat installer, e.g., child seat location, type of belt/LATCH used to secure child seat, etc.

CHILD RESTRAINT PLACEMENT

Screen Name: Placement

SAS Data Set: *CHILDSEAT*

SAS Variable: *PLCMNT*

Oracle Name: *CHILDSEAT.PLACEMENTID*

Element Attributes:

Oracle	SAS	
1	1	Seat
2	2	Floor
3	3	Lap of other occupant
4	4	Console
-9998	8	Other (specify)
-9999	9	Unknown

Source: Vehicle inspection

Remarks:**Seat**

Child restraint sitting on vehicle seat.

Floor

Child restraint sitting on vehicle floor.

Lap of Occupant

Child restraint sitting on lap of other occupant.

Console

Child restraint sitting on front, middle or rear console.

Other (specify)

Other position of child restraint (specify).

Unknown

Position of child restraint is not known.

CHILD POSITION IN CHILD RESTRAINT

Page 1 of 2

Screen Name: Child Position**SAS Data Set:** *CHILDSEAT***SAS Variable:** *POSTN***Oracle Name:** *CHILDSEAT.POSTUREINUSEID***Element Attributes:**

Oracle	SAS	
-9997	0	[Not occupied]
1	1	Upright
2	2	Reclined/lying back
3	3	Supine, facing upwards
4	4	Slumped forward
5	5	Slumped to the Side
6	6	Kneeling
-9998	8	Other (specify)
-9999	9	Unknown

Source: Interview**Remarks:****Upright**

Child was sitting upright, facing forward.

Reclined/Lying Back

Child was reclined, between 90 and 45 degrees.

Supine

Child was laying flat, outstretched facing upwards

Slumped Forward

Child was leaning forward from the waist up and their back was not against the back of the child restraint or vehicle seat in the case of a belt-positioning booster.

Slumped to the Side

Child was leaning to the side from the waist up and their back was not against the back of the child restraint or vehicle seat in the case of a belt-positioning booster.

Kneeling

Child was resting on their knees while in the child restraint.

Child Position In Child Restraint (cont'd)

Page 2 of 2

Other (specify)

Any other position of child (specify).

Unknown

Unknown position of child in restraint.

VEHICLE

Occupant Form, Case #2007-996-900015/Vehicle # 2/Occupant #1

OCCUPANT | EJECTION | ENTRAPMENT | SEAT | AIR BAG | CHILD SEAT | SEAT BELT | INJURY | INJURY CODES | LOG | REVIEW

LIST | **DETAIL**



CHILD SEAT | **VEHICLE**

Belt Retractor Type

Latch Plate Type

Latch Anchor

Latch Tether

 Save  Close

BELT RETRACTOR TYPE

Page 1 of 2

Screen Name: Belt Retractor**SAS Data Set:** SEATLOC**SAS Variable:** ACTBLRET**Oracle Name:** DUPMANUALSEATBELT.RETRACTORTYPEID**Element Attributes:**

Oracle	SAS	
3	0	None Present
2	1	Emergency Locking Retractor
7	2	Automatic Locking Retractor
4	3	Switchable Retractor in ELR Mode
5	4	Switchable Retractor in ALR Mode
6	5	Switchable Retractor in Unknown Mode
9	9	Unknown Type of Retractor

Source: Vehicle Inspection, interview**Remarks:**

This variable is coded for all manual seat belts that are coded for any vehicle position.

If a sewn on latch plate is present, there will most likely be a retractor for both the shoulder portion and the lap portion of the belt. Most likely the shoulder portion will be an ELR and the lap portion will be switchable from ELR to ALR. In this variable we are only interested in the retractor of the lap portion of the belt.

Another type of switchable retractor switches when the belt is pulled all the way out causing the retractor to switch to ALR mode.

Retractors wind up the loose webbing of the unused 3-point safety belt, take up the slack, and provides slight tension on belts that are in use. They are usually located out of sight at an anchor point. Check the vehicle owner's manual and also look for labels on the belt webbing to determine the retractor type.

NOTE that some newer vehicles have a switchable retractor that can be manually adjusted from ELR to ALR. Most of them can be switched by pulling the webbing all the way out of the retractor to activate the ALR. In some models, the retractors switch from ELR to ALR with the push of a button. Most switchable retractors have a label on the belt with instructions on how to switch it. Enter the information for the position of the retractor.

Automatic locking retractor (ALR)

The ALR locks in place after being pulled out and allowed to retract about ½" The belt cannot be extended unless it is first fully rewound. It is generally uncomfortable for adults to wear.

Emergency locking retractor (ELR)

The ELR allows the belt to be freely extended or rewound. It locks only when the vehicle slows, changes direction, or stops suddenly. Since the retractor rarely locks during normal driving, it provides more freedom and comfort to an adult driver than an ALR. Some ELRs are vehicle sensitive and lock in direct response to the deceleration of the vehicle. Other ELRs are webbing or belt-sensitive and temporarily lock in response to a quick jerk or pull on the belt. Some ELRs are both vehicle and belt sensitive. Some ELRs have a window shade tension reliever system designed to make 3-point belts more comfortable by allowing "slack" in the shoulder belt. Occupants using these belts "tug" on the shoulder belt to tighten it after they lean forward.

Unknown

is used when the type of retractor cannot be determined.

LATCH PLATE TYPE

Page 1 of 2

Screen Name: Latch Plate**SAS Data Set:** SEATLOC**SAS Variable:** ACTLPLAT**Oracle Name:** DUPMANUALSEATBELT.LATCHPLATETYPEID**Element Attributes:**

Oracle	SAS	
8	0	Not used/not available
1	1	Sliding
2	2	Light weight locking/cinching
3	3	Locking
4	4	Switchable
5	5	Sewn On
6	9	Unknown Type

Source: Vehicle Inspection**Remarks:**

This variable is coded for all manual seat belts that are coded for any vehicle position.

Sliding

The webbing is threaded through a slot in the latch plate and there is no locking bar. The latch plate slides freely along the webbing, regardless of the angle. Allows the webbing to slip through unrestricted.

Locking

The webbing threads through a locking bar or an adjuster in the latch plate. Once it is tightened, the belt will not loosen until the plate is tilted and the belt is unbuckled.

Lightweight locking/cinching

The same as locking but with more moving parts. As long as the plate is parallel with the webbing the latch plate is locked.

Switchable

Switchable has a switch that locks the belt webbing by sliding a button.

Sewn on

If a sewn on latch plate is present, there will be a retractor for both the shoulder portion and the lap portion of the belt. Most likely the shoulder portion will be an ELR and the lap portion will be switchable.

Unknown type

is used when the type of latch plate is not determined.

Sliding



Sliding



Lightweightlocking/cinching



Lightweight locking/cinching



Locking



Locking



Switchable



Switchable
Sewn on



Sewn on

LATCH LOWER ANCHOR AVAILABILITY

Screen Name: LATCH Anchor

SAS Data Set: SEATLOC

SAS Variable: LATANCH

Oracle Name: SEATLOC.LATCHANCHORID

Element Attributes:


Oracle	SAS	
1	0	No
2	1	Yes
9	9	Unknown if anchor

Source: Interior Vehicle Inspection (and/or Interview)

Remarks:

Currently, some new passenger vehicles are equipped with lower child seat anchorage points between a vehicle's seat cushion and seat back. Together, the two lower anchorage points and top tether anchorage make the Lower Anchor and Tether for Children (LATCH) system. Since 2002, this system is required in two rear seating positions of all cars, minivans, and light trucks.

A lower anchorage is a small rod or bar located between a vehicle's seat cushion and seat back allowing a child safety seat to be attached or snapped into the vehicle instead of being held secure by the vehicle's belt system. By September 1, 2002, all child safety seats will have two attachments which will connect to the vehicle's lower anchorage attachment points. (Some child seat manufacturers have included lower anchorage points in year 2000 models.)

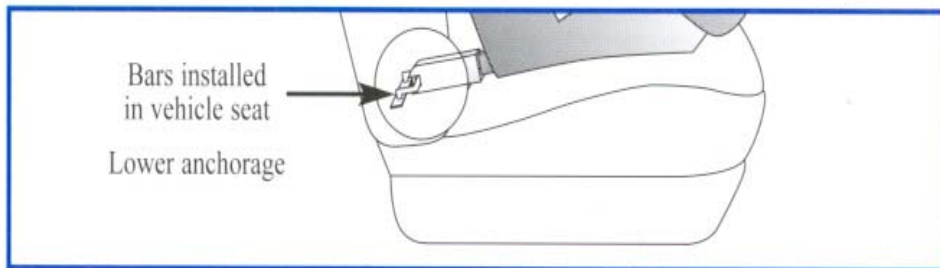

LATCH TETHER AVAILABILITY

Screen Name: LATCH Tether

SAS Data Set: SEATLOC

SAS Variable: LATTETH

Oracle Name: SEATLOC.LATCHTETHERID


Element Attributes:

Oracle	SAS	
1	0	No
2	1	Yes
9	9	Unknown if tether

Source: Interior Vehicle Inspection (and/or Interview)

Remarks:

In some vehicles, such as mini-vans and station wagons, the tether anchor may be found on the rear floor of the vehicle, on the back of the rear seat, and on the roof area. It may be concealed by some sort of covering which can be removed or “flipped up”.

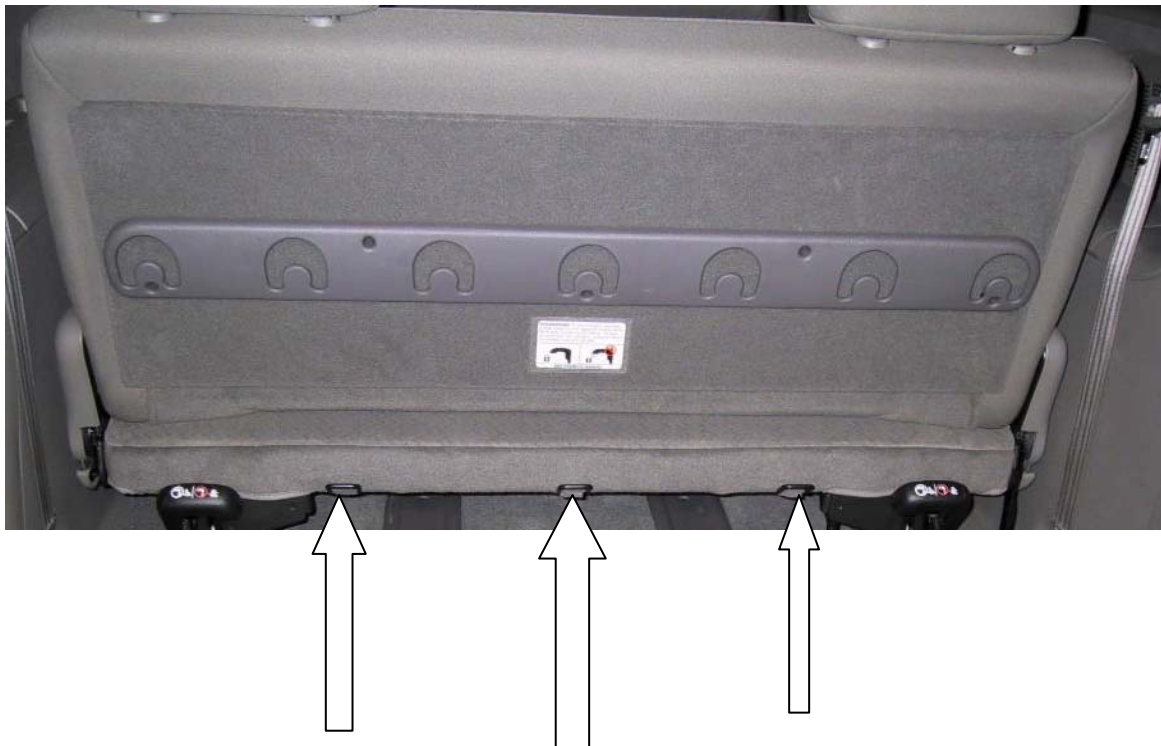

MANUAL SEAT BELT

Occupant Form, Case #2007-996-900015/Vehicle # 2/Occupant #1

OCCUPANT | EJECTION | ENTRAPMENT | SEAT | AIR BAG | CHILD SEAT | SEAT BELT | INJURY | INJURY CODES | LOG | REVIEW

MANUAL | AUTOMATIC

BELT | COMPONENTS

Vehicle Inspection

Availability

Used in this crash?

Position

Lap

Shoulder

Failure

Anchorage Adjustment

Source of Belt Use

MANUAL (ACTIVE) BELT SYSTEM AVAILABILITY

Screen Name: Availability

SAS Data Set: OA

SAS Variable: MANAVAIL

Oracle Name: MANUALEATBELT.PICKMANUALBELTAVAIL

Element Attributes:

Oracle	SAS	
1	0	None available
2	1	Belt removed/destroyed
3	2	Shoulder belt
4	3	Lap belt
5	4	Lap and shoulder belt
6	5	Belt available - type unknown
7	6	Shoulder belt (lap belt destroyed/removed)
8	7	Lap belt (shoulder belt destroyed/removed)
9	8	Other belt (specify)
10	9	Unknown

Source: Researcher determined—primary source is vehicle inspection, secondary sources include medical records, and the interview.

Remarks:

The **Vehicle Inspection** portion of this screen shows what was determined **at the vehicle inspection** which is the primary source of information for these variables. **However**, the researcher should use all the available information, placing emphasis on the vehicle inspection information, to make the final determination for completion of this variable.

Some belt restraint systems are a combination of manual (active) and automatic (passive) occupant protection devices. For this variable, consider only the manual portion of the system. Select the manual belt system which was available at the time of the crash for this occupant.

Select the manual belt system which was available for use by the occupant relative to the seat position in the vehicle.

Not available

indicates: (1) that at the time of the crash the designated seating position was not equipped with a manufacturer installed or post manufacturer installed manual belt (lap, shoulder, or lap and shoulder) or (2) the seat position was equipped only with an automatic (passive) belt system.

Belt removed/destroyed

indicates that the manual belt, initially installed at this occupant's seating position, was subsequently removed or destroyed (*e.g.*, unbolted, cutout, etc.). If the belt is present but nonfunctional, then select the type of manual belt available on this variable and use **Inoperative** for **Used In This Crash?**

Belts which are knotted, buckled at the rear of the seat (bench or bucket), stored below the seat, etc., are available if they were otherwise operative.

Shoulder belt

is used when this occupant's seat position was equipped with a manual upper torso restraint and no lap belt. The population of vehicles equipped with only manual shoulder belts is very small, therefore, care must be taken that a two-point passive belt is not identified as a manual belt.

Lap belt

is used when this occupant's seat position is equipped with a manual belt that secures the pelvic area of the occupant in the seat and there is no manual upper torso belt.

Lap and shoulder belt

is used when both a manual upper torso belt and a manual lap (pelvic area) belt are present at this occupant's seat position.

Belt available — type unknown

is used when there is no vehicle inspection and there is disagreement regarding the type of manual belt system among the secondary sources. When the specific manual belt system cannot be determined, but it is known some type of belt is present, then use this attribute.

Shoulder belt (lap belt destroyed/removed)

is used for integral noncontinuous loop manual belt systems when the lap belt portion of the belt has been removed or destroyed leaving only the shoulder belt portion present at this occupant's seating position.

Lap belt (shoulder belt destroyed/removed)

is used for an integral noncontinuous loop manual belt systems when the shoulder belt portion of the belt has been removed or destroyed leaving only the lap belt portion present at this occupant's seating position.

Other belt (specify)

is used when the belt system is nonstandard or cannot be described with other attributes. Specify (write out in the Specify Box) the type of manual belt (*e.g.*, 5 point competition harness, 4 inch wide webbing, etc.) In addition, use this attribute if a properly positioned "built-in" child safety seat was available at this occupant's seating position. Other child restraints are not recorded here.

Unknown

is used when it cannot be determined whether or not manual belts were available for this occupant's seat position.

OCCUPANT FORM
MANUAL (ACTIVE) BELT SYSTEM USED IN THIS CRASH?

SEAT BELT/MANUAL/BELT

Page 1 of 3

Screen Name: Used in this crash?

SAS Data Set: *OA*

SAS Variable: *MANUSE*

Oracle Name: *MANUALBELTUSE.MANUALBELTTYPEUSED*

Element Attributes:

Oracle	SAS	
0	0	None used not available/removed or destroyed
1	1	Inoperative (specify)
2	2	Shoulder belt
3	3	Lap belt
4	4	Lap and shoulder belt
5	5	Belt used — type unknown
6	8	Other belt used (specify)
7	12	Shoulder belt with child safety seat
8	13	Lap belt with child safety seat
9	14	Lap and shoulder belt with child safety seat
10	15	Belt with child safety seat — type unknown
11	18	Other belt with child safety seat (specify)
12	99	Unknown if belt used

Source: Researcher determined—primary source is vehicle inspection, secondary sources include medical records, and the interview.

Remarks:

The **Vehicle Inspection** portion of this screen shows what was determined **at the vehicle inspection** which is the primary source of information for these variables. **However**, the researcher should use all the available information, placing emphasis on the vehicle inspection information, to make the final determination for completion of this variable.

Select the manual belt system or portion of the system which was in use at the time of the crash by the occupant. The correctness of the use is not assessed on this variable. This variable only identifies manual belt usage; do not consider the presence and use of a passive belt system.

None used/not available/removed or destroyed
is used when a manual belt was available but not worn.

Inoperative (specify)
includes belts which are knotted, jammed, tucked behind the seat, or in any other fashion rendered unusable. In addition, use this attribute for belts which are inoperative because of extreme

deterioration from aging. A belt system that was completely removed from or cut out of a vehicle is assigned None used/not available /removed or destroyed.

Shoulder belt

is used when a manual shoulder belt alone was in use. This can occur when: (1) the vehicle was not equipped with a lap belt, (2) only the shoulder belt portion of a nonintegral system was in use, or (3) when the lap belt portion of a noncontinuous loop integral lap and shoulder belt system was cut out leaving only a functional shoulder belt portion in use.

Lap belt

is used when a manual lap belt alone was in use. This can occur when: (1) the vehicle was not equipped with a shoulder belt, (2) only the lap belt portion of a nonintegral system was in use, or (3) when the shoulder belt portion of a noncontinuous loop integral lap and shoulder belt system was cut out leaving only a functional lap belt portion in use. **Note**, manual lap belts can be used in conjunction with a two-point automatic belt system. For manual and automatic belt combinations, use this attribute for the manual lap belt usage.

Lap and shoulder belt

is used when the occupant is: (1) "encompassed" **both** in the lap and upper torso region by a manual lap and shoulder belt combination, or (2) using only a portion of an **intact integral** lap and shoulder belt system. For example, if a person has an integral lap and shoulder belt but is only using the lap portion (*i.e.*, having the shoulder belt behind his or her back), then use this attribute.

Belt used — type unknown

is used when it is known that the type of manual belt system being used cannot be determined.

Other belt (specify)

is used when the belt system is nonstandard or cannot be described with other attributes. Specify the type of manual belt (*e.g.*, 5 point competition harness, 4 inch wide webbing, etc).

Shoulder with child safety seat

is used when the vehicle's manual shoulder belt system anchors a child safety seat to the vehicle, or when the shoulder belt is used to restrain a child who is sitting on a booster seat. These attributes do not refer to the belts which are part of the child seat itself.

Lap with child safety seat

is used when the vehicle's manual lap belt system anchors a child safety seat to the vehicle, or when the lap belt is used to restrain a child who is sitting on a booster seat. These attributes do not refer to the belts which are part of the child seat itself.

Lap and shoulder w/child safety seat

is used when the vehicle's manual lap and shoulder belt system anchors a child safety seat to the vehicle, or when the lap/shoulder belt is used to restrain a child who is sitting on a booster seat. These attributes do not refer to the belts which are part of the child seat itself.

Belt with child safety seat — type unknown

is used when the vehicle belt type is unknown, not the child safety seat type.

Other belt with child safety seat (specify)

is used when a built-in child safety seat is “self contained” (does not use any part of the regular existing manual belt system available at the occupant seating position).

Unknown if belt used

is used if it cannot be determined whether or not a manual belt was in use by the occupant at the time of the crash.

POSITION OF MANUAL BELT/LAP PORTION OF BELT

Page 1 of 2

Screen Name: Lap

*SAS Data Set:**SAS Variable:**Oracle Name: MANUALBELTUSE.LAPPOSITIONID***Element Attributes:**

Oracle	SAS	
0	0	[Not equipped/not available/not used]
1	1	Snug and low across hips
2	2	Across abdomen
3	3	Used to install child restraint
4	4	Low across hips with extra "slack room"
5	5	Across abdomen with extra "slack room"
98	98	Other position (specify)
99	99	Unknown position

Source: Interview and injuries and medical records**Remarks:**

If the manual lap belt is being used to install a child restraint than chose "Other position (specify)" and annotate. The routing of the manual lap belt/lap portion (if any) through the child restraint is indicated in the variable "Seat Belt Routing" on the Child Restraint Tab.

If two occupants are using one belt code as "Other (specify)" to both occupants and annotate.

Snug and low across hips

the manual lap belt or lap portion of a 3 pt manual belt is snug and low across the hips so that it goes around the front of pelvis, with the webbing lying across the top of thighs.

Across abdomen

the manual lap belt or lap portion of a 3 pt manual belt snug and is across the "belly" or abdomen.

Low across hips with extra "slack room"

the manual lap belt or lap portion of a 3 pt manual belt is low across the hips so that it goes around the front of pelvis, with the webbing lying across the top of thighs and is not tight against the person, but has extra "slack room".

Position of manual belt/Lap portion of belt (cont'd)

Page 2 of 2

Across abdomen with extra “slack room”

the manual lap belt or lap portion of a 3 pt manual belt is across the “belly” or abdomen and is not tight against the person, but has extra “slack room”.

Other position (specify)

is used to document the use of the lap portion in a manner not identified in the above.

Unknown position

is used if it cannot be determined the position of the manual belt/lap portion by the occupant at the time of the crash.

POSITION OF MANUAL SHOULDER BELT/SHOULDER PORTION OF BELT

Screen Name: Shoulder

SAS Data Set:

SAS Variable:

Oracle Name: *MANUALBELTUSE.SHLDPOSITIONID*

Element Attributes:

Oracle	SAS	
0	0	[Not equipped/not available/not used]
1	1	Snugly across the collarbone and over shoulder
2	2	Resting on neck
3	3	On edge of shoulder
4	4	Under arm
5	5	Behind occupant's back or seat
10	10	Used to install child restraint
6	6	Across the collarbone and over shoulder with extra "slack room"
7	7	Resting on neck with extra "slack room"
8	8	On edge of shoulder with extra "slack room"
9	9	Under arm with extra "slack room"
98	98	Other position (specify)
99	99	Unknown belt position

Source: Interview and medical records

Remarks:

If the manual shoulder belt is being used to install a child restraint then chose "Other position (specify)" and annotate. The routing of the manual lap belt/shoulder portion (if any) through the child restraint is indicated in the variable "Seat Belt Routing" on the Child Restraint Tab.

If two occupants are using one belt code as "Other (specify)" to both occupants and annotate.

Snugly across the collarbone and over shoulder

the manual shoulder belt or shoulder portion of a 3 pt manual belt fits snugly and is routed over the collarbone and over the shoulder.

Resting on neck

the manual shoulder belt or shoulder portion of a 3 pt manual belt is routed such that it is rubbing against the neck.

On edge of shoulder

the manual shoulder belt or shoulder portion of a 3 pt manual belt is worn on the edge of the shoulder.

Under arm

the manual shoulder belt or shoulder portion of a 3 pt manual belt is placed under the arm.

Behind occupant's back or seat

the manual shoulder belt or shoulder portion of a 3 pt manual belt is placed behind the back of the occupant or behind the back of the seat.

Across the collarbone and over shoulder with extra "slack room"

the manual shoulder belt or shoulder portion of a 3 pt manual belt is routed over the collarbone and over the shoulder and is not tight against the person, but has extra "slack room".

Resting on neck with extra "slack room"

the manual shoulder belt or shoulder portion of a 3 pt manual belt is routed such that it is rubbing against the neck and is not tight against the person, but has extra "slack room".

On edge of shoulder with extra "slack room"

the manual shoulder belt or shoulder portion of a 3 pt manual belt is worn on the edge of the shoulder and is not tight against the person, but has extra "slack room".

Under arm with extra "slack room"

the manual shoulder belt or shoulder portion of a 3 pt manual belt is placed under the arm and is not tight against the person, but has extra "slack room".

Other position (specify)

is used to document the use of the shoulder portion in a manner not identified in the above.

Unknown position

is used if it cannot be determined the position of the manual belt/shoulder portion by the occupant at the time of the crash.

MANUAL (ACTIVE) BELT MALFUNCTION MODES DURING CRASH

Page 1 of 2

Screen Name: Malfunction

SAS Data Set: OA

SAS Variable: MANFAIL

Oracle Name: MANUALBELTUSE.MANUALBELTFAILURE

Element Attributes:

Oracle	SAS	
0	0	[None used/not available/removed or destroyed]
1	1	No manual belt malfunction(s)
2	2	Torn webbing (stretched webbing not included)
3	3	Broken buckle or latch plate
4	4	Upper anchorage separated
5	5	Other anchorage separated (specify)
6	6	Broken retractor
7	7	Combination of above (specify)
8	8	Other manual belt malfunction (specify)
9	9	Unknown

Source: Researcher determined—primary source is vehicle inspection, additional input may include the interview and police report if a vehicle inspection is obtained.

Remarks:

The **Vehicle Inspection** portion of this screen shows what was determined **at the vehicle inspection** which is the primary source of information for these variables. **However**, the researcher should use all the available information, placing emphasis on the vehicle inspection information, to make the final determination for completion of this variable.

If any component of the manual belt system malfunctions during the impact as a result of occupant loading, the malfunction is captured in this variable. The malfunction is also recorded on the **Case Form/Summary Tab** and documented with photographs.

If a malfunction occurs, select the attribute which corresponds to the appropriate manual belt malfunction mode that describes the component of the restraint system which malfunctioned (*i.e.*, torn webbing, broken buckle or latchplate, anchorage separation, broken retractor). A complete and documented description of the malfunctioned component and the way it malfunctioned must accompany the case.

No manual belt malfunction(s)

is used when there is no physical evidence from the vehicle inspection to indicate that a malfunction occurred.

Combination of above (specify)

is used when any combination of specified attributes occur and describes multiple manual belt malfunction modes. Manual belt malfunction modes which are not described are reported in **Other manual belt malfunction (specify)**. Manual belt malfunctions **with specific attributes** take priority over the **Other manual belt failure** code.

Other manual belt malfunction (specify)

is used when the only manual belt malfunction(s) which occur are not described with a specific attribute.

Unknown

is used when it can not be determined if the manual belt malfunctioned.

MANUAL SHOULDER BELT UPPER ANCHORAGE ADJUSTMENT

Page 1 of 2

Screen Name: Anchorage Adjustment

SAS Data Set: *OA*

SAS Variable: *MANANCH*

Oracle Name: *MANUALBELTUSE.PICKUPPERANCHORPOSITION*

Element Attributes:

Oracle	SAS	
0	0	[No manual shoulder belt]
1	1	None for manual shoulder belt
2	2	In full up position
3	3	In mid position
4	4	In full down position
5	5	Position unknown
6	9	Unknown if adjuster present

Source: Researcher determined—primary source is vehicle inspection, secondary sources include the interview.

Remarks:

Complete this variable regardless of manual shoulder belt usage.

The **Vehicle Inspection** portion of this screen shows what was determined **at the vehicle inspection** which is the primary source of information for these variables. **However**, the researcher should use all the available information, placing emphasis on the vehicle inspection information, to make the final determination for completion of this variable.

None for manual shoulder belt

is used when a manual shoulder belt is present but there is no adjustment mechanism at the upper anchorage point.

In full up position

is used when the manual shoulder belt is equipped with an adjustable upper anchorage point and it was in its highest position at the time of the crash (*e.g.* closest position to the roof).

In mid position

is used when the manual shoulder belt is equipped with an adjustable upper anchorage point and it was in a middle position at the time of the crash (somewhere between full up and full down).

In full down position

is used when the manual shoulder belt is equipped with an adjustable upper anchorage point and it was in its lowest position at the time of the crash (closest position to the floor).

Position unknown

is used when the manual shoulder belt is equipped with an adjustable upper anchorage point but it cannot be determined what the position was at the time of the crash.

Unknown if adjuster present

is used when it cannot be determined if the manual shoulder belt was equipped with an adjustable upper anchorage device.

SOURCE OF RESEARCHER'S DETERMINATION OF BELT USE

Screen Name: Source of Belt Use

SAS Data Set: *OA*

SAS Variable: *MBELTSOU*

Oracle Name: *MANUALBELTUSE.SOURCEBELTUSE*

Element Attributes:

Oracle	SAS	
1	0	Not equipped/not available
2	1	Vehicle Inspection
3	2	Official Injury Data
4	3	Driver/occupant interview
5	8	Other (specify)
6	9	Unknown if belt used

Source: Researcher determined

Remarks:

This variable explains what preponderance of information the researcher used to make the determination whether the manual seat belt was used, **not** whether the belt system was available. **The PAR is not an acceptable source to list for belt use determination.** If multiple sources of information are available, select the source that gives the most reliable information.

Vehicle Inspection

is used if the vehicle inspection gave definitive indications that the belt was in use.

Official Injury Data

is used if the official injury data makes a specific mention of injury patterns that can be attributed to the use of a seat belt, and the vehicle inspection did not give definitive indications of usage.

Driver/occupant interview

is used if the vehicle inspection did not give definitive indications of usage or there was no vehicle inspection, however the interview(s) provided significant information to code belt use.

Other (specify)

is used when information from other official sources such as the EMS, fire department (e.g., rescue or extrication personnel), or on-scene photographs indicates that the occupant was or was not restrained by a manual or automatic belt at the time of the crash. Specify the source of the information.

Occupant Form, Case #2007-996-900015/Vehicle # 2/Occupant #1

OCCUPANT | EJECTION | ENTRAPMENT | SEAT | AIR BAG | CHILD SEAT | SEAT BELT | INJURY | INJURY CODES | LOG | REVIEW

MANUAL | AUTOMATIC

BELT | COMPONENTS

Vehicle Inspection

Pretensioner

Belt Positioning

Presence

Use

Source of Belt Use

SEAT BELT POSITIONING DEVICE PRESENCE

Screen Name: Positioning Device Presence

SAS Data Set: *OA*

SAS Variable: *POSPRES*

Oracle Name: *MANUALBELTUSE.BELTPOSDEVICEID*

Element Attributes:

Oracle	SAS	
1	0	None present
2	1	Buckle Buddy – Shoulder Belt Adjuster
3	2	Sta-n-Place – Shoulder Belt Adjuster
4	3	Belt-A-Way – Shoulder Belt Adjuster
5	4	Shoulder Strap Adjuster – Shoulder Belt Adjuster
6	5	Child Protector – Lap and Shoulder Belt Adjuster
7	6	SafeFit – Shoulder Belt Adjuster
8	7	SafeFit Supreme - Shoulder Belt Adjuster
9	8	Seat Belt Adjuster – Shoulder Belt Adjuster
10	9	Klunk-Klip – Shoulder Belt Adjuster
11	10	Child Safer – Shoulder Belt Adjuster
12	11	Comfort Ride – Shoulder Belt Adjuster
13	12	Belt Buddy
14	97	OEM device
15	98	Other (specify)
-9999	99	Unknown if present

Source: Vehicle Inspection and/or interview.

Remarks:

This variable is coded for any position containing a shoulder belt.

Aftermarket seat belt positioning devices are typically manufactured for use by small stature adults, large adults and children to adjust lap and shoulder belt fit and comfort.

These products are not considered “safety devices” and are not tested or regulated by NHTSA.

Other (specify)

includes belt extension devices. Annotate the name and type of device.

Examples of seat belt positioning devices:



GM rear seat shoulder belt comfort guide



Belt buddy




Buckle buddy



Shoulder strap adjusters



Shoulder strap adjusters



Child safer



Child safer



Child safer

SEAT BELT POSITIONING DEVICE USE

Screen Name: Position Device Use

SAS Data Set: *OA*

SAS Variable: *POSUSE*

Oracle Name: *MANUALBELTUSE.BELTPOSDEVICEUSEID*

Element Attributes:

Oracle	SAS	
3	3	[None present]
1	1	Device not used
2	2	Device used
-9999	9	Unknown if device used

Source: Vehicle Inspection and Interview

Remarks:

SEAT BELT/AUTOMATIC

Occupant Form, Case #2007-996-900015/Vehicle # 2/Occupant #1

OCCUPANT | EJECTION | ENTRAPMENT | SEAT | AIR BAG | CHILD SEAT | SEAT BELT | INJURY | INJURY CODES | LOG | REVIEW

MANUAL | AUTOMATIC

Vehicle Inspection

Avail / Function

Used in this crash?

Motorized

Position
Lap
Shoulder

Failure

Source of Belt Use

AUTOMATIC (PASSIVE) BELT SYSTEM AVAILABILITY/FUNCTION

Page 1 of 3

Screen Name: Availability/Function**SAS Data Set:** *OA***SAS Variable:** *ABELTAVL***Oracle Name:** *AUTOMATICSEATBELT.PICKAUTOBELTAVAIL***Element Attributes:**

Oracle	SAS	
1	0	Not equipped/not available
2	1	2 point automatic belts
3	2	3 point automatic belts
4	3	Automatic type unknown
5	4	Automatic belts destroyed or rendered inoperative
6	9	Unknown

Source: Researcher determined—primary source is vehicle inspection, secondary sources include medical records, and the interview.

Remarks:

The **Vehicle Inspection** portion of this screen shows what was determined **at the vehicle inspection** which is the primary source of information for these variables. **However**, the researcher should use all the available information, placing emphasis on the vehicle inspection information, to make the final determination for completion of this variable.

Some belt restraint systems are a combination of manual (active) and automatic (passive) occupant protection devices. For this variable, consider only the automatic portion of the system. Select the automatic belt system which was available at the time of the crash for this occupant.

Automatic belts are designed to restrain an occupant and allow an occupant egress (the act of going from an enclosed place) without the requirement of manually activating the belt. Some systems use only a torso belt (2 point automatic belts), while others are designed with a lap and torso belt (3 point automatic belts). A clue for proper system identification involves the egress issue. If you are sitting in the occupant's position and all belts are attached and you open the door, then determine if you **have to** detach any belt in order to exit the vehicle. Belts which do not require detaching are automatic belts. Note: The ease of egress is not considered because many automatic belt systems may appear cumbersome.

Availability is assessed based on the occupant's seating position. Select the automatic belt system which was available for use by the occupant relative to the occupant's seating position in the vehicle. Availability is also determined by presence, functional status, and use of the automatic belt system.

Any occupant who is using a belt restraint system, or portion thereof, must by default have that system available to them.

Not equipped/not available

indicates:

- that at the time of the crash the designated seating position that the occupant was in, was not equipped with a manufacturer installed or post manufacture installed automatic belt (2- point or 3-point)
- the occupant was not in a designated seat position (*e.g.*, on the floor)
- the occupant was not the person assigned the designated seat position and was not using an automatic belt (*e.g.*, sitting side-by-side) **or**
- the seat position that the occupant was in was equipped only with a manual (active) belt system.

2 point automatic belts

is used when a torso belt is anchored along the inboard side of the front seat and anchored either at the upper window frame of the door surface (adjacent to the upper B-pillar) or attached to a motorized track located along the upper A-pillar, roof side rail, and upper B-pillar. A two point automatic belt system requires the presence of either a manual lap belt or a knee bolster.

3 point automatic belts

is used for an automatic belt system consisting of a lap and torso belt. This system uses a common anchor for both belts located on the inboard side of the front seat and two anchors along the door surface (*e.g.*, commonly used in General Motors cars beginning in 1987 until the mid 1990's). This system can be detected by sitting in the occupant's position with the latch plate/buckle attached and opening the door. If the belt travels with the door and allows egress without detaching the belt, then use this attribute – the system is automatic.

Automatic belts — type unknown

is used when:

- no vehicle inspection occurs and the occupant's seating position is known to have automatic belts but the type (2 point versus 3 point) is unknown, or
- a vehicle inspection occurs and the occupant's seating position is known to have automatic belts but the researcher is not able to determine from the vehicle inspection or any secondary sources what type of automatic belts are available.

If the type of automatic belt system is determinable, then the system's mechanization can also be determined because most manufacturers use the same type of system for a given vehicular model. In addition, this code takes precedence over the following code **Automatic belts destroyed or rendered inoperative**.

Automatic belts destroyed or rendered inoperative

is used when the automatic belt, initially installed at this occupant's seating position, was subsequently removed or destroyed (*e.g.*, unbolted, cutout, etc.) or in any way rendered inoperative. In addition, use this attribute for belts which are extremely deteriorated from aging. Do not use this attribute for motorized belt tracks which are mechanically or electrically inoperative. This is considered under Automatic Belt System Failure.

Belts which are knotted, buckled at the rear of the seat (bench or bucket), etc., are available if they were otherwise operative.

Unknown

is used for front out-board occupants of an uninspected passenger vehicle(s) when it cannot be determined whether or not this occupant's seating position was equipped with an automatic belt system.

AUTOMATIC (PASSIVE) BELT SYSTEM USE

Page 1 of 2

Screen Name: Used in this crash?**SAS Data Set:** *OA***SAS Variable:** *ABELTUSE***Oracle Name:** *AUTOMATICBELTUSE.AUTOBELTTYPEUSED***Element Attributes:**

Oracle	SAS	
0	0	Not equipped/not available/destroyed or rendered inoperative
1	1	Automatic belt in use
2	2	Not in use (manually disconnected, motorized track inoperative) (specify)
3	3	Automatic belt use unknown
5	4	Automatic belt used with child restraint
4	9	Unknown if equipped/available

Source: Researcher determined—primary source is vehicle inspection, secondary sources include medical records, and the interview.**Remarks:**

The **Vehicle Inspection** portion of this screen shows what was determined **at the vehicle inspection**, which is the primary source of information for these variables. **However**, the researcher should use all the available information, placing emphasis on the vehicle inspection information, to make the final determination for completion of this variable.

Not equipped/not available/destroyed or rendered inoperative

is automatically selected when **Automatic Availability** is selected as “Not equipped not available”. Additionally, select this code when automatic belts are present, but were destroyed or rendered inoperative at the time of the crash.

Automatic belt in use

is used when this automatic belt was hooked up (in use) at the time of the crash. The correctness of the use is not assessed on this variable.

Not in use (manually disconnected, motorized track inoperative) (specify)

is used when the automatic belt's latch plate/buckle was detached at the time of the crash. For example, this attribute is used to capture disconnected 3-point, door mounted automatic belts (i.e., 1987 to mid-1990 General Motors vehicles) which can be used similar to an active lap and shoulder belt system.

This is also used for motorized tracks which were *not in the restrained position* at the time of the crash. The motorized track may be inoperative because of fuse removal, electric motor failure, or track failure when the malfunction prevents the automatic belt system from moving along its track into the restrained position.

Note: This variable does not assess how this occupant uses the automatic belt when entering or exiting the seating position. For example, this occupant may routinely manually detach/attach the latch plate/buckle (*i.e.*, uses the automatic belt system as if it were a manual belt system). This variable assumes that the nonmotorized automatic belt is available and functioning and assesses whether or not the latch plate/buckle was attached at the time of the crash. If the latch plate/buckle was attached at the time of the crash, then use Automatic belt in use. On the other hand, if it was detached, then use Automatic belt not in use (manually disconnected, motorized track inoperative).

For motorized belts, this variable assumes that the motorized belt system is locked in the restrained position with the belt attached at the time of the crash. If the motorized belt system was locked in the restrained position and the belt was attached at the time of the crash, then use Automatic belt in use. If the motorized belt system was not locked in the restrained position or the belt was detached, then use Automatic belt not in use (manually disconnected motorized track inoperative).

Automatic belt used with child restraint

is used when this automatic belt was used to anchor a child restraint in the seat at the time of the crash. The correctness of the use is not assessed on this variable.

Automatic belt use unknown

is used when the researcher is unable to determine if the automatic belt was in use.

AUTOMATIC (PASSIVE) BELT SYSTEM TYPE

Screen Name: Motorized

SAS Data Set: *OA*

SAS Variable: *ABELTYPE*

Oracle Name: *AUTOMATICSEATBELT.PICKMOTORIZED*

Element Attributes:

Oracle	SAS	
0	0	[Not equipped/not available/destroyed or rendered inoperative]
1	1	Non-motorized system
2	2	Motorized system
9	9	Unknown

Source: Researcher determined—primary source is vehicle inspection, secondary sources include medical records, and the interview.

Remarks:

The **Vehicle Inspection** portion of this screen shows what was determined **at the vehicle inspection** which is the primary source of information for these variables. **However**, the researcher should use all the available information, placing emphasis on the vehicle inspection information, to make the final determination for completion of this variable.

Non-motorized system

is used when the automatic belt system available to this occupant does not require a motor for operation.

Motorized system

is used when the automatic belt system available to this occupant requires a motor for operation.

Unknown

is used when it is known that an automatic belt is available but the type (non-motorized or motorized) cannot be determined.

POSITION OF AUTOMATIC LAP BELT/LAP PORTION OF BELT

Screen Name: Position/Lap

SAS Data Set:

SAS Variable:

Oracle Name: *AUTOMATICBELTUSE.LAPPOSITIONID*

Element Attributes:

Oracle	SAS	
0	0	[Not equipped/not available/not used]
1	1	Snug and low across hips
2	2	Across abdomen
3	3	Used to install child restraint
4	4	Low across hips with extra "slack room"
5	5	Across abdomen with extra "slack room"
98	98	Other position (specify)
99	99	Unknown position

Source: Interview and injuries

Remarks:

If the lap portion of an automatic 3 pt belt is being used with a child restraint then indicate how the lap portion is positioned on the child. If it is being used to install a child restraint than chose "Lap portion of automatic belt used to install child restraint". The routing of the lap portion of the automatic 3 pt belt (if any) through the child restraint is indicated in the variable "Seat Belt Routing" on the Child Restraint Tab.

If two occupants are using one belt code as "Other (specify)" to both occupants and annotate.

Snug and low across hips

The lap portion of a 3 pt automatic belt is snug and low across the hips so that it goes around the front of pelvis, with the webbing lying across the top of thighs.

Across abdomen

The lap portion of a 3 pt automatic belt is across the "belly" or abdomen.

Used to install child restraint

The lap portion of a 3 pt automatic belt is being used to install a child restraint. The lap portion of a 3 pt automatic belt does not go across the child.

Position of automatic lap belt/Lap portion of belt (cont'd)

Page 2 of 2

Low across hips with extra “slack room”

The lap portion of a 3 pt automatic belt is low across the hips so that it goes around the front of pelvis, with the webbing lying across the top of thighs and is not tight against the person, but has extra “slack room”.

Across abdomen with extra “slack room”

The lap portion of a 3 pt automatic belt is across the “belly” or abdomen and is not tight against the person, but has extra “slack room”.

Other use (specify)

is used if the automatic lap belt is in any position other than what is described above. The researcher must specify how the belt was used.

Unknown position

is used if the researcher is unable to determine the position of the automatic lap belt.

POSITION OF AUTOMATIC SHOULDER BELT/SHOULDER PORTION OF BELT

Screen Name: Position/Shoulder

SAS Data Set:

SAS Variable:

Oracle Name: ***AUTOMATICBELTUSE.SHLDPOSITIONID***

Element Attributes:

Oracle	SAS	
0	0	[Not equipped/not available/not used]
1	1	Snugly across the collarbone and over shoulder
2	2	Resting on neck
3	3	On edge of shoulder
4	4	Under arm
5	5	Behind occupant's back or seat
10	10	Used to install child restraint
6	6	Across the collarbone and over shoulder with extra "slack room"
7	7	Resting on neck with extra "slack room"
8	8	On edge of shoulder with extra "slack room"
9	9	Under arm with extra "slack room"
98	98	Other position (specify)
99	99	Unknown position

Source: Interview and injuries

Remarks:

If the shoulder portion of a 3 pt automatic belt is being used with a child restraint then indicate how the shoulder portion is positioned on the child. The routing of the shoulder portion (if any) through the child restraint is indicated in the variable "Seat Belt Routing" on the **Child Restraint Tab**.

If two occupants are using one belt code as "**Other (specify)**" to both occupants and annotate.

Snugly across the collarbone and over the shoulder

The automatic shoulder belt or shoulder portion of a 3 pt automatic belt fits snugly and is routed over the collarbone and over the shoulder.

Resting on neck

The automatic shoulder belt or shoulder portion of a 3 pt automatic belt is routed such that it is rubbing against the neck.

On edge of shoulder

The automatic shoulder belt or shoulder portion of a 3 pt automatic belt is worn on the edge of the shoulder.

Under arm

The automatic shoulder belt or shoulder portion of a 3 pt automatic belt is placed under the arm.

Behind occupant's back or seat

The automatic shoulder belt or shoulder portion of a 3 pt automatic belt is placed behind the back of the occupant or behind the back of the seat.

Used to install child restraint

The shoulder portion of a 3 pt automatic belt is being used to install a child restraint. The shoulder portion of a 3 pt automatic belt does not go across the child.

Resting on neck with extra "slack room"

The automatic shoulder belt or shoulder portion of a 3 pt automatic belt is routed such that it is rubbing against the neck and is not tight against the person, but has extra "slack room".

On edge of shoulder with extra "slack room"

The automatic shoulder belt or shoulder portion of a 3 pt automatic belt is worn on the edge of the shoulder and is not tight against the person, but has extra "slack room".

Under arm with extra "slack room"

The automatic shoulder belt or shoulder portion of a 3 pt automatic belt is placed under the arm and is not tight against the person, but has extra "slack room".

Other use (specify)

is used if the automatic shoulder belt is in any position other than what is described above. The researcher must specify how the belt was used.

Unknown position

is used if the researcher is unable to determine the position of the automatic shoulder belt.

AUTOMATIC (PASSIVE) BELT MALFUNCTION MODES DURING CRASH

Page 1 of 2

Screen Name: Malfunction

SAS Data Set: OA

SAS Variable: ABLTFAIL

Oracle Name: AUTOMATICBELTUSE.AUTOBELTFAILURE

Element Attributes:

Oracle	SAS	
0	0	[Not equipped/not available/destroyed or rendered inoperative]
1	1	No automatic belt malfunction(s)
2	2	Torn webbing (stretched webbing not included)
3	3	Broken buckle or latchplate
4	4	Upper anchorage separated
5	5	Other anchorage separated (specify)
6	6	Broken retractor
10	10	Belt integrity loss due to structural movement
7	7	Combination of above (specify)
8	8	Other automatic belt malfunction (specify)
-9999	99	Unknown

Source: Researcher determined—primary source is vehicle inspection, additional input may include the interview and police report if a vehicle inspection is obtained.

Remarks:

The **Vehicle Inspection** portion of this screen shows what was determined **at the vehicle inspection** which is the primary source of information for these variables. **However**, the researcher should use all the available information, placing emphasis on the vehicle inspection information, to make the final determination for completion of this variable.

If any component of the automatic belt system malfunctions during the impact, the malfunction is captured in this variable. The malfunction is also recorded on the **Case Form/Summary Tab** and documented with images as needed. Automatic belt system malfunctions, unlike manual belt system malfunctions, are not limited to those that resulted from occupant loading.

If a malfunction occurs, select the attribute which corresponds to the appropriate automatic belt malfunction mode that describes the component of the restraint system which malfunctioned (*i.e.*, torn webbing, broken buckle or latchplate, anchorage separation, broken retractor). A complete and documented description of the malfunctioned component and the way it malfunctioned must accompany the case.

No automatic belt malfunction(s)

is used when there is no physical evidence from the vehicle inspection to indicate or support that a malfunction occurred.

Belt integrity loss due to structural movement

is used when a component of the vehicle moves due to crash forces, which causes the seat belt mechanism to move.

Combination of above (specify)

is used when any combination of specified attributes occurs and describes multiple automatic belt malfunction modes. Automatic belt malfunctions which are not described are reported in Other automatic belt malfunctions. Automatic belt malfunctions listed with specific attributes take priority over other attributes.

Other automatic belt malfunction (specify)

is used when the only automatic belt malfunction(s) which occur are not described in the specific attributes. An example of this would be when the 2 pt automatic "track mouse" is ripped from the mechanism.

Unknown

is used when it cannot be determined if the automatic belt malfunctioned.

SOURCE OF RESEARCHER'S DETERMINATION OF AUTOMATIC BELT USE

Screen Name: Source of Belt Use

SAS Data Set: *OA*

SAS Variable: *ABELTSOU*

Oracle Name: *AUTOMATICBELTUSE.SOURCEBELTUSE*

Element Attributes:

Oracle	SAS	
1	0	Not equipped/available/destroyed/rendered inoperative
2	1	Vehicle Inspection
3	2	Official Injury Data
4	3	Driver/occupant interview
5	8	Other (specify)
6	9	Unknown if belt used

Source: Researcher determined.

Remarks:

This variable explains what preponderance of information the researcher used to make the determination that the automatic seat belt was used, **not** whether the belt system was available. **The PAR is not an acceptable source to list for belt use determination.** If multiple sources of information are available, select the source that gives the most reliable information.

Vehicle Inspection

is used if the vehicle inspection gave definitive indications that the belt was in use.

Official Injury Data

is used if the official injury data makes a specific mention of injury patterns that can be attributed to the use of a seat belt, and the vehicle inspection did not give definitive indications of usage.

Driver/occupant interview

is used if the vehicle inspection did not give definitive indications of usage or there was no vehicle inspection, however the interview(s) provided significant information to code belt use.

Other (specify)

is used when information from other official sources such as the EMS, fire department (e.g., rescue or extrication personnel), or on-scene photographs indicates that the occupant was or was not restrained by a manual or automatic belt at the time of the crash. Specify the source of the information.

INJURY/PSU

Occupant Form, Case #2007-996-900015/Vehicle # 2/Occupant #1

OCCUPANT | EJECTION | ENTRAPMENT | SEAT | AIR BAG | CHILD SEAT | SEAT BELT | INJURY | INJURY CODES | LOG | REVIEW

INJURY

PAR Severity



Mortality

Treatment

Initial Facility

Hospital Stay days

Work Days Lost days

 Save  Close

[POLICE INJURY SEVERITY (POLICE RATING)]

Page 1 of 7

Screen Name: PAR Severity**SAS Data Set:** OA**SAS Variable:** INJSEV**Oracle Name:** OCCUPANTINJURY.PICKPOLICEINJURYSEVERITY**Element Attributes:**

Oracle	SAS	
1	0	O — No injury
2	1	C — Possible injury
3	2	B — Nonincapacitating injury
4	3	A — Incapacitating injury
5	4	K — Killed
6	5	U — Injury, severity unknown
7	6	Died prior to crash
8	9	Unknown

Source: Police report.**Remarks:****Rolled up from Occupant Tab.**

If the police report contains a detailed description of the injuries but does not translate the injuries into the KABCO codes, use the police method for doing so. For example, injuries which are considered to be of an incapacitating nature are classified as "A", Nonincapacitating-evident injuries are classified as "B", and possible injuries are "C". Property damage only (i.e., no injury) is classified as "O".

Enter **Injured, Severity Unknown** if the police report indicates a "U" or in any other way communicates the idea that the person was injured but the severity is unknown.

Enter **Died Prior to Crash** only if the police explicitly states the person died prior to the crash. This code is also used if the police report indicates the person died as a result of natural causes (e.g., heart attack), disease, drug overdose or alcohol poisoning. This code does not apply if the police report specifically states that the cause of death is a result of crash-related injury or that on-set occurred after the crash. Further clarification: this code applies if the police report indicates that the person died as a result of natural causes (e.g., heart attack), disease, drug overdose or alcohol poisoning, but is silent about the time of on-set and if on-set is the result of injuries sustained in the crash.

As a general rule, if the PAR is "blank" where the injury severity is assessed and the person was at the scene during the police investigation, enter **No Injury (O)**. If the PAR is "blank" and the person was not present during the police investigation, enter **Unknown**.

U — Injury, severity unknown

is used when the police report indicates a "U" or in any other way communicates the idea that the person was injured but their severity is unknown.

Died prior to crash

is only used if the police explicitly so indicate.

As a general rule, if the PAR is "blank" where the injury severity is assessed and the person was at the scene during the police investigation, then select "O" - No injury. If the PAR is "blank" and the person was not present during the police investigation, then select "Unknown".

The following states use the KABCO injury coding scheme: Illinois (incl. Chicago), Michigan, New Mexico, North Carolina, Texas (incl. Dallas), Wisconsin, and the city of Los Angeles.

Not all states use the KABCOU scheme. Listed below, by state, are alternative schemes; a mapping to the NASS scheme is provided.

State	PAR Code/Definition		NASS Scheme/Code
Alabama	K	= Killed	K - 4
	A	= Visible or carried from scene	A - 3
	B	= Bruise/abrasion/swelling	B - 2
	C	= Not visible - has pain/faint	C - 1
	Blank	= No documentation of driver or occupant injury	Blank - 0
		= No set unknown code	
Arizona	5	= Fatal Injury	K - 4
	4	= Incapacitating injury	A - 3
	3	= Non-incapacitating Evident	B - 2
	2	= Possible Injury	C - 1
	1	= No injury	O - 0
	6	= Unknown	U - 9

OCCUPANT FORM**INJURY/PSU**

Police Injury Severity (Police Rating) (cont'd)

Page 3 of 7

California	1	= Fatal	K - 4
	2	= Severe injury	A - 3
	3	= Other visible injury	B - 2
	4	= Complaint of pain	C - 1
	Blank	= Occupant present	O - 0
	Blank	= Occupant not present	- 9

Colorado	5	= Fatal	K - 4
	4	= Evident - incapacitating	A - 3
	3	= Evident - non-incapacitating	B - 2
	2	= Possible injury	C - 1
	1	= No injury	O - 0

	*There is a box at the top of the PAR indicating number of persons injured. If this box is marked 0 and the injury code is left "blank", assume "No injury". If the box is marked 1 (or more) pertaining to the vehicle occupants in question and the injury code is "blank", assume "Injured, severity unknown". If "blanks" are present in both the persons injured box and the injury code box, assume "Unknown".		
--	--	--	--

Florida	5	= Fatal (within 90 days) injury	K - 4
	4	= Incapacitating	A - 3
	3	= Non-Incapacitating	B - 2
	2	= Possible	C - 1
	1	= None	O - 0
		= No set unknown code	- 9
	6	= Non-traffic fatality	- 9

Indiana

Nature of Most Severe Injury	Location of Most Severe Injury	Victim's Injury Status	
1-11 Any Entry	1-12 Any Entry	6 Dead	K-4
1-11 Any Entry	1-12 Any Entry	2 Semiconscious 3 Incoherent 4 Unconscious	A-3
1 Severed 2 Internal 4 Severe Burn 7 Severe Bleed (Arterial) 8 Fracture/Dislocation	1-12 Any Entry	1 Conscious 5 Shock 7 Refused Med	A-3
3 Minor Burn 6 Minor Bleed 10 Complaint 11 None Visible	1-2, 4-12 Eye	1 Conscious 5 Shock 7 Refused Med	A-3
3 Minor Burn 6 Minor Bleed	1-2, 4-12 Any EXCEPT eye)	1 Conscious 5 Shock 7 Refused Med	B-2
5 Abrasion 9 Contusion/Bruise	1-12 Any Entry	1 Conscious 5 Shock 7 Refused Med	B-2
10 Compliant of Pain 11 None Visible	1-2, 4-12 (Any EXCEPT eye)	1 Conscious 5 Shock 7 Refused Med	C-1
11 None Visible	Blank or Slashed	1 Conscious	0-0
Blank or Slashed	Blank or Slashed	Blank or Slashed	0-0
Unknown	Unknown	Unknown	U-9

State	PAR Code/Definition		NASS Scheme/ Code
Iowa			
	1	= Fatal Injury	K - 4
	2	= Major (incapacitating)	A - 3
	3	= Minor (bruises and abrasions)	B - 2
	4	= Possible (complaint of pain)	C - 1
	0	= Unknown	U - 9
	Blank	= No documentation of driver or occupants on back of PAR	O - 0
Kentucky			
	1	= Fatal	K - 4
	2	= Incapacitating	A - 3
	3	= Non-Incapacitating	B - 2
	4	= Possible Injury	C - 1
	5	= None Detected	O - 0
Maryland			
	05	= Fatal	K - 4
	04	= Disabled (Incapacitated)	A - 3
	03	= Injured - not Incapacitated	B - 2
	02	= Possible injury	C - 1
	01	= Not Injured (& present)	O - 0
	01	= Not Known (if left scene)	- 9
	Blank	= No documentation of driver or occupants on front of PAR	

State	PAR Code/Definition		NASS Scheme/ Code
Massachusetts			
	1	= Killed	K - 4
	2	= Serious Visible Injury	A - 3
	3	= Minor Visible Injury	B - 2
	4	= No visible injury but complaints of pain	C - 1
	Blank	= No documentation of driver or occupants on front of PAR	O - 0
		= No set unknown code	- 9
Missouri			
	1	= Fatal	K - 4
	2	= Disabling	A - 3
	3	= Evident-Not Disabling	B - 2
	4	= Probable-Not Apparent	C - 1
	5	= None Apparent	O - 0
	6	= Unknown	U - 9
Nebraska			
	1	= Killed	K - 4
	2	= Disabling - cannot leave scene without assistance	A - 3
	3	= Visible but not disabling	B - 2
	4	= Possible but not visible	C - 1
	Blank	= Occupant present	O - 0
	Blank	= Occupant not present	- 9

New Jersey

Location of Injury	Type of Injury	Victim's Condition	
Any Entry	Any Entry	Killed	K-4
Any Entry	Any Entry	Incapacitated	A-3
Any Entry	amputation, concussion, internal, fracture/dislocation	Moderate injury complaint of pain	A-3
Eye	burn, bleeding, complaint of pain	Moderate injury complaint of pain	A-3
Any Entry	bleeding, contusion bruise, abrasion	Moderate Injury	B-2
Any Entry (EXCEPT Eye)	complaint of pain	complaint of pain	C-1
-	-	-	0-0
U	U	U	U

New York

Location of Injury	Type of Injury	Victim's Condition	
Any Entry	Any Entry	Apparent Death	K-4
Any Entry	Any Entry	Unconscious, Semi-Conscious, Incoherent	A-3
Any Entry	amputation, concussion, internal, severe burn, moderate burn, fracture/dislocation	Shock, Normal	A-3
Eye	minor bleeding, minor burn, complaint of pain	Shock, Normal	A-3
All but eye	minor bleeding minor burn	Shock, Normal	B-2
Any Entry	contusions-bruise abrasion	Shock, Normal	B-2
All but eye	complaint of pain	Shock, Normal	C-1 0-0
X	X	X	X

Screen Name: Mortality

SAS Data Set: OA

SAS Variable: MORTLTY

Oracle Name: OCCUPANTINJURY.PICKMORTALITY

Element Attributes:

Oracle	SAS	
1	0	Not Fatal
2	1	Fatal
3	2	Fatal — ruled disease (specify)

Source: Researcher determined — inputs include interviewee, police report, and medical records.

Remarks:

Official sources (if they exist) take precedence over interview data.

Not Fatal

is used when death does not occur or occurs more than 30 days after the crash.

Fatal

is used when death occurs within 30 days of the crash. Death must have occurred as a consequence of injuries sustained in the traffic crash. Interview information alone should not be sufficient to select this attribute.

Fatal — ruled disease (specify)

is used in two situations. The first is when the effects of a disease can be deemed as a cause of the crash. Cause means that the on-set of the disease occurred prior to the first harmful event. When determining the time of on-set (relative to the first harmful event), the researcher can use any information source available. The researcher makes his/her determination after weighing all the evidence. (**NOTE:** The use of all available information sources is restricted to the determination of when the on-set occurred.)

Second is when a medical examiner (or other official vested by the state to verify the cause of death) or an official medical report verifies that the death resulted from either (1) a diseased condition, or (2) not from crash related injuries.

TREATMENT

Screen Name: Treatment

SAS Data Set: *OA*

SAS Variable: *TRETMENT*

Oracle Name: *OCCUPANTINJURY.PICKINITIALTREATMENT*

Element Attributes:

Oracle	SAS	
0	0	No treatment
8	1	Dead on Arrival (DOA) at hospital
10	2	Dead Prior To Admission
1	3	Hospitalized
2	4	Transported and released
3	5	Treatment at scene - non-transported
4	6	Treatment later
6	7	Transported to a medical facility - unknown if treated
5	8	Treatment - other (specify)
7	9	Unknown

Source: Researcher determined — inputs include interviewee, police report, and medical records.

Remarks:

Official sources (if they exist) take precedence over interview data.

No treatment

includes persons transported to a hospital but who refuse treatment. A person who is declared dead at the scene of the crash and is not transported to a hospital is coded **No treatment**.

Dead On Arrival (DOA) at hospital

includes persons who are transported from the scene to a hospital facility and pronounced dead on arrival **at the hospital**. This means that no treatment was attempted at the hospital facility (e.g., no CPR, no examination, no x-rays, etc.)

Dead Prior To Admission

includes persons who are transported from the scene to a hospital facility and treated in the ER, but died prior to admission. See **Hospital Stay** for hospitalization criteria.

Hospitalized

is used when hospitalization occurs as a result of injury (need *not* be taken directly to a hospital). See Hospital Stay for hospitalization criteria. Also use this attribute if a person is treated and released, then is subsequently hospitalized as a result of injuries sustained in the crash.

Transported and released

is used when the person went *directly* from the crash scene to a treatment facility (hospital, clinic, doctor's office, etc.), and the person *is examined* for injuries at the facility. The person need not have been injured. The means of transportation is *not* a consideration.

Treatment at scene — non-transported

includes treatment at scene such as: first aid, self-treatment, EMT treatment, doctor treatment, etc.-- and the person is not transported or does not go to a treatment facility (*e.g.*, doctor, clinic, hospital, etc.) as a result of injuries sustained in this crash.

Treatment later

includes only professional treatment (*e.g.*, doctor, clinic, hospital, etc.) where the person:

- did not go directly from the scene to treatment,
and
- was treated and released.

If a person is treated at the scene, is not transported from the scene, and subsequently receives later treatment (without being hospitalized), then use this attribute.

Treatment — other (specify)

includes non-professional treatment such as first aid, self-treatment, etc., not at the scene of the crash. If this is used, then Type of Medical Facility (for Initial Treatment), must be assigned Not treated at a medical facility.

Transported to a medical facility-unknown if treated

is used when the person went *directly* from the crash scene to a treatment facility (hospital, clinic, doctor's office, etc.), and no other information about treatment is known.

If a person survives the injuries and receives treatment at a hospital, but is not admitted for hospitalization, that person's treatment is either Transported and released or Treatment later, depending upon whether the person went directly or indirectly to the hospital. It does not matter if the person is treated for one hour or twelve, only that the person is released following treatment. Nor does it matter if the treatment begins prior to midnight and spans into the following day.

TYPE OF MEDICAL FACILITY (FOR INITIAL TREATMENT)

Page 1 of 3

Screen Name: Initial Facility

SAS Data Set: OA

SAS Variable: MEDFACIL

Oracle Name: OCCUPANTINJURY.PICKFACILITYTYPE

Element Attributes:

Oracle	SAS	
1	0	Not treated at a medical facility
2	1	Trauma center
3	2	Hospital
4	3	Medical clinic
5	4	Physician's office
6	5	Treatment later at medical facility
7	8	Other (specify)
8	9	Unknown

Source: Researcher determined — inputs include police report, interviewee, official records, and the American College of Surgeons classification criteria.

Remarks:

The treatment of injuries by a physician immediately (*i.e.*, within one hour) following a crash is of utmost importance in serious injury crashes. In order to assess the quality of immediate care available to the victims in CDS crashes, the following criteria are used to categorize the various treatment facilities. Teams must develop a listing of treatment facilities serving their PSU and categorize each into this variable's scheme. Teams must communicate their list to their respective zone center.

Not treated at a medical facility

is used when the person was not injured or receives nonprofessional treatment such as first-aid, self-treatment, etc. In addition, use this attribute for persons who "died" at the scene or "died in-route" to a medical facility. Treatment at the scene or in-route to a medical facility by emergency medical personnel is *not* considered initial treatment for the purposes of this variable. This is true even if the facility has radio communications with their EMTs. If a person arrives at a medical facility and subsequently dies or is declared dead after some treatment, but prior to admission, then use one of the other attributes. For example, an occupant arrives with no vital signs, CPR in progress, and a "flat" EKG and is declared "dead on arrival" on the ER report.

Trauma center

is used when the occupant was initially treated at a Level I or Level II Trauma Center as defined by the American College of Surgeon's Committee on Trauma report entitled: "Hospital and prehospital resources for optimal care of the injured patient", *American College of Surgeons Bulletin*, Vol. 71, No. 10, October 1986, pp. 4-12.

The fact that a medical facility calls itself a "Trauma Center" or something of the same nature does not mean that it satisfies the criteria for Trauma center. The facility must meet the criteria as noted in the preceding paragraph. Teams should contact their "hospitals" and ask each what they consider themselves to be (according to criteria referenced above). Teams should also be alert for communication releases (*i.e.*, newspapers, radio, TV, etc.) which concern the trauma capability status of their area emergency rooms. **If the status of a hospital should change, notify your Zone Center.**

Hospital

is used for all "hospitals" which do not fall into the definition of a Level I or Level II Trauma Center as defined.

Medical clinic

is used for treatment facilities which provide outpatient medical care with related in-house laboratory facilities (e.g, x- ray). These are usually a group practice in which several physicians work cooperatively. This also includes school clinics, work place clinics, or similar facilities if they are staffed by a physician while open. If a doctor is not normally present at a clinic while it is open, then the appropriate attribute is Other.

Physician's office

is used when the person is initially treated in an office of a professional health care provider which does not qualify for Trauma center, Hospital, or Medical clinic.

Treatment later at medical facility

includes only professional treatment (*e.g.*, doctor, clinic, hospital, etc.) where the person:

- did not go directly from the scene to treatment,
and
- was treated and released.

If a person is treated at the scene, is not transported from the scene, and subsequently receives later treatment (without being hospitalized), then use this attribute.

Other (specify)

is used when a health care provider's facility is used for the initial treatment, and the facility does not qualify as a Trauma center, Hospital, Medical clinic, or Physician's office above.

Type of Medical Facility (for Initial Treatment) (cont'd)

Page 3 of 3

Unknown

is used when it is unknown what type of initial treatment facility was used or when it is unknown if treatment of any kind was obtained.

HOSPITAL STAY

Page 1 of 2

Screen Name: Hospital Stay

SAS Data Set: OA

SAS Variable: HOSPSTAY

Oracle Name: OCCUPANTINJURY.NUMDAYSHOSPITALIZED

Element Attributes:

Oracle	SAS	
	0	Not hospitalized Enter the number of days (up through 60)
	61	61 days or more
-9999	99	Unknown

Source: Researcher determined — inputs include interviewee and medical reports.

Remarks:

Official sources (if they exist) take precedence over interview data.

Not hospitalized

is used when the person was not injured or injured but not admitted to the facility (*i.e.*, admission to the facility's emergency room is not "admission" to the facility for the purposes of the hospitalization question). In addition, use this attribute if fatal at scene, pronounced dead on arrival, or survival does not extend beyond the emergency room.

The basis for the number of days is an overnight criterion. Every time a person remains past midnight subsequent to admission, it is one day. However, there are two exceptions. One exception occurs when a person dies on the same day as the admission. In this situation, 1 is entered. The other exception occurs when a person is *admitted* in the early morning hours (between midnight and 7:00 a.m.), usually for observation, and is subsequently released later in the same day (usually late morning or early afternoon) 1 is entered because the person was hospitalized, Treatment equals Hospitalized.

If your information indicates that the person died while in a critical care unit [*e.g.*, intensive (*i.e.*, ICU), coronary (*i.e.*, CCU), etc.], then at least 1 is entered even if the person expires on the same day. In other words, a person is considered admitted if they are still alive when they are transferred to a critical care unit. On the other hand, in the event that the person survives the emergency room but subsequently dies during surgery, then Not hospitalized is used, because a person who goes directly from the emergency room to an operating room is not considered to have been admitted.

If a person is admitted, lives four days in the hospital, and subsequently expires, enter 4.

This variable reports the number of days this occupant is hospitalized at a primary care facility. Primary care facilities includes medical facilities that receive patients via air transfer (*e.g.*, "lifeline" and "medivac"). However, the number of days spent at secondary care facilities (*i.e.*, rehabilitation or convalescent units, centers, facilities; or nursing homes) are ***not*** included in this variable.

WORKING DAYS LOST

Screen Name: Work Days Lost

SAS Data Set: OA

SAS Variable: WORKDAYS

Oracle Name: OCCUPANTINJURY.PICKWORKINGDAYSLOST

Element Attributes:

Oracle	SAS	
	0	No working days lost
		Enter the number of days (up through 60)
	61	61 days or more
	62	Fatally injured
-8888	97	Not working prior
-9999	99	Unknown

Source: Primary source is the interviewee; a secondary source is the person's employer.

Remarks:

Report the actual number of "work" days lost due to the crash by an employed person or a full-time college student. Children, adolescents, retirees, or unemployed persons are included in **Not working prior to crash**.

If no interview is obtained, assume that persons over 65 or under 17 are not employed full-time; for these persons Not working prior to crash is used unless the person is fatally injured.

Employed is defined to mean that the person was scheduled to work at least four hours on each of the days lost. Each such day is counted as a full day so long as the person was scheduled to work at least four hours on the day lost. Do **not** accumulate the hours and convert to equivalent full-time days; however, if the person works less than full-time but greater than four hours per day annotate "part-time" or "PT".

If during the interview a reasonable projection of future days lost can be made, then add those days to those already known to have been lost. If a reasonable projection cannot be made, then select Unknown.

- The days lost need not be due to injury.
- Days lost include Saturdays, Sundays, and afternoon and evening shifts if so scheduled. Do not count double shifts or days at time and one-half pay, etc., as more than one day.

- If the reported work days lost includes a fraction, round one-half ($\frac{1}{2}$) day or greater up to a whole day. Less than one-half day is excluded (rounded down).
- If someone loses their job as a result of the crash, then count only the work days lost between the crash and the date of termination, inclusive.
- Do not include days lost by persons who were not directly involved in the crash but who lost days because of it (*e.g.*, husband who was not in crash but stayed home to take care of wife who was injured and required assistance).
- If an involved person changes their work schedule as a result of a crash (*e.g.*, to take care of someone injured in the crash), then the work time, which was given up as a result of the crash, shall not be considered as lost.

Not working prior to crash

is used when a person is not employed, not a full-time college student, or works less than four hours per day. This includes all persons (except fatals) who do not qualify to lose working days.

INJURY-ZONE

Occupant Form, Case #2006-903-702S/Vehicle # 1/Occupant #1

OCCUPANT | EJECTION | ENTRAPMENT | SEAT | AIR BAG | CHILD SEAT | SEAT BELT | INJURY | INJURY CODES | LOG | REVIEW

PSU | ZONE

Death - Date: [] Time: []

Time to Death: [] [Not Fatal](#) hrs. (NASS - Valid only within 30 days)

Num Injuries: [2]

GCS: []

Occupant Given Blood: []

ABG(HCO3): []

Medically Reported Cause Of Death [Ctrl I = Insert Cause of Death](#)

Order	Injury
▶	

Save Close

DEATH DATE

Screen Name: Death - Date

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *OCCUPANTINJURY.DEATHDATE*

Element Attributes:

Enter Date of Death

Source: Zone Center determined from police report, hospital/medical records, autopsy report, or other official records for actual date of death for fatally injured occupants.

Remarks:

Enter the date that the occupant died.

DEATH TIME

Screen Name: Time

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: ***OCCUPANTINJURY.DEATHTIME***

Element Attributes:

Enter Time of Death, 0001-2400 hours

Source: Zone Center determined from police report, hospital/medical records, autopsy report, or other official records for actual time of death for fatally injured occupants.

Remarks:

Enter the time that the occupant died using the 24 hour military clock. Do not use the 0000 hours time.

[TIME TO DEATH]

Screen Name: Time to Death

SAS Data Set: *OA*

SAS Variable: *DEATH*

Oracle Name: *OCCUPANTINJURY.TIMETODEATH*

Element Attributes:

Oracle	SAS	
	[0	Not Fatal]
	[1-24	Hours to death]
	[31-60	1 day to 30 days]
-8887	[96	Fatal, ruled disease]
-9999	[99	Unknown]

Source: Zone Center determined from police report, hospital/medical records, autopsy report, or other official records for actual time of death for fatally injured occupants.

Range: 0, 1-24, 31-60, 96, 99

Remarks:

Enter date and time of death. The system computes the time to death based on the crash date and the date and time of death entered previously. This value is valid in NASS only up to 30 days.

[NUMBER OF INJURIES FOR THIS OCCUPANT]

Screen Name: Num Injuries

SAS Data Set: *OA*

SAS Variable: *INJNUM*

Oracle Name: *DERIVED*

Element Attributes:

0 [No injuries]
[The actual number of injuries recorded for this occupant will be rolled up]
97 [Injured, severity unknown]
99 [Unknown if injured]

Source: Zone Center determined — inputs include official medical records and interviewee data from the PSU and PAR (see limitations below).

Range: 0, 1, 95, 97, 99

Remarks:

The system rolls the number of injuries coded in the NASSINJURY program to the number of injuries variable.

No injuries are recorded by the system when no injuries have been coded in the NASSINJURY program.

GLASGOW COMA SCALE (GCS) SCORE (AT MEDICAL FACILITY)

Page 1 of 2

Screen Name: GCS

SAS Data Set: OA

SAS Variable: GLASGOW

Oracle Name: OCCUPANTINJURY.PICKGCSSCORE

Element Attributes:

Oracle	SAS	
0	0	Not injured
1	1	Injured — not treated at medical facility
2	2	No GCS Score at medical facility
3-15	3-15	Enter the actual value of the initial GCS Score recorded at medical facility
97	97	Injured, details Unknown
99	99	Unknown if injured

Source: Zone Center determined from official medical records.

Remarks:

Report the actual value of the *initial* GCS score obtained at a medical facility. The Glasgow Coma Scale assesses three neurological functions: **eye opening**, **motor response**, and **verbal response**. The GCS value can often be found in medical records by looking for the abbreviation "GCS". The number following the abbreviation is the score unless the value is less than "03" or greater than "15". It is not uncommon to find the GCS Score accompanied by information about eye pupil size and motor strength.

If more than one Glasgow Coma Scale (GCS) Score is recorded in the document without reference to initial GCS Score, then select the GCS Score to be entered in the following order:

- (a) enter the GCS Score from the medical record with the earliest time to hospital treatment (*i.e.*, enter ER record over discharge summary)
- (b) enter the GCS Score that appears first in a medical record other than the ER record
- (c) if two or more GCS Scores are recorded in the same record without reference to time, enter the lowest GCS Score.

"15" is entered when the occupant's medical record does not specifically indicate the GCS Score but does indicate one or more of the following pieces of information:

- AxOx3 (alert and oriented times three)
- neurologically intact, normal, etc., or
- CN II-XII okay, normal, intact, etc.

Injured — not treated at medical facility

is used when the person was injured and received only nonprofessional treatment such as first-aid, self-treatment, etc., or was treated at the scene by emergency medical personnel. In addition, use this for persons who "died" at the scene or "died in-route" to a medical facility. This is true even if the medical facility has radio communications with the emergency medical personnel.

No GCS Score at medical facility

is used when the occupant was injured and received professional medical treatment but no Glasgow Coma Scale Score was assessed or recorded at a medical facility. Use this if the only GCS Score obtained was reported on an emergency medical report. If GCS Scores are obtained by both emergency medical personnel and at a medical facility, then report the initial score obtained at the medical facility.

Use this attribute if a person was treated at a medical facility and their medical records are pending.

Injured, details unknown

is used when the occupant was injured but the details of the injuries are unknown.

Unknown if injured

is used when the PAR injury severity is "C-injury" and there is no interview and it is unknown if the person received medical treatment.

WAS THE OCCUPANT GIVEN BLOOD?

Page 1 of 2

Screen Name: Occupant Given Blood?**SAS Data Set:** *OA***SAS Variable:** *BLOOD***Oracle Name:** *OCCUPANTINJURY.BLOODGIVENUNITS***Element Attributes:**

Oracle	SAS	
0	0	No — blood not given
1	1	1 unit given
2	2	2 units given
3	3	3 units given
4	4	4 units given
5	5	5 units given
6	6	6 units given
7	7	7 units given
8	8	8 units given
9	9	9 units given
10	10	10 or more units given
11	97	Blood given, # units unknown
-99	99	Unknown if blood given

Source: Zone Center determined from official medical records or Emergency Medical Service (EMS) reports.**Remarks:**

In general, blood consists of red blood cells (erythrocytes), white blood cells (leukocytes) and platelets (thrombocytes) suspended in plasma. In a transfusion, blood can be given in four separate forms: whole blood, packed red blood cells, plasma, or platelets; or in a combination of these forms.

Whole blood

is blood from which none of the elements have been removed.

Packed red blood cells

are whole blood from which plasma has been removed.

Plasma

is the fluid (pale yellow liquid) of the blood in which the particulate components are suspended. Plasma is often given to burn patients.

Was the Occupant Given Blood? (cont'd)

Page 2 of 2

Platelets

are known for their role in blood coagulation. Platelets are often given when blood clotting is desired.

No — blood not given

is used whenever, Glasgow Coma Scale (GCS) Score equals Not injured or Injured - not treated at medical facility, or it is known that the person did not receive any professional treatment. In addition, use this when:

- it is known that the occupant was injured and not given blood; or
- an occupant is transported and released **and** not subsequently hospitalized independent of whether the occupant's records are acquired.

Enter the number of units of blood

when this occupant was given "blood" in any of the four forms, or combinations, discussed above for injuries sustained as a result of their motor vehicle traffic crash. **Excluded** are transfusions which result from noninjury. For example, if a spontaneous abortion results to a mother who was not injured, but who was given a transfusion, then do not consider this occupant to have had blood given. Whenever an occupant is "taken to surgery" researchers should be alert to the possibility that a blood transfusion occurred. Whenever a transfusion occurs, select the number of units of blood given.

Blood given, # units unknown

is used when this occupant was given blood, but the amount was not specified.

Unknown if blood given

use this when the occupant is:

- injured and treated at a medical facility but it cannot be determined if blood was given.
- hospitalized **and** the occupant's records are inconclusive regarding whether blood was given;
- taken to surgery, regardless of hospitalization (*e.g.*, died prior to being hospitalized), **and** the occupant's records are inconclusive regarding whether blood was given; or
- hospitalized **or** taken to surgery **and** the medical records are pending.

ARTERIAL BLOOD GASES -- ABG (HCO₃)

Screen Name: ABG (HCO₃)

SAS Data Set: OA

SAS Variable: BICARB

Oracle Name: OCCUPANTINJURY.PICKABGRESULTS

Element Attributes:

Oracle	SAS	
0	0	Not injured
1	1	Injured, ABGs not measured or reported
2-50	2-50	ABG=2, 3, 4, , , , 50
96	96	ABGs reported, HCO ₃ unknown
97	97	Injured, details unknown
99	99	Unknown if injured

Source: Zone Center determined from official medical records.

Remarks:

The table below presents the normal measures of arterial blood gases followed by the definitions of these measures and other keywords.

Arterial Blood Gases (ABGs)

Measure	Normal	Respiratory Acidosis	Respiratory alkalosis	Metabolic acidosis	Metabolic alkalosis
pH	7.35 to 7.45	Normal or Decreased	Increased	Decreased	Increased
PO ₂	90 to 95 mm Hg	Decreased	Altered	Normal or increased	Normal or decreased
PCO ₂	34 to 46 mm Hg	Increased	Decreased	Decreased	Increased
HCO ₃	24 to 26 mEq/L	Increased	Decreased	Decreased	Increased
RR	10/min to 20/min	Irregular	Altered	Increased	Decreased

Definitions of Measures

pH — the symbol relating the hydrogen ion (H⁺) concentration or activity of a solution to that of a given standard solution. Numerically the pH is approximately equal to the negative logarithm of H⁺ concentration expressed in molarity pH 7 is neutral; above it alkalinity increases and below it acidity increases.

PO₂, pO₂, P_o2 oxygen partial pressure (tension).

PCO₂, pCO₂, P_co₂ carbon dioxide partial pressure or tension.

HCO₃ bicarbonate radical.

RR respiratory rate.

Alphabetical Definitions of Keywords

acidosis (as"i-do/sis) — a pathologic condition resulting from accumulation of acid or depletion of the alkaline reserve (bicarbonate content) in the blood and body tissues, and characterized by an increase in hydrogen ion concentration (decrease in pH). metabolic a. — a disturbance in which the acid-base status of the body shifts toward the acid side because of loss of base or retention of noncarbonic, or fixed (nonvolatile), acids; called also nonrespiratory a. respiratory a. — a state due to excess retention of carbon dioxide in the body; called also hypercapnic a.

alkali (al'kah-li) — any of a class of compounds which form soluble soaps with fatty acids ... and form soluble carbonates.

alkalosis (al"kah-lo/sis) — a pathologic condition resulting from accumulation of base, or from loss of acid without comparable loss of base in the body fluids, and characterized by decrease in hydrogen ion concentration (increase in pH). metabolic a. — a disturbance in which the acid-base status of the body shifts toward the alkaline side because of retention of base or loss of noncarbonic, or fixed (nonvolatile), acids. respiratory a. — a state due to excess loss of carbon dioxide from the body.

anion (an'i-on) — an ion carrying a negative charge owing to a surplus of electrons.

bicarbonate (bi-kar'bo-na t) — any salt containing the HCO₃⁻ anion. blood b. — the bicarbonate of the blood, an index of the alkali reserve.

ion (i'on) — an atom or radical having a charge of positive (cation) or negative (anion) electricity owing to the loss (positive) or gain (negative) of one or more electrons.

mEq/L milliequivalent per liter: a milliequivalent is the number of grams of a solute contained in one milliliter of a normal solution; therefore, the normal range for the bicarbonate of blood is 0.024–0.026 grams per milliliter. Thus, for a thousand milliliters, the normal values become 24 to 26 grams.

Medical records often provide ABG information in a condensed format. For example, a medical record presented the ABG information as follows.

ABG:7.56 / 25 / 171 / 100 %

This equates to: pH = 7.56; PCO₂ = 25; PO₂ = 171 -- at 100 percent saturation

In this example, the measure desired is not reported; use ABGs reported, HCO₃ unknown. The measure of interest is the HCO₃ (also referred to as the **bicarbonate**). Researchers must look carefully at their reported ABGs to insure that the desired measure is being obtained. The closeness in range between the normal values of HCO₃ and PCO₂, makes mistaking them easy. In general, when ABGs are reported as a set of three values, consider them to be the pH, PCO₂, and PO₂.

Actual Values

are used to report the measured HCO₃ (bicarbonate) value obtained for this occupant. If multiple ABG HCO₃ values are reported, enter the lowest value.

Injured, ABGs not measured or reported

is used when the occupant is injured

and:

- (1) was not treated at a medical facility
- (2) was treated at a medical facility but no official medical records were obtained, or
- (3) no ABG measures are reported in any of the occupant's obtained official medical records.

ABGs reported, HCO₃ unknown

is used when ABG value(s) are reported in this occupant's medical records but the HCO₃ measure is unknown.

MEDICALLY REPORTED CAUSE OF DEATH

Screen Name: Medically Reported Cause of Death

SAS Data Set: *OA*

SAS Variable: *DCAUSE1, DCAUSE2, DCAUSE3, DCAUSE4, DCAUSE5*

Oracle Name: *CAUSEOFDEATH.PICKCAUSEOFDEATH*

Element Attributes:

Oracle	SAS	
	0	Not fatal
	Assigned #	Select the injuries which have been identified that reportedly contributed to this occupant's death
-96	96	Mode of death given but specific injuries are not linked to cause of death (specify)
-97	97	Other result (includes fatal ruled disease) (specify)
-99	99	Unknown

Source: Zone Center determined from official records

Range: 96, 97, 99

Remarks:

This variable records the injury(s) which was/were determined by the medical professional completing the report, or by trained Zone Center injury coders using official medical records, to be the cause of death. A "cause of death" statement may appear at the beginning or end of an official medical record or it may also appear in a "diagnosis" section or body of a medical record. Like the coding rule for injuries, probable or possible causes of death are not used. If the occupant was killed and no official medical data was obtained, or the data obtained inadequately describes injuries which could have an affect on the occupant's death, then assign cause of death equal to **Unknown**. If the occupant was killed and acquired medical data do not provide a specific official medically reported cause of death, then the Zone Center injury coder will determine if injury data are sufficient to enter the 1st cause of death, and/or 2nd, and/or 3rd with an appropriate injury row(s).

Select the injury(s) which caused the death.

If the "cause of death" statement consist of nonspecific indefinite injuries (e.g., multiple injuries of head, trunk, etc., blunt force injuries of the chest etc., massive injury, and multiple traumatic injuries) and injuries are detailed in the official medical records such that the cause of death can be logically determined, then choose up to three specific injuries using the following guidelines:

- Proceed by first considering specific AIS-6 injuries, followed by AIS-5, then AIS-4, then AIS-3.

Note: AIS levels do not automatically identify an injury as the selected cause of death. For example, if the occupant has an AIS-6 burn injury but the medical says that the occupant was dead prior to the occupant's vehicle catching on fire, then burn was not the cause of death.

- Within each AIS level, determine the contribution the specific injury had on the occupant's chance of survival.

Mode of death given but specific injuries are not linked to cause of death (specify)

is used when it is determined that the occupant qualifies for Fatal in variable, Mortality, but specific injuries are not medically reported for the cause of death. The official medical report may give a mode of death such as (1) acute pulmonary embolis, (2) respiratory failure, (3) cardiac arrest, or (4) asphyxiation. This is also used when the cause of death is reported from complications or consequences of injuries.

Other result (specify)

is used when it is determined that the occupant qualifies for **Fatal-ruled disease** in **Mortality**.

If no cause of death is directly from an injury and there is no officially reported mode of death, then encode cause of death as **Other-result**.

INJURIES LIST

Occupant Form, Case #2007-996-900015/Vehicle # 2/Occupant #1

OCCUPANT | EJECTION | ENTRAPMENT | SEAT | AIR BAG | CHILD SEAT | SEAT BELT | INJURY | INJURY CODES | LOG | REVIEW

INJURIES | VITAL SIGNS | MANNEQUINS

LIST | DETAIL

Num	AIS Code	Rank	Medical Record Type	Aspects	Injury Source	Confidence	Direct/Indirect	Direct Intrusion

Max AIS

Save Close

INJURIES DETAIL

Occupant Form, Case #2007-996-900015/Vehicle # 2/Occupant #1

OCCUPANT | EJECTION | ENTRAPMENT | SEAT | AIR BAG | CHILD SEAT | SEAT BELT | INJURY | INJURY CODES | LOG | REVIEW

INJURIES | VITAL SIGNS | MANNEQUINS

LIST | DETAIL

NASS Code

Description

Aspect

Source

Area

Element

Confidence Level

Direct Intrusion

Indirect Intrusion

Air Bag Related

Direct/Indirect Injury

Rank

Medical Record Type

INJURY NUMBER**Screen Name:** N/A**SAS Data Set:** *OI***SAS Variable:** *INJNO***Oracle Name:** *INJURY.INJURYNUMBER***Element Attributes:**

Sequential number assigned by the system to each coded injury.

Source: Application assigned field**Remarks:**

The NASSINJURY application generates a consecutive number for each injury inserted per occupant beginning with the number 1. No duplicate numbers or skipped numbers allowed.

AIS CODE

Screen Name: NASS Code

SAS Data Set: *OI*

SAS Variable: *AISCODE*

Oracle Name: *INJURY.AISCODES*

Element Attributes:

Adaptation of AIS 90 (1998 Update) codes for CDS data collection (7 digit numeric field describing injury)

Source: Zone center determined based on the current NASS 2000 Injury Coding Manual; inputs include medical records, interviewee, and PAR data.

Remarks:

Select the appropriate NASS injury code using the list of codes developed for use in CDS. For guidance in selecting the appropriate code click on the F10 key. Coding conventions and rules included in the Source document will appear appropriate to the injury code selected.

INJURY DESCRIPTION

Screen Name: Description

SAS Data Set: *OI*

SAS Variable: *AISCODE*

Oracle Name: *DERIVED*

Element Attributes:

Standardized word description of injury code selected in previous variable.

Source: Automatically filled based upon prior coding.

Remarks:

Description of injury from AIS dictionary section of the current NASS Injury Coding Manual. This field is self-populated when an AIS code is entered.

ASPECT

Screen Name: N/A

SAS Data Set: *OI*

SAS Variable: *ASPECT90*

Oracle Name: *INJURY.PICKASPECT*

Element Attributes:

Primary

Oracle	SAS	
1	1	Right
2	2	Left
3	3	Bilateral
4	4	Central
5	5	Anterior/Front/Ventral
6	6	Posterior/Back/Dorsal
7	7	Superior/Upper
8	8	Inferior/Lower
9	9	Unknown
0	0	Whole Region

Secondary

Oracle	SAS	Oracle	SAS	Oracle	SAS
11	11	26	25	47	47
	Elbow		C6C7		C5
	Upper Extremity	27	27	48	48
			T1T2		C6
12	12	28	28	49	49
	Forearm		T2T3		C7
13	13	29	29	50	50
	Wrist		T3T4		T1
14	14	30	30	51	51
	Hand/Digits		T4T5		T2
15	15	31	31	52	52
	Buttock		T5T6		T3
16	16	32	32	53	53
	Thigh		T6T7		T4
17	17	33	33	54	54
	Knee		T7T8		T5
18	18	34	34	55	55
	Lower Leg		T8T9		T6
19	19	35	35	56	56
	Ankle		T9T10		T7
20	20	36	36	57	57
	Foot/Toes		T10T11		T8
913	21	37	37	58	58
	Shoulder		T11T12		T9
914	22	38	38	59	59
	Hip		L1L2		T10
110	23	39	39	60	60
	Lateral		L2L3		T11
	Medial	40	40	61	61
			L3L4		T12
21	21	41	41	62	62
	C1C2		L4L5		L1
22	22	42	42	63	63
	C2C3		C1		L2
23	23	43	43	64	64
	C3C4		C2		L3
24	24	44	44	65	65
	C4C5		C3		L4

OCCUPANT FORM**INJURY CODES/INJURIES/LIST**

Aspect (cont'd)

Page 2 of 2

Oracle	SAS		Oracle	SAS		Oracle	SAS	
25	25	C5C6	45	45	C4	66	66	L5
889	889	R Rib 1	897	897	R Rib 9	905	905	L Rib 5
890	890	R Rib 2	898	898	R Rib 10	906	906	L Rib 6
891	891	R Rib 3	899	899	R Rib 11	907	907	L Rib 7
892	892	R Rib 4	900	900	R Rib 12	908	908	L Rib 8
893	893	R Rib 5	901	901	L Rib 1	909	909	L Rib 9
894	894	R Rib 6	902	902	L Rib 2	910	910	L Rib 10
895	895	R Rib 7	903	903	L Rib 3	911	911	L Rib 11
896	896	R Rib 8	904	904	L Rib 4	912	912	L Rib 12

Source: Zone Center determined--inputs include interviewee, medical records, and PAR data.

Remarks:

One primary aspect must be selected for each injury.

Prior to 2004, aspects for location of injuries were limited to ten attributes (shown as Primary in the list above). The aspect codes are linked to NASS AIS codes based on valid combinations developed for use in the NASS CDS system. In 2004 secondary aspects codes were added to better identify the exact location of the injury.

Rules for coding secondary aspects:

- Code secondary aspects for bone injuries to the rib cage.
- Code secondary aspects for injuries to the spinal column.
- Code secondary aspects for integumentary injuries involving extremities.
- The secondary aspect should be included if the medical record specifies. The injuries with secondary aspects will include injuries beginning with NASS AIS codes: 45 (only rib cage, not sternum), 63, 64, 65, 79, 89
- Secondary aspects are optional but may be multiple in the case of rib and integumentary injuries.
- Instances where two bone injuries to the rib cage have different secondary aspects (e.g. Left Rib 1 and Right Rib 4) and a single source should be coded as one injury with a bilateral primary aspect. The secondary aspects must also be included.
- Extremity integumentary injuries that have a bilateral primary aspect should only have secondary aspects listed if the same secondary aspect exists on both sides. For example: contusions to the right thigh and left lower leg would be coded as bilateral primary aspect but no secondary aspects.

SOURCE/AREA

Screen Name: Source - Area
SAS Data Set: N/A
SAS Variable: N/A
Oracle Name: *INJURY.INJURYCATID*

Element Attributes:

Oracle	SAS
1	Front
2	Left Side
15	Left Door Panel
3	Right Side
16	Right Door Panel
4	Interior
5	Air Bag
6	Roof
7	Floor
8	Rear
9	Adaptive (Assistive) Driving Equipment
10	Exterior of Occupant's Vehicle
11	Exterior of Other Motor Vehicle
12	Other Vehicle or Object in the Environment
13	Noncontact Injury
14	Injured, unknown source

Source: Zone Center determined--inputs include vehicle inspection, interviewee, and medical records.

Remarks:

Categorization of the injury source list into groups inside and external to the vehicle provides a means for easier selection of the individual component. Selection of the source area leads to filtering of the attribute list in the Source/Element variable.

Injured, unknown source

This code is used in situations where there is no source for determining the injury mechanism, i.e. no inspection, interview or medical records are available. Selection of this attribute automatically codes the dependent variables.

“Injured, unknown source” may be used when the vehicle is inspected and:

- The vehicle has all interior components destroyed by fire or damaged such that no contact evidence can be collected;
- Occupant injuries are so severe, e.g. torso transaction, etc. that reconstruction of the injury mechanism is impossible;
- Vehicle is completely repaired.

AIR BAG LOCATION

Screen Name: Air Bag Location

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: *INJURY.AIRBAGRELATEDID*

Element Attributes:

[Not air bag related]
<Seat position>-<Bag type>
Unknown Airbag

Source: Zone Center determined--inputs include vehicle inspection, interviewee, and medical records.

Remarks:

This variable displays only when Air Bag is selected in Source – Area. After the variable space opens, a list of all air bags associated with the vehicle appears. The appropriate air bag for the injury can then be selected.

INJURY SOURCE

Screen Name: N/A

SAS Data Set: *OI*

SAS Variable: *INJSOU*

Oracle Name: *INJURY.PICKINJURYSOURCE*

Element Attributes:

Element Values:

Oracle SAS

FRONT

- | | | |
|----|----|--|
| 1 | 1 | Windshield |
| 2 | 2 | Mirror |
| 3 | 3 | Sunvisor |
| 4 | 4 | Steering wheel rim |
| 5 | 5 | Steering wheel hub/spoke |
| 6 | 6 | Steering wheel combination of rim and hub/spoke) |
| 7 | 7 | Steering column, transmission selector lever, other attachment |
| 8 | 8 | Cellular telephone or CB radio |
| 9 | 9 | Add on equipment <i>e.g.</i> , tape deck, air conditioner) |
| 13 | 13 | Glove compartment door |
| 15 | 15 | Windshield including one or more of the following: front header, A A1/A2)-pillar, instrument panel, mirror, or steering assembly driver side only) |
| 16 | 16 | Windshield including one or more of the following: front header, A A1/A2)-pillar, instrument panel, or mirror (passenger side only) |
| 17 | 17 | Windshield reinforced by exterior object (specify) |
| 19 | 19 | Other front object (specify): |
| 20 | 20 | Sunvisor reinforced by exterior object (specify) |
| 21 | 21 | Left instrument panel |
| 22 | 22 | Center instrument panel |
| 23 | 23 | Right instrument panel |
| 24 | 24 | Left lower instrument panel (includes knee bolster) |
| 25 | 25 | Center lower instrument panel (includes knee bolster) |
| 26 | 26 | Left lower instrument panel (includes knee bolster) |

LEFT SIDE

- | | | |
|----|----|------------------------------|
| 53 | 53 | Left A (A1/A2)-pillar |
| 54 | 54 | Left B-pillar |
| 55 | 55 | Other left pillar (specify): |

56	56	Left side window glass
57	57	Left side window frame
58	58	Left side window sill
59	59	Left side window glass including one or more of the following: frame, window sill, A (A1/A2)-pillar, B-pillar, or roof side rail.
60	60	Left side glass (laminated) reinforced by exterior object (specify)
61	61	Other left side object (specify):
62	62	Left side panel forward of A1/A2 pillar
63	63	Left side panel rear of the B-pillar

LEFT DOOR PANEL

73	73	Left forward upper quadrant
74	74	Left forward lower quadrant
75	75	Left rear upper quadrant
76	76	Left rear lower quadrant
77	77	Left hardware/armrest forward upper quadrant
78	78	Left hardware/armrest forward lower quadrant
79	79	Left hardware/armrest rear upper quadrant
80	80	Left hardware/armrest rear lower quadrant

RIGHT SIDE

103	103	Right A (A1/A2)-pillar
104	104	Right B-pillar
105	105	Other right pillar (specify):
106	106	Right side window glass
107	107	Right side window frame
108	108	Right side window sill
109	109	Right side window glass including one or more of the following: frame, window sill, A (A1/A2)-pillar, B-pillar, or roof side rail.
110	110	Other right side object (specify):
111	111	Right side glass (laminated) reinforced by exterior object (specify)
112	112	Right side panel forward of A1/A2 pillar
113	113	Right side panel rear of the B-pillar

RIGHT DOOR PANEL

121	121	Right forward upper quadrant
122	122	Right forward lower quadrant
123	123	Right rear upper quadrant
124	124	Right rear lower quadrant
125	125	Right hardware/armrest forward upper quadrant
126	126	Right hardware/armrest forward lower quadrant

127 127 Right hardware/armrest rear upper quadrant
128 128 Right hardware/armrest rear lower quadrant

INTERIOR

151 151 Seat, back support
152 152 Belt restraint webbing/buckle
153 153 Belt restraint B-pillar or door frame attachment point
154 154 Other restraint system component (specify):
155 155 Head restraint system
160 160 Other occupants (specify):
161 161 Interior loose objects (specify):
163 163 Other interior object(s) (specify):
164 164 Center console first row
165 165 Center console second row
166 166 Center console other row
167 167 Fold down armrest first row
168 168 Fold down armrest second row
169 169 Fold down armrest other row
271 271 Child safety seat shell, (i.e., Shell interior, exterior, base, cup holder,
padding, head restraint, handle)
272 272 Child safety seat harness system, (i.e., Harness system straps, retainer clip, t-
shield, tray-shield, shield, latchplate, buckle
273 273 Unknown child safety seat component
570 570 Same occupant contact (specify) (ex. knee)
571 571 Interior loose object (specify)
572 572 Seat latch points for child restraints
573 573 Grab handles
574 574 Engine shroud/cover
575 575 Seatback trays
576 576 Cargo in vehicle

ROOF

201 201 Front header
202 202 Rear header
203 203 Roof left side rail
204 204 Roof right side rail
205 205 Roof or convertible top
206 206 Roof map light/console
207 207 Sunroof/components'
208 208 Roll bar

FLOOR

251 251 Floor (including toe pan)
252 252 Floor or console mounted transmission lever, including console
253 253 Parking brake handle

254 254 Foot controls including parking brake

REAR

301 301 Backlight (rear window)
 302 302 Backlight storage rack, door, etc.
 303 303 Other rear object (specify):

AIR BAG

320 320 Air bag
 321 321 Air bag and eyewear
 322 322 Air bag and jewelry
 323 323 Air bag and object held
 324 324 Air bag and object in mouth
 325 325 Air bag compartment cover
 326 326 Air bag compartment cover and eyewear
 327 327 Air bag compartment cover and jewelry
 328 328 Air bag compartment cover and object held
 329 329 Air bag compartment cover and object in mouth

ADAPTIVE (ASSISTIVE) DRIVING EQUIPMENT

401 401 Hand controls for braking/acceleration
 401 402 Steering control devices (attached to OEM steering wheel)
 403 403 Steering knob attached to steering wheel
 405 405 Replacement steering wheel (*i.e.*, reduced diameter)
 406 406 Joy stick steering controls
 407 407 Wheelchair tie-downs
 408 408 Modification to seat belts,(specify):
 409 409 Additional or relocated switches, (specify):
 410 410 Raised roof
 411 411 Wall mounted head rest (used behind wheel chair)
 412 412 Other adaptive device (specify):

EXTERIOR OF OCCUPANT'S VEHICLE

451 451 Hood
 452 452 Outside hardware (*e.g.*, outside mirror, antenna)
 453 453 Other exterior surface or tires (specify):
 454 454 Unknown exterior objects

EXTERIOR OF OTHER MOTOR VEHICLE

501 501 Front bumper
 502 502 Hood edge
 503 503 Other front of vehicle (specify):
 504 504 Hood
 505 505 Hood ornament
 506 506 Windshield, roof rail, A-pillar
 507 507 Side surface
 508 508 Side mirrors
 509 509 Other side protrusions (specify):

Injury Source (cont'd)

Page 5 of 5

510	510	Rear surface
511	511	Undercarriage
512	512	Tires and wheels
513	513	Other exterior of other motor vehicle (specify):
514	514	Unknown exterior of other motor vehicle

OTHER VEHICLE OR OBJECT

551	551	Ground
598	598	Other object (specify):
599	599	Unknown object (specify)
552	598	Tree
553	598	Pole
554	598	Traffic barrier (includes: jersey barrier, guardrail, etc.)

NONCONTACT INJURY

601	601	Fire in vehicle
602	602	Flying glass
603	603	Other noncontact injury source (specify):
604	604	Air bag exhaust gases
697	697	Injured, unknown source

Source: Zone Center determined--inputs include vehicle inspection, interviewee, and medical records

Remarks:

Code the attribute that caused the injury, disregarding any reinforcement by other objects. Use all available information including occupant kinematics, posture, and safety system function to select the component.

Cargo

is described as cargo inside the vehicle. Examples: spare tire, construction equipment, tools and tool box(es).

CONFIDENCE

Screen Name: Confidence Level

SAS Data Set: *OI*

SAS Variable: *SOUCON*

Oracle Name: *INJURY.PICKSOURCECONFIDENCELEVEL*

Element Attributes:

Oracle	SAS	
1	1	Certain
2	2	Probable
3	3	Possible
9	9	[Unknown]

Source: Zone Center determined--inputs include vehicle inspection, interviewee, and medical records.

Remarks:

The intent of this variable is to give analysts an assessment of the likelihood the injury source coded by the injury coder actually caused the injury.

Certain

This code is used when the coder has a very strong indication that a particular component caused the injury, given the occupant location, vehicle dynamics, and injury mechanism. This code may also be used in cases with little or no physical evidence where the vehicle dynamics and occupant injuries indicate only one possible scenario

Probable

This code is used when a reasonable interpretation of injury causation can be approximated. There is some evidence present but source could be attributed to more than one component.

Possible

This code is used when there is no supporting physical evidence but factors point to an area of the vehicle or an object as the injury source. Contact points, detailed injury information or occupant demographics are missing. A scenario exists but cannot be verified with the information available.

Unknown

This code is used in situations where there is no source for determining the injury mechanism, i.e. no inspection, interview or medical records are available.

Unknown may be used when the vehicle is inspected and:

- The vehicle has all interior components destroyed by fire or damaged such that no contact evidence can be collected;
- Occupant injuries are so severe, e.g. torso transaction, etc. that reconstruction of the injury mechanism is impossible;
- Vehicle is completely repaired.
-

This attribute is automatically entered when “Injured, unknown source” is entered in SOURCE/Area.

DIRECT INTRUSION

Screen Name: Direct Intrusion

SAS Data Set:

SAS Variable:

Oracle Name: *INJURY.DIRECTINTRUSIONID*

Element Attributes:

< Select appropriate intrusion from list >

Not directly related to intrusion

Unknown

Source: Zone Center determined--inputs include vehicle inspection, interviewee, and medical records.

Remarks:

Injuries directly related to intrusion occur when the intruding component directly contacts the occupant causing injury.

If intrusions exist, this variable space will display a filtered list of intrusions for the vehicle based on the Source/Element

There is not a one to one relationship between the list of possible intruding components and the list of injury sources. Table A-15 defines the relationship between the list of intrusions and their associated injury source. Refer to table at the end of this section of manual for the correct combinations.

Not directly related to intrusion

Use this attribute for injuries assigned to components that have not intruded. If there are no intrusions listed for this vehicle, this attribute is automatically coded.

Unknown

Use this attribute when the vehicle was not inspected. This attribute is also used for injuries when it is not possible to identify the injury source.

INDIRECT INTRUSION

Screen Name: Indirect Intrusion

SAS Data Set:

SAS Variable:

Oracle Name: *INJURY.INDIRECTINTRUSIONID*

Element Attributes:

<Select appropriate intrusion from list>

Not directly related to intrusion

Unknown

Source: Zone Center determined--inputs include vehicle inspection, interviewee, and medical records.

Remarks:

Indirect intrusions are where the intruding component reinforces a Source/Element causing injury.

If intrusions exist for an occupant's vehicle, this variable will display all intrusions. Unlike Direct Intrusion, the injury source may not be related to the intruding component.

Not indirectly related to intrusion

Use this attribute for injuries that are not indirectly associated with an intrusion.

Unknown

Use this attribute when the vehicle was not inspected. This attribute is also used for injuries when it is not possible to identify the injury source.

AIR BAG RELATED

Screen Name: Air bag related

SAS Data Set:

SAS Variable:

Oracle Name: *INJURY.AIRBAGRELATEDID*

Element Attributes:

Injury not air bag related
Select appropriate air bag location
Injured, unknown source

Source: Zone Center determined--inputs include vehicle inspection, interviewee, and medical records.

Remarks:

Air bag related is coded when a body part set in motion by a deploying air bag contacts a component which produces and injury. These are commonly referred to as “fling” injuries.

For example, a driver has their left arm on the steering wheel when the steering wheel air bag deploys. The deploying air bag directs the left arm into the A-pillar and contact with the A-pillar fractures the arm.

This variable identifies the air bag that causes the acceleration. This variable will list all those air bags which have been entered through the Occupant or Safety Systems form.

DO NOT use airbag related in instances where the air bag directly causes an injury.

Injury not air bag related

Air bag either directly caused the injury or did not accelerate the body part into another vehicle component.

<Injury, unknown source>

Automatically system coded when the Injury Source is coded **Injury, unknown source**.

DIRECT/INDIRECT INJURY

Screen Name: Direct/Indirect Injury

SAS Data Set: *OI*

SAS Variable: *DIRINJ*

Oracle Name: *INJURY.PICKDIRECTINDIRECTINJURY*

Element Attributes:

Oracle	SAS	
1	1	Direct contact injury
2	2	Indirect contact injury
3	3	Noncontact injury
7	7	Injured, unknown source

Source: Zone Center determined--inputs include vehicle inspection, interviewee, and medical records.

Remarks:

Injury source is defined as the vehicle component or object that directly caused the injury (direct injury) or initiated the injury mechanism (indirect injury).

Direct contact injury

An injury to a particular body region caused by the traumatic contact of that body region with a vehicle component or other object. The vehicle component or other object is coded as the injury source for that injury. Brain injuries, anatomic or non-anatomic, and skull injuries may be caused by the face or head striking a component or object. For these cases, consider the brain or skull injury as a direct injury.

If an object on the occupant (e.g. eyeglasses, pen, pencil, etc.) produces an injury due to contact, consider the object a medium through which force is transmitted rather than the injury source itself. Determine and code the mechanism that contacted the object on the occupant.

Example: Driver’s face strikes steering wheel rim causing eyeglasses to lacerate eyebrow, code injury source as steering wheel rim.

Indirect contact injury

An injury to a particular body region caused by a blow or a traumatic contact in some other body region (e.g. head/neck). In the case of the lower or upper extremities, an injury to a particular body member caused by a blow or traumatic contact to a different body member within the same body region (e.g. knee/acetabulum). The injury source for an indirect injury would be the vehicle component contacted by the other body region or member.

Direct/Indirect Injury (cont'd)

Page 2 of 2

Noncontact injury

Use when the Source equals **Fire in vehicle, Flying glass, Other noncontact injury source, or Air bag exhaust gases.**

<Injury, unknown source>

Automatically system coded when the Injury Source is coded **Injury, unknown source.**

INJURY RANK

Screen Name: Rank

SAS Data Set: *OI*

SAS Variable: *RANK*

Oracle Name: *INJURY.RANK*

Element Attributes:

1

Source: Zone center determined

Remarks:

The injury with the highest AIS (1-6) is assigned the rank of 1. If there are two or more injuries that meet the criteria of the highest AIS, the injury rank should be based on the source of injury information and confidence of all data.

The injury with the rank of 1 is not necessarily the cause of death.

MEDICAL RECORD TYPE

Screen Name: Medical Record Type

SAS Data Set: *OI*

SAS Variable: *SOUDAT*

Oracle Name: *INJURY.PICKSOURCE*

Element Attributes:

Enter the source of the injury information

Oracle	SAS	
16		Internal Autopsy
17		External Autopsy
2		Post ER Medical Record
8		Emergency Room Records
9		Private physician
10		Lay Coroner
11		EMS Record
12		Interviewee
13		Police report
14		Other (specify)

Source: Zone center determined

Remarks:

Enter the source of the injury information

Autopsy Internal – Internal examination of a deceased individual by a licensed or official medical examiner. The examination should be a systematic review all major body regions and organs. Overall anatomical structure and condition should be detailed in conjunction with injury detail (location and measurement) and evidence of possible pre- morbid conditions. An accurate cause of death should be documented.

Autopsy External only - External examination of a deceased individual by a licensed or official medical examiner. The examination will consist of a visual record of the individual from general body build and features to details of visible external injury (lacerations, contusions, open fractures). A cause of death will be determined from the examiners external findings. A Death Certificate signed by a medical professional would be included in this attribute.

Post-ER Medical Record – Medical chart documentation for an individual admitted to a hospital after initial evaluation in the Emergency Room (ER) or Trauma Resuscitation Unit (TRU). Documentation may be from physicians, nurses, therapists or other health care providers who

provide services for the individual during their stay in the hospital. This documentation will cover the period of time from transfer from the ER/TRU till discharge. **Emergency Room Records** - Medical chart documentation for an individual during their stay in the Emergency Room. Documentation may be from physicians, nurses, therapists or other health care providers. Documentation should include an H&P and a disposition plan.

Private Physician – Documentation from a physician encounter in a private office or other non-hospital, clinic, or out-patient facility.

Lay Coroner – Documentation from an individual appointed by local government to assign cause of death in fatal injury cases in their jurisdiction. These individuals are usually not medical doctors and the injury/cause of death is typically derived from an external exam of the expired individual. This includes death certificates signed by someone other than a medical professional.

EMS record – A report from the transporting emergency team detailing an individual's health status at the crash scene and during transport to a health care facility. The report may document visible injury (lacerations) and possible injury (deformed ankle). Vital signs are generally documented as well. Details related to extrication and restraint status might be included in this record.

Interviewee – Documented information from an interview with the case occupant or an individual with sufficient knowledge of the occupant's injuries/condition.

Police Report – Official document from the reporting officer recording different aspects and details of the crash.

Other (specify-) – Documentation of medical or injury status not previously mentioned. Specify type of document.

VITAL SIGNS data is rolled up from the EMS Form and medically reported vitals.

Only Zone Centers can edit medically reported vitals.


The date and time is recorded for each set of coded vital signs. Medically reported vital signs are coded a maximum of four times, taken at six hour intervals. During the first 24 hours of arrival at the medical facility, this period is measured from arrival at the emergency room and could include time spent in the emergency room and any hospital admission. If the date/time information is vague, the coder should use their judgment and code the first, second, third and last readings that appear on any record during this time.

After the 24 hours, the first vital sign data recorded for each day should be the vital signs recorded for the individual for that date. If no time or date appears on the medical record or if it is difficult to determine the exact date or time of any recorded vital sign, then code the vital sign but leave the date/time as "unknown".

Note: The system will only save one "unknown" time vitals were taken, regardless of the data source.

OCCUPANT FORM

INJURY CODES/INJURIES/MANNEQUINS

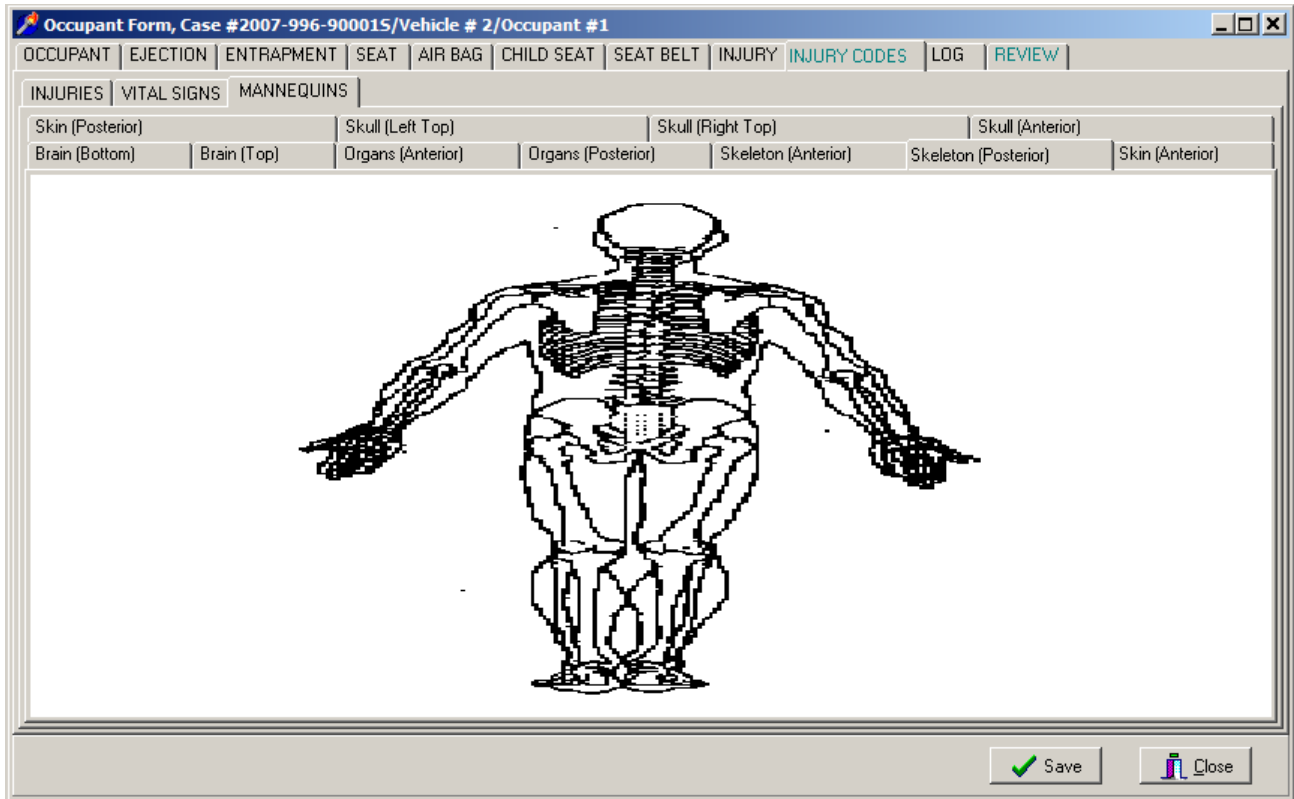

Only Zone Centers can insert/edit this data using the NASSINJURY program.

Occupant Form, Case #2007-996-900015/Vehicle # 2/Occupant #1

OCCUPANT | EJECTION | ENTRAPMENT | SEAT | AIR BAG | CHILD SEAT | SEAT BELT | INJURY | INJURY CODES | LOG | REVIEW

INTERVIEW | MEDICAL

Interviewer

Interviewee

Last Interview Attempt

- Manner

- Result

Interview Date

Save Close

Note: Information must be coded by the researcher. This data does not roll up from the Contact Log.

The screenshot shows a software window titled "Occupant Form, Case #2007-996-900015/Vehicle # 2/Occupant #1". The window has a menu bar with options: OCCUPANT, EJECTION, ENTRAPMENT, SEAT, AIR BAG, CHILD SEAT, SEAT BELT, INJURY, INJURY CODES, LOG, and REVIEW. Below the menu bar are two tabs: INTERVIEW and MEDICAL. The MEDICAL tab is active. The main area contains two fields: "Injured?" with a dropdown menu, and "Medical Facility" with a text input field. The text "Medical Facility" is already entered in the input field. At the bottom right, there are two buttons: "Save" (with a green checkmark icon) and "Close" (with a red X icon).

Note: Medical Facility must be entered using the Edit/Insert.

DETAIL

Occupant Form, Case #2007-996-900015/Vehicle # 2/Occupant #1

OCCUPANT | EJECTION | ENTRAPMENT | SEAT | AIR BAG | CHILD SEAT | SEAT BELT | INJURY | INJURY CODES | LOG | REVIEW

PSU REVIEW | ZONE REVIEW

LIST | DETAIL

Form Tab Veh# Occ#

Original Suggested

Comment

Save Close

DETAIL

Occupant Form, Case #2007-996-90001S/Vehicle # 2/Occupant #1

OCCUPANT | EJECTION | ENTRAPMENT | SEAT | AIR BAG | CHILD SEAT | SEAT BELT | INJURY | INJURY CODES | LOG | REVIEW

PSU REVIEW | ZONE REVIEW

LIST | DETAIL

Form Tab Veh # Occ #

Original Final

Reason Change

Comment

EMERGENCY MEDICAL SERVICE (EMS) OVERVIEW

Emergency Medical Service (EMS) personnel are integral to the survivability of the people involved in crashes. The following variables attempt to collect some basic information on their involvement with crashes.

Please note that there is only **ONE NOTIFICATION TIME** and **ONE ARRIVAL TIME** for a crash.

Information is required for the first EMS unit that responded to the scene of the crash and administered care or transported any occupants. Correspondingly any occupant who receives care or is transported must have information added.

ANY TIME THERE IS INFORMATION THAT AN EMERGENCY UNIT RESPONDED TO THE SCENE OF THE CRASH AN EMS RECORD SHOULD BE REQUESTED FOR EACH OCCUPANT WITH A PAR REPORTED INJURY.

Any time an EMS unit responds to the scene of a crash, all crash involved persons are deemed to receive care if a run sheet is filled out for them.

Do not collect EMS information for those occupants who are declared dead at the scene of the crash. These occupants will have **Treatment** coded as **No Treatment** and **Mortality** coded as **Fatal** or **Fatal Ruled Disease**.

VEHICLES

Emergency Medical Services (EMS)

VEHICLES | CARE | VITAL SIGNS

Agency Type	Type	Mode	Notified	Arrived	Departed	Arvd Medical

Crash Date

[EMS UNIT NUMBER]

Screen Name: N/A

SAS Data Set: *EMS*

SAS Variable: *EMSNO (EMS data set);*
EMSNO1, EMSNO2, EMSNO3, EMSNO4 (OA data set)

Oracle Name: *DERIVED*

Element Attributes:
System assigned

Source: Derived from entered data by the data entry system.

Remarks:

The number of the EMS unit. This is derived by the data entry system.

AGENCY TYPE

Screen Name: Responding Agency

SAS Data Set: *EMS*

SAS Variable: *EMSTYPE*

Oracle Name: *EMSRESPONSE.EMSTYPE*

Element Attributes:

Oracle	SAS	
1	1	Fire Department
2	2	Rescue Squad
3	3	Police Department
4	4	Trauma Unit
5	5	Disaster Unit
6	6	Ambulance Service Unit
7	7	Hospital
8	8	Mortuaries/Funeral Home
98	98	Other, Specify
99	99	Unknown

Source: EMS records, Emergency room records, PAR, interviewee

Remarks:

Indicate the responding agency of the EMS vehicle. The classification of that vehicle will be entered under **EMS Form/Vehicles/Responding Emergency Vehicle Type**.

Fire Department

Any vehicle that belongs to a fire department will be classified here.

Rescue Squad

Make this selection only if it is not associated with a fire department, police department, or hospital.

Police Department

Any vehicle that belongs to a police department will be classified here.

Trauma Unit

All trauma units that cannot be classified as a fire department, police department or hospital will fall here.

Disaster Unit

This will primarily occur during some national disaster.

Responding Agency (cont'd)

Page 2 of 2

Remarks:**Ambulance Service Unit**

An ambulance not otherwise connected with any other type will be entered here.

Hospital

Any unit that belongs to a hospital will be classified here.

Mortuaries/Funeral Home

In some very rural areas, the only unit available may be from a mortuary or funeral home. In those cases, make this selection.

Other, Specify

use this attribute if the agency type can not be selected from the above listed attributes. An example would be a military ambulance.

Unknown

if a determination could not be made of the agency type from the available documentation or interviews, select this attribute.

RESPONDING EMERGENCY VEHICLE TYPE

Screen Name: Type of Vehicle

SAS Data Set: *EMS*

SAS Variable: *EMSVTYPE*

Oracle Name: *EMSRESPONSE.VEHICLETYPEID*

Element Attributes:

Oracle	SAS	
1	1	Ambulance
2	2	Fire Truck/Apparatus
5	8	Other
9	9	Unknown

Source: EMS records, Emergency room records, PAR

Remarks:

This variable captures information irrespective of the operating authority or organization that is sponsoring/running the vehicle. Thus a fire department or hospital that uses an ambulance for EMS will be coded as **Ambulance**.

Ambulance

An ambulance is a vehicle that is specifically designed to provide care and transport people. An ambulance run by a Fire department should be included here. Helicopters/planes should be included here.

Fire Truck/Apparatus

Includes any vehicle other than an ambulance run by the Fire department.

Other

Any other unit not covered above will be entered here. This is very unlikely to occur.

Unknown

if a determination could not be made of the emergency vehicle type from the available documentation or interviews, select this attribute.

TRANSPORTATION MODE

Screen Name: Mode

SAS Data Set: EMS

SAS Variable: EMSMODE

Oracle Name: EMSRESPONSE.EMSMODE

Element Attributes:

Oracle	SAS	
1	1	Land
3	2	Air

Source: EMS records, Emergency room records, PAR, interviewee

Remarks:

Indicate what type of EMS vehicle came to the crash scene or transfer vehicle. Assume it is a road vehicle, unless contrary information is present.

Land

Air

FIRST NOTIFICATION TIME

Screen Name: Notified

SAS Data Set: *EMS*

SAS Variable: *NOTTIME*

Oracle Name: *EMSRESPONSE.NOTIFICATIONTIME*

Element Attributes:

Enter the EMS notification time in military time format.
8888 Not Applicable
9999 Unknown

Source: EMS records, Emergency room records, PAR, interviewee

Remarks:

This variable indicates the **earliest time** that **ANY vehicle was notified** to come to the crash scene. The notification can be made by any source (police, involved persons, witnesses, etc.).

There will be only ONE notification time for a crash

Indicate the earliest time that any unit, or the EMS notification system was notified to come to the crash scene for any occupant in the crash. It will be the earliest of the times listed below.

- Time incident reported (e.g., received by 911)
- Time dispatch notified
- Time EMS unit notified
- Time unit responds

FIRST ARRIVAL TIME

Screen Name: Arrived

SAS Data Set: *EMS*

SAS Variable: *ARRTIME*

Oracle Name: *EMSRESPONSE.ARRIVALTIME*

Element Attributes:

Enter the EMS arrival on scene time in military time format.
8888 Not Applicable
9999 Unknown

Source: EMS records, Emergency room records, PAR, interviewee

Remarks:

This variable indicates the earliest time that ANY vehicle arrived at the crash scene.

There will be only ONE arrival time for a crash.

Indicate the earliest time that any unit arrived at the crash scene.

Indicate the time that the EMS unit stops physical motion at the scene. If an individual EMT arrives at the scene by private vehicle, that time is NOT the recorded value for this variable.

TIME OF DEPARTURE FROM THE SCENE

Screen Name: Departed

SAS Data Set: *EMS*

SAS Variable: *DEPTIME*

Oracle Name: *EMSRESPONSE.DEPARTURETIME*

Element Attributes:

Enter the EMS departure time in military time format.
8886 Transport refused
8888 Not Applicable
9999 Unknown

Source: EMS records, Emergency room records, PAR, interviewee.

Remarks:

Enter the time that the unit departed for the treatment unit or transfer vehicle.

Transport refused

Use this attribute when a person refuses transport to a treatment facility, regardless of treatment level at the crash site.

Not applicable

Units which just provide treatment at the crash site and do not transport occupants are entered as **Not applicable**.

Units which do not respond to the crash site, but do receive patient(s) at a transfer point in order to transfer them to a treatment facility, are entered as **Not Applicable** .

Unknown

Use this attribute for instances where the time of departure cannot be determined from any source.

ARRIVED AT MEDICAL FACILITY

Screen Name: Arvd Medical

SAS Data Set: *EMS*

SAS Variable: *MEDTIME*

Oracle Name: *EMSRESPONSE.MEDARRIVALTIME*

Element Attributes:

Enter the EMS arrival time in military time format.
8888 Not Applicable
9999 Unknown

Source: EMS records, Emergency room records, PAR, interviewee.

Remarks:

Enter the time that the unit with the occupant arrived at the treatment facility.

This may be the unit that responded to the crash site or a unit which received the occupant at a point between the crash site and the treatment facility.

Not applicable

Units which just provide treatment at the crash site and do not transport occupants are entered as **Not applicable** .

Units which leave the scene and only transport occupant(s) to a transfer vehicle are entered as **Not applicable**.

Unknown

Use this attribute for instances where the time of departure cannot be determined from any source.

EMS CARE

Emergency Medical Services (EMS)

VEHICLES | CARE | VITAL SIGNS

EMS Vehicle

Vehicle/Occupant	Care	Note

Crash Date

Note: Select edit/insert from the main menu. A new screen appears (see below) from which you select Vehicle #, Occupant # and Care.

EMSCare

Fire Department

Vehicle

Occupant

Care

Note

VEHICLE #

Screen Name: Vehicle #

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: ***VEHICLE.VEHICLENUMBER***

Element Attributes:

Enter the vehicle # for the occupant being reported on

Source: EMS records, Emergency room records, PAR

Remarks:

OCCUPANT #

Screen Name: Occupant #

SAS Data Set: N/A

SAS Variable: N/A

Oracle Name: ***OCCUPANT.OCCUPANTNUMBER***

Element Attributes:

Enter the occupant # for the occupant being reported on

Source: EMS records, Emergency room records, PAR

Remarks:

TYPE OF EMS CARE ADMINISTERED

Page 1 of 2

Screen Name: Type of Care

SAS Data Set: OA

SAS Variable: CARETYP1, CARETYP2, CARETYP3, CARETYP4

Oracle Name: EMS_X_CARE.CARETYPE

Element Attributes:

Oracle	SAS	
0	0	No Care Administered
1	1	Basic Life Support
2	2	Advanced Life Support
7	7	Care administered, type unknown
9	9	Unknown if care administered

Source: EMS records, Emergency room records, PAR

Remarks:

For this variable, the taking of a pulse, blood pressure, or just the general assessment of a person's health is considered care. Therefore all crash involved persons receive care from any EMS unit at the scene. This minimal level of care is considered **Basic Life Support**. However, not all persons are transported, and some persons refuse transport.

Indicate what type of EMS care was administered:

No Care Administered

Select this when this occupant was transported but did not receive any treatment **including monitoring of vital signs.**

Basic Life Support

Includes non-invasive care such as stabilizing the patient, stop bleeding, and opening of air way, vitals, and basic CPR.

Advanced Life Support

In addition to the care listed under **Basic Life Support**, this includes invasive procedures (IV Fluids, intubation), burn care, emergency cardiac care/CPR (use of defibrillator).

Care Administered, Type Unknown

Use this attribute in instances where treatment was definitely administered, e.g. severity of injuries but NO details are available.

Type of EMS Care Administered (cont'd)

Page 2 of 2

Unknown if Care Administered

Use if there is evidence that EMS responded to the crash site but no further information is available about this occupant and the police crash report assigns this occupant an injury code of K, A, B or C.

VITAL SIGNS

Emergency Medical Services (EMS)

VEHICLES | CARE | VITAL SIGNS

EMS Vehicle Vehicle # Occupant #

Date	Time	Pulse	Systolic	Diastolic	Respiratory Rate
	:				

Crash Date

If no vital signs, do not enter "U" across the grid, if one variable is known enter that data, the other variables would be coded as "U".

[VITAL SIGN NUMBER]

Screen Name: N/A

SAS Data Set: *VSIGN*

SAS Variable: *VSIGNNO*

Oracle Name: *DERIVED*

Element Attributes:

Sequentially numbered by system

Source: EMS and other medical records

Remarks:

TIME OF READING**Screen Name:** Time**SAS Data Set:** *VSIGN***SAS Variable:** *VTIME***Oracle Name:** *PHYSIOLOGIC.SIGNTIME***Element Attributes:**

9999 Enter time, in military time format, for the vital signs reading that was taken
Unknown

Source: EMS records**Range:** 1-2400, 9999**Remarks:**

Enter the time that the vital signs readings were taken.

Unknown

Enter in the first space of the variable, the program will fill in the remainder of the attribute.

Note: Only one vital sign with an unknown time can be entered into the electronic system.

PULSE

Screen Name: Pulse

SAS Data Set: *VSIGN*

SAS Variable: *PULSE*

Oracle Name: *PHYSIOLOGIC.PULSE*

Element Attributes:

Oracle	SAS	
	0-300	Enter pulse of patient
	P	Palpable
-9999	U	Unknown

Source: EMS records

Remarks:

Enter the recorded pulse count of the patient. Range is 0-300.

P Palpable

Enter P (the rest of the word is automatically filled in) when palpable is used in the EMS record.

U Unknown

Enter U (the rest of the word is automatically filled in) when there is no recorded value for pulse.

SYSTOLIC BLOOD PRESSURE

Screen Name: Systolic Systolic Blood Pressure

SAS Data Set: *VSIGN*

SAS Variable: *SYST*

Oracle Name: *PHYSIOLOGIC.SYSTOLIC*

Element Attributes:

Oracle	SAS	
	0-300	Enter systolic value for patient
	P	Palpable
-9999	U	Unknown

Source: EMS records

Remarks:

Enter the recorded systolic pressure value of the patient. Range is 0-300.

P Palpable

Enter P (the rest of the word is automatically filled in) when palpable is used in the EMS record.

U Unknown

Enter U (the rest of the word is automatically filled in) when there is no recorded value for systolic blood pressure.

DIASTOLIC BLOOD PRESSURE

Screen Name: Diastolic

SAS Data Set: *VSIGN*

SAS Variable: *DIAST*

Oracle Name: *PHYSIOLOGIC.DIASTOLIC*

Element Attributes:

Oracle	SAS	
	0-300	Enter diastolic value for patient
	P	Palpable
-9999	U	Unknown

Source: EMS records

Remarks:

Enter the recorded diastolic pressure value of the patient. Range is 0-300.

P Palpable

Enter P (the rest of the word is automatically filled in) when palpable is used in the EMS record.

U Unknown

Enter U (the rest of the word is automatically filled in) when there is no recorded value for diastolic blood pressure.

RESPIRATORY RATE

Screen Name: Respiratory Rate

SAS Data Set: *VSIGN*

SAS Variable: *REPRATE*

Oracle Name: *PHYSIOLOGIC.RESPRATE*

Element Attributes:

Oracle SAS

		Enter the respiratory rate of the patient
	A	Agonal
-9999	U	Unknown

Source: EMS records

Range: 0-98, 997, 999

Remarks:

Enter the recorded diastolic pressure value of the patient.

A Agonal

Enter A (the rest of the word is automatically filled in) when agonal is used in the EMS record.

U Unknown

Enter U (the rest of the word is automatically filled in) when there is no recorded value for respiratory rate.

**APPENDIX A
MAKE MODEL**

<u>Model</u>	<u>Includes</u>	<u>Start</u>	<u>End</u>	<u>SAS Code</u>	<u>Model ID</u>
ACURA/54					
INTEGRA	RS, LS, GS	1986		31	435
LEGEND		1986	1995	32	19571
RL		1996		32	437
NSX	NTX-T	1991		33	440
VIGOR		1992	1994	34	476
CL	Coupe	1996		35	6849
TL		1996		35	19947
RSX				38	45074
TSX		2004		39	158101
OTHER AUTOMOBILE				398	
UNKNOWN AUTOMOBILE				399	478
SLX		1996		401	
MDX		2001		421	39814
OTHER LIGHT TRUCK				498	
UNKNOWN TYPE LIGHT TRUCK				499	6854
UNKNOWN VEHICLE				999	479
RDX		2007			232936
ALFA ROMEO/31					
SPIDER	All roadsters, Veloce, 1750/2000 roadsters	1933	1994	31	785
SPORTS SEDAN	All 4 door sedans; Giulia, Super, Berlina, Alfetta, Milano, 1750/2000 sedans	1933	1989	32	6776
SPRINT SPECIAL	All 2-door coupes; Alfetta GT, 1750/2000 sedans	1933	1980	33	786
GTV-6		1981	1986	34	6779
I64		1990	1995	35	6781
8C	Spider and Competizione	2009		36	
OTHER AUTOMOBILE				398	788
UNKNOWN AUTOMOBILE				399	789
UNKNOWN VEHICLE				999	790
AM GENERAL/3					
DISPATCHER	Post Office (Jeep)	1965	1994	401	6195
HUMMER1		1993	2006	421	6197
HUMMER2		1996		421	6197
HUMMER3		2005		402	233078
DISPATCHER	DJ series Post Office Van	1965	1991	466	6199
OTHER LIGHT TRUCK				498	139
UNKNOWN LIGHT TRUCK				499	140
Unknown Vehicle				999	155
MEDIUM/HEAVY TRUCK	Military off-road	1965	1994	884	6201
OTHER MEDIUM/HEAVY TRUCK				898	147
UNK TYPE TRUCK (LIGHT/MED/HEAVY)				899	27266

UNKNOWN MEDIUM/HEAVY TRUCK				899	148
BUS – REAR ENGINE/FLAT FRONT	Transit	1965	1994	983	152
OTHER BUS				988	153
UNKNOWN BUS TYPE				989	154

AMC/1

RAMBLER/AMERICAN	Rogue, Scambler, 220, 440	1954	1969	1	5821
REBEL/MATADOR	Barcelona, Classic, Brougham, 550, 660, 770, Marlin: WB=114"	0		2	6148
	Matador: WB=115"	0	1978	2	
	Barcelona, Classic, Brougham, 550, 660, 770, Marlin: WB=115"	1964	1978	2	
	Matador: WB=114"	1958	1974	2	
AMBASSADOR	Brougham, DPL, SST, DL, Limited, 880. 990	0		3	6153
PACER	Limited, DL	1975	1980	4	131
AMX	2-seater only	1968	1970	5	6156
JAVELIN	SST	0		6	6158
	AMX	1971	1974	6	
HORNET/CONCORD	Sportabout, limited, DL, SC-360, SST	0		7	6161
	AMX	1975	1978	7	
SPIRIT/GREMLIN	Limited, DL. Custom., X	0		8	132
	GT	1983		8	
	AMX	1979		8	
EAGLE	Concord based	1980	1987	9	129
EAGLE SX-4	Spirit/Gremlin based	1981	1984	10	130
OTHER AUTOMOBILE				398	133
UNKNOWN AUTOMOBILE				399	134
UNKNOWN VEHICLE				999	135

ASTON MARTIN/69

LAGONDA		1968		31	9595
OTHER AUTOMOBILE				31	239
SALOON		1968		31	9601
UNKNOWN AUTOMOBILE				31	240
VANTAGE		1968		31	9597
VOLANTE		1968		31	9599

AUDI/32

SUPER 90		1970	1972	31	6795
100/A6	S, LS, GL	1970	1977	32	797
	A6	1995		32	
	Quattro	1989	1994	32	
FOX		1974	1979	33	6797

	4000	Quattro, Coupe GT, CS, S	1980	1988	34	803
	5000	Quattro, CS, S, Turbo	1978	1988	35	16507
80/90		Quattro-80	1988	1992	36	809
		Quattro-90	1988	1995	36	
	200	Quattro	1989	1992	37	802
V8 QUATTRO			1990	1994	38	817
COUPE QUATTRO			1990	1993	39	814
S4/S6		S4	1993	1994	40	816
		S6	1995		40	
CABRIOLET			1994		41	6799
A4			1996		42	6801
S8					46	39816
ALLROAD					47	44656
A2			2009		5	
A3			1996		43	6803
A8			1996		44	6805
TT			2000		45	20200
R8			2008		50	232942
A2			2009		53	
RS5			2009		54	
OTHER AUTOMOBILE					398	818
UNKNOWN AUTOMOBILE					399	819
Q7					401	210233
Q5			2008		402	232948
Other Light Truck					498	210235
UNKNOWN LIGHT TRUCK					499	210237
UNKNOWN VEHICLE					999	820
A5			2008			232940

AUSTIN / AUSTIN HEALEY/33

MARINA		GT	0	1998	31	6807
AMERICA			0	1998	32	6809
HEALEY SPRITE			0	1998	33	6811
HEALY 3000		Healy 100	0	1998	34	6813
MINI			0	1998	35	6815
OTHER AUTOMOBILE					398	821
UNKNOWN AUTOMOBILE					399	822
UNKNOWN VEHICLE					999	823

AUTOCAR/98

MEDIUM/HEAVY – CBE					801	9754
MEDIUM/HEAVY – COE/ENTRY POSITION UNKNOWN					801	9750
MEDIUM/HEAVY – COE/HIGH ENTRY					801	9748
MEDIUM/HEAVY – COE/LOW ENTRY					801	9746

MEDIUM/HEAVY – OTHER				801	9751
MEDIUM/HEAVY – UNKOWN ENGINE LOCATION				801	9749
MEDIUM/HEAVY BASED MOTORHOME				801	9744
MEDIUM/HEAVY – COE/LOW ENTRY				802	9754

AUTO-UNION-DKW/98

MEDIUM/HEAVY – CBE				802	9753
MEDIUM/HEAVY – COE/ENTRY POSITION UNKNOWN				802	9757
MEDIUM/HEAVY – COE/HIGH ENTRY				802	9755
MEDIUM/HEAVY – OTHER				802	9758
MEDIUM/HEAVY – UNKNOWN ENGINE LOCATION				802	9756
MEDIUM/HEAVY BASED MOTORHOME				802	9752
MED/HEAVY-COE/LOW ENTRY				802	32532

AVANTI/29

OTHER AUTOMOBILE				1	9546
UNKNOWN AUTOMOBILE				399	9547

BERTONE/69

OTHER AUTOMOBILE				52	284
UNKNOWN AUTOMOBILE				52	285

BMW/34

1600, 2002	Tii, 1800i, 200CS	0	1976	31	6822
COUPE	2800CS, 3.0CS	1969	1976	32	6824
BAVARIA SEDAN	2500, 2800	1969	1974	33	6826
3 SERIES	318i, 318ti, 320i, 325e, 325es, 325i, 328, M3	1977		34	824
5 SERIES	525i (wagon), M5, 540iA, 540i	1993		35	826
	524i, 258i, 530i, 533i, 535i, TD	1975	1998	35	
6 SERIES	630, 633, 635, csi, M6	1977		36	829
7 SERIES	733i, 435i, L7, 740i, 750iL	1978		37	830
8 SERIES	850, 840ci	1990	1997	38	6828
Z3	M coupe (Brickland)	1996		39	6830
Z8		2001		40	45076
V5				41	232954
Z4		2003		42	146512
X6		2008		44	
OTHER AUTOMOBILE				398	831
UNKNOWN AUTOMOBILE				399	832
X5		2000		401	37074
X3		2004		402	158103
OTHER LIGHT TRUCK				498	37076

MOTORCYCLE (000-050CC)				701	833
MOTORCYCLE (051-124CC)				702	834
MOTORCYCLE (125-349CC)				703	835
MOTORCYCLE (350-449CC)				704	836
MOTORCYCLE (450-749CC)				705	837
MOTORCYCLE (750CC-OVER)				706	838
MOTORCYCLE (UNKNOWN CC)				709	839
UNKNOWN MOTORED CYCLE				799	840
UNKNOWN VEHICLE				999	841

BRICKLIN/69

OTHER AUTOMOBILE				32	241
UNKNOWN AUTOMOBILE				32	242

BROCKWAY/80

MEDIUM/HEAVY TRUCK BASED MOTORHOME		0	1998	850	9676
MEDIUM/HEAVY - CBE		0	1998	881	9678
MEDIUM/HEAVY - COE/LOW ENTRY		0	1998	882	9680
MEDIUM/HEAVY - COE HIGH ENTRY		0	1998	883	9682
MEDIUM/HEAVY - UNKNOWN ENGINE LOCATION		0	1998	884	9685
MEDIUM/HEAVY - COE/ENTRY POSITION UNKNOWN		0	1998	890	9687
MEDIUM/HEAVY - OTHER		0	1998	898	9689
UNK MED/HEAVY TRUCK				899	32524

BSA/70

MOTORCYCLE (000-050CC)				701	306
MOTORCYCLE (051-124CC)				702	307
MOTORCYCLE (125-349CC)				703	308
MOTORCYCLE (350-449CC)				704	309
MOTORCYCLE (450-749CC)				705	310
MOTORCYCLE (750CC-OVER)				706	311
MOTORCYCLE (UNKNOWN CC)				709	312
OTHER MOTORED CYCLE				798	313
UNKNOWN MOTORED CYCLE					314

BUICK/18

SPECIAL/SKYLARK (thru 1972)	GS, GS-350, GS-400, GS-455, GS California, Sport wagon, Custom	0	1972	1	6512
LESABRE/CENTURION/WILDCAT	Wagon, Luxus, Invicta, Custom, Limited	1977	1985	2	1140
	Wagon, Luxus, Invicta, Custom, Limited	0	1976	2	
ELECTRA/ELECTRA 225/PARK AVENUE (1991-ON)		1985		3	1145
	Limited, Park Avenue, Ultra	1977	1984	3	

	Limited, Park Avenue, Ultra	0	1976	3	
ROADMASTER	Estate Wagon, Limited	1991	1996	4	1163
RIVIERA	S-Type, T-Type	1963	1965	5	1161
	S-Type, T-Type	1966	1976	5	
	S-Type, T-Type	1977	1985	5	
CENTURY	Luxus, Custom	0	1977	7	1135
	Luxus, Regal	1972	1977	7	
	Custom	1978	1981	7	
APOLLO/SKYLARK (73-1976)	Skylark (1975), S/R	1973	1976	8	27310
REGAL	Turbo, Luxus, Gran National, GNX, T-Type	1978	1988	10	1153
SKYHAWK		1982		12	1166
	S-Type, Roadhawk, T-Type, GT	1975	1981	12	
SKYLARK (1976-1985)		1980	1985	15	1168
	S/R, S, Limited, Sprot, T-Type	1976	1979	15	
SOMERSET(1985-1987)/SKYLARK(1986-ON)		1986		18	1169
REGAL (FWD)	Limited	1988		20	1154
REATTA		1989	1991	21	1152
REATTA		1988	1991	21	1152
LACROSSE				22	174884
LUCERNE				23	210239
Enclave		2008		24	232958
OPEL KADETT		0	1975	31	6514
OPEL MANTA	1900, Luxus, Rallye, Sports Coupe	0	1975	32	6516
OPEL GT		0	1975	33	6518
OPEL ISUZU	Deluxe, Sport	1976	1979	34	6521
OTHER AUTOMOBILE				398	1175
UNKNOWN AUTOMOBILE				399	1176
RENDEZVOUS		2002		401	40757
RAINER		2004		402	158105
TERRAZA		2005		441	174886
UNKNOWN VEHICLE				999	1177

CADILLAC/19

DEVILLE/FLEETWOOD		0	1976	3	1195
		1977	1996	3	
LIMOUSINE	Fleetwood 75, Formal, DeVille-Based	0	1998	4	1183
INVICTA	Replaces LaCrosse	2010		4	
ELDORADO	Biarritz, El-doro, Touring Coupe	0	1978	5	1187
	Biarritz, El-doro, Touring Coupe	1979	1985	5	
COMMERCIAL SERIES	Ambulance/Hearse	0	1998	6	6537
ALLANTE		1987		9	1178
SEVILLE	Elegante	1976	1985	14	1197
CIMARRON		1982	1988	16	1180
CATERA	RWD	1997		17	6539

CTS		2003		18	45079
	CTC	2010		18	
XLR		2004		19	146514
SRX		2004		20	158107
ESCALADE		1998		21	20207
STS		2005		21	174888
DTS				22	210241
OTHER AUTOMOBILE				398	972
UNKNOWN AUTOMOBILE				399	973
ESCALADE ESV		2004		431	146516
ESCALADE EXT		2002		480	146518
UNKNOWN VEHICLE				999	974

CHECKER/29

AEROBUS		0	1982	2	9566
MARATHON		0	1982	2	9548
OTHER AUTOMOBILE		0	1982	2	9569
SUPERBA		0	1982	2	9562
TAXI		0	1982	2	9564
UNKNOWN AUTOMOBILE				2	9570

CHEVROLET/20

CHEVELLE/MALIBU	Classic, Concours, S-3, Laguna, Nomad, 300, Greenbriar, Estate, Deluxe, SS 396/454	1978	1983	1	1024
	Classic, Concours, S-3, Laguna, Nomad, 300, Greenbriar, Estate, Deluxe, SS 396/454	1964	1977	1	
IMPALA/CAPRICE	Brookwood, Kingswood	1977		2	1017
	St. Wgn. Biscayne, Belair, Super sport, Classic Classic Brougham, Townsman	0	1976	2	
	Biscayne, Belair, Super sport, Classic Classic Brougham, Townsman	0	1976	2	
CAMARO		2009		3	
CORVETTE	Stingray	1963	1998	4	1001
	Stingray	53	1962	4	
CORVAIR	Monza, Corsa, 500, Yenko	60	1969	6	6574
EL CAMINO	Royal Knight, SS	59	1960	7	6545
	Royal Knight, SS	1978	1998	7	
	Royal Knight, SS	1964	1977	7	
NOVA (-1979)	Chevy II, LN, LE, Concours SS-350/396, Rally	62	1979	8	6576
CAMARO	SS, RS, LT, Berlinetta, IROC-Z, Z28	1967	1998	9	979
		2010		9	
MONTE CARLO (RWD ONLY)	LS, SS, Aerocoupe, Landau	1978	1988	10	1025
	LS, SS, Aerocoupe, Landau	1970	1977	10	
VEGA	GT, Cosworth	1971	1977	11	6578
MONZA	Spyder, 2+2, Towne Coupe	1975	1980	12	1030
CHEVETTE	S, Scooter, CS-4 door	1976	1987	13	996

	S, Scooter, CS—2 door	1976	1987	13	
CITATION		1980	1985	15	997
CAVALIER	CS, RS, Z24, LS	1982	1998	16	989
CELEBRITY	CS, Eurosport, VR	1982	1998	17	994
BERETTA/CORSICA		1988	1998	19	998
LUMINA		1990	1998	20	1019
COBALT			2005	22	174890
HHR				23	210243
TRAVERSE		2009		24	
SPECTRUM		1985	1998	31	1032
NOVA/GEO PRIZM		1985	1998	32	1007
SPRINT/GEO SPRINT		1985	1998	33	1010
GEO METRO	LSi, Xfi	1989	1998	34	1004
GEO STORM	Gsi	1985	1998	35	1012
MONTE CARLO (FWD ONLY)		1995	1998	36	6580
MALIBU (1997-)		1997	1998	37	6582
SSR		2005		38	157958
AVEO			2005	39	158109
OTHER AUTOMOBILE				398	1036
OTHER AUTOMOBILE				398	1036
UNKNOWN AUTOMOBILE				399	1037
S-10 BLAZER, BLAZER		1995	1998	401	6584
GEO TRACKER		1989	1998	402	1014
TRAILBLAZER (2002 and later)				403	133074
EQUINOX		2005		404	158113
FULLSIZE BLAZER (K, Tahoe)	Tahoe	1995	1998	421	6587
	K-series, fullsized p/u based	1969	1994	421	
SUBURBAN		0	1998	431	6590
ASTRO VAN	Minivan	1985	1998	441	6592
LUMINA APV/VENTURE.	Venture	1990		442	6594
UPLANDER		2005		444	174892
G-SERIES VAN	Beauville, Chevy Van, Sport Van, G10-G30, Express	0	1998	461	6599
P-SERIES VAN		0	1998	466	6601
VAN DERIVATIVE	Hi-cube, Parcel Van	0	1998	470	6603
S-10/T-10	4 X 4	1982	1998	471	6605
LUV	Imported pickup	0	1998	472	6607
COLORADO			2004	473	158111
C, K, R, V-SERIES PICKUP	C10-C30, K10-K30, R10-R30, V10-V30, Silverado, C-K 1500, 2500, 3500	0	1998	481	6609
AVALANCHE			2002	482	44657
UNKNOWN LIGHT TRUCK				499	1039
MEDIUM/HEAVY CBE	C50/60/65; M60/65; H70/80/90; J70/80/90; Bison 90; all other CBE	0	1998	881	6611
MEDIUM/HEAVY COE LOW ENTRY	T60/65 - all other COE low entry	0	1998	882	6613

MEDIUM/HEAVY COE HIGH ENTRY	Titan 90, all other COE hight entry	0	1998	883	6615
MEDIUM/HEAVY; UNKNOWN ENGINE LOCATION				884	6617
MEDIUM/HEAVY; UNKNOWN ENGINE LOCAITON	MKIII, 1500	0	1979	890	6619
OTHER MEDIUM/HEAVY TRUCK				898	1040
UNK TYPE TRUCK (LIGHT/MED/HEAVY)				899	27267
UNKNOWN MEDIUM/HEAVY TRUCK				899	1041
BUS	S-60 series	0	1998	981	1042
OTHER BUS				988	1043
UNKNONW BUS TYPE				988	6620
OTHER VEHICLE				998	1044
UNKNOWN VEHICLE				999	1045

CHRYSLER/6

CORDOBA	Crown, 300, LS	1975	1983	9	159
NEW YORKER FIFTH AVENUE (1989)				10	175
NEWPORT				10	179
RAMPAGE 2.2 (CAR BASED PICKUP)	GT, Sport	1982	1984	13	6274
NEW YORKER ('83-'1990)				14	173
NEW YORKER SALON				14	177
NEW YORKER/E CLASS/IMPERIAL/5TH AVENUE		1990	1993	14	163
NEW YORKER/NEWPORT/5TH AVENUE/IMPERIAL (RWD ONLY)	Custom, Royal, Brougham, Town and Country	1979	1981	14	160
	Custom, Royal, Brougham, Town and Country	0	1978	14	
	Custom, Royal, Brougham, Town and Country	1982	1989	14	
	300	0	1971	14	
LASER		1984	1986	15	164
LEBARON		1982	98	16	165
	Medallion, Salon (RWD), Landau, LX	1977	1981	16	
LEBARON GTS/GTC		1987	1998	17	166
INTREPID		1993	2003	18	44198
TC (MASERATI SPORT)	Turbo Convertible	1988	1991	31	181
CONQUEST	TSI, Turbo	1987	1989	35	158
CONCORDE		1993	1998	41	157
LHS		1994	1998	42	171

SEBRING		1995	1998	43	180
CIRRUS		1995	1998	44	156
300M		1999		51	20209
PT CRUISER		2001		52	36181
PROWLER		2000	2002	53	146522
PACIFICA		2004		54	146524
CROSSFIRE		2005		55	158115
OTHER AUTOMOBILE				398	185
UNKNOWN AUTOMOBILE				399	186
TOWN AND COUNTRY		1990	1998	441	183
VOYAGER				442	348486
OTHER LIGHT TRUCK				498	187
ASPEN		2007			232963

CITROEN/69

OTHER AUTOMOBILE				33	243
UNKNOWN AUTOMOBILE				33	244

CONSULIER/29

OTHER AUTOMOBILE		0	1998	398	9589
UNKNOWN AUTOMOBILE		0	1998	398	9591

DAEWOO/64

LANOS		1999	2002	1	20213
NUBIRA		1999	2002	2	20215
LEGANZA		1999	2002	3	20217

DAIHATSU/60

CHARADE		1990	1992	31	458
OTHER AUTOMOBILE				398	460
UNKNOWN AUTOMOBILE				399	461
ROCKY		1990	1992	401	459
OTHER LIGHT TRUCK				498	462
UNKNOWN LIGHT TRUCK				499	463
UNKNOWN VEHICLE				999	464

DELOREAN/69

OTHER AUTOMOBILE				34	245
UNKNOWN AUTOMOBILE				34	246

DESOTO/29

OTHER AUTOMOBILE		0	1998	398	9568
UNKNOWN AUTOMOBILE		0	1998	398	7572

--	--	--	--	--	--

DESTA/69

OTHER AUTOMOBILE				48	280
UNKNOWN AUTOMOBILE				48	281

DIAMOND REO/REO/81

MEDIUM/HEAVY TRUCK BASED MOTORHOME		0	1998	850	9655
MEDIUM/HEAVY - CBE		0	1998	881	9657
MEDIUM/HEAVY - COE/LOW ENTRY		0	1998	882	9666
MEDIUM/HEAVY - COE/HIGH ENTRY		0	1998	883	9668
MEDIUM/HEAVY - UNKNOWN ENGINE LOCATION		0	1998	884	9670
MEDIUM/HEAVY - COE/ENTRY POSITION UNKNOWN				890	9672
MEDIUM/HEAVY - OTHER		0	1998	898	9673

DIVCO/98

MEDIUM/HEAVY - CBE				803	9760
MEDIUM/HEAVY - COE/ENTRY POSITION UNKNOWN				803	9764
MEDIUM/HEAVY - COE/HIGH ENTRY				803	9762
MEDIUM/HEAVY - COE/LOW ENTRY				803	9761
MEDIUM/HEAVY - OTHER				803	9765
MEDIUM/HEAVY - UNKNOWN ENGINE LOCATION				803	9763
MEDIUM/HEAVY BASED MOTORHOME				803	9759

DODGE/7

DART	Custom, Swinger, Sport, GT, Demon, Special, Special Edition, 170, 270, 340, 360: WB=111"	1962	1976	1	6259
	Custom, Swinger, Sport, GT, Demon, Special, Special Edition, 170, 270, 340, 360: WB=108"	1962	1976	1	
DEMON		2010		1	
CORONET/CHARGER/MAGNUM	Brougham, Custom, Superbee, Crestwood, Deluxe, XE, R/t, SE 440, 500, Police	0	1979	2	226
	Charger	0	1978	2	
POLARA/MONACO/ROYAL MONACO	Custom, Special, Crestwood, Brougham, Police Taxi	1977	1978	3	6264
	Custom, Special, Crestwood, Brougham, Police Taxi	0	1976	3	
VIPER	RT/10, GTS	1992	98	4	6268
VIPER		1993		4	6268
CHALLENGER	R/T, T/A, Rallye	1970	1974	5	6270
ASPEN	Custom, Special Edition, Police, R/T, Sport: WB=109"	1976	1980	6	195

	Custom, Special Edition, Police, R/T, Sport: WB=113"	1976	1980	6	
DIPLOMAT	Medallion, Salon, S	1977	1989	7	215
OMNI/CHARGER	Charger 2.2	1983	1990	8	124
	O24, DeTomaso, Miser, GLH, GLHS, Shelby, America, Expo	1978	1990	8	
MIRADA		1980	1983	9	227
ST REGIS	Police, Taxi	1979	1981	10	9
ARIES (K)		1981	1989	11	192
400		1983	1983	12	6272
RAMPAGE 2.2, GT, SPORT				13	25735
600		1983	1988	14	191
DAYTONA		1984	1994	15	208
LANCER		1985	1989	16	223
SHADOW		1987	98	17	6276
DYNASTY		1988	98	18	216
SPIRIT		1989	1994	19	5
NEON		1994	98	20	230
MAGNUM		2005		21	174894
CHARGER (2006+)		2006		24	174896
CHALLENGER (ALL IMPORTED)	all imported	1978	1983	33	200
COLT (EXCLUDES VISTA)	RS, Turbo, Custom, GTS, DL, E, Premier, Deluxe Carousel, GT	1977	1980	34	203
	RS, Turbo, Custom, GTS, DL, E, Premier, Deluxe Carousel, GT	1974	1976	34	
	RS, Turbo, Custom, GTS, DL, E, Premier, Deluxe Carousel, GT	1980	1994	34	
	RS, Turbo, Custom, GTS, DL, E, Premier, Deluxe Carousel, GT: WB<93"	1977	1980	34	
CONQUEST	Turbo	1984	1986	35	206
STEALTH		1991	1998	39	10
MONACO		1990	1992	40	228
INTREPID		1993	1998	41	221
AVENGER		1995	1998	42	196
STRATUS		1995	1998	43	11
OTHER AUTOMOBILE				398	14
UNKNOWN AUTOMOBILE				399	15
RAIDER	Sport	1986	1998	401	127
DURANGO		1998		402	18847
RAMCHARGER		0	1998	421	6278
VISTA	4 X 4	1984	1991	441	204
CARAVAN	Mini-Ram, SE, ES: WB=119"	1984	1998	442	197
	Mini-Ram, SE, ES: WB=112"	1984	1998	442	
B-SERIES VANS	Sportsman, Royal, Maxiwagon, Ram, B150-B350, Tradesman	0	1998	461	6280
SPRINTER		2003		462	158117
VAN DERIVATIVE	Kary Van	0	1998	470	6282

D50, COLT P/U, RAM 50/RAM 100	Ram 50/Ram 100	1983	1998	471	126
	D50, Colt P/U	0	1982	471	
DAKOTA	WB=124"	1987	1998	472	6284
	WB=112"	1987	1998	472	
D, W-SERIES PICKUP, W100-W350	Ram, Custom, Royal, Miser, D100-D350	0	1998	481	6287
RAM	1500/2500/3500, P/U	1994	1998	482	6289
OTHER LIGHT TRUCK				498	16
MEDIUM/HEAVY: CBE				881	6291
MEDIUM/HEAVY: COE LOW ENGRY				882	6293
MEDIUM/HEAVY: COE HIGH ENTRY				883	6294
MEDIUM/HEAVY: UNKNOWN ENGINE LOCATION				884	6295
MEDIUM/HEAVY: COE ENTRY POSITION UNKNOWN				890	6296
OTHER MEDIUM/HEAVY TRUCK				898	18
UNK TYPE TRUCK (LIGHT/MED/HEAVY)				899	27268
UNKNOWN MEDIUM/HEAVY TRUCK				899	19
MEDIUM BUS	not van based	0	98	981	20
OTHER BUS				988	21
UNKNOWN BUS TYPE				989	6258
OTHER VEHICLE				998	22
UNKNOWN VEHICLE				999	23
AVENGER		2008			232965
CALIBER		2007			210245
NITRO		2007			232967

DUCATI/71

MOTORCYCLE (000-050CC)				701	315
MOTORCYCLE (051-124CC)				702	316
MOTORCYCLE (125-349CC)				703	317
MOTORCYCLE (350-449CC)				704	318
MOTORCYCLE (450-749CC)				705	319
MOTORCYCLE (750CC-OVER)				706	320
MOTORCYCLE (UNKNOWN CC)				709	321
OTHER MOTORED CYCLE				798	322
UNKNOWN MOTORED CYCLE				799	323

EAGLE/10

SUMMIT	DL, LX, ES	1989	98	34	65
TALON	TSI	1990	98	37	67
PREMIER	LX, ES	1988	1992	40	63

VISION		1993		41	68
MEDALLION	DL, LX	1988	1990	44	62
OTHER AUTOMOBILE				398	70
UNKNOWN AUTOMOBILE				399	72
SUMMIT WAGON	WB=99.2"	1992	98	441	66
OTHER LIGHT TRUCK				498	73
UNKNOWN LIGHT TRUCK				499	74
UNKNOWN VEHICLE				999	75

EXCALIBUR/29

OTHER AUTOMOBILE		0	98	398	9573
UNKNOWN AUTOMOBILE		0	98	398	9574

FISKER

KARMA	All electric	2010			
-------	--------------	------	--	--	--

FERRARI/69

CALIFORNIA		2009		35	
OTHER AUTOMOBILE				35	247
SUPERAMERICA				35	210247
UNKNOWN AUTOMOBILE				35	248

FIAT/36

124 (COUPE/SEDAN)	Sport	1967	1975	31	6487
124 SPIDER/RACER	Spider 2000/1500	1968	1983	32	766
BRAVA - 131		1975	1982	33	765
850 (COUPE/SPYDER)		1967	1973	34	6489
128		1972	1979	35	6491
X-1/9		1975	1983	36	768
STRADA		1979	1983	37	767
OTHER AUTOMOBILE				398	769
UNKNOWN AUTOMOBILE				399	770
MEDIUM/HEAVY COE LOW ENTRY				882	6493
MEDIUM/HEAVY COE HIGH ENTRY				883	6494
MEDIUM/HEAVY COE ENTRY POSITION UNKNOWN				890	6495
OTHER MEDIUM/HEAVY TRUCK				898	771
UNKNOWN MEDIUM/HEAVY TRUCK				899	772
UNKNOWN VEHICLE				999	773

FORD/12

FALCON	Sprint, GT, Futura	0	1970	1	6377
FAIRLANE	Torino	0	1970	2	6379
MUSTANG/MUSTANG II	Mach, Boss, Granada, Cobra	1965	1973	3	100
	Ghia, SVO, GT, LX, Shelby	1974	98	3	
FIESTA		2010		3	

THUNDERBIRD (ALL SIZES)	Landau, Heritage, Turbo coupe, Elan, Fila	1980	1988	4	118
	Landau, Heritage, Turbo coupe, Elan, Fila	1977	1979	4	
	Landau, Heritage, Turbo coupe, Elan, Fila	1972	1976	4	
	Landau, Heritage, Turbo coupe, Elan, Fila	1958	1971	4	
	Landau, Heritage, Turbo coupe, Elan, Fila	1989	1998	4	
	Landau, Heritage, Turbo coupe, Elan, Fila	1955	1957	4	
LTD II	S, Squire, Brougham	1977	1979	5	98
LTD/CUSTOM/GALAXIE (ALL SIZES)	XL, Landau, Ranch Wagon, Country Squire, S, 500, Brougham, XL, GT	1983	1986	6	94
	XL, Landau, Ranch Wagon, Country Squire, S, 500, Brougham, XL, GT	1978	1982	6	
	XL, Landau, Ranch Wagon, Country Squire, S, 500, Brougham, XL, GT	0	1977	6	
RANCHERO	Flacon/Fairlane based	0	1971	7	6381
	Torino/LTD II based	1972	1979	7	
MAVERICK	Grabber	1970	1977	8	6384
PINTO	Pony, MPG, ESS	1971	1980	9	105
TORINO/GRAN TORINO/ELITE	GT, Cobra, Sport, Squire, Brougham	1971	1976	10	6386
GRANADA	ESS, Ghia	1975	1982	11	6388
FAIRMONT	Futura, Sport Coupe	1978	1983	12	87
ESCORT/EXP		1981	1991	13	80
TEMPO		1992		15	115
CROWN VICTORIA		1981	1989	16	79
TAURUS	Mt-5, L, GL, LX, SHO	1986	1989	17	110
PROBE	GL, LX, GT	1988		18	6390
FIVE HUNDRED		2005		21	174898
TRANSIT CONNECT		2009		21	
FREESTYLE		2004		22	174900
FUSION				23	210249
ENGLISH FORD	Cortina	0	1998	31	6392
FIESTA	Sport, Ghia	1978	1980	32	92
FESTIVA		1988	1993	33	88
LASER		0	1998	34	6394
CONTOUR		1994		35	77
ASPIRE		1994		36	76
FOCUS				37	28553
GT				38	158122
OTHER AUTOMOBILE				398	1084
UNKNOWN AUTOMOBILE				399	1085
BRONCO ii/BRONCO (-1977)/EXPLORER	Bronco II--Eddie Bauer, XL, XLT, Limited	1983	1989	401	6396
	Explorer	1990		401	
	Bronco	0	1977	401	

ESCAPE		2001		402	37748
BRONCO-FULLSIZE	Eddie Bauer, Custom, XL, XLT	1978		421	6400
EXPEDITION		1997		422	6402
EXCURSION				431	37078
AEROSTAR	XLT, Cargo Van	1984	1998	441	6404
WINDSTAR		1994		442	6406
FREESTAR		2004		443	158120
TRANSIT CONNECT		2010		444	
E-SERIES VANS	Econoline, Clubwagon, Chateau, E150-E350	0		461	6408
VAN DERIVATIVE	Parcel van	0		470	6411
RANGER	Supercab, 4X4, STX, Splash: WB=108"	1982		471	6413
	Supercab, 4X4, STX, Splash: WB=108"	1982		471	
COURIER	Imported pickup	0	1998	472	6416
SPORT TRAC				473	44658
F-SERIES PICKUP	F100-F350	0		481	6418
OTHER LIGHT TRUCK				498	1088
UNKNOWN LIGHT TRUCK				499	1087
MEDIUM/HEAVY CBE	F-5 through F-8, L-series, FT-series	0		881	6420
MEDIUM/HEAVY COE LOW ENGRY	C/Ct series	0		882	6422
MEDIUM/HEAVY COE HIGH ENTRY	C/CLT series	0		883	6424
MEDIUM/HEAVY: UNKNOWN ENGINE LOCATION				884	6426
MEDIUM/HEAVY: COE ENTRY POSITION UNKNOWN				890	6427
OTHER MEDIUM/HEAVY TRUCK				898	1088
UNK TYPE TRUCK (LIGHT/MED/HEAVY)				899	27269
UNKNOWN MEDIUM/HEAVY TRUCK				899	1089
MEDIUM BUS	B-series (not van based)	0		981	1090
OTHER BUS				988	1091
UNKNOWN BUS TYPE				989	6428
OTHER VEHICLE				998	1092
UNKNOWN VEHICLE				999	1093
EDGE		2007			232969

FREIGHTLINER/WHITE/82

MEDIUM/HEAVY TRUCK BASED MOTORHOME		0	1998	850	9691
MEDIUM/HEAVY - CBE		0	1998	881	9693
MEDIUM/HEAVY - COE/LOW ENTRY		0	1998	882	9695

MEDIUM/HEAVY - COE/HIGH ENTRY		0	1998	883	9697
MEDIUM/HEAVY - UNKNOWN ENGINE LOCATION		0	1998	884	9699
MEDIUM/HEAVY - COE/ENTRY POSITION UNKNOWN		0	1998	890	9701
MEDIUM/HEAVY - OTHER		0	1998	898	9703
M-LINE WALK IN VAN				470	27457
SPRINTER/ADVANTAGE				461	104594

FWD/83

MEDIUM/HEAVY TRUCK BASED MOTORHOME				850	9705
MEDIUM/HEAVY - CBE				881	9706
MEDIUM/HEAVY - COE/LOW ENTRY				882	9707
MEDIUM/HEAVY - COE/HIGH ENTRY				883	9708
MEDIUM/HEAVY - UNKNOWN ENGINE LOCATION				884	9709
MEDIUM/HEAVY - COE/ENTRY POSITION UNKNOWN				898	9710

GMC/23

CABALLERO/SPRINT	Sierra Madre del Sur, SP	0	1977	7	6687
	Sierra Madre del Sur, SP	1978		7	
TERRAIN		2010		14	
OTHER AUTOMOBILE				398	914
UNKNOWN AUTOMOBILE				399	915
JIMMY/TYPHOON	S15 based (100.5" WB)	1983		401	6690
FULLSIZE JIMMY/YUKON	fullsize pickup based	0		421	6692
SUBURBAN	all models	0		431	6694
SAFARI (MINIVAN)		1986	1998	441	6696
G-SERIES VAN	Rally Van, Vandura, G15-G35	0		461	6698
P-SERIES VAN		0		466	6700
VAN DERIVATIVE		1987	1987	470	6702
S15/T15/SONOMA	4X4, Cyclone	1982		471	6704
CANYON		2004		472	158124
C, K, R, V-SERIES PICKUP	C15-C35, K15-K35, R15-R35, V15-V35, SIERRA	0		481	6706
OTHER LIGHT TRUCK				498	916
UNKNOWN LIGHT TRUCK				499	917
MEDIUM/HEAVY CBE	W5000/6000/7000 series, Brigadier/General models	0		881	6709
MEDIUM/HEAVY COE LOW ENTRY	W6000/W7000, all other COE, low entry	0		882	6711
MEDIUM/HEAVY COE HIGH ENTRY	Astro 95, all other COE, high entry	0		883	6713
MEDIUM/HEAVY: UNKNOWN ENGINE LOCATION		0		884	6715

MEDIUM/HEAVY: COE ENTRY POSITION UNKNOWN				890	6717
ACADIA		2007			232971
OTHER MEDIUM/HEAVY TRUCK				898	918
UNK TYPE TRUCK (LIGHT/MED/HEAVY)				899	27270
UNKNOWN MEDIUM/HEAVY TRUCK				899	919
MEDIUM BUS	B6000	0		981	920
OTHER BUS				988	921
UNKNOWN BUS TYPE				989	6718
UNKNOWN VEHICLE				999	922

GRUMMAN/25

LLV	Postal vehicles (see Chevrolet for VIN)	0	1998	441	6727
STEP-IN VAN	Multi-stop, step van	0	1998	442	6729
OTHER LIGHT TRUCK				498	926
UNKNOWN LIGHT TRUCK				499	927
MEDIUM/HEAVY TRUCK - CBE				881	6731
MEDIUM/HEAVY TRUCK - COE LOW ENTRY				882	6732
MEDIUM/HEAVY TRUCK - COE HIGH ENTRY				883	6733
MEDIUM/HEAVY TRUCK UNKNOWN ENGINE LOCATION				884	6734
MEDIUM/HEAVY TRUCK ENTRY POSITION UNKNOWN				890	6735
OTHER MEDIUM/HEAVY TRUCK				898	928
UNK TYPE TRUCK (LIGHT/MED/HEAVY)				899	27271
UNKNOWN MEDIUM/HEAVY TRUCK				899	929
BUS-FLAT FRONT, REAR ENGINE	Transit	0	1998	983	6736
OTHER BUS				988	930
UNKNOWN BUS TYPE				989	6738
UNKNOWN VEHICLE				999	931

HARLEY-DAVIDSON/72

MOTORCYCLE (000-050CC)				701	324
MOTORCYCLE (051-124CC)				702	325
MOTORCYCLE (125-349CC)				703	326
MOTORCYCLE (350-449CC)				704	327
MOTORCYCLE (450-749CC)				705	328
MOTORCYCLE (750CC-OVER)				706	329
MOTORCYCLE (UNKNOWN CC)				709	330
OTHER MOTORED CYCLE				798	33
UNKNOWN MOTORED CYCLE				799	332

HILLMAN/69

UNKNOWN AUTOMOBILE				35	249
OTHER AUTOMOBILE				36	250

HINO/98

MEDIUM/HEAVY - CBE				806	9781
MEDIUM/HEAVY - COE/ENTRY POSITION UNKNOWN				806	9785
MEDIUM/HEAVY - COE/HIGH ENTRY				806	9783
MEDIUM/HEAVY - COE/LOW				806	9782
MEDIUM/HEAVY - UNKNOWN ENGINE LOCATION				806	9784
MEDIUM/HEAVY BASED MOTORHOME				806	9780

HONDA/37

CR-Z	Hybrid electric	2010		3	
STREAM		2010		6	
CIVIC/CRX/DEL SOL	del Sol	1993	1998	31	775
	1300, 1500, CVCC, DX, EX, VX, CRX, S, Si, HF, 4WD Wagon	0		31	
ACCORD		1982	1986	32	774
	LX, CVCC, SE-i, LX-i, EX, EX wagon	0	1981	32	
PRELUDE		1984	1998	33	651
	Si	1980	1983	33	
	600 Coupe, Sedan	0	1998	34	6504
S2000		2000		35	31630
INSIGHT		2001	2006	37	37080
	Returned for year 2010	2010		37	
FCX	Fuel Cell/Hydrogen	2002		38	158126
FIT				39	210251
STREAM		2010		40	
OTHER AUTOMOBILE				398	653
UNKNOWN AUTOMOBILE				399	654
PASSPORT		1994		401	6506
C-RV		1997		402	16407
ELEMENT		2003		403	146526
PILOT		2003		421	146528
ODYSSEY		1995		441	650
RIDGELINE		2005		471	174902
OTHER LIGHT TRUCK				498	655
UNKNOWN LIGHT TRUCK				499	656
MOTORCYCLE (000-050CC)				701	657
MOTORCYCLE (051-124CC)				702	658
MOTORCYCLE (125-349CC)				703	659

MOTORCYCLE (350-449CC)				704	660
MOTORCYCLE (450-749CC)				705	661
MOTORCYCLE (750CC-OVER)				706	662
MOTORCYCLE (UNKNOWN CC)				709	663
ATC/ATV (000-050CC)				731	664
ATC/ATV (051-124CC)				732	665
ATC/ATV (125-349CC)				733	666
ATC/ATV (350CC-OVER)				734	667
ATC/ATV (UNKNOWN CC)				739	668
UNKNOWN VEHICLE				999	670

HUDSON/29

OTHER AUTOMOBILE		0	1998	398	9577
UNKNOWN AUTOMOBILE		0	1998	398	9587

HYUNDAI/55

PONY		1984	1988	31	7878
EXCEL	GL, GLS	1984	1994	32	480
EQUUS		2008			233005
SONATA		1989		33	482
SCOUPE		1991	1995	34	7880
ELANTRA		1992		35	7882
ACCENT		1995		36	7884
TIBURON		1997		37	7886
Veracruz		2008			233007
XG300/350		2001		38	44659
AXERA				39	210253
TUCSON				402	174904
OTHER AUTOMOBILE				398	481
UNKNOWN AUTOMOBILE				399	485

IMPERIAL/8

IMPERIAL	Lebaron	0	1976	10	6297
	Mark Croww, Frank Sinatra editions	1981	1983	10	
OTHER AUTOMOBILE				398	24
UNKNOWN AUTOMOBILE				399	25
UNKNOWN VEHICLE				999	26

INFINITI/58

M30		1990	1992	31	444
Q45		1990		32	445
G20		1991	1996	33	442
FX35/45		2003		39	146536

G35		2003		37	146532
J30		1993	1998	34	443
I30		1996		35	7896
I35		2002		36	146530
M35/M45		2003		38	146534
OTHER AUTOMOBILE				398	446
UNKNOWN AUTOMOBILE				399	447
QX4		1997		401	7898
QX56		2004			158128
OTHER LIGHT TRUCK				498	7900
UNKNOWN LIGHT TRUCK				499	7901
UNKNOWN VEHICLE				999	448

INTERNATIONAL HARVESTER/NAVISTAR/84

SCOUT	Scout II, Utility pu, SS-2, Roadstar, 800 series, Traveler, Terra Traveltop	0	1998	421	9632
TRAVELALL	1010-1210, 100-200	0	1998	431	9634
MULTISTOP VAN	Metro RM, 120-160, MS 1210, MS 1510	0	1998	466	9636
PICKUP	R-100-500, 900A-1500C/D, 1010-1510	0	1998	481	9638
OTHER LIGHT TRUCK				498	301
UNKNOWN LIGHT TRUCK				499	302
TRUCK BASED MOTORHOME				850	303
MEDIUM HEAVY - CBE	Loadstar/Fleetstar, Paystar, CBE Transtar, 4200, S-series Mixer	0	1998	881	9641
MEDIUM/HEAVY - COE LOW ENTRY	CO, VCO, DCO, 190-1950, Cargostar, LFM, 5370 (Garbage)	0	1998	882	9643
MEDIUM/HEAVY - COE HIGH ENTRY	DCO, DCOT, UCO, VCOT, 405-series, COE Transtar, Unistar, Conco 707B, 9600	0	1998	883	9645
MEDIUM/HEAVY: UNKNOWN ENGINE LOCATION				884	9647
MEDIUM/HEAVY: COE ENTRY POSITION UNKNOWN				890	9648
OTHER MEDIUM/HEAVY TRUCK	Fire Truck - R140-R306, CO 8190-	0	1998	898	231
UNK TYPE TRUCK (LIGHT/MED/HEAVY)				899	27275
UNKNOWN MEDIUM/HEAVY TRUCK				899	232
BUS BASED MOTOHOME				950	25907
CONVENTIONAL BUS	R153-1853 - Loadstar, 1603-1853	0	1998	981	9649
BUS-FLAT FRONT, FRONT ENGINE	173FC, 183FC	0	1998	982	9651
BUS-FLAT FRONT, REAR ENGINE	183RE, 193RD-transit	0	1998	983	9653
OTHER BUS				988	234
OTHER VEHICLE				998	235

ISUZU/38

I-MARK	S, RS, Turbo	1985	1989	31	672
IMPULSE	Turbo, RS	1984	1998	32	673
STYLUS		1990	1998	33	677
ASCENDER		2004	2008	421	146538
AXIOM		2002		405	44662
OTHER AUTOMOBILE				398	680
UNKNOWN AUTOMOBILE				399	681
TROOPER/TROOPER II	Deluxe, LS	1984	1998	401	678
RODEO		1991		402	676
AMIGO		1989	1994	403	671
OASIS		1996		441	674
P'UP (PICKUP) HOMBRE	4x4	0	1995	471	675
i-280				473	210258
i-350				474	210260
OTHER LIGHT TRUCK				498	682
UNKNOWN LIGHT TRUCK				499	683
MEDIUM/HEAVY - CBE				881	6517
MEDIUM/HEAVY COE LOW ENTRY				882	6540
MEDIUM/HEAVY COE HIGH ENTRY				883	6519
MEDIUM/HEAVY COE UNKNOWN ENGINE LOCATION				884	6523
MEDIUM/HEAVY COE ENTRY POSITION UNKNOWN				890	6524
OTHER MEDIUM/HEAVY TRUCK				898	684
UNK TYPE TRUCK (LIGHT/MED/HEAVY)				899	27272
UNKNOWN MEDIUM/HEAVY TRUCK				899	685
CONVENTIONAL FRONT ENGINE				981	6525
FRONT ENGINE/FLAT FRONT				982	6526
REAR ENGINE/FLAT FRONT				983	6527
OTHER BUS				988	686
UNKNOWN BUS TYPE				989	6528
VEHICROSS				404	37454

IVECO/MAGIRUS/88

MEDIUM/HEAVY BASED MOTORHOME				850	9736
MEDIUM/HEAVY - CBE				881	9737
MEDIUM/HEAVY - COE/LOW ENTRY				882	9738
MEDIUM/HEAVY - COE/HIGH ENTRY				883	9739
MEDIUM/HEAVY - UNKOWN ENGINE LOCATION				884	9740

MEDIUM/HEAVY - COE/ENTRY POSITION UNKNOWN				890	9742
MEDIUM/HEAVY - OTHER				898	9743

JAGUAR/39

XJ-S COUPE		1976		31	688
VANDEN PLAS		1999		32	20220
XJ6/12 SEDAN/COUPE/XJ8/	L, XJ, C, 340/420 Sedan	0	1998	32	691
XKE	V12, Roadster, 120	0	1998	33	6531
	2+2	0	1998	33	
X100		1997	1998	34	6534
S-YYPE				34	40034
X-TYPE				35	44661
OTHER AUTOMOBILE				398	693
UNKNOWN AUTOMOBILE				399	694
UNKNOWN VEHICLE				999	695

JEEP / KAISER-JEEP/2

SCRAMBLER	Truck bed	2010		30	
CJ-2/CJ-3/CJ-4	Military: WB=81"	0	1966	401	6169
CJ-5/CJ-6/CH-7/CH-8	Scrambler, Bolde Eagle, Renegade, Laredo, Wrangler: WB=84"	1967		402	6174
	Scrambler, Bolde Eagle, Renegade, Laredo, Wrangler: WB=104"	1967		402	
YJ-SERIES	Wrangler	1986		403	6178
CHEROKEE / GRAND - 1984 ON	Grand	1992		404	6180
	Limited, Lored, Pioneer, Briarwood	1984		404	
LIBERTY		2002		405	45081
COMMANDER			2009	406	210262
CHEROKEE	Wide Track, Chief, Commando, Jeepster	0	1983	421	6183
GRAND WAGONEER	Wagoneer	1971	1991	431	6186
	Custom, Bougham Limited	1971	1991	431	
PICKUP	J-10, J-20, Honcho	0	1998	481	6189
COMANCHE	Chief: WB=119"	1986	1992	482	6191
	Chief: WB=111"	1986	1992	482	
OTHER LIGHT TRUCK				498	136
UNKNOWN LIGHT TRUCK				499	137
UNKNOWN VEHICLE				999	138
COMPASS		2007			233015
PATROIT		2007			233019

JENSEN/69

HEALY		0	1998	37	9603
OTHER AUTOMOBILE				37	251
UNKNOWN AUTOMOBILE				37	252

--	--	--	--	--	--

KAWASAKI/73

MOTORCYCLE (000-050CC)				701	333
MOTORCYCLE (051-124CC)				702	334
MOTORCYCLE (125-349CC)				703	335
MOTORCYCLE (350-449CC)				704	336
MOTORCYCLE (450-749CC)				705	337
MOTORCYCLE (750CC-OVER)				706	338
MOTORCYCLE (UNKNOWN CC)				709	339
ATC/ATV (000-050CC)				731	340
ATC/ATV (051-124CC)				732	341
ATC/ATV (125-349CC)				733	342
ATC/ATV (350CC-OVER)				734	343
ATC/ATV (UNKNOWN CC)				739	344
OTHER MOTORED CYCLE				798	345
UNKNOWN MOTORED CYCLE				799	346

KENWORTH/85

MEDIUM/HEAVY TRUCK BASED MOTORHOME				850	9712
MEDIUM/HEAVY - CBE				881	9713
MEDIUM/HEAVY - COE/LOW ENTRY				882	9714
MEDIUM/HEAVY - COE/HIGH ENTRY				883	9718
MEDIUM/HEAVY - UNKNOWN ENGINE LOCATION				884	9719
MEDIUM/HEAVY - COE/ENTRY POSITION UNKNOWN				890	9720
MEDIUM/HEAVY - OTHER				898	9721

KIA/63

SEPHIA		0		31	471
SPECTRA		2002		32	38480
RIO		2001		33	38482
OPTIMA		2001		34	38484
AMANTI		2004		35	158130
OTHER AUTOMOBILE				398	473
UNKNOWN AUTOMOBILE				399	474
SPORTAGE		1996		401	472
SORRENTO		2003		402	146540
SEDONA		2002		441	45083
OTHER LIGHT TRUCK				498	475
UNKNOWN LIGHT TRUCK				499	304
RONDO		2008			233021

LADA/69

OTHER AUTOMOBILE				53	286
UNKNOWN AUTOMOBILE				53	287

LAMBORGHINI/69

COUNTACH 5000S		0		38	9605
JALPA		0		38	9607
OTHER AUTOMOBILE				38	253
UNKNOWN AUTOMOBILE				38	254

LANCIA/40

BETA SEDAN-HPE		0	1980	31	696
BETA COUPE - ZAGATO		0	1982	32	697
SCORPION		0	1978	33	6538
OTHER AUTOMOBILE				398	698
UNKNOWN AUTOMOBILE				399	699700
UNKNOWN VEHICLE				999	

LAND ROVER/62

DISCOVERY (LR)		1994		401	7914
COUNTY LWB (RR) / COUNT CLASSIC (RR)	Count Classic (RR)	1994		421	7918
	County LWB (RR)	0	1994	421	
4.0 SE (RR)		1995	2002	422	7922
DEFENDER 90 (LR)		1994	1997	422	7916
FREELANDER		2002		422	146542
LR3		2005		423	174906
LR2		2008			233023
OTHER LIGHT TRUCK				498	468
UNKNOWN LIGHT TRUCK				499	469
UNKNOWN VEHICLE				999	470

LEXUS/59

ES250/ES-300		1990		31	449
LS400/430/460/600		1990		32	452
SC-300/SC-400	2-door Coupe	1992		33	453
GS300/GS400		1994		34	451
GX470		2004		402	146552
IS 250/300/350/500		2008			233025
OTHER AUTOMOBILE				398	455
UNKNOWN AUTOMOBILE				399	455
RX300		1999		401	20801
LX 450/470		1996		421	7906
OTHER LIGHT TRUCK				498	7908
UNKNOWN LIGHT TRUCK				499	7909

--	--	--	--	--	--

LINCOLN/13

CONTINENTAL/TOWN CAR	Continental	0	1979	1	1099
	Continental	1980	1981	1	
	Town Car	1982		1	
MARK	VI	1980	1983	2	1096
	VII	1993	1998	2	
	LSC, all Signature/Designer Series	1971	1980	2	
	I, II, III, IV, V	0	1970	2	
	VII	1984	1998	2	
CONTINENTAL (1982-ON)	All Signature/Designer Series	1982	1987	5	6438
	All Signature/Designer Series	1988		5	
MKT		2010		6	
VERSAILLES		1977	1980	11	1100
LS		2000	2006	12	20803
ZEPHYR				13	210264
OTHER AUTOMOBILE				398	1101
UNKNOWN AUTOMOBILE				399	1102
AVIATOR		2003	2006	401	146554
NAVIGATOR		1997		421	6441
BLACKWOOD		2001	2004	481	44663
MARK LT		2005		482	174909
OTHER LIGHT TRUCK				498	6443
UNKNOWN LIGHT TRUCK				499	6444
UNKNOWN VEHICLE				999	1103
MKX		2007			233036
MKS		2008			233038

LOTUS/69

ESPRIT		0		39	9611
EUROPE		0		39	9609
ELISE				39	193699
EVORA		2010		39	
OTHER AUTOMOBILE				39	255
UNKNOWN AUTOMOBILE				39	256

MACK/86

MEDIUM/HEAVY – CBE				850	9723
				881	
MEDIUM/HEAVY – COE/ENTRY POSITION UNKNOWN					9727
				882	
MEDIUM/HEAVY – COE/HIGH ENTRY					9725
				883	
MEDIUM/HEAVY – COE/LOW ENTRY					9724
				884	
MEDIUM/HEAVY – OTHER					9728
				890	
MEDIUM/HEAVY – UNKNOWN ENGINE LOCATION					9726

MEDIUM/HEAVY BASED MOTORHOME				898	9722
UNK MED HEAVY TRUCK				899	32528

MARMON/98

MEDIUM/HEAVY – CBE				898	9795
MEDIUM/HEAVY – COE/ENTRY POSITION UNKNOWN				898	9799
MEDIUM/HEAVY – COE/HIGH ENTRY				898	9797
MEDIUM/HEAVY – COE/LOW ENTRY				898	9796
MEDIUM/HEAVY – OTHER				898	9800
MEDIUM/HEAVY – UNKNOWN ENGINE LOCATION				898	9798
MED/HEAVY BASED MOTORHOME					9794

MASERATI/69

BITURBO		0		40	9613
OTHER AUTOMOBILE				40	257
UNKNOWN AUTOMOBILE				40	258

MAZDA/41

RX2			1972	1974	31	6553
RX3			1972	1978	32	6555
RX-8					32	146556
RX4			1974	1978	33	6557
RX7	S, GS, GSL, SE		1979	1998	34	714
GLC/PROTEGE/323	DX		1977		35	701
		323	1977	1994	35	
	Protege		1990		35	
COSMO			1976	1978	36	6559
	626	GT, GS, GSL, SE	1979		37	702
	808		1972	1977	38	6563
MIZER			1976	1976	39	6565
R-100			0	1972	40	6567
616/618			0	1972	41	6569
	1800		0	1972	42	6571
	929		1988	1996	43	703
MX-6	Turbo		1988		44	712
MIATA			1990		45	711
MX-3	GS		1992		46	710
MILLENIA			1995		47	708
MP3					48	45085
MAZDA 6					50	146558
MAZDA 3					51	158132
MAZDA 5					52	210266
CX-7					53	210268

CX-9				54	233040
OTHER AUTOMOBILE				398	715
UNKNOWN AUTOMOBILE				399	716
NAVAJO		1991	1994	401	6573
TRIBUTE		2001		402	31624
MPV		1989	2006	441	709
MAZDA PICKUP	Cab Plus, B-4000	1994		471	704
	B-2000, B-2200, B-2600, SE-5, LX	0		471	
OTHER LIGHT TRUCK				498	717
UNKNOWN LIGHT TRUCK				499	718
UNKNOWN VEHICLE				999	719
CX-9		2007			233040

MERCEDES BENZ

GLK		2010		14	
200/220/230/240/250/260/280/300/320 SE,CD,D,SD,ETC	Sedan and 5 passenger "C" only, SE, CD, D, SD, TD, TE, CE, E, (DOES NOT include 280 SE) (75 on)	0		31	725
230/280 SL	2 seater only	0		32	6588
300/350/380/450/500SL/560SL	300/500 SL	1990	1994	33	632
	2 seater only	0	1994	33	
350/380/420/450/560/ SLC		0		34	6593
280/300SEL		0		35	616
380/420/450/500/560SEL/500SEC/560SEC/350SDL/300SDL		0		36	631
300 SE/380/450 SE	280 S, 300 SD Sedan/350 SD	0		37	621
	280 SE	1975		37	
600, 6.9 SEDAB	Pullman	0		38	633
	190 D, E, 2.3, 2.5	0		39	720
	300 CE Cabriolet	1993		40	727
400/500 E	SE	1992		41	641
220/280/320 C		1997		42	636
S CLASS				43	22152
SL CLASS				44	22154
SLK				45	22156
CL				46	22158
CLK				47	22160
E				48	22163
SLR MCLAREN				49	174911
R-CLASS				50	210270
CLS CLASS				51	210272
OTHER AUTOMOBILE				398	639
UNKNOWN AUTOMOBILE				399	495
M		1997		401	6597
G CLASS		2002		402	45087
GLK CLASS		2010		403	
VAN DERIVATIVE	Kurbstar	1982		470	6600

OTHER LIGHT TRUCK				498	496
UNKNOWN LIGHT TRUCK				499	497
MEDIUM/HEAVE – CBE				881	6602
MEDIUM/HEAVY – COE LOW ENTRY				882	6604
MEDIUM/HEAVY – COE HIGH ENTRY				883	6606
MEDIUM/HEAVY; UNKNOWN ENGINE LOCATION				884	6610
MEDIUM/HEAVY: COE ENTRY POSITION UNKNOWN				890	6612
OTHER MEDIUM/HEAVY TRUCK				898	498
UNK TYPE TRUCK (LIGHT/MED/HEAVY)				899	27273
UNKNOWN MEDIUM/HEAVY TRUCK				899	499
MEDIUM BUS				981	500
OTHER BUS				988	501
UNKNOWN BUS TYPE				989	6618

MERCURY/14

CYCLONE	GT, CJ, Spoiler	0	1971	2	6467
CAPRI-DOMESTIC	RS, Turbo, GS, Black Magic	1979	1986	3	1105
COUGAR/XR7	XR-7, RS, LS, GS, Eliminator, Brougham, Villager, (includes all body styles): WB=118"	1977	1979	4	1109
	XR-7, RS, LS, GS, Eliminator, Brougham, Villager, (includes all body styles): WB=114"	1977	1979	4	
	XR-7, RS, LS, GS, Eliminator, Brougham, Villager, (includes all body styles)	1980	1988	4	
	XR-7, RS, LS, GS, Eliminator, Brougham, Villager, (includes all body styles)	1989		4	
	XR-7, RS, LS, GS, Eliminator, Brougham, Villager, (includes all body styles)	1967	1976	4	
MARQUIS/MONTEREY	Marauder, X-100, Parklane, S-55, Custom, Brougham, Montclair, Grand Marquis: WB=121"	0	1978	6	1108
	Marauder, X-100, Parklane, S-55, Custom, Brougham, Montclair, Grand Marquis	1979	1982	6	
	Marauder, X-100, Parklane, S-55, Custom, Brougham, Montclair, Grand Marquis: WB=106"	1982	1998	6	
	Marauder, X-100, Parklane, S-55, Custom, Brougham, Montclair, Grand Marquis: WB=114"	1982	1998	6	
	Marauder, X-100, Parklane, S-55, Custom, Brougham, Montclair, Grand Marquis: WB=124"	0	1978	6	
COMET	Capri	1966	1967	8	6469
	Caliente, GT, Voyager, 202	1971	1977	8	
	Caliente, GT, Voyager, 202	62	1967	8	
BOBCAT	Runabout, Villager	1975	1980	9	1104

MONTEGO	GT, MX, Villager, Brougham	1968	1973	10	6473
	GT, MX, Villager, Brougham: WB=114"	1972	1976	10	
	GT, MX, Villager, Brougham: WB=114"	1972	1976	10	
	Comet	1968	1970	10	
MONARCH	Ghia	1975	1980	11	1119
ZEPHYR	GS, Z-7	1978	1983	12	1131
LYNX/LN-7 (1982-1983)		1981	1987	13	1113
TOPAZ		1984		15	1124
SABLE	LS, GS	1986		17	1121
MONTEGO (2005+)				20	174913
MILAN				21	210274
CAPRI-FOREIGN	Capri II	1970	1977	31	1106
	2 + 2	1989	1994	31	
PANTERA	deTomaso	1972	1974	33	6478
TRACER	L, GL	1994		36	1129
MYSTIQUE		1994		37	1120
COUGAR				38	22165
MARAUDER				39	146560
OTHER AUTOMOBILE				398	1132
UNKNOWN AUTOMOBILE				399	1133
MOUNTAINEER		1996		401	6480
MARINER	Hybrid	2005		402	174915
VILLAGER	LS, GS	1993		443	6482
MONTEREY (2004+)				444	158134
OTHER LIGHT TRUCK				498	6484
UNKNOWN LIGHT TRUCK				499	6485
UNKNOWN VEHICLE				999	1134

MERKUR/56

XR4Ti	Turbo	1985	1989	31	487
SCORPIO	Turbo	1987	1990	32	486
OTHER AUTOMOBILE				398	488
UNKNOWN AUTOMOBILE				399	489
UNKNOWN VEHICLE				999	490

MG/43

MIDGET				31	6542
MGB (1976 – 1979)		1976	1979	32	6621
MGB ('67-'1975)	GT	1967	1975	33	6623
MGA		0		34	6625
TA/TC/TD/TF		0		35	6627
MGC	GT	0	1969	36	6629
OTHER AUTOMOBILE				398	503
UNKNOWN AUTOMOBILE				399	504
UNKNOWN VEHICLE				999	505

MINI/65

COOPER/COOPER S				31	143056
-----------------	--	--	--	----	--------

MITSUBISHI/52

STARION	2+2, LE, Turbo	1983	1990	31	391
TREDIA	L, LS, Turbo	1983	1988	32	393
CORDIA	L, Turbo	1983	1988	33	382
GALANT	Sigma	1985	1988	34	384
	ECS	1985		34	
MIRAGE	L, Turbo	1985		35	385
PRECIS				36	6817
ECLIPSE		1990		37	383
SIGMA		1989	1990	38	390
3000GT	Spyder, VR-4	1991		39	381
DIAMANTE		1992		40	6819
LANCER				46	46434
OTHER AUTOMOBILE				398	397
UNKNOWN AUTOMOBILE				399	398
MONTERO	Sport	1985	2006	401	386
MINIVAN	LS	1987		441	395
EXPO WAGON	LRV, Sport WB=107.1"	1992	1995	442	396
	LRV, Sport WB=99.2"	1992	1995	442	
PICKUP	Mighty Max, SPX, 4 X 4	0		471	389
ENDEAVOR		2004		403	158136
OUTLANDER		2003		402	146562
OTHER LIGHT TRUCK				498	399
UNKNOWN LIGHT TRUCK				499	400
MEDIUM/HEAVY – COE LOW ENTRY	FUSO FE	0		882	6821
OTHER MEDIUM/HEAVY TRUCK				898	401
UNK TYPE TRUCK (LIGHT/MED/HEAVY)				899	27274
UNKNOWN MEDIUM/HEAVY TRUCK				899	402
CONVENTIONAL FRONT ENGINE				981	6823
FRONT ENGINE/FLAT FRONT				982	6825
REAR ENGINE/FLAT FRONT				983	6827
OTHER BUS				988	403
UNKNOWN TYPE BUS				989	6829
UNKNOWN VEHICLE				999	6831
RAIDER/DUROCROSS				472	233043

MORRIS/69

MINOR		0	1998	41	9615
OTHER AUTOMOBILE				41	259
UNKNOWN AUTOMOBILE				41	260

MOTO-GUZZI

ATC/ATV (000-050CC)				731	354
ATC/ATV (051-124CC)				732	355
ATC/ATV (125-349CC)				733	356
ATC/ATV (350CC-OVER)				734	357
ATC/ATV (UNKNOWN CC)				739	358
MOTORCYCLE (000-050CC)				701	347
MOTORCYCLE (051-124CC)				702	348
MOTORCYCLE (125-349CC)				703	349
MOTORCYCLE (350-449CC)				704	350
MOTORCYCLE (450-749CC)				705	351
MOTORCYCLE (750CC-OVER)				706	352
MOTORCYCLE (UNKNOWN CC)				709	353
OTHER MOTORED CYCLE				798	359
UNKNOWN MOTORED CYCLE				799	360

NEOPLAN/9810

BUS – CONVENTIONAL FRONT ENGINE				902	9810
BUS – FRONT ENGINE/FLAT FRONT				902	9811
BUS – REAR ENGINE/FLAT FRONT				902	9812
BUS BASED MOTORHOME				902	9809
OTHER BUS				902	9813
					9810

NISSAN / DATSUN/35

F10		1977	1978	31	6855	
200/240 SX		1984	1998	32	846	
1200/210/B210	Honeybee	1971	1982	33	842	
Z-CAR, ZX	240/260/280Z, 300 ZX, Turbo	1970		34	849	
	2+2	1975	1978	34		
	2+2	1979		34		
	310	1979	1982	35	843	
	510	PL	1978	1981	36	844
		PL	1968	1973	36	
	610	PL	1973	1976	37	6857
	710	PL	1974	1977	38	6859
810/MAXIMA		1977		39	738	
ROADSTER	SPL 311, SRL 311, 1600, 2000, convertible	0	1970	40	6861	
PL411, RL411		0	1967	41	6863	
STANZA	XE	1982	1992	42	756	
SENTRA		1983		43	750	
PULSAR	EXA	1986	1990	44	745	
	NX	1983	1990	44		
MICRA		1987		45	6865	

NX 1600/2000		1992		46	742
ALTIMA		1993	1999	47	12227
350Z		2003		48	158138
370Z		2009		48	
MURANO				49	158140
VERSA				50	210276
ROGUE				51	
CUBE		2009		52	
GT-R		2009		53	
OTHER AUTOMOBILE				398	758
UNKNOWN AUTOMOBILE				399	759
PATHFINDER		1986		401	6867
XTERRA		2000		402	31619
PATHFINDER ARMADA				421	158142
VAN	XE, GXE	1988		441	757
AXXESS		1989	1990	442	6833
QUEST		1993		443	747
DATSUN/NISSAN PU/Frontier	PL620, King Cab, Hardbody	1973		471	743
TITAN				481	158144
OTHER LIGHT TRUCK	Patrol (1960)	0		498	760
UNKNOWN LIGHT TRUCK				499	761
MEDIUM/HEAVY COE HIGH ENTRY				883	6870
OTHER MEDIUM/HEAVY TRUCK				898	762
UNK TYPE TRUCK (LIGHT/MED/HEAVY)				899	27276
UNKNOWN MEDIUM/HEAVY				899	763

NORTON/75

MOTORCYCLE (000-050CC)				701	
MOTORCYCLE (051-124CC)				702	
MOTORCYCLE (125-349CC)				703	
MOTORCYCLE (350-449CC)				704	
MOTORCYCLE (450-749CC)				705	
MOTORCYCLE (750CC-OVER)				706	
MOTORCYCLE (UNKNOWN CC)				709	
OTHER MOTORED CYCLE				798	
UNKNOWN MOTORED CYCLE				799	

OLDSMOBILE/21

CUTLASS (RWD-ONLY)	Classic	1988	1988	1	1052
	Supreme, S, LS, Salon, Brougham, Vista Cruiser, Rallye 350, Hurst Olds, 442, Calais	1978	1988	1	
	Supreme, S, LS, Salon, Brougham, Vista Cruiser, Rallye 350, Hurst Olds, 442, Calais	0	1977	1	

	F85	0	1972	1	
DELTA 88	Royale, Custom, Delta, Jetstar 88, Delmont 88, Custom Cruiser	1977	1985	2	1051
	Royale, Custom, Delta, Jetstar 88, Delmont 88, Custom Cruiser	0	1976	2	
	Starfire	0	1966	2	
NINETY-EIGHT	Regency, Luxury	1986		3	1071
	Regency, Luxury	1977	1984	3	
	Regency, Luxury	0	1976	3	
TORONADO	XSR, Trofeo, Brougham, Custom	1986	1992	5	1079
	XSR, Trofeo, Brougham, Custom	1979	1985	5	
	XSR, Trofeo, Brougham, Custom	1966	1978	5	
COMMERCIAL SERIES	Ambulance/Hearse	0	98	6	6646
STARFIRE	SX, GT	1975	1980	12	1078
OMEGA		1980	1985	15	1076
	RWD	1975	1979	15	
FIRENZA		1982	1988	16	1069
CIERA		1982		17	1054
CALAIS		1985	1991	18	1050
CUTLASS (FWD)		1988		20	1060
ACHIEVA		1992		21	1046
AURORA		1994		22	1049
INTRIGUE				23	22167
ALERO				24	22169
OTHER AUTOMOBILE				398	1081
UNKNOWN AUTOMOBILE				399	1082
BRAVADA		1991	1994	401	22171
SILHOUETTE		1990		441	1077
OTHER LIGHT TRUCK				498	1083
UNKNOWN LIGHT TRUCK				499	853
OTHER VEHICLE				998	854
UNKNOWN VEHICLE				999	855

OSHKOSH/98

MEDIUM/HEAVY – CBE				805	9774
MEDIUM/HEAVY – COE/ENTRY POSITION UNKNOWN				805	9778
MEDIUM/HEAVY – COE/HIGH ENTRY				805	9776
MEDIUM/HEAVY – COE/LOW ENTRY				805	9779
MEDIUM/HEAVY – OTHER				805	9777

MEDIUM/HEAVY – UNKNOWN ENGINE LOCATION				805	9773

OTHER DOMESTIC MANUFACTURER/29

OTHER AUTOMOBILE				398	
UNKNOWN MAKE				399	933
OTHER LIGHT TRUCK				498	12917
OTHER MEDIUM/HEAVY TRUCK				898	12919
OTHER BUS				988	12921
OTHER VEHICLE				998	12923

OTHER FOREIGN MANUFACTURER/69

OTHER AUTOMOBILE	Includes 2010 Mahindra Scorpio , 2009 Yes! Roadster			398	
OTHER LIGHT TRUCK				498	12918
OTHER MEDIUM/HEAVY TRUCK				898	12919
OTHER BUS				988	12922
OTHER VEHICLE				998	12923

OTHER MAKE/98

OTHER AUTOMOBILE				398	12911
OTHER LIGHT TRUCK				498	12913
TRUCK BASED MOTORHOME				850	26126
OTHER MEDIUM/HEAVY TRUCK				898	12914
BUS BASED MOTORHOME				950	25908
OTHER BUS				988	12912
OTHER VEHICLE				998	12915

OTHER MAKE MOPED/78

OTHER MOTORED CYCLE				798	299
UNKNOWN MOTORED CYCLE				799	300

OTHER MAKE MOTORED CYCLE/79

0-50cc		0		701	9625
51-124cc		0		702	9626
125-349cc		0		703	9627
350-449cc		0		704	9628
450-749cc		0		705	9629
750c or greater		0		706	9630
Unknown cc		0		709	9631

PETERBILT/89

MEDIUM/HEAVY BASED MOTORHOME				850	9729
------------------------------	--	--	--	-----	------

MEDIUM/HEAVY – CBE				881	9730
MEDIUM/HEAVY – COE/LOW ENTRY				882	9731
MEDIUM/HEAVY – COE/HIGH ENTRY				883	9732
MEDIUM/HEAVY – UNKNOWN ENGINE LOCATION				884	9733
MEDIUM/HEAVY – COE/ENTRY POSITION UNKNOWN				890	9734
MEDIUM/HEAVY – OTHER				898	9735

PEUGEOT/44

304		1971	1973	31	6635
403		0	1967	32	6637
404	Station Wagon	0	1970	33	6639
		0	1970	33	
504/505	STI, STX, Turbo, S, GL GLS, Liberte	1970	1991	34	6642
	Station Wagon	1970	1991	34	
604	SL, D	1977	1984	35	6645
405		1989	1991	36	6647
OTHER AUTOMOBILE				398	506
UNKNOWN AUTOMOBILE				399	512
MOTORCYCLE (000-050CC)				701	508
MOTORCYCLE (051-124CC)				702	509
MOTORCYCLE (UNKNOWN CC)				709	510
UNKNOWN MOTORED CYCLE				799	511
UNKNOWN VEHICLE				999	512

PLYMOUTH/9

VALIANT/DUSTER/SCAMP	100, 200, Brougham, Signet, Custom, Special, 340/360, Twister: WB=108"	0	1976	1	6320
	100, 200, Brougham, Signet, Custom, Special, 340/360, Twister: WB=111"	0	1976	1	
SATELLITE/BELVEDERE	Belveder I/II, GTX, Roadrunner, Sebring, Sebring Plus, Superbird, Brougham	0	1974	2	6323
FURY	Roadrunner	1975	1975	3	6325
	I, II, III	0	1974	3	
	Salon, VIP, Sport, Suburban	1975	1978	3	
GRAN FURY	Sedan, Brougham, Custom Sport, Suburban	1975	1981	4	36
	Sedan, Brougham, Custom Sport, Suburban	1982	1989	4	
BARRACUDA	Formula, S, 340, AAR, 'Cuda, Gran Coupe	1965	1973	5	6329
VOLARE	Custom, Premier, Roadrunner, Police: WB=109"	1976	1980	6	53
	Custom, Premier, Roadrunner, Police: WB=113"	1976	1980	6	
CARAVELLE		1985	1989	7	29

HORIZON	TC-3, Miser, Turismo 2.2, Custom, SE, America Expo	1978	1990	8	40
	Duster	1985	1990	8	
RELIANT (K)	SE, LE	1981	1989	11	44
SCAMP (CAR BASED PICKUP)	GT, 2.2	1982	1984	13	6331
SUNDANCE		1987		17	47
ACCLAIM		1989		19	27
NEON		1994		20	42
ARROW	Fire Arrow, GS, GT	1976	1980	32	28
SAPPORO	all imported	1978	1983	33	46
CHAMP/COLT (EXCLUDES VISTA)	Turbo, Custom	1979	1994	34	30
	Station Wagon (WB=103")	1984	1994	34	
CONQUEST	TSI	1984	1989	35	34
LASER	RS, Turbo	1989		37	41
BREEZE		1996		38	6333
PROWLER				39	6335
OTHER AUTOMOBILE				398	57
UNKNOWN AUTOMOBILE				399	58
TRAILDUSTER		0		421	47
COLT VISTA	4 X 4	1987		441	32
VOYAGER (MINIVAN)	SE, LX: WB=112"	1984		442	37
	SE, LX: WB=119"	1984		442	
ARROW PICKUP (FOREIGN)		0		471	6341
OTHER LIGHT TRUCK				498	59
UNKNOWN LIGHT TRUCK				499	60
UNKNOWN VEHICLE				999	61

PONTIAC/22

LEMANS/TEMPEST (THRU 1979)	Safari, T-37, Luxury, Grand Sport, GT-37, Sprint, Grand Lemans	1976	1977	1	893
	Safari, T-37, Luxury, Grand Sport, GT-37, Sprint, Judge Grand AM, Grand Lemans	1973	1975	1	
	Safari, T-37, Luxury, Grand Sport, GT-37, Sprint, Grand Lemans	1978	1979	1	
	Safari, T-37, Luxury, Grad Sport, GTO, GT-37, Sprint, Grand Lemans	0	1973	1	
BONNEVILLE/CATALINA/PARISIENNE	Brougham, Gand Safari, Safari, Granville, 2+2 Executive, Starchief	0	1968	2	895
	Brougham, Gand Safari, Safari, Granville, 2+2 Executive, Starchief	1977	1981	2	
	Brougham, Gand Safari, Safari, Granville, 2+2 Executive, Starchief	1982	1984	2	
	Parisienne	1983	1984	2	
	SE, SSE, SSEi	1987		2	
	Brougham, Gand Safari, Safari, Granville, 2+2 Executive, Starchief	1969	1976	2	
FIERO	2M4, 2M6, GT, SE	1984	1988	5	873

VENTURA	II, SJ, Sprint, Custom	1971	1977	8	6681
	GTO	1974	1977	8	
FIREBIRD/TRANS AM	Esprit, Formula, GTA, Redbird, Yellowbird, Skybird, SE	1967	1981	9	875
	Esprit, Formula, GTA, Redbird, Yellowbird, Skybird, SE	1982		9	
GRAND PRIX (RWD)	J, LJ, SJ, Brougham, 2+2	1978	1987	10	885
	J, LJ, SJ, Brougham, 2+2	1973	1977	10	
	J, LJ, SJ, Brougham, 2+2	1963	1972	10	
ASTRE	Safari, SJ, Custom	1975	1977	11	6684
SUNBIRD (THRU 80)	Safari, Sport, Formula	1976	1980	12	897
T1000/1000	4 door	1981	1987	13	903
	2 door	1981	1987	13	
PHOENIX		1980	1984	15	896
	LJ, SJ	1977	1979	15	
J2000/SUNBIRD/SUNFIRE		1984	1994	16	901
	6000	1982		17	
GRAND AM	SE, LE	1980	1980	18	881
G6				19	233043
GRAND PRIX (FWD)		1988		20	886
SOLTICE				23	210278
G8	ST	2010		24	
G3		2009		25	
LEMANS (1988-on)	SE, Tempest (Canadian)	1988		31	894
VIBE		2003		32	45089
OTHER AUTOMOBILE				398	909
UNKNOWN AUTOMOBILE				399	910
AZTEK				401	40753
TORRENT				403	210280
TRANS SPORT		1990		441	906
OTHER LIGHT TRUCK				498	911
UNKNOWN LIGHT TRUCK				499	912
UNKNOWN VEHICLE				999	913
SPORT TRUCK		2010			
G5		2007			233045

PORSCHE/45

911	L, S, E, T, SC, Carrera, Slopenose, Speedstar	0		31	516
	Panorama	1996		31	
912	E, T	0	1969	32	6654
914	S, 1.8, 2.0, 914/6	1970	1976	33	6656
924	Turbo, S	1977	1988	34	513
928	S	1978		35	514
930	Turbo	1989	1994	36	6658
944	Turbo, S	1983	1992	37	515
959		1989	1994	38	6661

968		1992	1995	39	6663
986 BOXSTER				40	22173
CAYENNE		2003		421	158146
OTHER AUTOMOBILE	Spyder, Speedster, 356	0		398	518
UNKNOWN AUTOMOBILE				399	519
UNKNOWN VEHICLE				999	520

RELIANT/69

OTHER AUTOMOBILE				49	282
UNKNOWN AUTOMOBILE				49	283

RENAULT/AMC/46

LECAR		5	1976	1983	31	521
DAUPHINE/10/R-8/CARAVELLE			0	1971	32	6671
12	R12L, R12TL		1972	1977	33	6674
15	R14TL		1973	1976	34	6676
16	R16		1969	1972	35	6678
17	R17, Gordini Coupe, R17TL		1973	1980	36	6680
R18i	Sportwagon		1981		37	522
FUEGO	TL, TS, GTL, GTS, Turbo		1982	1985	38	525
ALLIANCE/ENCORE/GTA, CONVERTIBLE	L, DL, Limited, X-37		1983		39	523
ALPINE	GT		1987		41	6682
MEDALLION	DL, LX		1987	1987	44	526
PREMIER			1987	1987	45	6685
OTHER AUTOMOBILE					398	527
UNKNOWN AUTOMOBILE					399	528
UNKNOWN VEHICLE					999	529

ROLLS ROYCE/BENTLEY/69

CLOUD/SHADOW SERIES			0		42	261
OTHER AUTOMOBILE					42	272
UNKNOWN AUTOMOBILE					42	273

SAAB/47

99/99E/900	S, Turbo, Cabriolet		0		31	530
SONNETT	II, III, V-4		1968	1974	32	6707
95/96/97			0	1973	33	6710
9000, CS	CS		1993		34	531
	S, Trubo		1985		34	
3-Sep					35	
5-Sep					36	
9-2X					37	174919
9-4X			2009		38	
OTHER AUTOMOBILE					398	533

9-7X		2005		401	174921
------	--	------	--	-----	--------

SATURN/24

SL	SL1, SL2, SL3	1991		1	6719
SC	includes 3 door coupe	1997		2	6721
	SC1, SC2	1991	1996	2	
SW	SW1, SW2	1993		3	6723
EV	EV1 (electric vehicle)	1997		4	6725
LS/LS1/LS2/L100/L200/L300				5	31617
LW/LW1/LW2/LW200/300				6	37084
ION				7	148360
SKY				8	210286
AURA				9	210284
RELAY		2005		441	174925
VUE		2002		401	45091
OTHER AUTOMOBILE				398	923
UNKNOWN AUTOMOBILE				399	924
UNKNOWN VEHICLE				999	925

SCANIA/98

MEDIUM/HEAVY – CBE				807	9788
MEDIUM/HEAVY – COE/ENTRY POSITION UNKNOWN				807	9792
MEDIUM/HEAVY – COE/HIGH ENTRY				807	9790
MEDIUM/HEAVY – COE/LOW ENTRY				807	9789
MEDIUM/HEAVY – OTHER				807	9793
MEDIUM/HEAVY – UNKNOWN				807	9791

SIMCA/69

OTHER AUTOMOBILE				44	274
UNKNOWN AUTOMOBILE				44	275

SMART/65

FORTWO					31
OTHER AUTOMOBILE					398
UNKNOWN AUTOMOBILE					399

STERLING/61

827S	Li	1986	1991	31	7912
OTHER AUTOMOBILE				398	465
UNKNOWN AUTOMOBILE				399	466
UNKNOWN VEHICLE				999	467

STERLING TRUCKS/98

MEDIUM/HEAVY – CBE				808	24429
MEDIUM/HEAVY – COE/ENTRY POSITION UNKNOWN				808	24437

MEDIUM/HEAVY – COE/HIGH ENTRY				808	24433
MEDIUM/HEAVY – COE/LOW ENTRY				808	24431
MEDIUM/HEAVY – OTHER				808	24439
MEDIUM/HEAVY – UNKNOWN ENGINE LOCATION				808	24435

STUDEBAKER/29

CRUISER		0	1966	1	9542
GRAN TURISMO		0	1966	1	9538
HAWK		0	1966	1	9540
LARK		0	1966	1	9536
OTHER AUTOMOBILE				1	9544
UNKNOWN AUTOMOBILE				1	9545

STUTZ/29

OTHER AUTOMOBILE		0		398	9575
UNKNOWN AUTOMOBILE		0		398	9576

SUBARU/48

DL/FE/G/GF/GL/GLF/STD/LOYALE	4 wheel drive, Turbo	1972	1989	31	543
	Loyale	1990	1994	31	
STAR		1970	1971	32	7620
360		1969	1970	33	
LEGACY	Brighton, Outback, Outback II	1989		34	541
XT/XT6	4WD Turbo, convertible, DL	1986		35	546
JUSTY	DL, GL	1987	1994	36	540
SVX		1992		37	545
IMPREZA	Outback, Outback II	1993		38	539
BRAT DL, GL		1978		43	6724
BAJA		2003		44	158148
OUTBACK				45	158150
OTHER AUTOMOBILE				398	550
UNKNOWN AUTOMOBILE				399	551
FORESTER		1996		401	22179
B9 TIRBECA				402	210288
UNKNOWN VEHICLE				999	552

SUNBEAM/69

OTHER AUTOMOBILE				45	276
UNKNOWN AUTOMOBILE				45	277

SUZUKI/53

SA310	GLX	1986		31	6839
SWIFT	Gti, GTX	1989		34	411
ESTEEM		1995		35	405
AERIO				36	147792
FORENZA				37	158152
VERONA				38	158156

RENO				39	174927
OTHER AUTOMOBILE				398	416
UNKNOWN AUTOMOBILE				399	417
SAMURAI	Standard, Deluxe	1985	1995	401	406
SX4		2007			233047
SIDEKICK/GRAND VITARA		1996		402	407
X-90/VITARA		1999		403	415
GRAND VITARA				404	158154
XL7		2001		405	158158
EQUATOR		2009		481	
OTHER LIGHT TRUCK				498	418
UNKNOWN LIGHT TRUCK				499	419
MOTORCYCLE (000-050CC)				701	420
MOTORCYCLE (051-124CC)				702	421
MOTORCYCLE (125-349CC)				703	422
MOTORCYCLE (350-449CC)				704	423
MOTORCYCLE (450-749CC)				705	424
MOTORCYCLE (750CC-OVER)				706	425
MOTORCYCLE (UNKNOWN CC)				709	426
ATC/ATV (000-050CC)				731	427
ATC/ATV (051-124CC)				732	428
ATC/ATV (125-349CC)				733	429
ATC/ATV (350CC-OVER)				734	430
ATC/ATV (UNKNOWN CC)				739	431

TOYOTA/49

CORONA	Mark II, Custom, 1900, 2000, Deluxe	0	1982	31	561
COROLLA		1986		32	560
	1100, 1200, 1600, SR-5, LE, Deluxe, Custom	1969	1985	32	
CELICA	1900, 2000, GT, ST	1972		33	556
	GTS	1972	1993	33	
SUPRA	Celica Supra, Soarer	1979		34	559
CRESSIDA		1978	1992	35	562
CROWN	2300, 2600	0	1971	36	6746
CARINA	2000	1972	1973	37	6748
TERCEL	Corolla Tercel, 4WD Wagon	1980		38	571
STARLET		1981	1984	39	568
CAMRY	LE, Deluxe, XLE, Coupe	1983		40	555
MR-2		1985	1995	41	564
PASEO		1992		42	565
AVALON		1995		43	554
SOLARA				44	22182
ECHO				45	31612
PRIUS				46	44664

SCION XA				48	158160
SCION XB				49	158162
SCION TC				50	174929
YARIS				51	210292
SCION XD				52	257690
VENZA				53	
OTHER AUTOMOBILE				398	608
UNKNOWN AUTOMOBILE				399	607
4-RUNNER		1985		401	553
RAV-4				402	6750
HIGHLANDER		2001		403	44666
MATRIX				404	45093
FJ CRUISER				405	210290
LANDCRUISER		1976		421	563
SEQUOIA				422	40895
MINVAN/PREVIEW		1991		441	567
	LE, Cargo	1984	1990	441	
SIENNA				442	22184
PICKUP	SR-5, Extra Cab, Sport, LN44, Chinook, Wonder Wagon			471	566
TACOMA				472	6752
T-100		1993		481	570
TUNDRA		2000		482	31615
OTHER LIGHT TRUCK				498	610
UNKNOWN LIGHT TRUCK				499	611
UNKNOWN VEHICLE				999	612

TRIUMPH/50

SPITFIRE	I, II, III, IV, 1500	0	1981	31	6754
GT-6	MK3	1967	1973	32	6756
TR4	TR2, TR3, TR4A	0	1968	33	6758
TR6		1969	1976	34	6760
TR7/8		1975	1981	35	6762
HERALD	Vitesse	0		36	6764
STAG		1971	1973	37	6766
OTHER AUTOMOBILE	2000, 1200 series	0		398	572
UNKNOWN AUTOMOBILE				399	573
MOTORCYCLE (000-050CC)				701	574
MOTORCYCLE (051-124CC)				702	575
MOTORCYCLE (125-349CC)				703	576
MOTORCYCLE (350-449CC)				704	577
MOTORCYCLE (450-749CC)				705	578
MOTORCYCLE (750CC-OVER)				706	579
MOTORCYCLE (UNKNOWN CC)				709	580

TVR/69

OTHER AUTOMOBILE				46	278
UNKNOWN AUTOMOBILE				46	279

UNKNOWN DOMESTIC MANUFACTURER/99

UNKNOWN AUTOMOBILE				399	24515
UNKNOWN LIGHT TRUCK				499	732
UNKNOWN MOTORED CYCLE				799	728
UNKNOWN MEDIUM/HEAVY TRUCK				899	734
UNKNOWN BUS TYPE				989	730
UNKNOWN VEHICLE				999	736

UNKNOWN FOREIGN MANUFACTURER/99

UNKNOWN AUTOMOBILE				399	293
UNKNOWN LIGHT TRUCK				499	733
UNKNOWN MOTORED CYCLE				799	729
UNKNOWN MEDIUM/HEAVY TRUCK		1993		899	735
UNKNOWN BUS TYPE				989	731
UNKNOWN VEHICLE				999	737

UNKNOWN MANUFACTURER/99

UNKNOWN AUTOMOBILE				399	10351
UNK TYPE TRUCK (LIGHT/MED/HEAVY)				899	27277
UNKNOWN MEDIUM/HEAVY TRUCK				899	626
UNKNOWN BUS TYPE				989	623
UNKNOWN VEHICLE				999	627

**UNKNOWN MEDIUM/HEAVY TRUCKS AND BUSES
MANUFACTURER/99**

UNK MED/HEAVY TRUCK		0		899	12908
UNK BUS TYPE		0		988	12910

VOLKSWAGEN/30

KARMANN GHIA		0	1974	31	6759
BEETLE 1300/1500	flat windshield, 94.5" WB	0	1977	32	6761
SUPER BEETLE	Distinguished by curved windshield, 95.3" WB	1971	1980	33	5820
411/412	Squareback/Fastback	1971	1974	34	6763
SQUAREBACK/FASTBACK	Type 3, 1600	0	1974	35	6765
RABBIT	L, GTI, Sport, LS, Custom, DL, Deluxe	1975	1984	36	964
DASHER		1974	1981	37	6767

SCIROCCO	16V	1975	1988	38	965
JETTA	GL, GLI	1981	1992	40	950
QUANTUM	Synco	1982	1988	41	961
GOLF/CABRIOLET	Synco, GTI, Cabriolet, GT, GL	1985	1992	42	934
RABBIT PICKUP	car/based pickup	1980	1983	43	6769
FOX	GL	1987		44	941
CORRADO		1989		45	937
PASSAT		1990		46	968
JETTA III		1993		47	957
GOLF III		1993		48	946
NEW BEETLE				49	22187
PHAETON				50	158164
EOS				51	210294
TOUAREG		2004		421	158166
ROUTAN		2009		443	
TIGUAN		2008			233049
OTHER AUTOMOBILE				398	968
UNKNOWN AUTOMOBILE				399	969
THE THING (181)		1973	1975	401	6771
VANAGON/CAMPER	Bus, Kombi, Van	0		441	935
EUROVAN		1992		442	940
OTHER LIGHT TRUCK				498	781
UNKNOWN LIGHT TRUCK				499	782

VOLVO/51

122	S	0	1968	31	6774
142/144/145	S, E, GL, GLS, Deluxe	0	1974	32	6777
164	S, E	1969	1975	33	6780
240/242/244/245	DL, GL, GLE, GLT, Deluxe	1975		34	583
262/264/265	GL	1976	1982	35	587
1800	E, S, ES	0	1973	36	6782
760/780	GLE, Turbo	1983	1990	38	596
	GLE, Turbo	1987	1992	38	
740	GLE, GT, Turbo, GL	1986	1992	39	590
960		1992		41	6786
850	GLT, Wagon	1993		42	6788
70 SERIES				43	24066
90 SERIES				44	24068
80 SERIES				45	31610
40 SERIES				46	31608
60 SERIES				47	44667
V50				48	174931
XC60		2009		50	
OTHER AUTOMOBILE				398	600

UNKNOWN AUTOMOBILE				399	601
XC90		2003		401	148083
MEDIUM/HEAVY CBE				881	6790
MEDIUM/HEAVY COE LOW ENTRY				882	6791
MEDIUM/HEAVY COE HIGH ENTRY				883	6792
MEDIUM/HEAVY - UNKNOWN ENGINE LOCATION				884	6793
MEDIUM/HEAVY: COE ENTRY POSITION UNKNOWN				890	6794
OTHER MEDIUM/HEAVY TRUCK				898	602
UNKNOWN MEDIUM/HEAVY TRUCK				899	603
MEDIUM BUS				981	604
OTHER BUS				988	379
UNKNOWN TYPE BUS				989	6796
UNKNOWN VEHICLE				999	6798

WARD LAFRANCE/98

MEDIUM/HEAVY - CBE				898	9802
MEDIUM/HEAVY - COE/ENTRY POSITION UNKNOWN				898	9806
MEDIUM/HEAVY - COE/HIGH				898	9804
MEDIUM/HEAVY - COE/LOW ENTRY				898	9803
MEDIUM/HEAVY - OTHER				898	9807
MEDIUM/HEAVY - UNKNOWN ENGINE LOCATION				898	9805

WESTERN STAR/98

MEDIUM/HEAVY - CBE				804	9767
MEDIUM/HEAVY - COE/ENTRY POSITION UNKNOWN				804	9771
MEDIUM/HEAVY - COE/HIGH ENTRY				804	9769
MEDIUM/HEAVY - COE/LOW ENTRY				804	9768
MEDIUM/HEAVY - OTHER				804	9772
MEDIUM/HEAVY - UNKNOWN ENGINE LOCATION				804	9770
MEDIUM/HEAVY BASED MOTORHOME				804	9766

YAMAHA/76

MOTORCYCLE (000-050CC)				701	370
MOTORCYCLE (051-124CC)				702	371
MOTORCYCLE (125-349CC)				703	372

MOTORCYCLE (350-449CC)				704	373
MOTORCYCLE (450-749CC)				705	374
MOTORCYCLE (750CC-OVER)				706	375
ATC/ATV (000-050CC)				731	377
ATC/ATV (051-124CC)				732	378
ATC/ATV (125-349CC)				733	294
ATC/ATV (350CC-OVER)				734	295
ATC/ATV (UNKNOWN CC)				739	296
OTHER MOTORED CYCLE				798	297
UNKNOWN MOTORED CYCLE				799	298
OTHER VEHICLE				999	298

YUGO/57

GV	GVX, Cabriolet	1986	1992	31	7890
OTHER AUTOMOBILE				398	491
UNKNOWN AUTOMOBILE				399	492
UNKNOWN VEHICLE				999	441

APPENDIX B

STIFFNESS VALUES

Table 1: Vehicle Size Categories for Automobiles, Pickups and SUVs

Category No.	Wheelbase Size (cm)
1	1 - 240
2	241 - 258
3	259 - 280
4	281 - 298
5	299 - 313
6	> 313
7	All Vans

Table 2: Vehicle Stiffness Categories

Body Type Category ¹	Stiffness Category		
	Front	Rear	Side
Automobiles, Automobile Derivatives	Wheelbase size ²	Wheelbase size ²	Wheelbase size ²
Utility Vehicles (SUV's) (≤4,536 kgs GVWR)	7	7	Wheelbase size ²
Vans (≤4,536 kgs GVWR)	7	7	Wheelbase size ²
Light Conventional Trucks Pickup style cab, ≤4,536 kgs GVWR)	8	8	Wheelbase size ²

Notes:

1. Body Category is selected on General Vehicle Form, Vehicle Tab.
2. Select category 1 to 6 based on wheelbase size from Table 1.

APPENDIX C

**MAKE MODEL
CHILD SAFETY SEATS**

TYPE	MAKE	MODEL	SAS
ISS	Baby Trend	EZ Loc	149
ISS	Baby Trend	Flex Loc	142
ISS	Baby Trend	Latch Loc	150
BSS	Baby Trend	Recaro	343
ISS	Baby Trend	Tahoe	130
BSS	Baby Trend	Trend	344
CSS	Babyhood	Baby Sitter, Wonda Chair	249
BSS	Basic Comfort	Booster	548
BSS	Basic Comfort	Galaxy 2000	636
CSS	Britax	Advantage	702
ISS	Britax	Baby Safe	131
ISS	Britax	Baby Trend Latch-Loc	133
BSS	Britax	Bodyguard	836
CSS	Britax	Boulevard	265
ISS	Britax	Companion	132
BSS	Britax	Cruiser	640
CSS	Britax	Decathlon	266
CSS	Britax	Diplomat	281
CSS	Britax	Elite	677
FSS	Britax	Expressway	706
FSS	Britax	Freeway, Plus	701
CSS	Britax	Galaxy	267
ISS	Britax	Handle With Care	639
FSS	Britax	Husky	811
FSS	Britax	Laptop	815
CSS	Britax	Marathon	812
BSS	Britax	Monarch	350
BSS	Britax	Parkway	331
FSS	Britax	Regent	705
BSS	Britax	Roadster	531
ISS	Britax	Rock -a- tot	641
CSS	Britax	Roundabout	637
BSS	Britax	Stariser / Comfy	530
FSS	Britax	Traveller Plus	700
CSS	Britax	Wizard	845
ISS	Buick	Baby Safe	129
INT	Buick	Century Integrated Seat	950
INT	Buick	Regal Integrated Seat	950
ISS	Car Seat Speciality	Nania Baby One	123
CSS	Car Seat Speciality	Nania Convertible	268
BSS	Car Seat Speciality	Nania Ola	329
BSS/FSS	Car Seat Speciality	Airway	830
BSS	Car Seat Speciality	Duo Highback Booster	520
CSS	Car Seat Speciality	Nania Basic	269
BSS/FSS	Car Seat Speciality	Nania Nuevo	851
BSS/FSS	Car Seat Speciality	Nania Solo	850
CSS	Car Seat Speciality	Safety Basic Convertible	521

TYPE	MAKE	MODEL	SAS
BSS	Car Seat Specialty	Speedway Booster	522
FSS	Car Seat Specialty	Speedway Car Seat	526
BSS	Car Seat Specialty	Topper Highback/LoBack	532
BSS	Car Seat Specialty	Uno/Polo	704
CSS	Century Products	1000 STE	205
CSS	Century Products	1500 STE	635
CSS	Century Products	2000 STE	206
CSS	Century Products	3000 STE, 3500 STE	207
ISS	Century Products	4-in-1 Travel Solutions	591
CSS	Century Products	4100	710
CSS	Century Products	4200	630
CSS	Century Products	4300	631
CSS	Century Products	4400	632
ISS	Century Products	4500	633
FSS	Century Products	4600	709
CSS	Century Products	5000 STE, 5500 STE	250
BSS/FSS	Century Products	8480 Booster	634
CSS	Century Products	Accel	534
ISS	Century Products	Advanta	513
ISS	Century Products	Assura	514
ISS	Century Products	Assura Premiere	771
ISS	Century Products	Assura V	515
ISS	Century Products	Avanta SE	772
CSS	Century Products	Bravo	596
BSS/FSS	Century Products	Breverra	599
BSS/FSS	Century Products	Breverra Ascend, Sport	516
BSS/FSS	Century Products	Breverra Classic	774
BSS/FSS	Century Products	Breverra Contour	600
BSS/FSS	Century Products	Breverra Contour SE	601
BSS	Century Products	Breverra Contour Sport	519
BSS/FSS	Century Products	Breverra Metro	517
BSS/FSS	Century Products	Breverra Premier	518
BSS/FSS	Century Products	Breverra Transit	792
BSS/FSS	Century Products	CR3	598
FSS	Century Products	Commander	301
ISS	Century Products	Infant 560, 565, 570	565
ISS	Century Products	Infant 580, 590	569
ISS	Century Products	Infant Love Seat	567
BSS/FSS	Century Products	Next Step	776
CSS	Century Products	Nexus	597
CSS	Century Products	Ovation	594
CSS	Century Products	Ovation Encore	684
CSS	Century Products	Ovation Select Fit	595
CSS	Century Products	Room To Grow	592
BSS/FSS	Century Products	Safe-T-Rider	801
ISS	Century Products	Smart Fit	593
ISS	Century Products	Smart Fit Plus, Elite	625
ISS	Century Products	Smart Fit Supreme	623
CSS	Century Products	Smart Move	681

TYPE	MAKE	MODEL	SAS
CSS	Century Products	Smart Move XT, SE	533
ISS	Century/Graco	530	602
ISS	Century/Graco	560	536
ISS	Century/Graco	Avanta	537
ISS	Century/Graco	Celestia	562
CSS	Century/Graco	Encore	686
BSS/FSS	Century/Graco	Simpson	397
ISS	Century/Graco	Travel System	140
ISS	Century/Graco	Vante V	804
ISS	Century/Graco	Vante V	814
INT	Chevrolet	Astro Integrated Seat	950
INT	Chevrolet	Geo Prizm Integrated Seat	950
INT	Chevrolet	Lumina Integrated Seat	950
INT	Chevrolet	Venture Integrated Seat	950
ISS	Chicco	KeyFit	848
FSS	Chicco	Shuttle	685
INT	Chrysler	Cirrus Integrated Seat	950
INT	Chrysler	Concorde Integrated Seat	950
INT	Chrysler	Town & Country SX, LX Integrated Seat	950
INT	Chrysler	Seat	950
FSS	Collier-Keyworth	Co-Pilot	303
ISS	Collier-Keyworth	Cuddle Shuttle	104
CSS	Collier-Keyworth	Formula 1	547
CSS	Collier-Keyworth	Roundtripper	210
CSS	Collier-Keyworth	Safe & Sound II	209
SNSS	Columbia Medical	2000	703
BSS	Combi	Apogee	342
CSS	Combi	Avatar	271
ISS	Combi	Centre	138
ISS	Combi	Connection	136
BSS	Combi	Dakota	348
BSS	Combi	Everest	347
BSS	Combi	Kobuk	349
ISS	Combi	Shuttle	144
ISS	Combi	Tyro	134
CSS	Combi	Victoria	270
BSS	Combi	Yorktown	345
BSS/FSS	Compass	Apex	857
BSS	Compass	B500 Folding Booster	346
CSS	Cosco/Dorel	5 PT	215
BSS/FSS	Cosco/Dorel	Adventurer II	535
BSS/CSS	Cosco/Dorel	Alpha Omega	551
BSS/CSS	Cosco/Dorel	Alpha Omega Elite	506
BSS	Cosco/Dorel	Ambassador	325
ISS	Cosco/Dorel	Arriva	552
CSS	Cosco/Dorel	Auto Trac	553
CSS	Cosco/Dorel	Comfort Ride	751
CSS	Cosco/Dorel	Commuter	554
BSS/FSS	Cosco/Dorel	Commuter High Back Booster	324
BSS	Cosco/Dorel	Complete Voyager	725

TYPE	MAKE	MODEL	SAS
CSS	Cosco/Dorel	Cosco Safe & Easy	213
CSS	Cosco/Dorel	Cosco Safe & Snug	214
ISS	Cosco/Dorel	Cosco TLC	105
ISS	Cosco/Dorel	Designer 22	726
ISS	Cosco/Dorel	Designer 35	727
ISS	Cosco/Dorel	Dream Ride	728
CSS	Cosco/Dorel	Eddie Bauer	278
BSS/FSS	Cosco/Dorel	Eddie Bauer 02-429,	679
BSS/CSS	Cosco/Dorel	Eddie Bauer 02-537	718
ISS	Cosco/Dorel	Eddie Bauer 02-770	719
BSS/FSS	Cosco/Dorel	Eddie Bauer 02-849, 02-880, 22-854	668
CSS	Cosco/Dorel	Eddie Bauer 02-870	669
CSS	Cosco/Dorel	Eddie Bauer 02-875	670
ISS	Cosco/Dorel	Eddie Bauer Comfort	124
BSS/CSS	Cosco/Dorel	Eddie Bauer Deluxe 3-in-1	326
BSS/CSS	Cosco/Dorel	Eddie Bauer Deluxe Convertible	500
BSS/FSS	Cosco/Dorel	Eddie Bauer High Back Booster	864
ISS	Cosco/Dorel	Eddie Bauer Infant Car Seat	146
ISS	Cosco/Dorel	Eddie Bauer Integrated Travel System	135
ISS	Cosco/Dorel	Eddie Bauer SureFit	143
BSS/CSS	Cosco/Dorel	Enspira	502
BSS/FSS	Cosco/Dorel	Explorer	672
ISS	Cosco/Dorel	First Ride	673
BSS/FSS	Cosco/Dorel	Grand Explorer	674
BSS/FSS	Cosco/Dorel	High Backed Booster	550
BSS	Cosco/Dorel	Highrise	328
ISS	Cosco/Dorel	Infant Car Seat	675
BSS/CSS	Cosco/Dorel	Intera	503
ISS	Cosco/Dorel	LatchLoc	846
FSS	Cosco/Dorel	Maxi-Cosi Priori	615
CSS	Cosco/Dorel	Olympian	576
ISS	Cosco/Dorel	Opus 35	577
BSS	Cosco/Dorel	Protek	323
CSS	Cosco/Dorel	Regal Ride	578
CSS	Cosco/Dorel	Scenera	272
BSS	Cosco/Dorel	Select Ride	357
CSS	Cosco/Dorel	Soft Shield	579
BSS/FSS	Cosco/Dorel	Summit	797
ISS	Cosco/Dorel	TLC	580
CSS	Cosco/Dorel	Touriva	581
VSS	Cosco/Dorel	Travel Vest	720
BSS	Cosco/Dorel	Traveler	332
CSS	Cosco/Dorel	Triad	582
ISS	Cosco/Dorel	Turnbout	583
ISS	Cosco/Dorel	Ultra Dream Ride	584
BSS	Cosco/Dorel	Valet	333
BSS/FSS	Cosco/Dorel	Vantage Point	852
BSS/FSS	Cosco/Dorel	Ventura/Vision	586
BSS	Cosco/Dorel	Vista	800

TYPE	MAKE	MODEL	SAS
BSS	Cosco/Dorel	Voyager	585
CSS	Cosco/Peterson	Safe & Easy	764
CSS	Cosco/Peterson	Safe & Snug	765
CSS	Cosco/Peterson	Safe-T-Seat	217
CSS	Cosco/Peterson	Safe-T-Shield	218
FSS	Cosco/Peterson	Travel Hi-Lo - Includes Deluxe High Back	305
BSS	Cosco/Peterson	Traver Hi-Lo	671
INT	Dodge	Caravan	
INT	Dodge	Caravan Integrated Seat	950
ISS	Dodge	Flex Loc	122
INT	Dodge	Grand Caravan Integrated Seat	950
INT	Dodge	Integrated	
INT	Dodge	Intrepid Integrated Seat	950
INT	Dodge	Neon Integrated Seat	950
INT	Dodge	Stratus Integrated Seat	950
BSS	Downunder	Kangaroo	770
Unknown	E-Z On Products	E-Z-On Vest - Includes 101-TCXS, 101-TC, 102-TC(8 sizes)	403
CSS	Early Development	Guardian Comfort	667
CSS	Early Development	Guardian Express	773
CSS	Early Development	Guardian Folder	775
ISS	Eddie Bauer	Deluxe Infant Car Seat	148
CSS	Evenflo	7 Year	616
BSS/FSS	Evenflo	Apollo	813
BSS	Evenflo	Big Kid	330
CSS	Evenflo	Bobby Mac	223
CSS	Evenflo	Bobby-Mac Champion	620
FSS	Evenflo	Bobby-Mac Lite	621
CSS	Evenflo	Bobby-Mac Super	622
BSS/FSS	Evenflo	Bolero	866
FSS	Evenflo	Booster	306
BSS	Evenflo	Booster Seat	624
CSS	Evenflo	Champion	626
BSS/FSS	Evenflo	Chase Comfort Touch	798
BSS/FSS	Evenflo	Chase DLX	862
BSS/FSS	Evenflo	Comet	835
BSS	Evenflo	Confidence	355
CSS	Evenflo	Conquest I	627
CSS	Evenflo	Conquest V	628
ISS	Evenflo	Cozy Carry	794
ISS	Evenflo	Discovery	629
ISS	Evenflo	Dyn-O-Mite	109
ISS	Evenflo	Embrace	847
BSS/FSS	Evenflo	Express	545
ISS	Evenflo	First Choice	546
BSS/FSS	Evenflo	Generations	860
HSS	Evenflo	Harness	724
CSS	Evenflo	Horizon	707
CSS	Evenflo	Horizon I	524

TYPE	MAKE	MODEL	SAS
CSS	Evenflo	Horizon V	525
ISS	Evenflo	Infant Seat 456	508
ISS	Evenflo	Joy Ride	115
CSS	Evenflo	Medallion	510
CSS	Evenflo	Medallion V	527
CSS	Evenflo	My Style	273
CSS	Evenflo	Odyssey I	643
CSS	Evenflo	Odyssey V	646
ISS	Evenflo	On My Way	649
ISS	Evenflo	On My Way, Position Right	654
CSS	Evenflo	One Step	655
CSS	Evenflo	Orion	
ISS	Evenflo	Port About	805
ISS	Evenflo	Port About 3	832
		Port About 5, Comfort Touch,	
ISS	Evenflo	Premier	831
BSS	Evenflo	Right Fit	656
CSS	Evenflo	Scout	657
CSS	Evenflo	Secure Advantage I	658
CSS	Evenflo	Secure Advantage V	659
CSS	Evenflo	Secure Choice	660
BSS	Evenflo	Secure Comfort	661
BSS/CSS	Evenflo	Seven Year	605
BSS/FSS	Evenflo	Sidekick	606
FSS	Evenflo	Sightseer	319
BSS	Evenflo	Sightseer Comfort Touch	834
CSS	Evenflo	Titan	793
CSS	Evenflo	Titan 5	816
ISS	Evenflo	Tot Taxi	806
CSS	Evenflo	Town & Country	607
BSS/FSS	Evenflo	Traditions	853
ISS	Evenflo	Travel Tandem	117
CSS	Evenflo	Tribute	817
CSS	Evenflo	Tribute 5	818
CSS	Evenflo	Triumph	799
CSS	Evenflo	Trooper	608
BSS/FSS	Evenflo	Two-in-One	609
CSS	Evenflo	Ultara I	610
CSS	Evenflo	Ultara II	611
CSS	Evenflo	Ultara Premier	612
CSS	Evenflo	Ultara Premier V	613
CSS	Evenflo	Ultara V	614
CSS	Evenflo	Vanguard 1 Comfort Touch	833
CSS	Evenflo	Vanguard 5	809
VSS	Evenflo	Vest	248
CSS	Evenflo	Victory 5	808
BSS/FSS	Evenflo	Vision	264
FSS	Evenflo	Wings	307
CSS	FBS, Inc. Renolux	GT-2000	549
CSS	FBS, Inc. Renolux	GT-5000 Turn-A-Tot	574

TYPE	MAKE	MODEL	SAS
CSS	FBS, Inc. Renolux	GT-7000	575
CSS	Fisher-Price	9100, 9101	555
CSS	Fisher-Price	Bolster	556
CSS	Fisher-Price	Comfort Plus	557
CSS	Fisher-Price	Deluxe	558
FSS	Fisher-Price	Futura 20/60	559
BSS/FSS	Fisher-Price	Grow with me	662
ISS	Fisher-Price	Infant Seat	663
ISS	Fisher-Price	Infant Seat 9149, 9173	664
BSS/CSS	Fisher-Price	Safe Embrace	587
BSS	Fisher-Price	Safe Embrace Booster	828
ISS	Fisher-Price	Safe Embrace Infant Seat	588
BSS	Fisher-Price	Safe Voyage Booster	352
CSS	Fisher-Price	Safe Voyage Convertible	279
ISS	Fisher-Price	Stay in View	589
BSS/FSS	Fisher-Price	T-Shield Booster	590
INT	Ford	Escort Integrated Seat	950
INT	Ford	Explorer Integrated Seat	950
INT	Ford	Taurus Integrated Seat	950
FSS	Ford	Tot Guard	308
INT	Ford	Windstar Integrated Seat	950
INT	GMC	Safari Integrated Seat	950
BSS	Gerry	Belt Right	761
BSS/FSS	Gerry	Double Guard	762
BSS/FSS	Gerry	Evolution	777
ISS	Gerry	Guard with Glide	779
CSS	Gerry	Guardian	781
CSS	Gerry	One Click	784
BSS	Gerry	Pro-Ride	785
CSS	Gerry	Pro-Tech	787
CSS	Gerry	ReadyLock	789
ISS	Gerry	Secure Ride	791
CSS	Gerry	SecureLock	617
BSS	Gerry	Super Shield	618
BSS	Gerry	Voyager	619
BSS	Graco	AirBooster	353
ISS	Graco	Aspen	139
BSS/FSS	Graco	CarGo	859
ISS	Graco	Cherish Car Bed	729
BSS/FSS	Graco	Cherished CarGo	730
ISS	Graco	CoachRider Travel System	840
CSS	Graco	ComfortSport	795
ISS	Graco	DuoGlider Travel System	841
CSS	Graco	GT1000	228
BSS/FSS	Graco	Grand Cargo	822
ISS	Graco	Infant Car Bed	733
ISS	Graco	Infant Safe Seat	145
ISS	Graco	Infant Seat/Carrier	735
ISS	Graco	LiteRider	837

TYPE	MAKE	MODEL	SAS
ISS	Graco	LiteRider Breeze	844
ISS	Graco	LiteRider Glider	843
ISS	Graco	LiteRider Sterling	842
CSS	Graco	Little Trav'ler	227
ISS	Graco	MetroLite Travel System	839
BSS	Graco	My CarGo	334
BSS/FSS	Graco	Nautilus	865
BSS/FSS	Graco	Platinum CarGo	854
BSS/FSS	Graco	Quest	737
ISS	Graco	Safe Seat Step 1	141
FSS	Graco	Safe Seat Step 2	861
ISS	Graco	Snug Ride	749
ISS	Graco	Snug Ride DX5	750
ISS	Graco	Snug Seat	111
BSS/FSS	Graco	Teasured Cargo	824
BSS	Graco	TurboBooster	802
BSS/FSS	Graco	Ultra Cargo	829
CSS	Graco	Vanguard Comfort Touch	810
CSS	Guardian	Comfort Plus	757
BSS	Guardian	Double Up	758
CSS	Guardian	Folder Plus	682
BSS	IMMI	Komfort Kreuzer	827
FSS	IMMI	SafeGuard	711
CSS	International	Teddy Tot Astrorider	760
BSS	International	Teddy Tot Astrorider 6000 Series	310
INT	Jeep	Grand Cherokee Integrated Seat	950
HSS	Joey Safe	Safety Harness	807
BSS	Jupiter	Grand Touring	722
BSS	Jupiter	Komfort Rider	723
BSS	Jupiter	Komfort Rider GT	604
INT	Kia	Sephia Integrated Seat	950
CSS	Kolcraft	Auto-Mate - Includes Dial-A-Fit	252
CSS	Kolcraft	Dial-A-Fit	778
BSS/FSS	Kolcraft	Flip'n Go	780
CSS	Kolcraft	Hi-Rider XL2	782
ISS	Kolcraft	Infant Car Seat	783
ISS	Kolcraft	Infant Rider	786
CSS	Kolcraft	Perfect F.I.T.	247
CSS	Kolcraft	Performa	788
CSS	Kolcraft	Playskool	253
BSS	Kolcraft	Prodigy	790
CSS	Kolcraft	Quickstep	232
CSS	Kolcraft	Redi-Rider	231
ISS	Kolcraft	Rock 'n Ride	112
ISS	Kolcraft	Secura	731
CSS	Kolcraft	Secure Fit	732
BSS	Kolcraft	Tot Rider	734
FSS	Kolcraft	Tot Rider Quick Step	838
ISS	Kolcraft	Travel About	736

TYPE	MAKE	MODEL	SAS
CSS	Kolcraft	Traveler 700	260
CSS	Kolcraft	Ultra Ride	233
BSS	LaRoche	Grizzly Bear	738
BSS	LaRoche	Polar Bear	335
BSS	LaRoche	Teddy Bear	739
CSS	Lennox	Tattle Tale	275
VSS	Little Cargo	Travel Vest	740
BSS	Magna	Clek Olli	354
ISS	Maxi-Cosi	Mico	147
CSS	Maxi-Cosi	Priori	283
ISS	Mercedes Benz	Baby Smart	741
BSS	Mercedes Benz	Booster Seat	690
FSS	Mercedes Benz	Toddler Seat	680
INT	Mercury	Mountaineer Integrated Seat	950
INT	Mercury	Sable Integrated Seat	950
INT	Mercury	Tracer Integrated Seat	950
INT	Mercury	Villager Integrated Seat	950
BSS	Nania	HighRide	358
CSS	Nissan	Child Safety Seat	746
CSS	Nissan	Infant-Child Safety Seat	234
INT	Nissan	Quest Integrated Seat	950
INT	Oldsmobile	Silhouette Integrated Seat	950
ISS	Peg Perego	Primo Viaggio	796
ISS	Pioneered II	Safety System Infant Car Seat	125
INT	Plymouth	Breeze Integrated Seat	950
INT	Plymouth	Grand Voyager Integrated Seat	950
INT	Pontiac	Grand Prix Integrated Seat	950
INT	Pontiac	Montana Integrated Seat	950
INT	Pontiac	Trans Sport Integrated Seat	950
ISS	Porsche	Baby-Safe	650
BSS	Porsche	Comfy	651
CSS	Porsche	Convertible	678
FSS	Porsche	Prince	652
BSS	Porsche	Zoom	653
CSS	Pride-Trimble	Pride-Ride 820 & 830 Series	235
CSS	Prodigy	Kiwi Plus	254
CSS	Prodigy	Shuttle	255
CSS	Questor/Kantwet	Care Seat	236
CSS	Questor/Kantwet	One Step	752
FSS	Questor/Kantwet	Safe Guard	237
CSS	Recaro	Como	282
CSS	Recaro	Signo	
BSS	Recaro	Start	665
BSS	Recaro	Vivo	356
BSS/FSS	Recaro	Young Sport	867
BSS	Renolux	Booster	666
CSS	Renolux	GT 4000	714
CSS	Renolux	GT 7000	715
CSS	Renolux	Renolux GT 2000	256

TYPE	MAKE	MODEL	SAS
CSS	Renolux	Turn-A-Tot GT 5000	753
INT	Saab	9-3 Integrated Seat	950
INT	Saab	9-5 Integrated Seat	950
ISS	Safe-n-Sound	Capsule	126
FSS	Safe-n-Sound	Series 3	712
ISS	Safe-n-Sound	Unity	137
FSS	Safeguard	Child Seat	870
BSS/FSS	Safeguard	Go	868
BSS	Safeline	Mission Control	573
BSS	Safeline	Pilot	695
CSS	Safeline	Sit n' Stroll	696
BSS/CSS	Safety 1st	Alpha Sport 3 Phase	507
BSS/FSS	Safety 1st	Apex 65	863
CSS	Safety 1st	Comfort Ride	274
ISS	Safety 1st	Designer 22	821
BSS/CSS	Safety 1st	Enspira	505
CSS	Safety 1st	Forerunner	820
BSS	Safety 1st	Highrider	336
BSS/CSS	Safety 1st	Itera	504
BSS/FSS	Safety 1st	Prospect	856
ISS	Safety 1st	Starter	127
BSS/FSS	Safety 1st	Summit Deluxe	869
BSS/FSS	Safety 1st	Surveyor	855
VSS	Safety 1st	Tote 'n Go	900
CSS	Safety 1st	Uptown	280
BSS/FSS	Safety 1st	Vantage Point	819
BSS	Safety Angel	Ride Ryte	337
VSS	Safety Angel	Travel Vest	803
FSS	Safety Baby	Airway	825
BSS/FSS	Safety Baby	Speedway	826
SNSS	Safety Rehab	900 Series Transporter	412
SNSS	Sammons Preston	Tumbleforms Carrie	698
FSS	Snug Seat	Gorilla	511
FSS	Snug Seat	Snug Seat 1	411
FSS	Snug Seat	Snug Seat 2	688
ISS	Snug Seat	Snug Seat Car Bed	512
CSS	Snug Seat	Spelcast	528
CSS	Strolee	597	708
CSS	Strolee	599	523
BSS/FSS	Strolee	Airway Kansas	858
ISS	Strolee	Baby One	128
BSS	Strolee	Highride	339
BSS	Strolee	McKinley	340
FSS	Strolee	Quick Click	243
BSS	Strolee	Saratoga	338
CSS	Strolee	Wee Care 600 Series	241
BSS/FSS	Strolee	Wee Care Booster	509
BSS	Strolee	Yorktown 8600	341
INT	Subaru	Legacy Integrated Seat	950

TYPE	MAKE	MODEL	SAS
CSS	Sunshine Kids	Radian	276
BSS	Team Tex	Polo Uno	327
INT	Toyota	Camry Integrated Seat	950
INT	Toyota	Corolla Integrated Seat	950
INT	Toyota	Sienna Integrated Seat	950
FSS	Travel Safety	Inflatable Car Seat	691
CSS	Tripleplay Products	Sit n' Stroll	277
FSS	Tumble Forms	Carrie Car Seat	404
Unknown	Unknown Make	Unknown Model	998
CSS	Volvo	240, 260	539
BSS	Volvo	Booster Cushion	692
BSS	Volvo	Child Cushion	245
INT	Volvo	S40 Integrated Seat	950
INT	Volvo	S70/V70 Integrated Seat	950
INT	Volvo	S80 Integrated Seat	950
INT	Volvo	V40 Integrated Seat	950
INT	Volvo	V70 Integrated Seat	950
CSS	Welsh	Travel Tot	246
FSS	ZB Sales	Bobob	538

Table A-15 Intruding Component by Injury Source

<i>INTRUDING COMPONENT</i>	<i>INJURY SOURCE</i>
1 Steering assembly	4 Steering wheel rim 5 Steering wheel hub/spoke 6 Steering wheel combination of codes 004 and 005) 7 Steering column, transmission selector lever, other attachment 15 Windshield including one or more of the following: front header, A A1/A2)-pillar, instrument panel, mirror, or steering assembly driver side only) 401 Hand controls for braking/acceleration 402 Steering control devices (attached to OEM steering wheel) 403 Steering knob attached to steering wheel 405 Replacement steering wheel (<i>i.e.</i> , reduced diameter) 406 Joy stick steering controls 407 Wheelchair tie-downs 408 Modification to seat belts,(specify): 409 Additional or relocated switches, (specify): 412 Other adaptive device (specify):
2 Instrument panel left	8 Cellular telephone or CB radio 9 Add on equipment <i>e.g.</i> , tape deck, air conditioner) 21 Left instrument panel 24 Left lower instrument panel (includes knee bolster) 15 Windshield including one or more of the following: front header, A A1/A2)-pillar, instrument panel, mirror, or steering assembly driver side only) 253 Parking brake handle 401 Hand controls for braking/acceleration 409 Additional or relocated switches, (specify): 412 Other adaptive device (specify):
3 Instrument panel center	8 Cellular telephone or CB radio 9 Add on equipment <i>e.g.</i> , tape deck, air conditioner) 22 Center instrument panel 25 Center lower instrument panel (includes knee bolster) 401 Hand controls for braking/acceleration 412 Other adaptive device (specify): 409 Additional or relocated switches, (specify):
4 Instrument panel right	8 Cellular telephone or CB radio 9 Add on equipment <i>e.g.</i> , tape deck, air conditioner) 13 Glove compartment door 23 Right instrument panel 26 Right lower instrument panel (includes knee bolster) 16 Windshield including one or more of the following: front header, A A1/A2)-pillar,

Table A-15 Intruding Component by Injury Source

5 Toe pan	254 Foot controls including parking brake 251 Floor (including toe pan)
6 A (A1/A2)-pillar	15 Windshield including one or more of the following: front header, A A1/A2)-pillar, instrument panel, mirror, or steering assembly driver side only) 16 Windshield including one or more of the following: front header, A A1/A2)-pillar, instrument panel, or mirror (passenger side only) 53 Left A (A1/A2)-pillar 59 Left side window glass including one or more of the following: frame, window sill, A (A1/A2)-pillar, B-pillar, or roof side rail. 103 Right A (A1/A2)-pillar 109 Right side window glass including one or more of the following: frame, window sill, A (A1/A2)-pillar, B-pillar, or roof side rail. 407 Wheelchair tie-downs 411 Wall mounted head rest (used behind wheel chair) 412 Other adaptive device (specify):
7 B-pillar	54 Left B-pillar 59 Left side window glass including one or more of the following: frame, window sill, A (A1/A2)-pillar, B-pillar, or roof side rail. 104 Right B-pillar 109 Right side window glass including one or more of the following: frame, window sill, A (A1/A2)-pillar, B-pillar, or roof side rail. 153 Belt restraint B-pillar or door frame attachment point 407 Wheelchair tie-downs 411 Wall mounted head rest (used behind wheel chair) 412 Other adaptive device (specify):
8 C-pillar	55 Other left pillar (specify): 105 Other right pillar (specify): 407 Wheelchair tie-downs 411 Wall mounted head rest (used behind wheel chair) 412 Other adaptive device (specify):
9 D-pillar	55 Other left pillar (specify): 105 Other right pillar (specify): 407 Wheelchair tie-downs 412 Other adaptive device (specify): 411 Wall mounted head rest (used behind wheel chair)
10 Side panel - forward of the A1/A2-pillar	62 Left side panel forward A1/A2 pillar 112 Right side panel forward A1/A2 pillar

Table A-15 Intruding Component by Injury Source

<p>51 Door forward upper quadrant</p>	<p>58 Left side window sill 59 Left side window glass including one or more of the following: frame, window sill, A (A1/A2)-pillar, B-pillar, or roof side rail. 73 Left door panel forward upper quadrant 74 Left door panel forward lower quadrant 75 Left door panel rear upper quadrant 76 Left door panel rear lower quadrant 77 Left hardware/armrest forward upper quadrant 78 Left hardware/armrest forward lower quadrant 79 Left hardware/armrest rear upper quadrant 80 Left hardware/armrest rear lower quadrant 108 Right side window sill 109 Right side window glass including one or more of the following: frame, window sill, A (A1/A2)-pillar, B-pillar, or roof side rail 121 Right door panel forward upper quadrant 122 Right door panel forward lower quadrant 123 Right door panel rear upper quadrant 124 Right door panel rear lower quadrant 125 Right hardware/armrest forward upper quadrant 126 Right hardware/armrest forward lower quadrant 127 Right hardware/armrest rear upper quadrant 128 Right hardware/armrest rear lower quadrant</p>
<p>52 Door forward lower quadrant</p>	<p>58 Left side window sill 59 Left side window glass including one or more of the following: frame, window sill, A (A1/A2)-pillar, B-pillar, or roof side rail. 73 Left door panel forward upper quadrant 74 Left door panel forward lower quadrant 75 Left door panel rear upper quadrant 76 Left door panel rear lower quadrant 77 Left hardware/armrest forward upper quadrant 78 Left hardware/armrest forward lower quadrant 79 Left hardware/armrest rear upper quadrant 80 Left hardware/armrest rear lower quadrant 108 Right side window sill 109 Right side window glass including one or more of the following: frame, window sill, A (A1/A2)-pillar, B-pillar, or roof side rail 121 Right door panel forward upper quadrant 122 Right door panel forward lower quadrant 123 Right door panel rear upper quadrant 124 Right door panel rear lower quadrant 125 Right hardware/armrest forward upper quadrant 126 Right hardware/armrest forward lower quadrant 127 Right hardware/armrest rear upper quadrant 128 Right hardware/armrest rear lower quadrant</p>

Table A-15 Intruding Component by Injury Source

<p>53 Door rear upper quadrant</p>	<p>58 Left side window sill 59 Left side window glass including one or more of the following: frame, window sill, A (A1/A2)-pillar, B-pillar, or roof side rail. 73 Left door panel forward upper quadrant 74 Left door panel forward lower quadrant 75 Left door panel rear upper quadrant 76 Left door panel rear lower quadrant 77 Left hardware/armrest forward upper quadrant 78 Left hardware/armrest forward lower quadrant 79 Left hardware/armrest rear upper quadrant 80 Left hardware/armrest rear lower quadrant 108 Right side window sill 109 Right side window glass including one or more of the following: frame, window sill, A (A1/A2)-pillar, B-pillar, or roof side rail 121 Right door panel forward upper quadrant 122 Right door panel forward lower quadrant 123 Right door panel rear upper quadrant 124 Right door panel rear lower quadrant 125 Right hardware/armrest forward upper quadrant 126 Right hardware/armrest forward lower quadrant 127 Right hardware/armrest rear upper quadrant 128 Right hardware/armrest rear lower quadrant</p>
<p>54 Door rear lower quadrant</p>	<p>58 Left side window sill 59 Left side window glass including one or more of the following: frame, window sill, A (A1/A2)-pillar, B-pillar, or roof side rail. 73 Left door panel forward upper quadrant 74 Left door panel forward lower quadrant 75 Left door panel rear upper quadrant 76 Left door panel rear lower quadrant 77 Left hardware/armrest forward upper quadrant 78 Left hardware/armrest forward lower quadrant 79 Left hardware/armrest rear upper quadrant 80 Left hardware/armrest rear lower quadrant 108 Right side window sill 109 Right side window glass including one or more of the following: frame, window sill, A (A1/A2)-pillar, B-pillar, or roof side rail 121 Right door panel forward upper quadrant 122 Right door panel forward lower quadrant 123 Right door panel rear upper quadrant 124 Right door panel rear lower quadrant 125 Right hardware/armrest forward upper quadrant 126 Right hardware/armrest forward lower quadrant 127 Right hardware/armrest rear upper quadrant 128 Right hardware/armrest rear lower quadrant</p>

Table A-15 Intruding Component by Injury Source

<p>55 Door undetermined quadrant</p>	<p>58 Left side window sill 59 Left side window glass including one or more of the following: frame, window sill, A (A1/A2)-pillar, B-pillar, or roof side rail. 73 Left door panel forward upper quadrant 74 Left door panel forward lower quadrant 75 Left door panel rear upper quadrant 76 Left door panel rear lower quadrant 77 Left hardware/armrest forward upper quadrant 78 Left hardware/armrest forward lower quadrant 79 Left hardware/armrest rear upper quadrant 80 Left hardware/armrest rear lower quadrant 108 Right side window sill 109 Right side window glass including one or more of the following: frame, window sill, A (A1/A2)-pillar, B-pillar, or roof side rail 121 Right door panel forward upper quadrant 122 Right door panel forward lower quadrant 123 Right door panel rear upper quadrant 124 Right door panel rear lower quadrant 125 Right hardware/armrest forward upper quadrant 126 Right hardware/armrest forward lower quadrant 127 Right hardware/armrest rear upper quadrant 128 Right hardware/armrest rear lower quadrant</p>
<p>12 Side panel - rear of the B-pillar</p>	<p>63 Left side panel rear of the B pillar 113 Right side panel rear of the B pillar</p>
<p>13 Roof (or convertible top)</p>	<p>205 Roof or convertible top 410 Raised roof 206 Roof maplight/console 207 Sunroof/components 208 Rollbar</p>
<p>14 Roof side rail</p>	<p>59 Left side window glass including one or more of the following: frame, window sill, A (A1/A2)-pillar, B-pillar, or roof side rail. 109 Right side window glass including one or more of the following: frame, window sill, A (A1/A2)-pillar, B-pillar, or roof side rail. 203 Roof left side rail 204 Roof right side rail</p>
<p>15 Windshield</p>	<p>1 Windshield 2 Mirror 15 Windshield including one or more of the following: front header, A A1/A2)-pillar, instrument panel, mirror, or steering assembly driver side only) 16 Windshield including one or more of the following: front header, A A1/A2)-pillar, instrument panel, or mirror (passenger side only) 17 Windshield reinforced by exterior object (specify) 20 Sunvisor reinforced by front header</p>

Table A-15 Intruding Component by Injury Source

16 Windshield header	<p>15 Windshield including one or more of the following: front header, A A1/A2)-pillar, instrument panel, mirror, or steering assembly driver side only)</p> <p>16 Windshield including one or more of the following: front header, A A1/A2)-pillar, instrument panel, or mirror (passenger side only)</p> <p>17 Windshield reinforced by exterior object (specify)</p> <p>201 Front header</p> <p>20 Sunvisor reinforced by front header</p>
17 Window frame	<p>56 Left side window glass</p> <p>57 Left side window frame</p> <p>59 Left side window glass including one or more of the following: frame, window sill, A (A1/A2)-pillar, B-pillar, or roof side rail.</p> <p>106 Right side window glass</p> <p>107 Right side window frame</p> <p>109 Right side window glass including one or more of the following: frame, window sill, A (A1/A2)-pillar, B-pillar, or roof side rail.</p>
18 Floor pan (includes sill)	<p>251 Floor (including toe pan)</p> <p>252 Floor or console mounted transmission lever, including console</p>
19 Backlight header	<p>202 Rear header</p> <p>301 Backlight (rear window)</p>
20 Front seat back	<p>151 Seat, back support</p> <p>155 Head restraint system</p> <p>412 Other adaptive device (specify):</p>
21 Second seat back	<p>151 Seat, back support</p> <p>155 Head restraint system</p> <p>412 Other adaptive device (specify):</p>
22 Third seat back	<p>151 Seat, back support</p>
23 Fourth seat back	<p>151 Seat, back support</p>
24 Fifth seat back	<p>151 Seat, back support</p>
25 Seat cushion	<p>151 Seat, back support</p>

Table A-15 Intruding Component by Injury Source

26 Back door/panel (e.g., tailgate)	302 Backlight storage rack, door, etc. 303 Other rear object (specify):
27 Other interior component (specify):	19 Other front object (specify): 55 Other left pillar (specify): 60 Other left side object (specify): 105 Other right pillar (specify): 110 Other right side object (specify): 163 Other interior object (specify): 252 Floor or console mounted transmission lever, including console 303 Other rear object (specify): 412 Other adaptive device (specify): 576 Cargo in vehicle 154 Other restraint system component 164 Center console first row 165 Center console second row 166 Center console other row 167 Fold down armrest first row 168 Fold down armrest second row 169 Fold down armrest other row 161 Interior loose objects 572 Seat LATCH points for child restraints 573 Grab handles 574 Engine shroud cover 575 Seatback trays
30 Hood	451 Hood
31 Outside surface of this vehicle (specify):	452 Outside hardware (e.g., outside mirror, antenna) 453 Other exterior surface or tires (specify):
32 Other exterior object in the environment (specify):	598 Other vehicle or object (specify): 501 Front bumper 502 Hood edge 503 Other front of vehicle (specify): 504 Hood 505 Hood ornament 506 Windshield, roof rail, A-pillar 507 Side surface 508 Side mirrors 509 Other side protrusions (specify): 510 Rear surface 511 Undercarriage 512 Tires and wheels 513 Other exterior of other motor vehicle (specify): 552 Tree 553 Pole 554 Traffic barrier 551 Ground


Table A-15 Intruding Component by Injury Source

	598 Other object (specify):
33 Unknown exterior object	514 Unknown exterior of other motor vehicle 454 Unknown exterior objects
98 Intrusion of unlisted component(s)	19 Other front object (specify): 60 Other left side object (specify): 110 Other right side object (specify): 163 Other interior object (specify): 195 Other air bag compartment cover (specify): 303 Other rear object (specify): 412 Other adaptive device (specify):


APPENDIX E

**UNIFORM SYMBOLS FOR DIAGRAMMING
AND SCENE MARKING**


UNIFORM SYMBOLS FOR SCENE MARKING




Mark to show beginning of rear skidmarks. Arrow shows direction of travel. Number indicates identity of vehicle involved.



Mark to show beginning of rear skidmarks. Arrow shows direction of travel. Number indicates identity of vehicle involved.



Position of rear wheels at impact. Notes end of post-impact skid.




Position of front wheels at impact. Notes end of post-impact skid.



Rear wheel at final position.



Front wheel at final position.



Position of impact point. 1-First Impact/2-Second Impact




Indicative mark for scratches.



Indicative mark for gouges.




Indicative mark for scuffs.



Indicative mark for centripetal curve scuffs.




Indicative mark for rotating tire print.



Indicative mark for puddle (liquids).



Indicative mark for puddle with run-off. (Initials-**G** for gasoline; **M** for motor oil; **R** for radiator coolant; **T** for transmission oil; **B** for battery acid; **F** for brake fluid; **W** for water and **H** for Blood-to be inserted inside the circles for further identification.



Indicative mark for debris, arrow to show direction of force.



Male body (arrow pointing toward feet).



Female body (cross indicating direction of feet).

UNIFORM SYMBOLS FOR CRASH DIAGRAMMING


Vehicle and Pedestrian Symbols




Automobile (pre-impact or at-impact position). Exception: draw **solid** outline if stopped at-impact.



Automobile (final rest position)-showing damaged area.



Automobile (final position on its top).



Automobile (final position on its left side, reverse for right side).




Automobile involved in the crash as a temporary environmental factor, but not physically involved in the collision (Noncontact Unit).




Parked automobile not struck (give it a number if it was struck).



Vehicle in which a witness was an occupant.




Pick up truck.



Van




Delivery Van




Sport Utility Vehicle




Truck tractor and semi-trailer




Utility Trailer



Bus



Motorcyclist



Pedestrian (pointer oriented to show direction of movement and dot spacing to show rate of movement (i.e., 1 meter apart walking and 2 meter apart running)).



Final position of body.




Pedestrian who witnessed crash.

All symbols referring to colliding vehicles (plus Noncontact, Witness and Parked vehicles) are to have a broken outline if they are moving at the point in which they are depicted; the outline should be solid if the vehicle is stopped where depicted, or at final rest. Be careful to insure proper placement (location) or orientation on the diagram.


Scene Road Marking



Point of Impact



Skidmarks



Centripetal curve scuffs



Tire scuff marks



Rotating tire print



Gouges



Scratches

















Liquids (puddle and run-off)



Debris


Any other crash-induced markings, components from vehicles, etc. should be shown in their approximate location and a reasonable likeness sketched on the diagram.

Topographical Highway and Environment Symbols

	Pavement edge
	
	
	Shoulder edge line (non-formal)
	Shoulder edge line (formal)
	Broken center line or lane lines
	Broken center line with No-Passing line
	Double yellow center lines
	Raised island and Grass Median
	Painted median
	Curb
	Paved shoulders with diagonal lines
	Turn arrows
	Building or wall



Bridge abutment and railing




Guardrail



Fence




Railroad tracks




Embankment (arrows show "DOWN")




Shrubbery-hedges

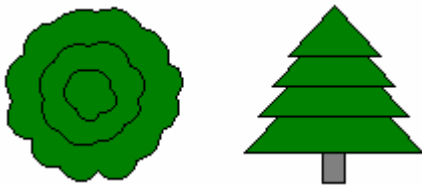

Trees (draw trunk and perimeter of foliage to approximate size).



Traffic signal (grayed area indicates red).




Flashing traffic signal (grayed area indicates red).



Traffic signs back to back.



Sign (indicate words or symbols)



Street light and pole (arm length may change with scene).



Pole



Fire hydrant

All crosswalks, road surface symbols and other relevant markings should be depicted and drawn to approximate scale on the diagram as much as possible.