

PRINTING SHOULD BE AT LEAST
0.125 FROM EDGE OF LABEL.

THIS LABEL IS FOR NEVS BUILT YEAR 2007 AND UP

SEE SHEET 2 FOR VEHICLE DATA

SEE SHEET 3 FOR 17 DIGIT FEDERAL VIN DEFINITION

MATERIAL DATA:

712036 – PRESSURE SENSITIVE FILM: THERMLfilm® TAMPERmark™ PM 200
WHITE POLYESTER VOID II TC-390 V-344
SPEC 50K-8
PERMANENT ADHESIVE BACKING

PERFORATED ROLL OF 500
3.50W X 4.50L EACH

712035 – LAMINATE MATERIAL: 2 MIL CLEAR POLYESTER
1 MIL UV RESISTANT OVERLAMINATE
PERMANENT ADHESIVE BACKING
(3M 7733FL UV RESISTANT FILM)

PERFORATED ROLL OF 1000
4.50W X 6.00L EACH

RIBBON MATERIAL: R390 NEAR EDGE RESIN


(FROM THE DAI NIPPON PRINTING GROUP)
TEST METHOD: ATLAS CM-5 CROCKMETER
(ABRASION & SOLVENT
RESISTANCE TESTS DONE
COVERED WITH CLOTH)
ABRASION RESISTANCE: 500 CYCLES @ 900G
SOLVENT RESISTANCE: 500 CYCLES @ 248G (WATER)
200 CYCLES @ 248G (KEROSENE)
10 CYCLES @ 248G (IPA)
HEAT RESISTANC: <170°C (<338°F)
PRINT SPEED RANGE: 2 - 12 IPS

NOTE:
ADHESIVE AND LABEL MUST BE RESISTANT
TO WATER, LIGHT CLEANING SOLVENTS,
AND HIGH TEMPERATURE PRESSURE WASHING.

LETTERING MUST BE INDELABLE AND MUST NOT SMEAR
WHEN EXPOSED TO WATER OR LIGHT CLEANING SOLVENTS.

CLEAR LAMINATION MUST NOT DISCOLOR OR DEGRADE
OVER TIME WHEN EXPOSED TO SUNLIGHT (UV).

WHEN APPLIED TO VEHICLE, THIS LABEL MUST ADHERE IN
SUCH A WAY THAT IT CANNOT BE REMOVED WITHOUT
DESTROYING OR DEFACING IT

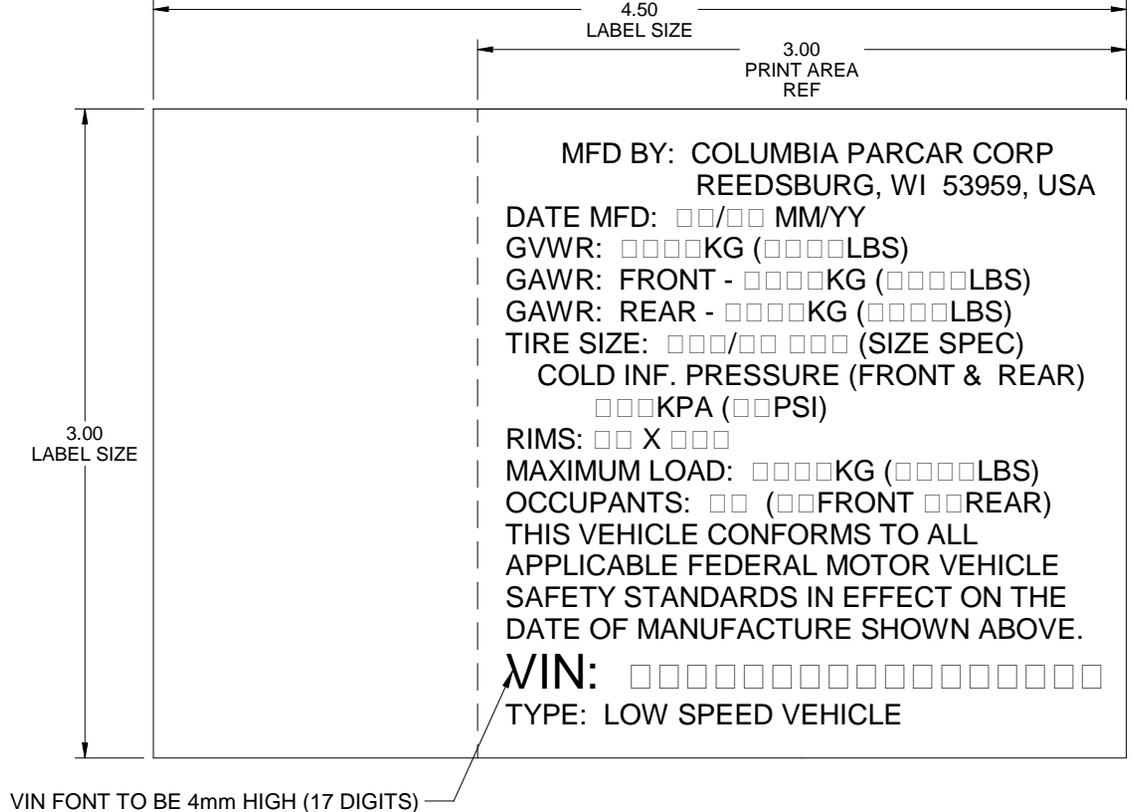

ALL LETTERING TO BE SANS SERIF, ALL CAPITAL
LETTERS, AND BE NO LESS THAN 2.38mm HIGH,
EXCEPT WHERE NOTED.

05	ECR 103643: ADDED "M=MEGA", MODEL YEARS 6 TO D, & "TYPE = (LSV) LOW SPEED VEHICLE" ON SHEET 3	1/7/08	DJH/DAP
04	ECR 103164: REMOVED SMT 2 CAB DATA, 710 WAS 1075, 1440 WAS 1550, 2150 WAS 2090, 1100 WAS 1075, 2550 WAS 2500 [ALL FIGURES AXLE WEIGHTS ON SHEET 2]. UPDATED METRIC WEIGHTS ALSO	12/14/07	DJH/CGM
03	ECR #103600: ADDED MFG LOCATION & RIMS, LISTED METRIC UNITS FIRST, "PRESSURE SENSITIVE FILM" & "RIBBON" SPECS CLARIFIED. UPDATED INFO IN SHEET 2 TABLE TO MATCH LABEL LAYOUT	11/15/07	DJH/CGM
2	ECR 101955 - CORRECTED FORMAT CONSISTANCY ERRORS	6/6/07	DAP
1	ECR 101955 - UPDATED LABEL SIZE - ADDED MATL INFO	1/8/07	DAP
0	ECR 100034 - DRAWN IN SOLID EDGE	1/4/06	DAP
REV	DESCRIPTION	DATE	APPROVED

DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED: 3 PLACE DECIMALS ± .010 2 PLACE DECIMALS ± .030 1 PLACE DECIMALS ± .50 ANGLES ± 1.0°			SEATS INCORPORATED PO BOX 60 REEDSBURG, WI 53959
PUNCHED/DRIILLED FEATURES ± .003			

DRAWN BY CJK		DATE 1/4/06		TITLE LABEL, VIN/CAPACITY - LSV/NEV	
APPROVED BY		DATE		SIZE B	FSCM NO. 09704
FILE NAME 511346-05.dft				PART NO. 511346	DO NOT SCALE PRINT

PLEASE NOTE
This drawing, owned by Seats, Inc, Reedsburg, WI, is conditionally loaned and its disclosure to the recipient is in confidence. In receiving it, the recipient agrees not to reproduce or copy it in whole or part without written consent or to furnish information from it to others or to make any use of it that is, or may be injurious or damaging to Seats, Inc. in any way, and to return it immediately upon request. Seats Inc.



VIN CAPACITY LABEL - SUMMIT NEV/LSV

		SMT 2	SMT 4	SUV - S	SUV - S CAB	SUV - L	SUV - L CAB
DATE MFD:	1	MO/YR	MO/YR	MO/YR	MO/YR	MO/YR	MO/YR
GVWR:	2	975 KG (2150 LBS)	1202 KG (2650LBS)	1077 KG (2370 LBS)	1113 KG (2450 LBS)	1198 KG (2636 LBS)	1234 KG (2716 LBS)
GAWR: FRONT	3	322 KG (710 LBS)	499 KG (1100 LBS)	406 KG (895 LBS)	461 KG (1015 LBS)	487 KG (1072 LBS)	538 KG (1185 LBS)
GAWR: REAR	4	653 KG (1440 LBS)	703 KG (1550 LBS)	670 KG (1475 LBS)	652 KG (1435 LBS)	710 KG (1564 LBS)	695 KG (1531 LBS)
TIRE DOT RATED:	5	175/50 R13	175/50 R13	175/50 R13	175/50 R13	175/50 R13	175/50 R13
	6						
TIRE PRESSURE:	7	206 KPA (30 PSI)	221 KPA (32 PSI)	221 KPA (32 PSI)	221 KPA (32 PSI)	221 KPA (32 PSI)	221 KPA (32 PSI)
RIMS:	8	13 X 5.5	13 X 5.5	13 X 5.5	13 X 5.5	13 X 5.5	13 X 5.5
MAXIMUM LOAD:	9	295 KG (650 LBS)	385 KG (850 LBS)	340 KG (750 LBS)	295 KG (650 LBS)	409 KG (900 LBS)	363 KG (800 LBS)
OCCUPANTS:	10	2	2 FRONT / 2REAR	2	2	2	2
VIN (5FCLxxxA---) xxx =	11	S26	S46	S56	S56	S36	S36
TYPE: LOW SPEED VEHICLE	12	LOW SPEED VEHICLE	LOW SPEED VEHICLE	LOW SPEED VEHICLE	LOW SPEED VEHICLE	LOW SPEED VEHICLE	LOW SPEED VEHICLE

VIN CAPACITY LABEL - EAGLE NEV

		NEV 2 PASSENGER
DATE MFD:	1	MO/YR
GVWR:	2	866 KG (1910 LBS)
GAWR: FRONT	3	258 KG (570 LBS)
GAWR: REAR	4	608 KG (1340 LBS)
TIRE DOT RATED:	5	175/50 R13
	6	
TIRE PRESSURE:	7	206 KPA (30 PSI)
RIMS:	8	13 X 5.5
MAXIMUM LOAD:	9	340 KG (750 LBS)
OCCUPANTS:	10	2
VIN (5FCLxxxA---) xxx =	11	E26
TYPE: LOW SPEED VEHICLE	12	LOW SPEED VEHICLE

SEE SHEET 3 FOR 17 DIGIT FEDERAL VIN DEFINITION.

PLEASE NOTE
 This drawing, owned by Seats, Inc, Reedsburg, WI, is conditionally loaned and its disclosure to the recipient is in confidence. In receiving it, the recipient agrees not to reproduce or copy it in whole or part without written consent or to furnish information from it to others or to make any use of it that is, or may be injurious or damaging to Seats, Inc. in any way, and to return it immediately upon request. Seats Inc.

SEE SHEET 1		DATE	APPROVED
REV	DESCRIPTION		
REVISIONS			
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED: 3 PLACE DECIMALS ± .010 2 PLACE DECIMALS ± .030 1 PLACE DECIMALS ± .50 ANGLES ± 1.0°		SEATS INCORPORATED PO BOX 60 REEDSBURG, WI 53959	
PUNCHED/DRILLED FEATURES ± .003		TITLE	
DRAWN BY	DATE	LABEL, VIN/CAPACITY - LSV/NEV	
CJK			
APPROVED BY	DATE	SIZE	FSCM NO.
		B	09704
FILE NAME:	PART NO.		
511346-05.dft	511346		
DO NOT SCALE PRINT			SHEET 2 OF 3

TYPE = (LSV) LOW SPEED VEHICLE/(NEV) NEIGHBORHOOD ELECTRIC VEHICLE 17 DIGIT VIN

1, 2, & 3	4	5	6	7	8	9	10	11	12-17
MFG ID	LINE	SERIES	BODY TYPE	ENGINE TYPE	RESTRAINT	CHECK DIGIT	MODEL YEAR	PLANT LOCATION	SEQUENTIAL #
5FC=CPC	L = LOW SPEED VEHICLE	E=EAGLE M=MEGA S=SUMMIT U=UTILITY N=EARLIER NEV SERIES	2=2 PERSON 3=LONG BED 4=4 PERSON 5=SHORT BED	4=SERIES WOUND 48V XP+ SYSTEM 6=SEPARATELY EXCITED 48V ACE + SYSTEM	A=TYPE 1 SEAT BELT ASSY	CALCULATED PER 49CFR 565.4	Y=2000 1=2001 2=2002 3=2003 4=2004 5=2005 6=2006 7=2007 8=2008 9=2009 A=2010 B=2011 C=2012 D=2013	1=REEDSBURG	000019 000999

△

△

SEE SHEET 1		DATE	APPROVED
REV	DESCRIPTION	DATE	APPROVED
REVISIONS			
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED: 3 PLACE DECIMALS ± .010 2 PLACE DECIMALS ± .030 1 PLACE DECIMALS ± .50 ANGLES ± 1.0°		SEATS INCORPORATED PO BOX 60 REEDSBURG, WI 53959	
PUNCHED/DRILLED FEATURES ± .003 DRAWN BY: CJK DATE:		TITLE LABEL, VIN/CAPACITY - LSV/NEV	
APPROVED BY: _____ DATE: _____		SIZE: B FSCM NO.: 09704	PART NO.: 511346 DO NOT SCALE PRINT
FILE NAME: 511346-05.dft		SHEET 3 OF 3	

PLEASE NOTE
 This drawing, owned by Seats, Inc, Reedsburg, WI, is conditionally loaned and its disclosure to the recipient is in confidence. In receiving it, the recipient agrees not to reproduce or copy it in whole or part without written consent or to furnish information from it to others or to make any use of it that is, or may be injurious or damaging to Seats, Inc. in any way, and to return it immediately upon request. Seats Inc.